Courtesy of CMA/Flodyne/Hydradyne ▪ Motion Control ▪ Hydraulic ▪ Pneumatic ▪ Electrical ▪ Mechanical ▪ (800) 426-5480 ▪ www.cmafh.com

Catalog Number Selection

This information is presented only as an aid to understanding catalog numbers. It is not to be used to build catalog numbers for circuit breakers or trip units.

Series G—EG-Frame (15–125 Amperes)

E G H 3 015 FF G

Frame
E

Standard/Application
G = IEC/CE/UL/CSA

Performance				
	600Y/347	**480**	**415**	**240**
B	—	18	18	25
E	18	25	25	35
S	22	35	40	85
H	25	65	70	100
C	35	100	100	200
K	Molded case switch ②			

Number of Poles
1 = One
2 = Two
3 = Three
4 = Four—neutral 0% protected
7 = Four—neutral 100% protected

Amperes
016 ①
015
020
025
030
032 ①
035
040
045
050
060
063 ①
070
080
090
100
110
125
160 ①

Terminations/Hardware	
Terminals	**Mounting Hardware**
M = Metric end caps	Metric
E = Imperial end caps	Imperial
G = Line/load standard	Metric
B = Bolt-on	—

Trip Unit
FF = Fixed fixed
AF = Adjustable thermal fixed magnetic
KS = Molded case switch

Notes

① Cannot be UL rated.

② Available only as 125 and 160A sizes.

Courtesy of CMA/Flodyne/Hydradyne ▪ Motion Control ▪ Hydraulic ▪ Pneumatic ▪ Electrical ▪ Mechanical ▪ (800) 426-5480 ▪ www.cmafh.com

Product Selection

Complete Breaker (Includes Frame, Trip Unit, Standard Terminals and Mounting Hardware) IC Rating at 415/480 Volts

EG-Frame



EG-Frame—18/18

Maximum Continuous Amps at 40°C ①	Single-Pole Fixed Thermal, Fixed Magnetic Catalog Number	Two-Pole Fixed Thermal, Fixed Magnetic Catalog Number	Three-Pole Fixed Thermal, Fixed Magnetic Catalog Number	Three-Pole Adjustable ② Thermal, Fixed Magnetic Catalog Number	Four-Pole ③ Fixed Thermal, Fixed Magnetic Catalog Number	Four-Pole ③ Adjustable ② Thermal, Fixed Magnetic Catalog Number
15	EGB1015FFG	EGB2015FFG	EGB3015FFG	—	EGB4015FFG	—
16	EGB1016FFG	EGB2016FFG	EGB3016FFG	—	EGB4016FFG	—
20	EGB1020FFG	EGB2020FFG	EGB3020FFG	—	EGB4020FFG	EGB4020AFG
25	EGB1025FFG	EGB2025FFG	EGB3025FFG	EGB3025AFG	EGB4025FFG	EGB4025AFG
30	EGB1030FFG	EGB2030FFG	EGB3030FFG	—	EGB4030FFG	—
32	EGB1032FFG	EGB2032FFG	EGB3032FFG	EGB3032AFG	EGB4032FFG	EGB4032AFG
35	EGB1035FFG	EGB2035FFG	EGB3035FFG	—	EGB4035FFG	—
40	EGB1040FFG	EGB2040FFG	EGB3040FFG	EGB3040AFG	EGB4040FFG	EGB4040AFG
45	EGB1045FFG	EGB2045FFG	EGB3045FFG	—	EGB4045FFG	—
50	EGB1050FFG	EGB2050FFG	EGB3050FFG	EGB3050AFG	EGB4050FFG	EGB4050AFG
60	EGB1060FFG	EGB2060FFG	EGB3060FFG	—	EGB4060FFG	—
63	EGB1063FFG	EGB2063FFG	EGB3063FFG	EGB3063AFG	EGB4063FFG	EGB4063AFG
70	EGB1070FFG	EGB2070FFG	EGB3070FFG	—	EGB4070FFG	—
80	EGB1080FFG	EGB2080FFG	EGB3080FFG	EGB3080AFG	EGB4080FFG	EGB4080AFG
90	EGB1090FFG	EGB2090FFG	EGB3090FFG	—	EGB4090FFG	—
100	EGB1100FFG	EGB2100FFG	EGB3100FFG	EGB3100AFG	EGB4100FFG	EGB4100AFG
125	EGB1125FFG	EGB2125FFG	EGB3125FFG	EGB3125AFG	EGB4125FFG	EGB4125AFG
160	—	—	EGB3160FFG	EGB3160AFG	EGB4160FFG	EGB4160AFG

Notes

① 16, 32, 63 and 160A are not UL listed ratings.
② Adjustable thermal are not UL listed.
③ Change the fourth digit to 7 for 100% neutral protection. Neutral is on the LH side.

EG-Frame—25/25 Single-Pole Unavailable

Courtesy of CMA/Flodyne/Hydradyne ▪ Motion Control ▪ Hydraulic ▪ Pneumatic ▪ Electrical ▪ Mechanical ▪ (800) 426-5480 ▪ www.cmafh.com

EG-Frame



EG-Frame—25/25

Maximum Continuous Amps at 40°C ①	Two-Pole Fixed Thermal, Fixed Magnetic Catalog Number	Three-Pole Fixed Thermal, Fixed Magnetic Catalog Number	Three-Pole Adjustable ② Thermal, Fixed Magnetic Catalog Number	Four-Pole ③ Fixed Thermal, Fixed Magnetic Catalog Number	Four-Pole ③ Adjustable ② Thermal, Fixed Magnetic Catalog Number
15	EGE2015FFG	EGE3015FFG	—	EGE4015FFG	—
16	EGE2016FFG	EGE3016FFG	—	EGE4016FFG	—
20	EGE2020FFG	EGE3020FFG	—	EGE4020FFG	EGE4020AFG
25	EGE2025FFG	EGE3025FFG	EGE3025AFG	EGE4025FFG	EGE4025AFG
30	EGE2030FFG	EGE3030FFG	—	EGE4030FFG	—
32	EGE2032FFG	EGE3032FFG	EGE3032AFG	EGE4032FFG	EGE4032AFG
35	EGE2035FFG	EGE3035FFG	—	EGE4035FFG	—
40	EGE2040FFG	EGE3040FFG	EGE3040AFG	EGE4040FFG	EGE4040AFG
45	EGE2045FFG	EGE3045FFG	EGE3050AFG	EGE4045FFG	—
50	EGE2050FFG	EGE3050FFG	—	EGE4050FFG	EGE4050AFG
60	EGE2060FFG	EGE3060FFG	—	EGE4060FFG	—
63	EGE2063FFG	EGE3063FFG	EGE3063AFG	EGE4063FFG	EGE4063AFG
70	EGE2070FFG	EGE3070FFG	—	EGE4070FFG	—
80	EGE2080FFG	EGE3080FFG	EGE3080AFG	EGE4080FFG	EGE4080AFG
90	EGE2090FFG	EGE3090FFG	—	EGE4090FFG	—
100	EGE2100FFG	EGE3100FFG	EGE3100AFG	EGE4100FFG	EGE4100AFG
125	EGE2125FFG	EGE3125FFG	EGE3125AFG	EGE4125FFG	EGE4125AFG
160	—	EGE3160FFG	EGE3160AFG	EGE4160FFG	EGE4160AFG

Notes

① 16, 32, 63 and 160A are not UL listed ratings.

② Adjustable thermal are not UL listed.

③ Change the fourth digit to 7 for 100% neutral protection. Neutral is on the LH side.

Courtesy of CMA/Flodyne/Hydradyne ▪ Motion Control ▪ Hydraulic ▪ Pneumatic ▪ Electrical ▪ Mechanical ▪ (800) 426-5480 ▪ www.cmafh.com

EG-Frame



EG-Frame—40/35

Maximum Continuous Amps at 40°C ①	Single-Pole Fixed Thermal, Fixed Magnetic Catalog Number	Two-Pole Fixed Thermal, Fixed Magnetic Catalog Number	Three-Pole Fixed Thermal, Fixed Magnetic Catalog Number	Three-Pole Adjustable ② Thermal, Fixed Magnetic Catalog Number	Four-Pole ③ Fixed Thermal, Fixed Magnetic Catalog Number	Four-Pole Adjustable ② Thermal, Fixed Magnetic Catalog Number
15	EGS1015FFG	EGS2015FFG	EGS3015FFG	—	EGS4015FFG	—
16	EGS1016FFG	EGS2016FFG	EGS3016FFG	—	EGS4016FFG	—
20	EGS1020FFG	EGS2020FFG	EGS3020FFG	—	EGS4020FFG	EGS4020AFG
25	EGS1025FFG	EGS2025FFG	EGS3025FFG	EGS3025AFG	EGS4025FFG	EGS4025AFG
30	EGS1030FFG	EGS2030FFG	EGS3030FFG	—	EGS4030FFG	—
32	EGS1032FFG	EGS2032FFG	EGS3032FFG	EGS3032AFG	EGS4032FFG	EGS4032AFG
35	EGS1035FFG	EGS2035FFG	EGS3035FFG	—	EGS4035FFG	—
40	EGS1040FFG	EGS2040FFG	EGS3040FFG	EGS3040AFG	EGS4040FFG	EGS4040AFG
45	EGS1045FFG	EGS2045FFG	EGS3045FFG	—	EGS4045FFG	—
50	EGS1050FFG	EGS2050FFG	EGS3050FFG	EGS3050AFG	EGS4050FFG	EGS4050AFG
60	EGS1060FFG	EGS2060FFG	EGS3060FFG	—	EGS4060FFG	—
63	EGS1063FFG	EGS2063FFG	EGS3063FFG	EGS3063AFG	EGS4063FFG	EGS4063AFG
70	EGS1070FFG	EGS2070FFG	EGS3070FFG	—	EGS4070FFG	—
80	EGS1080FFG	EGS2080FFG	EGS3080FFG	EGS3080AFG	EGS4080FFG	EGS4080AFG
90	EGS1090FFG	EGS2090FFG	EGS3090FFG	—	EGS4090FFG	—
100	EGS1100FFG	EGS2100FFG	EGS3100FFG	EGS3100AFG	EGS4100FFG	EGS4100AFG
125	EGS1125FFG	EGS2125FFG	EGS3125FFG	EGS3125AFG	EGS4125FFG	EGS4125AFG
160	—	—	EGS3160FFG	EGS3160AFG	EGS4160FFG	EGS4160AFG

Notes

① 16, 32, 63 and 160A are not UL listed ratings.

② Adjustable thermal are not UL listed.

③ Change the fourth digit to 7 for 100% neutral protection. Neutral is on the LH side.

Courtesy of CMA/Flodyne/Hydradyne ▪ Motion Control ▪ Hydraulic ▪ Pneumatic ▪ Electrical ▪ Mechanical ▪ (800) 426-5480 ▪ www.cmafh.com

EG-Frame



EG-Frame—70/65

Maximum Continuous Amps at 40°C ①	Single-Pole Fixed Thermal, Fixed Magnetic Catalog Number	Two-Pole Fixed Thermal, Fixed Magnetic Catalog Number	Three-Pole Fixed Thermal, Fixed Magnetic Catalog Number	Three-Pole Adjustable ② Thermal, Fixed Magnetic Catalog Number	Four-Pole ③ Fixed Thermal, Fixed Magnetic Catalog Number	Four-Pole ③ Adjustable ② Thermal, Fixed Magnetic Catalog Number
15	EGH1015FFG	EGH2015FFG	EGH3015FFG	—	EGH4015FFG	—
16	EGH1016FFG	EGH2016FFG	EGH3016FFG	—	EGH4016FFG	—
20	EGH1020FFG	EGH2020FFG	EGH3020FFG	EGH3020AFG	EGH4020FFG	EGH4020AFG
25	EGH1025FFG	EGH2025FFG	EGH3025FFG	EGH3025AFG	EGH4025FFG	EGH4025AFG
30	EGH1030FFG	EGH2030FFG	EGH3030FFG	—	EGH4030FFG	—
32	EGH1032FFG	EGH2032FFG	EGH3032FFG	EGH3032AFG	EGH4032FFG	EGH4032AFG
35	EGH1035FFG	EGH2035FFG	EGH3035FFG	—	EGH4035FFG	—
40	EGH1040FFG	EGH2040FFG	EGH3040FFG	EGH3040AFG	EGH4040FFG	EGH4040AFG
45	EGH1045FFG	EGH2045FFG	EGH3045FFG	—	EGH4045FFG	EGH4050AFG
50	EGH1050FFG	EGH2050FFG	EGH3050FFG	EGH3050AFG	EGH4050FFG	—
60	EGH1060FFG	EGH2060FFG	EGH3060FFG	—	EGH4060FFG	—
63	EGH1063FFG	EGH2063FFG	EGH3063FFG	EGH3063AFG	EGH4063FFG	EGH4063AFG
70	EGH1070FFG	EGH2070FFG	EGH3070FFG	—	EGH4070FFG	—
80	EGH1080FFG	EGH2080FFG	EGH3080FFG	EGH3080AFG	EGH4080FFG	EGH4080AFG
90	EGH1090FFG	EGH2090FFG	EGH3090FFG	—	EGH4090FFG	—
100	EGH1100FFG	EGH2100FFG	EGH3100FFG	EGH3100AFG	EGH4100FFG	EGH4100AFG
125	EGH1125FFG	EGH2125FFG	EGH3125FFG	EGH3125AFG	EGH4125FFG	EGH4125AFG

Notes

① 16, 32, 63A are not UL listed ratings.
② Adjustable thermal are not UL listed.
③ Change the fourth digit to 7 for 100% neutral protection. Neutral is on the LH side.

Courtesy of CMA/Flodyne/Hydradyne ▪ Motion Control ▪ Hydraulic ▪ Pneumatic ▪ Electrical ▪ Mechanical ▪ (800) 426-5480 ▪ www.cmafh.com

EG-Frame—100/100 Current Limiting (Single-Pole and Two-Pole Unavailable)

EG-Frame



EG-Frame—100/100

	Three-Pole		Four-Pole 0% Protected Neutral ③	
	Fixed Thermal, Fixed Magnetic	Adjustable ② Thermal, Fixed Magnetic	Fixed Thermal, Fixed Magnetic	Adjustable ② Thermal, Fixed Magnetic
Maximum Continuous Amps at 40°C ①	Catalog Number	Catalog Number	Catalog Number	Catalog Number
15	EGC3015FFG	—	EGC7015FFG	—
16	EGC3016FFG	—	EGC7016FFG	—
20	EGC3020FFG	EGC3020AFG	EGC7020FFG	EGC7020AFG
25	EGC3025FFG	EGC3025AFG	EGC7025FFG	EGC7025AFG
30	EGC3030FFG	—	EGC7030FFG	—
32	EGC3032FFG	EGC3032AFG	EGC7032FFG	EGC7032AFG
35	EGC3035FFG	—	EGC7035FFG	—
40	EGC3040FFG	EGC3040AFG	EGC7040FFG	EGC7040AFG
45	EGC3045FFG	—	EGC7045FFG	—
50	EGC3050FFG	EGC3050AFG	EGC7050FFG	EGC7050AFG
60	EGC3060FFG	—	EGC7060FFG	—
63	EGC3063FFG	EGC3063AFG	EGC7063FFG	EGC7063AFG
70	EGC3070FFG	—	EGC7070FFG	—
80	EGC3080FFG	EGC3080AFG	EGC7080FFG	EGC7080AFG
90	EGC3090FFG	—	EGC7090FFG	—
100	EGC3100FFG	EGC3100AFG	EGC7100FFG	EGC7100AFG
125	EGC3125FFG	EGC3125AFG	EGC7125FFG	EGC7125AFG

Molded Case Switches ④

Catalog Number
EGK3125KSG
EGK7125KSG
EGK3160KSG
EGK7160KSG

Notes

① 16, 32, 63A are not UL listed ratings.
② Adjustable thermal is not UL listed.
③ Change the fourth digit to 7 for 100% neutral protection. Neutral is on LH side.
④ Molded case switches may open above 1250A.

Courtesy of CMA/Flodyne/Hydradyne ▪ Motion Control ▪ Hydraulic ▪ Pneumatic ▪ Electrical ▪ Mechanical ▪ (800) 426-5480 ▪ www.cmafh.com

EG Bolt-On Complete Breaker (Includes Frame, Trip Unit and Mounting Hardware)

EG-Frame



EG-Frame—18 kAIC at 480 Vac

Maximum Continuous Amps at 40°C	Single-Pole Fixed Thermal, Fixed Magnetic Catalog Number ①	Two-Pole Fixed Thermal, Fixed Magnetic Catalog Number ②	Three-Pole Fixed Thermal, Fixed Magnetic Catalog Number ③
15	**EGB1015FFB**	**EGB2015FFB**	**EGB3015FFB**
20	**EGB1020FFB**	**EGB2020FFB**	**EGB3020FFB**
25	**EGB1025FFB**	**EGB2025FFB**	**EGB3025FFB**
30	**EGB1030FFB**	**EGB2030FFB**	**EGB3030FFB**
35	**EGB1035FFB**	**EGB2035FFB**	**EGB3035FFB**
40	**EGB1040FFB**	**EGB2040FFB**	**EGB3040FFB**
45	**EGB1045FFB**	**EGB2045FFB**	**EGB3045FFB**
50	**EGB1050FFB**	**EGB2050FFB**	**EGB3050FFB**
60	**EGB1060FFB**	**EGB2060FFB**	**EGB3060FFB**
70	**EGB1070FFB**	**EGB2070FFB**	**EGB3070FFB**
80	**EGB1080FFB**	**EGB2080FFB**	**EGB3080FFB**
90	**EGB1090FFB**	**EGB2090FFB**	**EGB3090FFB**
100	**EGB1100FFB**	**EGB2100FFB**	**EGB3100FFB**
110	**EGB1110FFB**	**EGB2110FFB**	**EGB3110FFB**
125	**EGB1125FFB**	**EGB2125FFB**	**EGB3125FFB**

EG-Frame



EG-Frame—35 kAIC at 480 Vac

Maximum Continuous Amps at 40°C	Single-Pole Fixed Thermal, Fixed Magnetic Catalog Number ①	Two-Pole Fixed Thermal, Fixed Magnetic Catalog Number ②	Three-Pole Fixed Thermal, Fixed Magnetic Catalog Number ③
15	**EGS1015FFB**	**EGS2015FFB**	**EGS3015FFB**
20	**EGS1020FFB**	**EGS2020FFB**	**EGS3020FFB**
25	**EGS1025FFB**	**EGS2025FFB**	**EGS3025FFB**
30	**EGS1030FFB**	**EGS2030FFB**	**EGS3030FFB**
35	**EGS1035FFB**	**EGS2035FFB**	**EGS3035FFB**
40	**EGS1040FFB**	**EGS2040FFB**	**EGS3040FFB**
45	**EGS1045FFB**	**EGS2045FFB**	**EGS3045FFB**
50	**EGS1050FFB**	**EGS2050FFB**	**EGS3050FFB**
60	**EGS1060FFB**	**EGS2060FFB**	**EGS3060FFB**
70	**EGS1070FFB**	**EGS2070FFB**	**EGS3070FFB**
80	**EGS1080FFB**	**EGS2080FFB**	**EGS3080FFB**
90	**EGS1090FFB**	**EGS2090FFB**	**EGS3090FFB**
100	**EGS1100FFB**	**EGS2100FFB**	**EGS3100FFB**
110	**EGS1110FFB**	**EGS2110FFB**	**EGS3110FFB**
125	**EGS1125FFB**	**EGS2125FFB**	**EGS3125FFB**

Notes

① For bulk pack 24, add suffix BP24 and order quantities of 24.
② For bulk pack 12, add suffix BP12 and order quantities of 12.
③ For bulk pack 8, add suffix BP8 and order quantities of 8.

Courtesy of CMA/Flodyne/Hydradyne ▪ Motion Control ▪ Hydraulic ▪ Pneumatic ▪ Electrical ▪ Mechanical ▪ (800) 426-5480 ▪ www.cmafh.com

EG-Frame



EG-Frame—65 kAIC at 480 Vac

Maximum Continuous Amps at 40°C	Single-Pole Fixed Thermal, Fixed Magnetic Catalog Number ①	Two-Pole Fixed Thermal, Fixed Magnetic Catalog Number ②	Three-Pole Fixed Thermal, Fixed Magnetic Catalog Number ③
15	**EGH1015FFB**	**EGH2015FFB**	**EGH3015FFB**
20	**EGH1020FFB**	**EGH2020FFB**	**EGH3020FFB**
25	**EGH1025FFB**	**EGH2025FFB**	**EGH3025FFB**
30	**EGH1030FFB**	**EGH2030FFB**	**EGH3030FFB**
35	**EGH1035FFB**	**EGH2035FFB**	**EGH3035FFB**
40	**EGH1040FFB**	**EGH2040FFB**	**EGH3040FFB**
45	**EGH1045FFB**	**EGH2045FFB**	**EGH3045FFB**
50	**EGH1050FFB**	**EGH2050FFB**	**EGH3050FFB**
60	**EGH1060FFB**	**EGH2060FFB**	**EGH3060FFB**
70	**EGH1070FFB**	**EGH2070FFB**	**EGH3070FFB**
80	**EGH1080FFB**	**EGH2080FFB**	**EGH3080FFB**
90	**EGH1090FFB**	**EGH2090FFB**	**EGH3090FFB**
100	**EGH1100FFB**	**EGH2100FFB**	**EGH3100FFB**
110	**EGH1110FFB**	**EGH2110FFB**	**EGH3110FFB**
125	**EGH1125FFB**	**EGH2125FFB**	**EGH3125FFB**

Load Terminals

Maximum Breaker Amps	Terminal, Body Material	Wire Type	Metric Wire Range mm^2	AWG Wire Range	(Package of Three Terminals) Catalog Number
Standard Cu/Al Pressure Type Terminals					
15–50	Aluminum	Cu/Al	2.5–50	#14–1/0	**3TA125EF**
60–125	Aluminum	Cu/Al	16–70	#6–3/0	**3TA150EF**








Notes

① For bulk pack 24, add suffix BP24 and order quantities of 24.
② For bulk pack 12, add suffix BP12 and order quantities of 12.
③ For bulk pack 8, add suffix BP8 and order quantities of 8.

Courtesy of CMA/Flodyne/Hydradyne ▪ Motion Control ▪ Hydraulic ▪ Pneumatic ▪ Electrical ▪ Mechanical ▪ (800) 426-5480 ▪ www.cmafh.com

Accessories Selection Guide and Ordering Information

EG-Frame

3T125EF	3TA125EF	3TA150EF	3TA160EFK	EF2RTWK, Two-Pole–Metric EF3RTWK, Three-Pole–Metric EF4RTWK, Four-Pole–Metric EF2RTDK, Two-Pole–Imperial EF3RTDK, Three-Pole–Imperial EF4RTDK, Four-Pole–Imperial	Control Wire Terminal Kit GCWTK	Multiwire Connectors

Line and Load Terminals

Maximum Breaker Amps	Terminal Body Material	Wire Type	Metric Wire Range mm^2	AWG Wire Range	(Package of Three Terminals) Catalog Number
Standard Cu/Al Pressure Type Terminals					
125	Steel	Al	4–6	#12-10	**3T125EF** ①
125	Steel	Cu	2.5–95	#14-3/0	**3T125EF** ①
125	Aluminum	Cu/Al	2.5–50	#14-1/0	**3TA125EF**
160	Aluminum	Cu/Al	16–70	#6-3/0	**3TA150EF**
160	Aluminum	Cu/Al	35–120	#3-250	**3TA160EFK**
160	Aluminum	Cu/Al	35–120	#3-250	**4TA160EFK** ②

EG-Frame circuit breakers and molded case switches have line and load terminals as standard equipment.

Insert collar enclosing conductor as shown. Locate nut on top of conductor and tighten securely with screw and washer.

Caution: Collar must surround conductor.

Insert collar enclosing conductor and center on extrusion. Tighten securely with screw and washer. Endcap kits are used on the E-Frame breaker line side to connect busbar or similar electrical connections. Includes hardware.

Notes

① Standard line and load terminals.
② Four-pole kit with four terminals.

Courtesy of CMA/Flodyne/Hydradyne ▪ Motion Control ▪ Hydraulic ▪ Pneumatic ▪ Electrical ▪ Mechanical ▪ (800) 426-5480 ▪ www.cmafh.com

Control Wire Terminal Kit

	Catalog Number
Control wire terminal kit	**5652B38G01**
Package of 12—priced individually	

For use with steel or stainless steel standard line and load terminals only.

Interphase Barriers

	Catalog Number
Interphase barriers	**EIPBK**
Package of 12—priced individually	

The interphase barrier is available for extended insulation between circuit breaker poles. Specify quantity when ordering.

Base Mounting Hardware—DIN Rail Mounting

	Catalog Number
DIN rail adapter—single-pole	**EF1DIN**
DIN rail adapter—two-pole	**EGDIN**
DIN rail adapter—three- or four-pole	**EF34DIN**

Metric base mounting hardware is included with a circuit breaker or molded case switch. (Included with breaker.) If required separately, order S/N 8703C80G08.

Note: English mounting hardware kit can be supplied separate. Catalog number is **BMHE** #6–32 x 3 inches for two-, three- and four-pole. Single-pole mounting hardware metric order **8703C80G11**. English hardware **8703C80G12**. Both sold in quantities of 100.

Terminal Shields

The terminal shield is available for line terminal areas in three- and four-pole circuit breakers. Special terminal shields are also available for use when an electrical (solenoid) operator is mounted on the circuit breaker. The standard style number by pole for each terminal shield is for a package of 10 and is priced per each package. Special terminal shields are packaged individually.

Terminal Shields—IP30 Protection

Number of Poles	Catalog Number
3	**EFTS3K**
4	**EFTS4K**

Terminal End Covers (Gas Barrier)

The terminal end cover is available for three-pole circuit breakers only. Two conductor opening sizes are available. Specify quantity (one per circuit breaker) when ordering.

Terminal End Covers

Conductor Opening Diameter Inches (mm)	Catalog Number
6.35 (0.25)	**EEC3K**
10.41 (0.41)	**EEC4K**

Multiwire Connectors

Field-installed multiwire connectors for the load side (OFF) end terminals. They are used to distribute the load from the circuit breaker to multiple devices without the use of separate distribution terminal blocks.

Multiwire lug kits include mounting hardware, terminal shield insulators and tin-plated aluminum connectors to replace three mechanical load lugs. UL listed as used on the load side (OFF) end.

EG-Frame Multiwire Connectors Ordering Information (Package of 3) ①

Maximum Amperes	Wires per Terminal	Wire Size Range AWG Cu	Kit Catalog Number
125	3	14–2	**3TA125E3K**
125	6	14–6	**3TA125E6K**

Note

① For four-pole kit, change "3" at beginning of catalog number to "4."

Courtesy of CMA/Flodyne/Hydradyne ▪ Motion Control ▪ Hydraulic ▪ Pneumatic ▪ Electrical ▪ Mechanical ▪ (800) 426-5480 ▪ www.cmafh.com

Accessories

Allowable Accessory Combinations

Different combinations of accessories can be supplied, depending on the types of accessories and the number of poles in the circuit breaker.

EG-Frame Accessories

Description	Reference Page	Single-Pole	Two-Pole		Three-Pole			Four-Pole			
		Center	Left	Right	Left	Center	Right	Left	Center	Right	Neutral
Internal Accessories (Only one internal accessory per pole)											
Alarm lockout (Make/Break)	**V4-T2-104**	—	—	■	—	—	■	—	—	■	—
Alarm lockout (2Make/2Break)	**V4-T2-104**	—	—	■	—	—	■	—	—	■	—
Auxiliary switch (1A, 1B)	**V4-T2-104**	—	—	■	—	—	■	—	—	■	—
Auxiliary switch (2A, 2B)	**V4-T2-104**	—	—	■	—	—	■	—	—	■	—
Auxiliary switch and alarm switch combination	**V4-T2-104**	—	—	■	—	—	■	—	—	■	—
Shunt trip—standard	**V4-T2-104**	—	—	—	■	—	—	■	—	—	—
Undervoltage release mechanism	**V4-T2-105**	—	—	—	■	—	—	■	—	—	—
External Accessories											
End cap kit	**V4-T2-25**	—	●	●	●	●	●	●	●	●	●
Control wire terminal kit	**V4-T2-25**	●	●	●	●	●	●	●	●	●	●
Multiwire connectors	**V4-T2-25**	●	●	●	●	●	●	●	●	●	●
Base mounting hardware	**V4-T2-25**	●	●	●	●	●	●	●	●	●	●
Terminal shields	**V4-T2-25**	●	●	●	●	●	●	●	●	●	●
Terminal end covers	**V4-T2-25**	—	—	—	●	●	●	—	—	—	—
Interphase barriers	**V4-T2-25**	—	●	●	●	●	●	●	●	●	●
Non-padlockable handle block	**V4-T2-102**	■	■	—	—	■	—	—	■	—	—
Snap-on padlockable handle lock hasp	**V4-T2-102**	■	■	—	—	■	—	—	■	—	—
Padlockable handle lock hasp	**V4-T2-102**	—	—	■	❑	—	❑	❑	—	❑	—
Walking beam interlock—requires two breakers	**V4-T2-102**	—	—	—	●	●	●	●	●	●	●
Plug-in adapters	**V4-T2-102**	—	●	●	●	●	●	●	●	●	●
Electrical operator	**V4-T2-102**	—	—	—	●	●	●	—	—	—	—
Handle mechanisms	**V4-T2-407**	—	—	—	●	●	●	—	—	—	—
Modifications (Refer to Eaton)											
Moisture fungus treatment	**V4-T2-100**	●	●	●	●	●	●	●	●	●	●
Freeze-tested circuit breakers	—	●	●	●	●	●	●	●	●	●	●
Marine/naval application, UL 489 Supplement SA and SB	—	●	●	●	●	●	●	●	●	●	●

Legend

■ Applicable in indicated pole position
❑ May be mounted on left or right pole—not both
● Accessory available/modification available

Courtesy of CMA/Flodyne/Hydradyne ▪ Motion Control ▪ Hydraulic ▪ Pneumatic ▪ Electrical ▪ Mechanical ▪ (800) 426-5480 ▪ www.cmafh.com

Technical Data and Specifications

UL 489/IEC 60947-2 Interrupting Capacity (Symmetrical Amperes) (kA) Ratings

Circuit Breaker Type	Number of Poles	Volts AC (50/60 Hz) 120	220–240 I_{cu}	220–240 I_{cs}	277	347	380–415 I_{cu}	380–415 I_{cs}	480	600Y/347	690 ② I_{cu}	690 ② I_{cs}	Volts DC ① 125 I_{cu}	125 I_{cs}	250 ③④ I_{cu}	250 ③④ I_{cs}
EGB125	1	35	25	25	18	—	—	—	—	—	—	—	10	10	—	—
	2, 3, 4	—	25	25	—	—	18	18	18	—	—	—	—	—	10	10
EGE125	2, 3, 4	—	35	35	—	—	25	25	25	18	—	—	—	—	10	10
EGS125	1	100	85	43	35	22	—	—	—	—	—	—	35	35	—	—
	2, 3, 4	—	85	43	—	—	40	30	35	22	—	—	—	—	35	35
EGH125	1	200	100	50	65	30	—	—	—	—	—	—	42	42	—	—
	2, 3, 4	—	100	50	—	—	70	35	65	25	—	—	—	—	42	42
EGC125 ⑤	3, 4	—	200	200	—	—	100	100	100	35	—	—	—	—	42	42
EGB160 ②	3, 4	—	25	25	—	—	18	18	18	—	—	—	—	—	10	10
EGE160 ②	3, 4	—	35	35	—	—	25	25	25	18	—	—	—	—	10	10
EGS160 ②	3, 4	—	85	43	—	—	40	30	35	22	—	—	—	—	35	35

Dimensions and Weights


Approximate Dimensions in Inches (mm)

EG-Frame


Number of Poles	Width	Height	Depth
1	1.00 (25.4)	5.50 (139.7)	2.99 (75.9)
2	2.00 (50.8)	5.50 (139.7)	2.99 (75.9)
3	3.00 (76.2)	5.50 (139.7)	2.99 (75.9)
4	4.00 (101.6)	5.50 (139.7)	2.99 (75.9)

EG-Frame

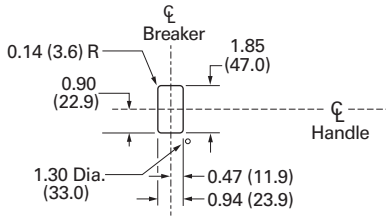
Front Cover Cutout



Front View Three-Pole



Side View



Approximate Shipping Weight in Lbs (kg)

EG-Frame

Breaker Type	Number of Poles 1	2	3	4
EGB125	1.5 (0.68)	2.0 (0.91)	3.0 (1.36)	4.9 (1.82)
EGC125	1.5 (0.68)	2.0 (0.91)	3.0 (1.36)	4.9 (1.82)
EGE125	1.5 (0.68)	2.0 (0.91)	3.0 (1.36)	4.9 (1.82)
EGH125	1.5 (0.68)	2.0 (0.91)	3.0 (1.36)	4.9 (1.82)
EGS125	1.5 (0.68)	2.0 (0.91)	3.0 (1.36)	4.9 (1.82)


Breaker Type	Number of Poles 3	4
EGB160	3.0 (1.36)	4.9 (1.82)
EGE160	3.0 (1.36)	4.9 (1.82)
EGS160	3.0 (1.36)	4.9 (1.82)

Notes

① DC ratings apply to substantially non-inductive circuits.
② IEC only.
③ Two-pole circuit breaker, or two poles of three-pole circuit breaker.
④ Time constant is 3 milliseconds minimum at 10 kA and 8 milliseconds minimum at 42 kA.
⑤ Current limiting per UL 489.

Courtesy of CMA/Flodyne/Hydradyne ▪ Motion Control ▪ Hydraulic ▪ Pneumatic ▪ Electrical ▪ Mechanical ▪ (800) 426-5480 ▪ www.cmafh.com

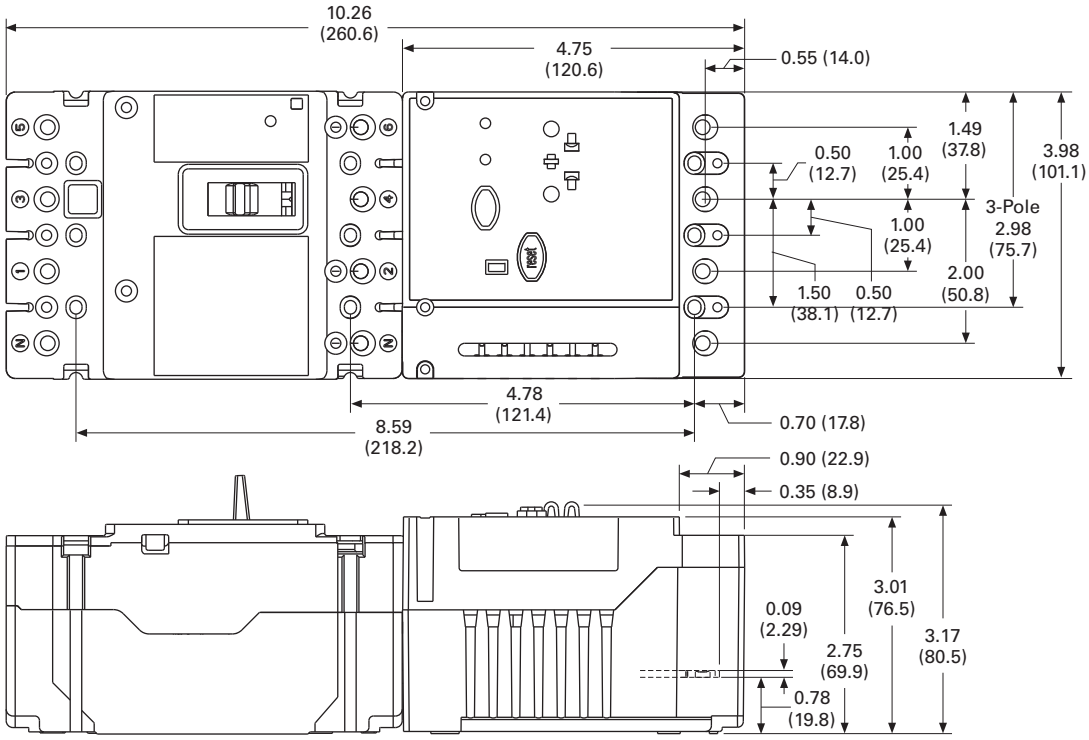EG-Frame With Earth Leakage Module



EG-Frame With Current Limiter Module

