

High performance PLC Programmable logic controller -PL4U

DESCRIPTION


The the PL4U is a high performance programmable logic controller (PLC) created to provide a facility to universities and colleges for developing the PLC practice process, becoming it in a facility to get a powerful tool by a small price.

This is an open source project that you can improve or edit to fit your needs as university or individual

FEATURES

- Many I/O.
- Modular
- Small and easy to fix
- Works from 24 to 12V
- Compact design
- Based on microcontroller


PIN CONFIGURATION

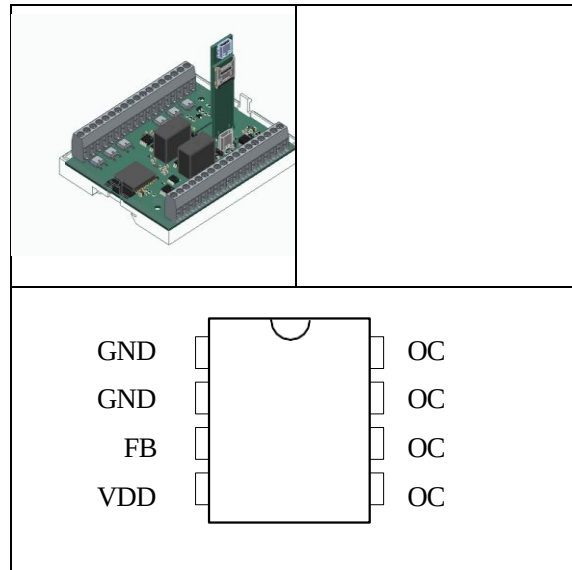

TYPICAL APPLICATION



- Automation.
- PLC learning and practicing
- Scada systems
- Machinery control

PIN DESCRIPTION

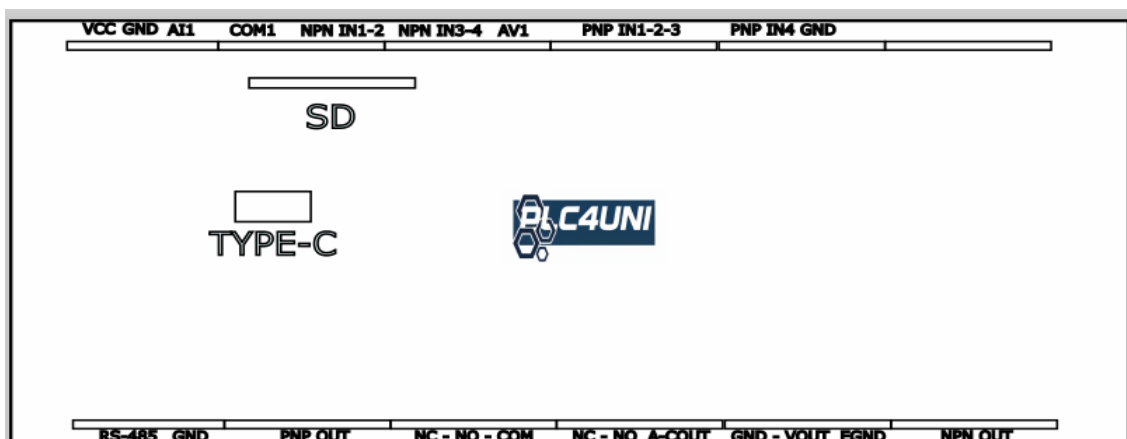

- It has several Digital I/O those are NPN and PNP, the COM 1 is the MINUS (-) Input For NPN. And EGND is the external source port for NPN Outputs .
- It has a type c communication and SD to use whenever you want to save a program.

BLOCK DIAGRAM

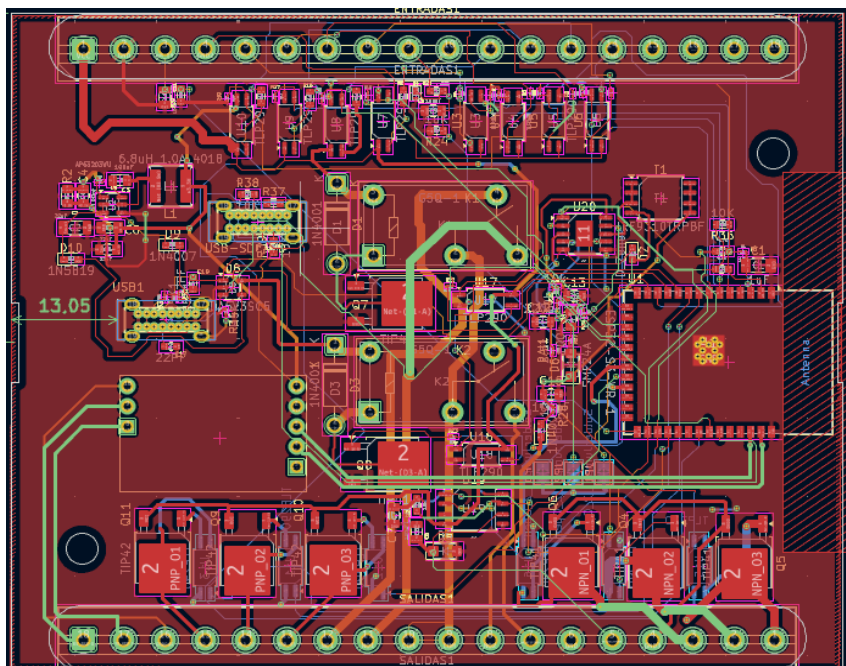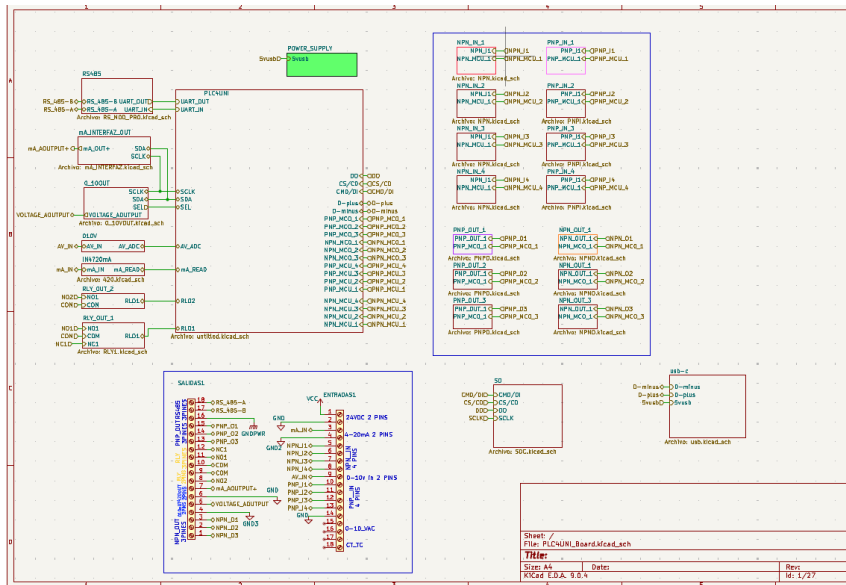



Note : Do never use under or over voltage, keep out of kids.





PLC4UN


ELECTRICAL CHARACTERISTICS (TA=25°C)


PARAMETER	SYMBOL	TEST CONDITION	MIN	TYP	MAX	UNIT
VCC Voltage Section						
Working Power Supply	V _{CC}	—	4	4.7	5.5	V
Start Threshold Voltage	V _{CC_ON}	—	4.6	4.9	5.2	V
Resart Volage	V _{CC_OFF}	—	3.2	3.5	3.8	V
Protect Voltage of VCC	V _{CC_OVP}	—	5.6	5.9	6.2	V
VCC Right Working Device	VCC	11V~32V	-	-	-	mA
Starting Current	-	-	-	-	—	μA
Working Current	-	-	—	-	-	-
OSCILLATOR Section						
Frequency	-	-	-	-	-	-

PICTURES

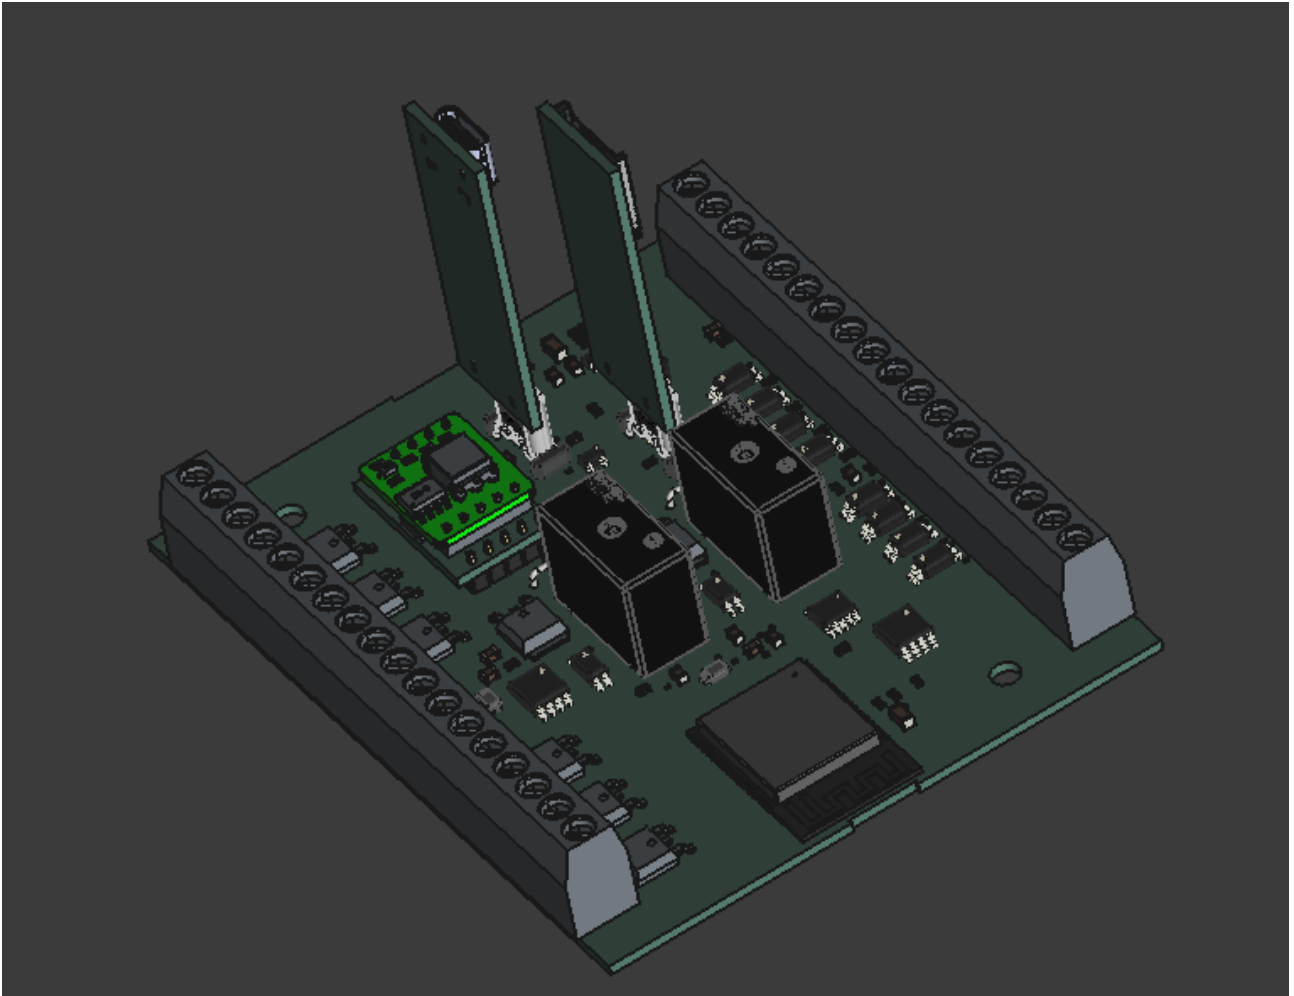

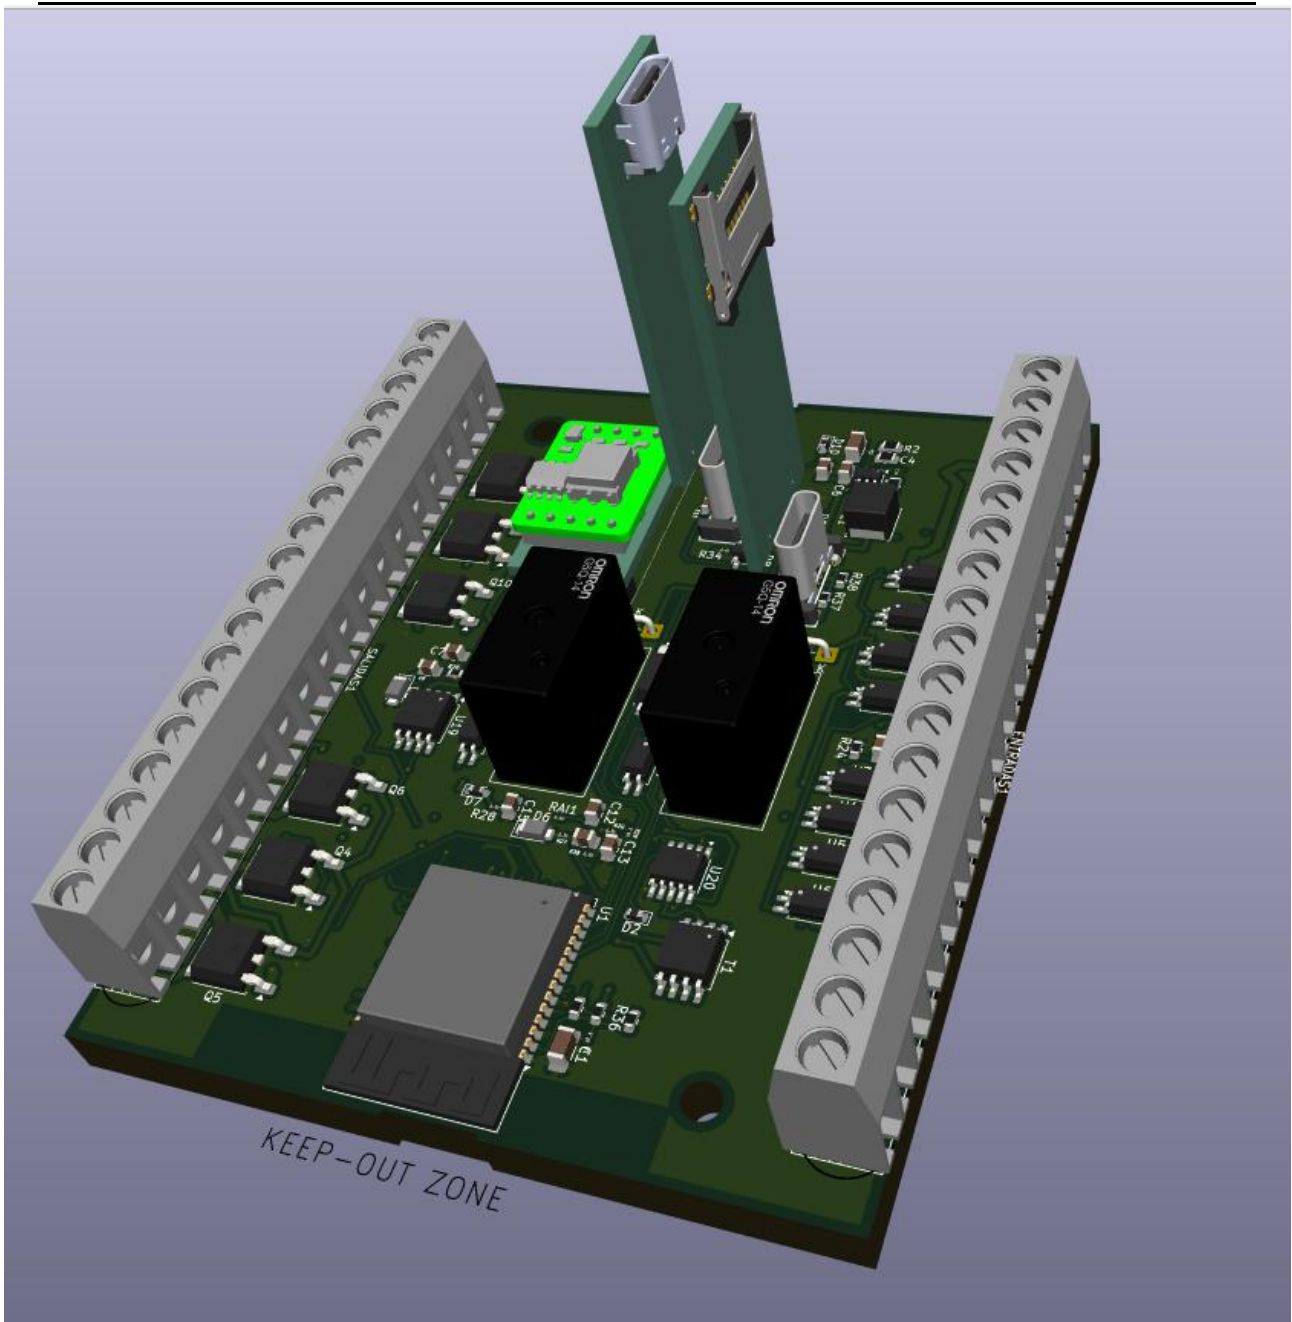

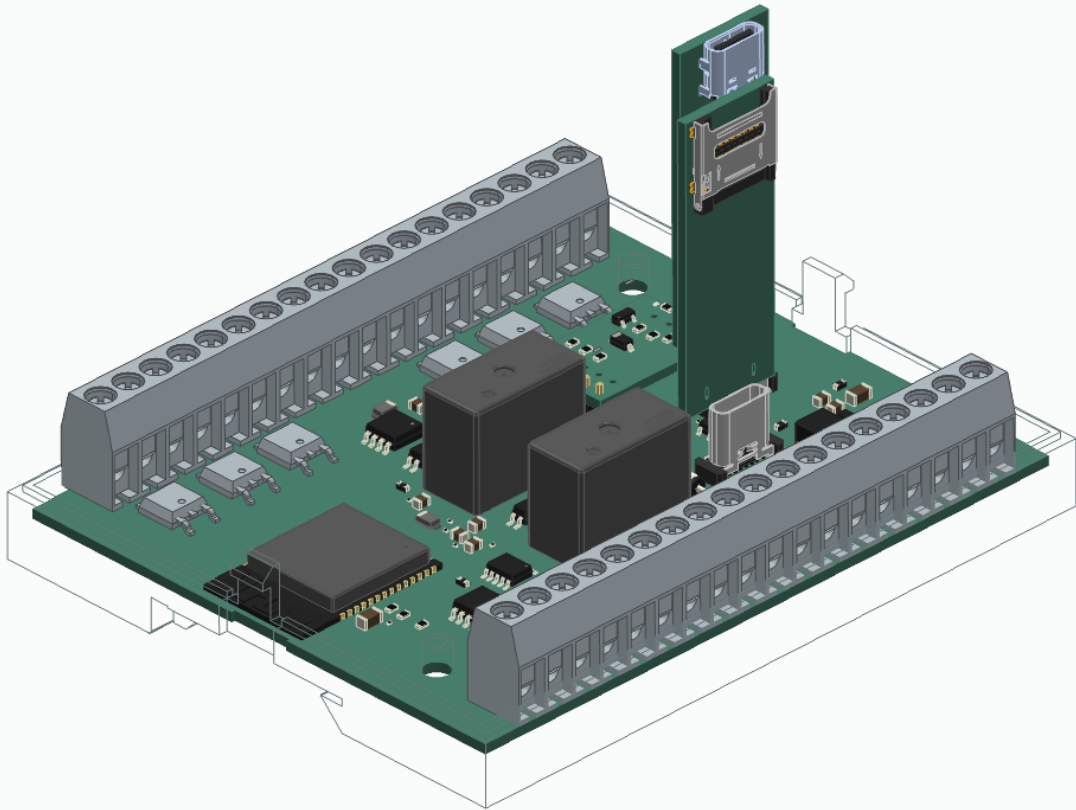

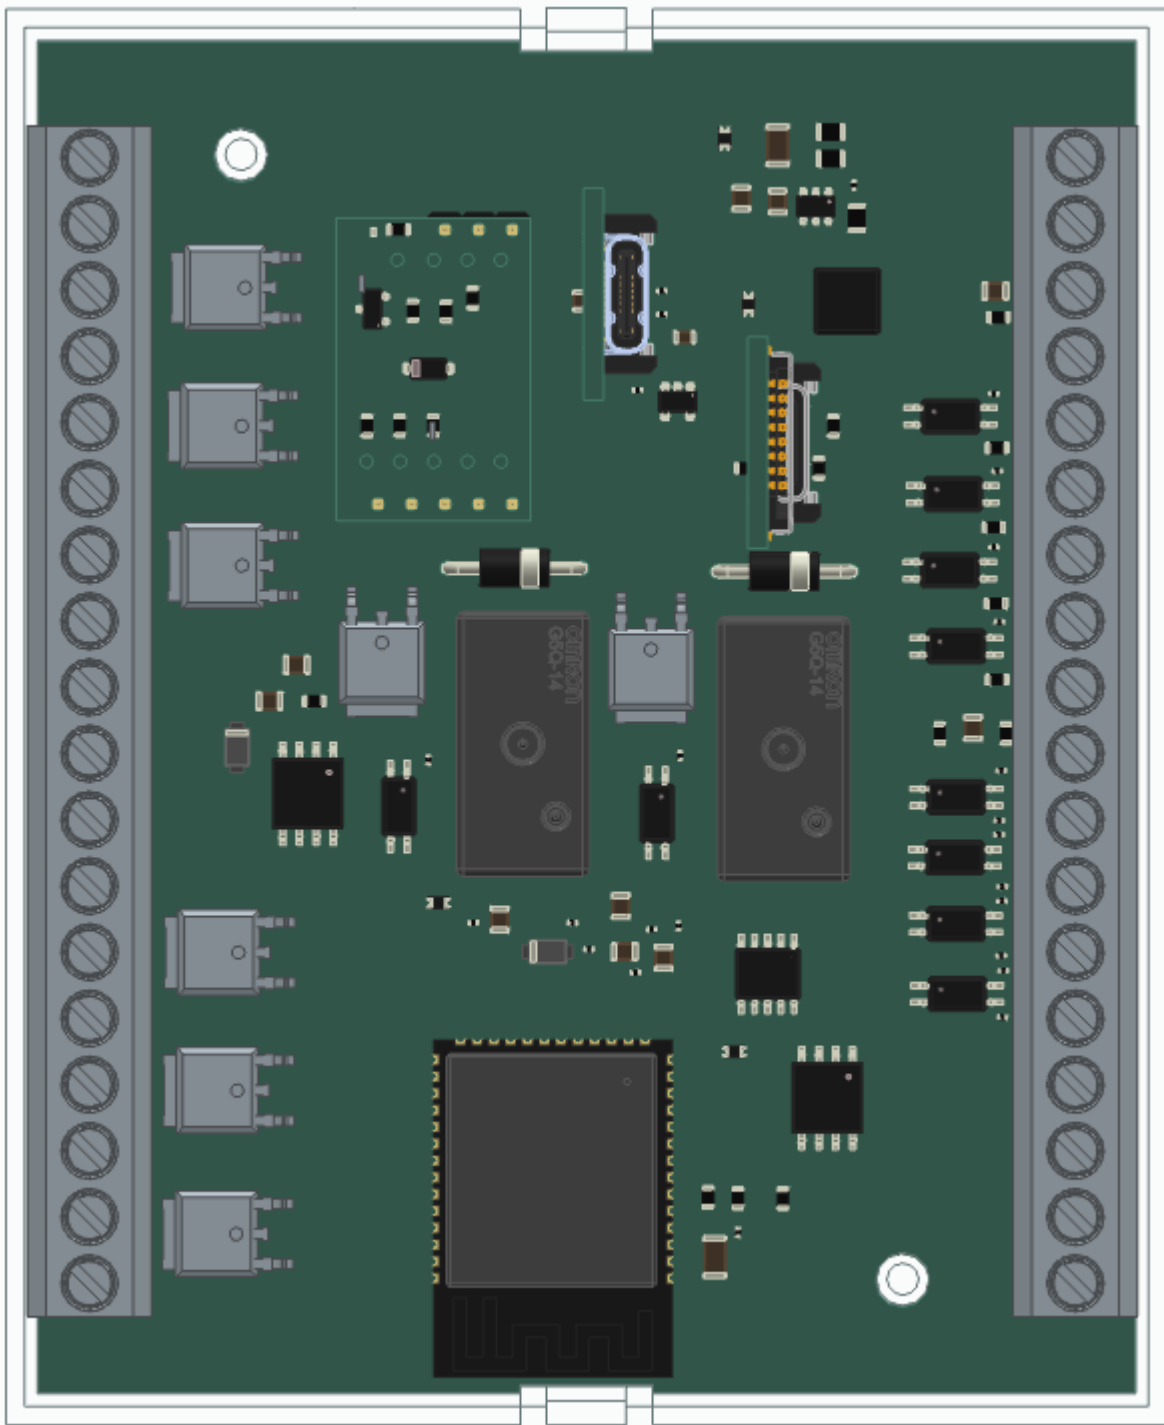

OUTLINE DRAWING