ANA®

EBOSS® 220-125 HYBRID SYSTEM

120/220 kVA PRIME/PEAK POWER

- **20X** — UP TO 20X THE CYCLE LIFE OF NMC/LFP BATTERIES
- SAFE BATTERY TECHNOLOGY NO THERMAL RUNAWAY
- 130°F / -22°F — WIDEST TEMPERATURE OPERATING RANGE
- 1Φ AND 3Φ — SIMULTANEOUS OUTPUT VOLTAGES
- REMOTE ACCESS MONITORING & TRACKING
- INDUSTRIAL GRADE INVERTERS

75 kWh ULTRA HIGH CYCLE LITHIUM TITANIUM OXIDE (LTO) BATTERY CHEMISTRY

PERFORMANCE //

1 - 10" Touchscreen Control Panel
2 - Simul. Voltage Output Panel
3 - Emergency Stop Button
4 - Delta Demand Excitation™
5 - QuieTech™ Sound Attenuation
6 - Telematics Monitoring System

MAINTENANCE //

7 - Lift-off Door Hinges
8 - Ext. Fuel Tank Connections
9 - 110% Fluid Containment
10 - Service Extensions
11 - Fuel & Containment Drains
12 - Removable Trailer Fenders

CONSTRUCTION //

13 - Power-coated Steel Enclosure
14 - Stainless Steel Hardware
15 - Lockable Access Doors
16 - Automotive Door Seals
17 - 168 Gallon Fuel Tank
18 - Heavy-Duty Steel Trailer

AIRMAN GENERATORS TIER 4 FINAL — TIER4F

ISUZU® BR-4HK1X
Tier 4 / CARB
Diesel Engine

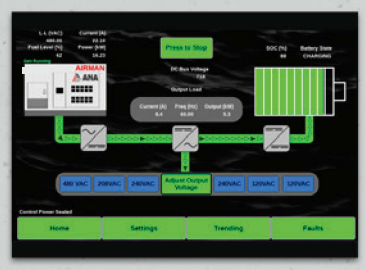

1 | 10" Touchscreen Control Panel with color display

2 | Simultaneous Voltage Output Panel
120V - 20A x 2 | 480/208V 3Φ Cam-Loks™

6 | Telematics Monitoring System
Remote access and monitoring of fuel, runtime, GPS, load and more

8 | External Fuel Tank Connections with 3-Way Selection Valve

IMPROVE FUEL ECONOMY // LOWER CARBON EMISSIONS \\ REDUCE NOISE LEVELS

THE INDUSTRY'S HIGHEST-QUALITY HYBRID POWER SYSTEMS

HYBRID SYSTEM MODEL
EBOSS® 220-125

SPECIFICATIONS	EBOSS® 220-125
HYBRID ENERGY SYSTEM	ANA EBOSS®
MAXIMUM INTERMITTENT POWER OUTPUT	(Battery SOC Greater than 5%)
THREE-PHASE	220 kVA / 176 kW
SINGLE-PHASE	N/A / N/A
FREQUENCY	60 Hz
SIMULTANEOUS VOLTAGE	120V (1Φ) • 208/480 (3Φ)
VOLTAGE REGULATION	Adjustable
MAX. INTERMITTENT AMP-LOAD @208V	700 A
MAX. INTERMITTENT AMP-LOAD @480V	303 A
MOTOR START RATING - 3 SECOND @208V	1065 A
MOTOR START RATING - 3 SECOND @480V	461 A
MAXIMUM CONTINUOUS POWER OUTPUT	(Battery SOC greater than 0%)
GENERATOR	Airman SDG125
GENERATOR CHARGE RATE	125 kVA / 100 kW
THREE-PHASE OUTPUT	120 kVA / 96 kW
SINGLE-PHASE OUTPUT	2.4 kW x 2
SIMULTANEOUS VOLTAGE	120V (1Φ) • 208/480 (3Φ)
OPTIMAL CONTINUOUS LOAD	< 75 kW
MAX. CONTINUOUS AMP-LOAD @208V	328 A
MAX. CONTINUOUS AMP-LOAD @480V	150 A
CONTROLS	
CONTROL PANEL	10" Full Color Touch Screen
TELEMATICS	Generator & EBOSS®
ESG REPORTING	Yes
TECHNOLOGY	
BATTERY CHEMISTRY	Lithium Titanium Oxide (LTO)
BATTERY CAPACITY	75 kWh
TOTAL BATTERY LIFE OR ENERGY THROUGHOUT	6,000 MWh
CHARGE TIME (NO LOAD)	≈ 50 min
INVERTER OUTPUT MAX	176 kW
BATTERY LIFE*	
BATTERY TYPE	Lithium Titanium Oxide (LTO)
EST. CYCLE LIFE @ 77°F ENCLOSURE TEMPERATURES	90K Cycles at 90% DOD
EST. CYCLE LIFE @ 100°F ENCLOSURE TEMPERATURES	80K Cycles at 90% DOD
BATTERY LIFE (100°F @ 3 kW AVERAGE LOAD)	20 Years
OPERATING TEMPERATURES	
INVERTER COLD START TEMPERATURE (MINIMUM)	14°F
RUNNING OPERATING TEMPERATURE	-22°F to 130°F
ARCTIC PACKAGE OPERATING TEMP. (OPTIONAL)	-50°F to 130°F
FEATURES & OPTIONS	
TRAILER MOUNT	Available
SKID MOUNT	Available
PARALLEL CAPABILITY	Available
COLD WEATHER/ARCTIC PACKAGES	Available

WEIGHTS & DIMENSIONS	
L x W x H x (EBOSS® ONLY)	91" x 62" x 102"
EBOSS® WEIGHT ONLY	8,673 lbs
L x W x H (TRAILER AND GENERATOR)	255" x 84" x 106"
TOTAL WEIGHT (WITHOUT/WITH FUEL)	17,520 / 19,020 lbs
INTEGRAL FUEL TANK CAPACITY	168 gal
GENERATOR COLD WEATHER OPTIONS	
BLOCK HEATER | CCV HEATER	Available
FUEL FILTER HEATER | FUEL TANK HEATER	Available
BATTERY BLANKET	Available
ENERGY BOSS COLD WEATHER OPTIONS	
Enclosure Heater	Available
Magnetic Ventillation Covers	Available
WARRANTY	
EBOSS® ONLY	2 Years
EBOSS® WITH TRAILER & GENERATOR	2 Years, 2000 Hours
MANUFACTURER BATTERY WARRANTY	7 Years
SERVICE & SUPPORT	24/7, 365 Days
TRAINING	Henderson, NV or On Location

HOW THE ANA EBOSS® BATTERY COMPARES

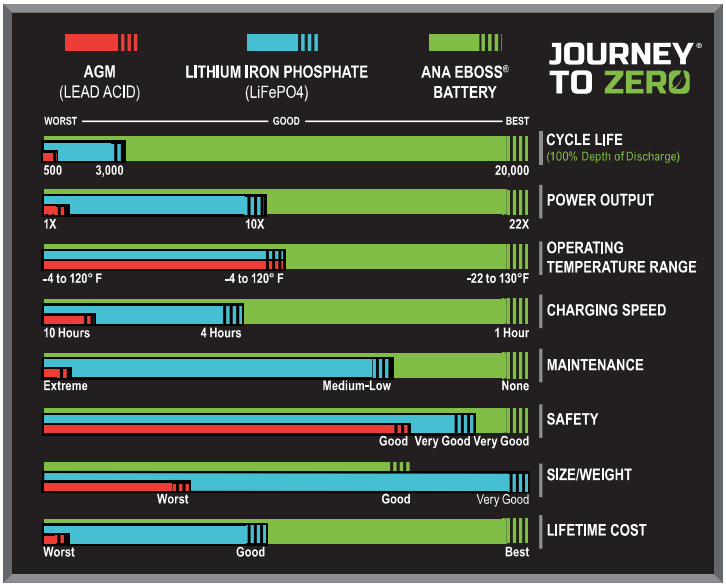

*Battery expected to retain 95% of its life after 7 years under 24/7 operation at 10% average load.

All specifications are subject to change without prior notice. Contact ANA Inc. for the most current information.

ANA EBOSS® HYBRID ENERGY SYSTEMS BENEFITS

- Increased Fuel Efficiency
- Cost Effective High ROI
- Eliminate Maintenance Needs and Operational Hours by up to 75%
- Reduced Green House Gas Emissions
- Minimize Noise / Maximize Quiet Time
- Remote Access and Monitoring

SOLD AND SERVICED BY

ANA Nevada
1740 Raiders Way
Henderson, NV 89052

ANA S. California
11100 Hope Street
Cypress, CA 90630

ANA N. California
1315 Vinci Avenue
Sacramento, CA 95838

ANA South Carolina
1335 Hayne Street
Spartanburg, SC 29301

ANA, Inc.
Executive Office
1770 Raiders Way, Henderson, NV 89052

ANACORP.COM
(562) 450-3570 // sales@anacorp.com

ANA
We make your world easier.

© 2025 Alliance North America, Inc. All rights reserved.
Airman® is a registered trademark of Hokuetsu Industries Co. Ltd. All other trademarks are property of their respective owners. Form EBOSSREV0126 - U.S. Patent No. 12,283,8222