ANA

EBOSS® 70-45
HYBRID SYSTEM

45/70 kVA PRIME/PEAK POWER

20X
UP TO 20X THE CYCLE LIFE OF NMC/LFP BATTERIES

SAFE BATTERY TECHNOLOGY NO THERMAL RUNAWAY

130°F / -22°F
WIDEST TEMPERATURE OPERATING RANGE

1Φ AND 3Φ
SIMULTANEOUS OUTPUT VOLTAGES

REMOTE ACCESS MONITORING & TRACKING

INDUSTRIAL GRADE INVERTERS

25 kWh ULTRA HIGH CYCLE LITHIUM TITANIUM OXIDE (LTO) BATTERY CHEMISTRY

PERFORMANCE //
1 - 10" Touchscreen Control Panel
2 - Simul. Voltage Output Panel
3 - Emergency Stop Button
4 - QuieTech™ Sound Attenuation
5 - Telematics Monitoring System

MAINTENANCE //
6 - Lift-off Door Hinges
7 - Ext. Fuel Tank Connections
8 - 110% Fluid Containment
9 - Service Extensions
10 - Fuel & Containment Drains
11 - Removable Trailer Fenders

CONSTRUCTION //
12 - Power-coated Steel Enclosure
13 - Stainless Steel Hardware
14 - Lockable Access Doors
15 - Automotive Door Seals
16 - 80.5 Gallon Fuel Tank
17 - Heavy-Duty Steel Trailer

AIRMAN GENERATORS TIER 4 FINAL TIER4F

ISUZU® 4LE2T
Tier 4 / CARB
Diesel Engine

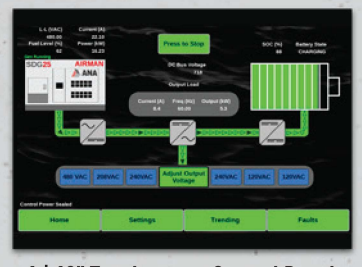

1 | 10" Touchscreen Control Panel with color display

2 | Simultaneous Voltage Output Panel
120V - 20A x 2 | 240V - 50A x 3
1Φ 240V & 3Φ 208/480v Cam-Loks™

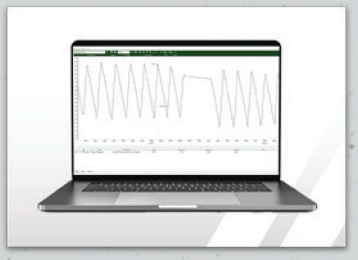

5 | Telematics Monitoring System
Remote access and monitoring of fuel, runtime, GPS, load and more

7 | External Fuel Tank Connections with 3-Way Selection Valve

IMPROVE FUEL ECONOMY // LOWER CARBON EMISSIONS \\ REDUCE NOISE LEVELS

THE INDUSTRY'S HIGHEST-QUALITY HYBRID POWER SYSTEMS

HYBRID SYSTEM MODEL
EBOSS® 70-45

SPECIFICATIONS	EBOSS® 70-45
HYBRID ENERGY SYSTEM	ANA EBOSS®
MAXIMUM INTERMITTENT POWER OUTPUT	(Battery SOC Greater than 5%)
THREE-PHASE	70 kVA / 56 kW
SINGLE-PHASE	47 kVA / 37 kW
FREQUENCY	60 Hz
SIMULTANEOUS VOLTAGE	120/240 (1Φ) • 208/480 (3Φ)
VOLTAGE REGULATION	Adjustable
MAX. INTERMITTENT AMP-LOAD @208V	194 A
MAX. INTERMITTENT AMP-LOAD @480V	84 A
MOTOR START RATING - 3 SECOND @208V	291 A
MOTOR START RATING - 3 SECOND @480V	126 A
MAXIMUM CONTINUOUS POWER OUTPUT	(Battery SOC greater than 0%)
GENERATOR	AIRMAN® SDG45
GENERATOR CHARGE RATE	45 kVA / 36 kW
THREE-PHASE OUTPUT	42 kVA / 33 kW
SINGLE-PHASE OUTPUT	28 kVA / 22 kW
SIMULTANEOUS VOLTAGE	120/240 (1Φ) • 208/480 (3Φ)
MAX. CONTINUOUS AMP-LOAD @208V	119 A
MAX. CONTINUOUS AMP-LOAD @480V	54 A
CONTROLS	
CONTROL PANEL	10" Full Color Touch Screen
TELEMATICS	Generator & EBOSS®
ESG REPORTING	Yes
TECHNOLOGY	
BATTERY CHEMISTRY	Lithium Titanium Oxide (LTO)
BATTERY CAPACITY	25 kWh
TOTAL BATTERY LIFE OR ENERGY THROUGHOUT	2,000 MWh
CHARGE TIME (NO LOAD)	≈ 45 Minutes
INVERTER OUTPUT MAX	56 kW
BATTERY LIFE*	
BATTERY TYPE	Lithium Titanium Oxide (LTO)
EST. CYCLE LIFE @ 77°F ENCLOSURE TEMPERATURES	90K Cycles at 90% DOD
EST. CYCLE LIFE @ 100°F ENCLOSURE TEMPERATURES	80K Cycles at 90% DOD
BATTERY LIFE (100°F @ 3 kW AVERAGE LOAD)	20 Years
OPERATING TEMPERATURES	
INVERTER COLD START TEMPERATURE (MINIMUM)	14°F
RUNNING OPERATING TEMPERATURE	-22°F to 130°F
ARCTIC PACKAGE OPERATING TEMP. (OPTIONAL)	-50°F to 130°F
FEATURES & OPTIONS	
TRAILER MOUNT	Available
SKID MOUNT	Available
ROOF MOUNTED SOLAR FOR EBOSS BATTERY, 3 PANELS (1.6 kW)	Available
PARALLEL CAPABILITY	Available
COLD WEATHER/ARCTIC PACKAGES	Available

WEIGHTS & DIMENSIONS	
L x W x H x (EBOSS® ONLY)	55" x 44" x 62"
EBOSS® WEIGHT ONLY	2,700 lbs
L x W x H (TRAILER AND GENERATOR)	167" x 71" x 76"
TOTAL WEIGHT (WITHOUT/WITH FUEL)	6950 / 7600 lbs
INTEGRAL FUEL TANK CAPACITY	80.5 gal
GENERATOR COLD WEATHER OPTIONS	
BLOCK HEATER | CCV HEATER	Available Now
FUEL FILTER HEATER | FUEL TANK HEATER	Available Now
BATTERY BLANKET	Available Now
EBOSS COLD WEATHER OPTIONS	
ENCLOSURE HEATER	Available Now
MAGNETIC VENTILLATION COVERS	Available Now
WARRANTY	
EBOSS® ONLY	2 Years
EBOSS® WITH TRAILER & GENERATOR	2 Years, 2000 Hours
MANUFACTURER BATTERY WARRANTY	7 Years
SERVICE & SUPPORT	24/7, 365 Days
TRAINING	Henderson, NV or On Location

*Battery expected to retain 95% of its life after 7 years under 24/7 operation at 3kW average load.

EBOSS® Solar 1.6

Solar Power to help charge your EBOSS Battery System during the day

- **Utility Scale Mono Bifacial Solar Modules**
- **High Powered 3-Phase Quad Microinverter**
- **UL1741/ CSA C22.2 No. 107.1-16/ UL1741SA/ UL1741SB/ IEEE1547**
- **Integrated Safety Protection**
- **96.5% Peak Efficiency**
- **Custom Solar Drawer with Locking Mechanism**
- **IRA Compliant**

All specifications are subject to change without prior notice. Contact ANA Inc. for the most current information.

ANA EBOSS® HYBRID ENERGY SYSTEMS BENEFITS

- Increased Fuel Efficiency
- Cost Effective High ROI
- Eliminate Maintenance Needs and Operational Hours by up to 75%
- Reduced Green House Gas Emissions
- Minimize Noise / Maximize Quiet Time
- Remote Access and Monitoring

SOLD AND SERVICED BY

ANA Nevada
1740 Raiders Way
Henderson, NV 89052

ANA S. California
11100 Hope Street
Cypress, CA 90630

ANA N. California
1315 Vinci Avenue
Sacramento, CA 95838

ANA South Carolina
1335 Hayne Street
Spartanburg, SC 29301

ANA, Inc.
Executive Office
1770 Raiders Way, Henderson, NV 89052

ANACORP.COM
(562) 450-3570 // sales@anacorp.com

ANA
We make your world easier.

© 2025 Alliance North America, Inc. All rights reserved.
U.S. Patent No. 12,283,822 | Airman® is a registered trademark of Hokuetsu Industries Co. Ltd. All other trademarks are property of their respective owners. Form EBOSSREV1025