KLAUKE
CATALOGUE
2017/18

www.klauke.com

THORNE & DERRICK INTERNATIONAL

Thorne & Derrick
+44 (0) 191 410 4292
www.powerandcables.com

Electrical connection system Crimping tools **Cutting tools** Holemaking tools **Universal tools**
Hand tools **Cable pulling technology** **Testing and measuring instruments**



Verbindungen mit System
The Power of Partnership

KLAUKE®
A Textron Company

KLAUKE NEWS

BATTERY POWERED
CUTTING TOOL
ESM 50

PAGE 385



ELECTROMECHANICAL
CRIMPING TOOL
KLAUKE MICRO
EK 50 ML

PAGE 254





CRIMPING TOOL FOR CABLE END-SLEEVES (ONE CRIMPING PROFILE FOR ALL CROSS-SECTIONS)
K 30/6 K

PAGE 217



BATTERY POWERED HYDRAULIC PUNCHING TOOL
LS 50 FLEX

PAGE 439



ALWAYS A STEP AHEAD. OUR NEW PRODUCT INNOVATIONS.



V-WATCH

PAGE 594

Electrical connection systems

Crimping

Cutting

Punching

Universal tools

Pumps

Hand tools

Cable-pulling technology

Testing and measuring instruments

Additional information

WORLDWIDE DISTRIBUTION AND SERVICE NETWORK



Your contact to Klauke Worldwide representatives see last pages of this catalogue or look at:

www.klauke.com/en/contact/

MORE THAN 135 YEARS OF EXPERIENCE



OUR COMPANY CERTIFICATES



ISO 9001:2008
Quality management system

ISO 14001:2004
Environmental management system

ISO/TS 16949:2009
Quality standard for the automotive industry

STRONG BRANDS FOR YOUR SUCCESS:

GREENLEE®

HOLEMAKING TOOLS, CABLE PULLING TECHNOLOGY, TESTING AND MEASURING INSTRUMENTS

Klauke®

ELECTRICAL CONNECTION SYSTEM, CRIMPING AND CUTTING TOOLS, HAND TOOLS

HDE®

TEST INSTRUMENTS FOR MEDIUM AND HIGH VOLTAGE

OUR FIELDS OF EXPERTISE
FOUR SECTORS, ONE QUALITY

We take your needs seriously. For us, “Made by Klauke” means that all products are produced to the highest quality.

ELECTRICAL DISTRIBUTION - STRONG PARTNER WORLDWIDE



Klauke, Greenlee and HDE are your strong team - innovative, reliable and cost-effective. Together they form a connection that has been established for professional service providers worldwide in the energy supply and panel building industries.

AUTOMOTIVE CONNECTOR SOLUTIONS - KNOW-HOW FOR EXTRAORDINARY SOLUTIONS



Decades of experience go into the development and manufacture of our products for the automobile sector. From standard to custom and non-standard cable lugs - our solutions are used in any onboard systems.

ASSEMBLY SOLUTIONS - SPECIAL TYPE OF QUALITY



We are at our customers' service. Klauke offers highly-flexible solutions for your specific requirements for small production runs in the industrial commodity sector. This includes punched parts, wiring harnesses and pre-assembled cables and connectors.
For your custom products, we rely on our in-house development and production expertise. Customers from sectors such as automotive, heating, air-conditioning, white goods, renewable energies or e-mobility rely on our quality.

CUSTOMIZED TOOLS - IMPROVING FOR THE FUTURE



We are market leaders: Our battery-powered hydraulic tools for the plumbing, heating and ventilation industries are at the forefront of the crimped connections sector. But that's not enough for us: In the Customized Tools sector, our tool experts together with our customers are always developing new prototypes, no matter whether for the cutting, crimping or punching segment.
We support you through the development process to the finished product including the After Sales service. We are at your service.

KLAUKE AFTER SALES SERVICE - PERFECTLY TAILORED FOR YOUR DAY-TO-DAY WORK

Information exchange and close cooperation are an important Klauke quality feature, which is key to our customers' success. We look at the initial requirements through product development to find the best solution together. The best solution for us, though, does not end when the product is delivered, but continues with advice and service support.

KLAUKE HOTLINE

HOTLINE:
0800 4 68 55 28

Your direct link to our tool service offers:
http://www.klauke.com/en/support/tool-service/

Link to our support video:
youtube.com/watch?v=0PMgCGz7GQk

KLAUKE SERVICE OFFERS

- Video support with live demonstration of your application and the product
- Your questions are answered immediately after prior agreement
- Service van for on-site service

KLAUKE GUARANTEE

- Worldwide repair and maintenance service through over 60 authorised Service Centers (Klauke ASC).
- Full maintenance service with annual inspection and maintenance at fixed prices


KlauKe ASC®
Authorised Service Center

THE BEST CONNECTION.

Thanks to the Klauke system, you can be sure that your connection will withstand any load. We find the right connector for every conductor.





Electrical connection systems

Copper tubular cable lugs and connectors **10**
Tubular cable lugs 10
Tubular cable lugs for switchgear connections 16
Angle tubular cable lugs 17
Connectors 21
Insulated tubular cable lugs und connectors 25
Tubular cable lugs and connectors, blue connection® 28
Tubular cable lugs and compression joints for solid conductors 30
Tubular cable lugs and connectors for fine stranded conductors 33
Tool application chart 38

Tubular cable lugs and connectors - nickel, stainless steel **46**
Tubular cable lugs and connectors - stainless steel 48
Tubular cable lugs and connectors - nickel 50
Tool application chart 53

Copper compression cable lugs and connectors acc. to DIN **54**
Compression cable lugs acc. to DIN 46235 56
Angle compression cable lugs 58
Compression cable lugs, special type 62
Compression joints acc. to DIN 46267, part 1 and similar versions 64
Tool application chart 69

Copper terminals, connectors and pin terminals acc. to DIN **72**
Solderless terminals acc. to DIN 46234 74
Insulated solderless terminals 76
Solderless terminals, fork and pin type 78
Insulated solderless terminals for meter connections 80
Solderless connectors acc. to DIN 46341, part 1 80
Tool application chart 82

Sleeves for compacted conductors and sector-shaped conductors - copper **86**

Aluminium compression cable lugs and connectors acc. to DIN **92**
Aluminium compression cable lugs acc. to DIN 46329 and similar versions 94
Aluminium compression joints acc. to DIN 46267 part 2 and similar versions 97
Aluminium reduction compression joints 99
Aluminium compression joints, full tension 101
Aluminium compression cable lugs and connectors for Al/St cables DIN EN 50182 102
Tool application chart 103

Aluminium/copper compression cable lugs and connectors **106**
Aluminium/copper compression cable lugs 108
Aluminium/copper compression joints 111
Bi-metallic washer 114
Tool application chart 115

Clamps and screw connectors **116**
Punched cable lugs - copper 118
Screw connectors with soldering hole - brass 119
Parallel groove clamps - copper 120
C- and H-shaped clamps - copper 122
Screw connector for shielded copper wires 124
Screw connectors for street lighting - brass 124
Screw connectors, high-resistant aluminium alloy 125
Compact tab connectors, high resistant aluminium alloy 130
Tool application chart 133

Cable end-sleeves **136**
Cable end-sleeves DIN 46228, part 1 and part 2 138
Insulated cable-end sleeves acc. to DIN 46228, part 4 and similar versions 141
Insulated cable end-sleeves for short circuit resistant conductors 146
Insulated twin cable-end sleeves 147
Insulated cable-end sleeves, strips and tapes 148
Tool application chart 150

Cable connections, insulated and non insulated **154**
Insulated terminals 156
Non insulated flat connectors 167
Flexible connectors 172
Tool application chart 175

Assortments **178**
Pocket boxes with cable end-sleeves 180
Pocket boxes with insulated cable end-sleeves 180
Assortment boxes with cable end-sleeves 185
Assortment boxes with insulated cable-end sleeves 186
Assortment boxes with tubular and compression cable lugs 189
Assortment boxes with insulated terminals 190
Steel carrying cases / bags 192

L-BOXXes **198**

THE CLASSIC - COPPER TUBULAR CABLE LUGS

Not every product becomes a classic at Klauke. Only the best ones. Tubular cable lugs made from high-quality electrolytic copper have been part of the Klauke standard range since 1960. The hallmarks: We handle all phases, from development to production. We monitor each and every step. The result: The certified classic remains - in every version.



In brief


- Everything from a single source, from development to production
- Best electrical conductivity thanks to electrolytic copper
- Available for all cross sections and in many special versions
- Tested to international standards

The system - Klauke connectors

At Klauke all products are matched to one another and we manufacture in our own factories. We think in your work steps – and produce everything systematically. Every cable lug, every tool for the perfect connection.

- Full flexibility through solutions for all conductor classes to DIN EN 60228
- For cables with compacted round conductors, cables with sector-shaped conductors and to suit individual requirements
- A single source - for everything from the cable lug to the tool for professional electrical installations



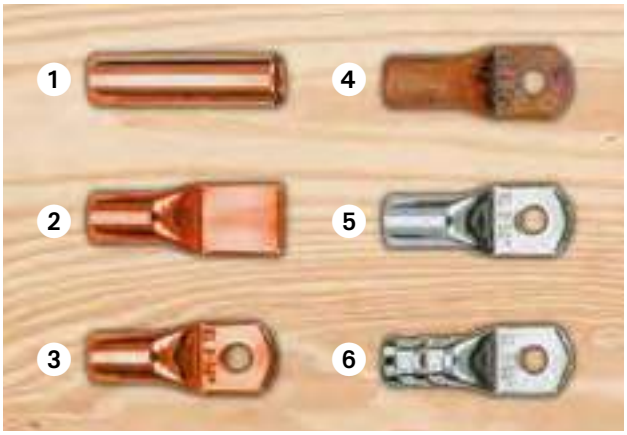

1 Source material
2 Folding and crimping
3 Punching
4 Annealing
5 Tinned end product
6 After crimping

The preparation - Traditional quality

The best material is the basis for quality products.
For our classics we use - as for all Klauke products - exclusively high-quality material from certified suppliers. You get all our cable lugs with the optimum features. To achieve this, we manufacture using a special annealing process.

- Optimum conductivity, high loading capacity and increased safety thanks to high-quality materials
- Outstanding processing properties


The proof - independent quality tests

Klauke aspires to its own high standard. We have this verified by several independent inspection authorities and have put ourselves through the tough IEC tests - with success.

- IEC (International Electric Commission): The IEC is an advisory board for standards in the electrical engineering and electronics sector. The certifications encompass all areas of electrical engineering that have to meet especially high demands.
- UL (Underwriters Laboratories): UL is an independent organisation that examines and certifies products for safety. The certification is particularly important on the American market.
- DNV (Det Norske Veritas) and GL (Germanischer Lloyd): DNV and GL have now merged to form the world's largest consulting company for onshore and offshore systems.

Tubular cable lugs, Cu, standard type



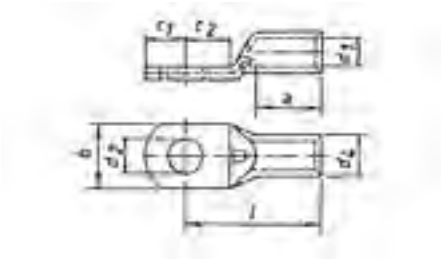

- Cable lug for fine-stranded round conductors, e.g. to DIN EN 60228 Cl. 5
- Simple processing thanks to inspection hole for monitoring full conductor insertion

Characteristics

- Annealed material optimises material and crimping properties
- Simple and safe connection due to flat contact surfaces and internal chamfer
- Item identification on cable lug

Material

- Copper (EN13600)

Surface

- Tin-plated to protect against corrosion


Technical instructions

- Tool: see page 38

Nominal cross section mm²	Size of bolt dia.	Part No.	Dimension mm								Weight/ 100 pcs. ~ kg	Packing unit/pcs
			d1	a	b	d2	d4	c1	c2	l		
0.75	M3	**91R3**	1.3	6	6.0	3.2	2.8	3.25	4.0	12	0.060	100
	M4	**91R4**	1.3	6	6.5	4.3	2.8	4.00	5.0	13	0.060	100
	M5	**91R5**	1.3	6	7.5	5.3	2.8	4.75	5.5	14	0.060	100
1.5	M3	**92R3**	1.8	6	6.5	3.2	3.3	3.25	4.0	12	0.080	100
	M4	**92R4**	1.8	6	6.5	4.3	3.3	4.00	5.0	13	0.080	100
	M5	**92R5**	1.8	6	7.5	5.3	3.3	4.75	5.5	14	0.080	100
	M6	**92R6**	1.8	6	9.0	6.5	3.3	6.50	6.5	16	0.090	100
2.5	M3	**93R3**	2.3	6	7.5	3.2	4.2	3.25	4.0	12	0.120	100
	M4	**93R4**	2.3	6	7.5	4.3	4.2	4.00	5.0	13	0.120	100
	M5	**93R5**	2.3	6	8.5	5.3	4.2	4.75	5.5	14	0.130	100
	M6	**93R6**	2.3	6	9.5	6.5	4.2	6.50	6.5	16	0.150	100
	M8	**93R8**	2.3	6	13.0	8.5	4.2	7.75	9.5	20	0.180	100
4	M4	**94R4**	3.0	8	8.5	4.3	5.0	4.75	5.5	18	0.210	100
	M5	**94R5**	3.0	8	9.0	5.3	5.0	4.75	6.0	18	0.213	100
	M6	**94R6**	3.0	8	10.0	6.5	5.0	6.50	6.5	19	0.220	100
	M8	**94R8**	3.0	8	13.0	8.5	5.0	8.50	9.5	22	0.280	100
6	M4	**95R4**	4.0	9	9.5	4.3	6.0	5.00	5.5	18	0.290	100
	M5	**95R5**	4.0	9	9.5	5.3	6.0	6.00	6.0	19	0.300	100
	M6	**95R6**	4.0	9	10.0	6.5	6.0	7.00	6.5	19	0.300	100
	M8	**95R8**	4.0	9	14.0	8.5	6.0	8.50	9.5	22	0.320	100

Tubular cable lugs, Cu, fork type



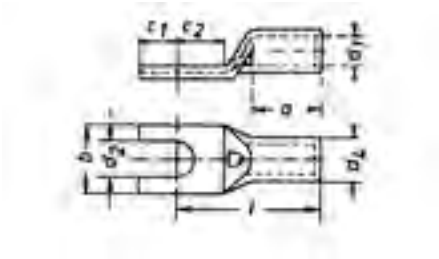

- Cable lug to 6 mm² for fine-stranded round conductors, 10 mm² and 16 mm² for multi-stranded round conductors to DIN EN 60228
- Simple fork-type mounting
- Simple processing thanks to inspection hole to check the inserted conductor

Characteristics

- Annealed material optimises material and crimping properties
- Simple and safe connection due to flat contact surfaces and internal chamfer
- Item identification on cable lug

Material

- Copper (EN13600)

Surface

- Tin-plated to protect against corrosion


Technical instructions

- Tool: see page 38

Nominal cross section mm²	Size of bolt dia.	Part No.	Dimension mm								Weight/ 100 pcs. ~ kg	Packing unit/pcs
			d1	a	b	d2	d4	c1	c2	l		
0.75	M3	**91C3**	1.3	6	6.0	3.2	2.8	3.25	4.0	12	0.06	100
	M4	**91C4**	1.3	6	6.5	4.3	2.8	4.00	5.0	13	0.05	100
	M5	**91C5**	1.3	6	7.5	5.3	2.8	4.75	5.5	14	0.06	100
1.5	M3	**92C3**	1.8	6	6.5	3.2	3.3	3.25	4.0	12	0.07	100
	M4	**92C4**	1.8	6	6.5	4.3	3.3	4.00	5.0	13	0.07	100
	M5	**92C5**	1.8	6	7.5	5.3	3.3	4.75	5.5	14	0.07	100
	M6	**92C6**	1.8	6	9.0	6.5	3.3	6.50	6.5	16	0.08	100
2.5	M3	**93C3**	2.3	6	7.5	3.2	4.2	3.25	4.0	12	0.12	100
	M4	**93C4**	2.3	6	7.5	4.3	4.2	4.00	5.0	13	0.11	100
	M5	**93C5**	2.3	6	8.5	5.3	4.2	4.75	5.5	14	0.12	100
	M6	**93C6**	2.3	6	9.5	6.5	4.2	6.50	6.5	16	0.10	100
4	M4	**94C4**	3.0	8	8.5	4.3	5.0	4.75	5.5	17	0.19	100
	M5	**94C5**	3.0	8	9.0	5.3	5.0	4.75	6.0	17	0.19	100
	M6	**94C6**	3.0	8	10.0	6.5	5.0	6.50	6.5	19	0.21	100
	M8	**94C8**	3.0	8	13.0	8.5	5.0	8.50	9.5	22	0.24	100
6	M4	**95C4**	4.0	9	9.5	4.3	6.0	5.00	5.5	18	0.27	100
	M5	**95C5**	4.0	9	9.5	5.3	6.0	6.00	6.0	19	0.32	100
	M6	**95C6**	4.0	9	10.0	6.5	6.0	7.00	6.5	19	0.27	100
	M8	**95C8**	4.0	9	14.0	8.5	6.0	8.50	9.0	22	0.31	100
10	M5	**96C5**	4.5	10	12.0	5.5	7.0	6.50	7.5	22	0.45	100
	M6	**96C6**	4.5	10	12.0	6.5	7.0	6.50	7.5	22	0.41	100
	M8	**96C8**	4.5	10	15.0	8.5	7.0	10.00	10.0	25	0.52	100
16	M5	**97C5**	5.5	13	12.0	5.5	8.5	5.50	6.5	26	0.81	100
	M6	**97C6**	5.5	13	12.0	6.5	8.5	6.25	7.5	27	0.81	100
	M8	**97C8**	5.5	13	15.0	8.5	8.5	8.50	9.5	29	0.90	100

Tubular cable lugs, Cu, standard type



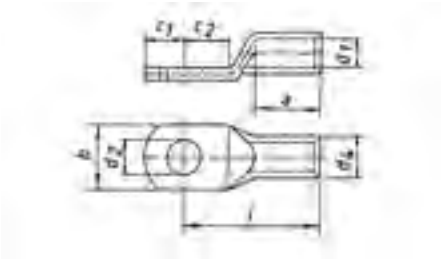

- For multi-stranded round conductors, e.g. to DIN EN 60228 Cl. 2
- For pre-rounded multi-stranded sector shaped conductors
- Ideal cable lug for control cabinet construction
- In combination with EKM 60 ID suitable for fine-stranded conductors

Characteristics

- Annealed material optimises material and crimping properties
- To DIN EN 61373 class 1B vibration-tested
- Simple and safe connection due to flat contact surfaces and internal chamfer
- Item identification on cable lug

Material

- Copper (EN13600)

Surface

- Tin-plated to protect against corrosion

Technical instructions

- Tool: see page 38
- Sleeves for compacted conductors and sleeves for 3-core and 4-core cables, see chapter „Sleeves for compacted conductors and sector shaped conductors - Cu“

Additional information

- Also available as featured article with inspection hole, part number appendix „MS“

Nominal cross section mm²	Size of bolt dia.	Part No.	Dimension mm								Weight/ 100 pcs. ~ kg	Packing unit/pcs
			d1	a	b	d2	d4	c1	c2	l		
6	M5	**1R5**	3.5	9	10	5.5	6.5	6.50	7.5	21	0.50	100
	M6	**1R6**	3.5	9	12	6.5	6.5	6.50	7.5	21	0.47	100
	M8	**1R8**	3.5	9	15	8.5	6.5	10.00	10.0	23	0.54	100
	M10	**1R10**	3.5	9	17	10.5	6.5	12.00	12.0	25	0.59	100
	M12	**1R12**	3.5	9	19	13.0	6.5	13.00	13.0	28	0.63	100
10	M5	**2R5**	4.5	10	12	5.5	7.0	6.50	7.5	22	0.50	100
	M6	**2R6**	4.5	10	12	6.5	7.0	6.50	7.5	22	0.49	100
	M8	**2R8**	4.5	10	15	8.5	7.0	10.00	10.0	25	0.58	100
	M10	**2R10**	4.5	10	17	10.5	7.0	12.00	12.0	27	0.62	100
	M12	**2R12**	4.5	10	19	13.0	7.0	13.00	13.0	29	0.64	100
16	M5	**3R5**	5.5	13	12	5.5	8.5	5.50	6.5	26	0.84	100
	M6	**3R6**	5.5	13	12	6.5	8.5	6.25	7.5	27	0.86	100
	M8	**3R8**	5.5	13	15	8.5	8.5	8.50	9.5	29	0.93	100
	M10	**3R10**	5.5	13	17	10.5	8.5	10.50	11.5	31	0.99	100
	M12	**3R12**	5.5	13	19	13.0	8.5	12.00	13.0	33	1.02	100
25	M5	**4R5**	7.0	15	14	5.5	10.0	7.50	7.5	30	1.22	25
	M6	**4R6**	7.0	15	14	6.5	10.0	7.50	7.5	30	1.20	100
	M8	**4R8**	7.0	15	16	8.5	10.0	10.00	10.0	32	1.31	100
	M10	**4R10**	7.0	15	18	10.5	10.0	12.00	12.0	34	1.57	100
	M12	**4R12**	7.0	15	19	13.0	10.0	13.00	13.0	35	1.39	25
	M14	**4R14**	7.0	15	21	15.0	10.0	14.50	14.5	38	1.49	25
35	M6	**5R6**	8.5	17	17	6.5	12.0	7.50	7.5	32	1.85	100
	M8	**5R8**	8.5	17	17	8.5	12.0	10.00	10.0	34	2.00	100
	M10	**5R10**	8.5	17	19	10.5	12.0	12.00	12.0	37	2.13	100
	M12	**5R12**	8.5	17	21	13.0	12.0	13.00	13.0	38	2.12	100
	M14	**5R14**	8.5	17	21	15.0	12.0	14.50	14.5	40	2.18	25
	M16	**5R16**	8.5	17	26	17.0	12.0	16.00	16.0	42	2.24	25


See next page

Tubular cable lugs, Cu, standard type

Nominal cross section mm²	Size of bolt dia.	Part No.	Dimension mm								Weight/ 100 pcs. ~ kg	Packing unit/pcs
			d1	a	b	d2	d4	c1	c2	l		
50	M6	**6R6**	10.0	19	20	6.5	14.0	10.00	10.0	37	3.00	25
	M8	**6R8**	10.0	19	20	8.5	14.0	10.00	10.0	37	2.93	50
	M10	**6R10**	10.0	19	20	10.5	14.0	12.00	12.0	39	3.08	50
	M12	**6R12**	10.0	19	23	13.0	14.0	13.00	13.0	43	3.23	50
	M14	**6R14**	10.0	19	23	15.0	14.0	14.50	14.5	45	3.32	25
	M16	**6R16**	10.0	19	28	17.0	14.0	16.00	16.0	46	3.38	25
	M20	**6R20**	10.0	19	30	21.0	14.0	19.00	19.0	48	3.46	25
70	M6	**7R6**	12.0	21	23	6.5	16.5	10.00	10.0	43	4.49	25
	M8	**7R8**	12.0	21	23	8.5	16.5	10.00	10.0	43	4.38	50
	M10	**7R10**	12.0	21	23	10.5	16.5	12.00	12.0	44	4.54	50
	M12	**7R12**	12.0	21	23	13.0	16.5	13.00	13.0	46	4.63	50
	M14	**7R14**	12.0	21	23	15.0	16.5	14.50	14.5	48	4.76	25
	M16	**7R16**	12.0	21	28	17.0	16.5	16.00	16.0	50	4.24	25
	M20	**7R20**	12.0	21	30	21.0	16.5	19.00	19.0	53	5.09	25
95	M8	**8R8**	13.5	25	26	8.5	18.0	12.00	12.0	48	5.44	25
	M10	**8R10**	13.5	25	26	10.5	18.0	12.00	12.0	48	5.40	50
	M12	**8R12**	13.5	25	26	13.0	18.0	13.00	13.0	49	5.56	50
	M14	**8R14**	13.5	25	26	15.0	18.0	14.50	14.5	51	5.62	25
	M16	**8R16**	13.5	25	28	17.0	18.0	16.00	16.0	54	5.82	50
	M20	**8R20**	13.5	25	36	21.0	18.0	22.00	22.0	60	6.71	25
120	M8	**9R8**	15.0	26	28	8.5	19.5	14.00	14.0	51	6.72	25
	M10	**9R10**	15.0	26	28	10.5	19.5	14.00	14.0	51	6.57	50
	M12	**9R12**	15.0	26	28	13.0	19.5	14.00	14.0	51	6.38	50
	M14	**9R14**	15.0	26	28	15.0	19.5	15.00	15.0	52	6.45	25
	M16	**9R16**	15.0	26	30	17.0	19.5	16.00	16.0	54	6.51	50
	M20	**9R20**	15.0	26	36	21.0	19.5	22.00	22.0	63	7.74	25
150	M8	**10R8**	16.5	30	31	8.5	21.0	14.00	14.0	56	7.78	10
	M10	**10R10**	16.5	30	31	10.5	21.0	14.00	14.0	56	7.62	10
	M12	**10R12**	16.5	30	31	13.0	21.0	15.00	15.0	57	7.73	25
	M14	**10R14**	16.5	30	31	15.0	21.0	15.00	15.0	57	7.64	10
	M16	**10R16**	16.5	30	31	17.0	21.0	16.00	16.0	58	7.53	10
	M20	**10R20**	16.5	30	36	21.0	21.0	22.00	22.0	66	8.80	10
185	M10	**11R10**	19.0	30	35	10.5	24.0	18.00	18.0	65	11.75	10
	M12	**11R12**	19.0	30	35	13.0	24.0	18.00	18.0	65	11.82	10
	M14	**11R14**	19.0	30	35	15.0	24.0	18.00	18.0	65	11.39	10
	M16	**11R16**	19.0	30	35	17.0	24.0	18.00	18.0	65	11.24	25
	M20	**11R20**	19.0	30	39	21.0	24.0	22.00	22.0	69	12.00	10
240	M10	**12R10**	21.0	35	39	10.5	26.0	21.50	19.0	72	14.72	10
	M12	**12R12**	21.0	35	39	13.0	26.0	21.50	19.0	72	14.55	10
	M14	**12R14**	21.0	35	39	15.0	26.0	21.50	19.0	72	14.24	10
	M16	**12R16**	21.0	35	39	17.0	26.0	21.50	19.0	72	14.09	25
	M20	**12R20**	21.0	35	39	21.0	26.0	21.50	19.0	72	13.60	10
300	M12	**13R12**	23.5	44	43	13.0	29.5	24.00	24.0	87	23.33	5
	M14	**13R14**	23.5	44	43	15.0	29.5	24.00	24.0	87	23.14	5
	M16	**13R16**	23.5	44	43	17.0	29.5	24.00	24.0	87	22.74	5
	M20	**13R20**	23.5	44	43	21.0	29.5	24.00	24.0	87	22.19	5
400	M12	**14R12**	27.0	44	49	13.0	34.0	24.00	24.0	90	32.41	5
	M14	**14R14**	27.0	44	49	15.0	34.0	24.00	24.0	90	32.24	5
	M16	**14R16**	27.0	44	49	17.0	34.0	24.00	24.0	90	31.98	5
	M20	**14R20**	27.0	44	49	21.0	34.0	24.00	24.0	90	31.41	5

Tubular cable lugs for switchgear connections, standard type



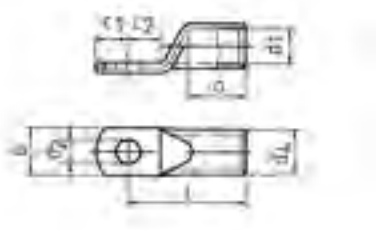

- For multi-stranded, round conductors e.g. to DIN EN 60228
- For pre-rounded multi-stranded sector shaped conductors
- For connecting in switch cabinets with reduced connecting space
- Narrow palm version manufactured without material loss
- In combination with EKM 60 ID suitable for fine-stranded conductors

Characteristics

- Annealed material optimises material and crimping properties
- Simple and safe connection due to flat contact surfaces and internal chamfer

Material

- Copper (EN13600)

Surface

- Tin-plated to protect against corrosion

Technical instructions

- Tool: see page 38
- Sleeves for compacted conductors and sleeves for 3-core and 4-core cables, see chapter „Sleeves for compacted conductors and sector shaped conductors - Cu“


Additional information

- Also available as featured article with inspection hole, part number appendix „MS“

Nominal cross section mm²	Size of bolt dia.	Part No.	Dimension mm								Weight/ 100 pcs. ~ kg	Packing unit/pcs
			d1	a	b	d2	d4	c1	c2	l		
35	M6	**5SG6**	8.5	17	15.0	6.5	12.0	7.5	7.5	32	1.78	25
50	M6	**6SG6**	10.0	19	15.0	6.5	14.0	10.0	10.0	37	2.95	25
	M8	**6SG8**	10.0	19	17.0	8.5	14.0	10.0	10.0	37	2.82	25
	M10	**6SG10**	10.0	19	19.0	10.5	14.0	11.5	12.0	39	3.08	25
70	M6	**7SG6**	12.0	21	17.0	6.5	16.5	10.0	10.0	43	4.22	25
	M8	**7SG8**	12.0	21	17.0	8.5	16.5	10.0	10.0	43	4.10	25
	M10	**7SG10**	12.0	21	19.0	10.5	16.5	11.5	12.0	44	4.45	25
	M12	**7SG12**	12.0	21	19.0	13.0	16.5	13.0	13.0	46	4.22	25
95	M6	**8SG6**	13.5	25	19.0	6.5	18.0	11.5	12.0	48	5.49	25
	M8	**8SG8**	13.5	25	19.0	8.5	18.0	11.5	12.0	48	5.46	25
	M10	**8SG10**	13.5	25	19.0	10.5	18.0	11.5	12.0	48	5.13	25
	M12	**8SG12**	13.5	25	19.0	13.0	18.0	13.0	13.0	49	5.15	25
120	M6	**9SG6**	15.0	26	19.0	6.5	19.5	11.5	14.0	51	6.16	10
	M8	**9SG8**	15.0	26	19.0	8.5	19.5	11.5	14.0	51	5.94	10
	M10	**9SG10**	15.0	26	19.0	10.5	19.5	11.5	14.0	51	5.81	10
	M12	**9SG12**	15.0	26	19.0	13.0	19.5	14.0	14.0	51	5.92	10
150	M6	**10SG6**	16.5	30	19.0	6.5	21.0	11.5	14.0	56	6.85	10
	M8	**10SG8**	16.5	30	19.0	8.5	21.0	11.5	14.0	56	6.80	10
	M10	**10SG10**	16.5	30	19.0	10.5	21.0	11.5	14.0	56	6.75	10
	M12	**10SG12**	16.5	30	19.0	13.0	21.0	15.0	15.0	57	7.15	10
185	M10	**11SG10**	19.0	30	24.5	10.5	24.0	11.5	18.0	65	10.59	10
	M12	**11SG12**	19.0	30	31.0	13.0	24.0	18.0	18.0	65	11.09	10
	M16	**11SG16**	19.0	30	31.0	17.0	24.0	18.0	18.0	65	9.76	10
240	M10	**12SG10**	21.0	35	31.0	10.5	26.0	11.5	19.0	72	12.70	5
	M12	**12SG12**	21.0	35	31.0	13.0	26.0	21.5	19.0	72	13.72	5
	M16	**12SG16**	21.0	35	31.0	17.0	26.0	21.5	19.0	72	13.28	5
300	M10	**13SG10**	23.5	44	31.0	10.5	30.0	11.5	24.0	87	19.70	5
	M12	**13SG12**	23.5	44	31.0	13.0	30.0	24.0	24.0	87	22.72	5
	M16	**13SG16**	23.5	44	31.0	17.0	30.0	24.0	24.0	87	22.50	5

Angled tubular cable lugs, Cu, 90° angled, standard type



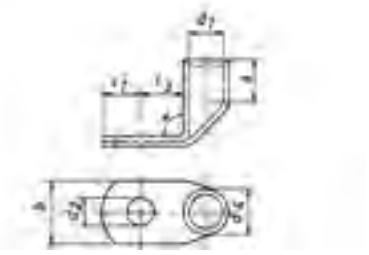

- For multi-stranded, round conductors e.g. to DIN EN 60228
- For pre-rounded multi-stranded sector shaped conductors
- Flat contact surface by special angle pressing technology
- In combination with the EKM 60 ID suitable for fine stranded conductors

Characteristics

- Annealed material optimises material and crimping properties
- Simple cable entry due to internal chamfer
- Item identification on cable lug

Material

- Copper (EN13600)

Surface

- Tin-plated to protect against corrosion

Technical instructions

- Tool: see page 38
- Sleeves for compacted conductors and sleeves for 3-core and 4-core cables, see chapter „Sleeves for compacted conductors and sector shaped conductors - Cu“

Additional information

- Also available as featured article with inspection hole, part number appendix „MS“

Nominal cross section mm²	Size of bolt dia.	Part No.	Dimension mm							Weight/ 100 pcs. ~ kg	Packing unit/pcs
			d1	a	b	d2	d4	c1	l3		
6	M5	**41R5**	3.5	9	10	5.5	6.5	7.5	9	0.59	50
	M6	**41R6**	3.5	9	12	6.5	6.5	7.5	10	0.58	50
	M8	**41R8**	3.5	9	14	8.5	6.5	10.0	13	0.61	50
	M10	**41R10**	3.5	9	17	10.5	6.5	12.0	15	0.65	50
	M12	**41R12**	3.5	9	19	13.0	6.5	13.0	17	0.62	50
10	M5	**42R5**	4.5	10	12	5.5	7.0	6.5	10	0.57	50
	M6	**42R6**	4.5	10	12	6.5	7.0	6.5	10	0.57	50
	M8	**42R8**	4.5	10	15	8.5	7.0	10.0	13	0.63	50
	M10	**42R10**	4.5	10	17	10.5	7.0	12.0	15	0.66	50
	M12	**42R12**	4.5	10	19	13.0	7.0	13.0	18	0.81	50
16	M5	**43R5**	5.5	13	12	5.5	8.5	7.5	10	1.01	50
	M6	**43R6**	5.5	13	12	6.5	8.5	7.5	11	1.01	50
	M8	**43R8**	5.5	13	15	8.5	8.5	10.0	13	1.08	50
	M10	**43R10**	5.5	13	17	10.5	8.5	12.0	15	1.09	50
	M12	**43R12**	5.5	13	19	13.0	8.5	13.0	18	1.15	50
25	M5	**44R5**	7.0	15	14	5.5	10.0	7.5	11	1.40	25
	M6	**44R6**	7.0	15	14	6.5	10.0	7.5	11	1.32	25
	M8	**44R8**	7.0	15	16	8.5	10.0	10.0	13	1.44	25
	M10	**44R10**	7.0	15	18	10.5	10.0	12.0	15	1.49	25
	M12	**44R12**	7.0	15	19	13.0	10.0	13.0	18	1.44	25
	M14	**44R14**	7.0	15	21	15.0	10.0	14.5	20	1.55	25
35	M6	**45R6**	8.5	17	17	6.5	12.0	7.5	11	2.05	25
	M8	**45R8**	8.5	17	17	8.5	12.0	10.0	13	2.20	25
	M10	**45R10**	8.5	17	19	10.5	12.0	12.0	15	2.28	25
	M12	**45R12**	8.5	17	21	13.0	12.0	13.0	18	2.38	25
	M14	**45R14**	8.5	17	21	15.0	12.0	14.5	20	2.41	25
	M16	**45R16**	8.5	17	26	17.0	12.0	16.0	22	2.40	25


See next page

Angled tubular cable lugs, Cu, 90° angled, standard type

Nominal cross section mm²	Size of bolt dia.	Part No.	Dimension mm							Weight/ 100 pcs. ~ kg	Packing unit/pcs
			d1	a	b	d2	d4	c1	l3		
50	M6	**46R6**	10.0	19	20	6.5	14.0	10.0	13	3.34	25
	M8	**46R8**	10.0	19	20	8.5	14.0	10.0	13	3.28	25
	M10	**46R10**	10.0	19	20	10.5	14.0	12.0	16	3.47	25
	M12	**46R12**	10.0	19	23	13.0	14.0	13.0	18	3.42	25
	M14	**46R14**	10.0	19	23	15.0	14.0	14.5	20	3.55	25
	M16	**46R16**	10.0	19	28	17.0	14.0	16.0	22	3.58	25
	M20	**46R20**	10.0	19	30	21.0	14.0	19.0	24	3.15	25
70	M6	**47R6**	12.0	21	23	6.5	16.5	10.0	13	4.90	25
	M8	**47R8**	12.0	21	23	8.5	16.5	10.0	14	4.80	25
	M10	**47R10**	12.0	21	23	10.5	16.5	12.0	16	4.88	25
	M12	**47R12**	12.0	21	23	13.0	16.5	13.0	18	4.99	25
	M14	**47R14**	12.0	21	23	15.0	16.5	14.5	20	5.38	25
	M16	**47R16**	12.0	21	28	17.0	16.5	16.0	22	5.35	25
	M20	**47R20**	12.0	21	30	21.0	16.5	19.0	24	5.30	25
95	M8	**48R8**	13.5	25	26	8.5	18.0	12.0	14	5.89	25
	M10	**48R10**	13.5	25	26	10.5	18.0	12.0	17	5.88	25
	M12	**48R12**	13.5	25	26	13.0	18.0	13.0	18	5.93	25
	M14	**48R14**	13.5	25	26	15.0	18.0	14.5	20	6.03	25
	M16	**48R16**	13.5	25	28	17.0	18.0	16.0	22	6.17	25
	M20	**48R20**	13.5	25	36	21.0	18.0	22.0	24	6.42	25
120	M8	**49R8**	15.0	26	28	8.5	19.5	14.0	16	7.26	10
	M10	**49R10**	15.0	26	28	10.5	19.5	14.0	17	7.30	10
	M12	**49R12**	15.0	26	28	13.0	19.5	14.0	18	7.19	10
	M14	**49R14**	15.0	26	28	15.0	19.5	15.0	20	7.30	10
	M16	**49R16**	15.0	26	30	17.0	19.5	16.0	22	7.35	10
	M20	**49R20**	15.0	26	36	21.0	19.5	22.0	24	7.60	10
150	M8	**50R8**	16.5	30	31	8.5	21.0	14.0	16	8.41	10
	M10	**50R10**	16.5	30	31	10.5	21.0	14.0	17	8.27	10
	M12	**50R12**	16.5	30	31	13.0	21.0	15.0	18	8.34	10
	M14	**50R14**	16.5	30	31	15.0	21.0	15.0	20	8.52	10
	M16	**50R16**	16.5	30	31	17.0	21.0	16.0	22	8.62	10
	M20	**50R20**	16.5	30	36	21.0	21.0	22.0	24	9.10	10
185	M10	**51R10**	19.0	30	35	10.5	24.0	18.0	22	12.17	10
	M12	**51R12**	19.0	30	35	13.0	24.0	18.0	22	11.97	10
	M14	**51R14**	19.0	30	35	15.0	24.0	18.0	22	11.77	10
	M16	**51R16**	19.0	30	35	17.0	24.0	18.0	22	11.53	10
	M20	**51R20**	19.0	30	39	21.0	24.0	22.0	24	12.00	10
240	M10	**52R10**	21.0	35	39	10.5	26.0	21.5	22	15.60	10
	M12	**52R12**	21.0	35	39	13.0	26.0	21.5	22	15.60	10
	M14	**52R14**	21.0	35	39	15.0	26.0	21.5	22	15.41	10
	M16	**52R16**	21.0	35	39	17.0	26.0	21.5	22	15.18	10
	M20	**52R20**	21.0	35	39	21.0	26.0	21.5	24	14.80	10
300	M12	**53R12**	23.5	44	43	13.0	29.5	24.0	24	23.60	5
	M14	**53R14**	23.5	44	43	15.0	29.5	24.0	24	23.40	5
	M16	**53R16**	23.5	44	43	17.0	29.5	24.0	24	20.99	5
	M20	**53R20**	23.5	44	43	21.0	29.5	24.0	24	22.70	5
400	M12	**54R12**	27.0	44	49	13.0	34.0	24.0	24	32.53	5
	M14	**54R14**	27.0	44	49	15.0	34.0	24.0	24	33.40	5
	M16	**54R16**	27.0	44	49	17.0	34.0	24.0	24	32.60	5
	M20	**54R20**	27.0	44	49	21.0	34.0	24.0	24	31.80	5

Angled tubular cable lugs, Cu, 45° angled, standard type



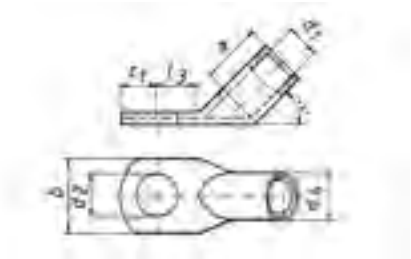

- For multi-stranded, round conductors e.g. to DIN EN 60228
- For pre-rounded multi-stranded sector shaped conductors
- Flat contact surface by special angle pressing technology

Characteristics

- Annealed material optimises material and crimping properties
- Simple cable entry due to internal chamfer
- Item identification on cable lug

Material

- Copper (EN13600)

Surface

- Tin-plated to protect against corrosion

Technical instructions

- Tool: see page 38
- Sleeves for compacted conductors and sleeves for 3-core and 4-core cables, see chapter „Sleeves for compacted conductors and sector shaped conductors - Cu“
- In combination with EKM 60 ID suitable for fine-stranded conductors

Additional information

- Also available as featured article with inspection hole, part number appendix „MS“

Nominal cross section mm²	Size of bolt dia.	Part No.	Dimension mm							Weight/ 100 pcs. ~ kg	Packing unit/pcs
			d1	a	b	d2	d4	c1	l3		
6	M5	**41R545**	3.5	9	10	5.5	6.5	7.5	9	0.60	50
	M6	**41R645**	3.5	9	12	6.5	6.5	7.5	10	0.58	50
	M8	**41R845**	3.5	9	14	8.5	6.5	10.0	13	0.68	50
	M10	**41R1045**	3.5	9	17	10.5	6.5	12.0	15	0.70	50
	M12	**41R1245**	3.5	9	19	13.0	6.5	13.0	17	0.70	50
10	M5	**42R545**	4.5	10	12	5.5	7.0	6.5	10	0.57	50
	M6	**42R645**	4.5	10	12	6.5	7.0	6.5	10	0.57	50
	M8	**42R845**	4.5	10	15	8.5	7.0	10.0	13	0.63	50
	M10	**42R1045**	4.5	10	17	10.5	7.0	12.0	15	0.68	50
	M12	**42R1245**	4.5	10	19	13.0	7.0	13.0	18	0.68	50
16	M5	**43R545**	5.5	13	12	5.5	8.5	7.5	10	1.01	50
	M6	**43R645**	5.5	13	12	6.5	8.5	7.5	11	1.06	50
	M8	**43R845**	5.5	13	15	8.5	8.5	10.0	13	1.15	50
	M10	**43R1045**	5.5	13	17	10.5	8.5	12.0	15	1.09	50
	M12	**43R1245**	5.5	13	19	13.0	8.5	13.0	18	1.15	50
25	M5	**44R545**	7.0	15	14	5.5	10.0	7.5	11	1.40	25
	M6	**44R645**	7.0	15	14	6.5	10.0	7.5	11	1.32	25
	M8	**44R845**	7.0	15	16	8.5	10.0	10.0	13	1.44	25
	M10	**44R1045**	7.0	15	18	10.5	10.0	12.0	15	1.49	25
	M12	**44R1245**	7.0	15	19	13.0	10.0	13.0	18	1.44	25
	M14	**44R1445**	7.0	15	21	15.0	10.0	14.5	20	1.55	25
35	M6	**45R645**	8.5	17	17	6.5	12.0	7.5	11	2.05	25
	M8	**45R845**	8.5	17	17	8.5	12.0	10.0	13	2.20	25
	M10	**45R1045**	8.5	17	19	10.5	12.0	12.0	15	2.28	25
	M12	**45R1245**	8.5	17	21	13.0	12.0	13.0	18	2.38	25
	M14	**45R1445**	8.5	17	21	15.0	12.0	14.5	20	2.41	25
	M16	**45R1645**	8.5	17	26	17.0	12.0	16.0	22	2.40	25


See next page

Angled tubular cable lugs, Cu, 45° angled, standard type

Nominal cross section mm²	Size of bolt dia.	Part No.	Dimension mm							Weight/ 100 pcs. ~ kg	Packing unit/pcs
			d1	a	b	d2	d4	c1	l3		
50	M6	**46R645**	10.0	19	20	6.5	14.0	10.0	13	3.43	25
	M8	**46R845**	10.0	19	20	8.5	14.0	10.0	13	3.28	25
	M10	**46R1045**	10.0	19	20	10.5	14.0	12.0	16	3.47	25
	M12	**46R1245**	10.0	19	23	13.0	14.0	13.0	18	3.42	25
	M14	**46R1445**	10.0	19	23	15.0	14.0	14.5	20	3.65	25
	M16	**46R1645**	10.0	19	28	17.0	14.0	16.0	22	3.76	25
	M20	**46R2045**	10.0	19	30	21.0	14.0	19.0	24	3.30	25
70	M6	**47R645**	12.0	21	23	6.5	16.5	10.0	13	5.06	25
	M8	**47R845**	12.0	21	23	8.5	16.5	10.0	14	5.06	25
	M10	**47R1045**	12.0	21	23	10.5	16.5	12.0	16	5.25	25
	M12	**47R1245**	12.0	21	23	13.0	16.5	13.0	18	5.30	25
	M14	**47R1445**	12.0	21	23	15.0	16.5	14.5	20	5.60	25
	M16	**47R1645**	12.0	21	28	17.0	16.5	16.0	22	5.61	25
	M20	**47R2045**	12.0	21	30	21.0	16.5	19.0	24	5.60	25
95	M8	**48R845**	13.5	25	26	8.5	18.0	12.0	14	6.19	25
	M10	**48R1045**	13.5	25	26	10.5	18.0	12.0	17	5.70	25
	M12	**48R1245**	13.5	25	26	13.0	18.0	13.0	18	6.67	25
	M14	**48R1445**	13.5	25	26	15.0	18.0	14.5	20	6.60	25
	M16	**48R1645**	13.5	25	28	17.0	18.0	16.0	22	6.78	25
	M20	**48R2045**	13.5	25	36	21.0	18.0	22.0	24	6.80	25
120	M8	**49R845**	15.0	26	28	8.5	19.5	14.0	16	7.92	10
	M10	**49R1045**	15.0	26	28	10.5	19.5	14.0	17	7.99	10
	M12	**49R1245**	15.0	26	28	13.0	19.5	14.0	18	7.96	10
	M14	**49R1445**	15.0	26	28	15.0	19.5	15.0	20	7.94	10
	M16	**49R1645**	15.0	26	30	17.0	19.5	16.0	22	8.26	10
	M20	**49R2045**	15.0	26	36	21.0	19.5	22.0	24	8.20	10
150	M8	**50R845**	16.5	30	31	8.5	21.0	14.0	16	9.00	10
	M10	**50R1045**	16.5	30	31	10.5	21.0	14.0	17	9.15	10
	M12	**50R1245**	16.5	30	31	13.0	21.0	15.0	18	8.75	10
	M14	**50R1445**	16.5	30	31	15.0	21.0	15.0	20	9.20	10
	M16	**50R1645**	16.5	30	31	17.0	21.0	16.0	22	9.22	10
185	M10	**51R1045**	19.0	30	35	10.5	24.0	18.0	22	13.30	10
	M12	**51R1245**	19.0	30	35	13.0	24.0	18.0	22	13.32	10
	M14	**51R1445**	19.0	30	35	15.0	24.0	18.0	22	13.40	10
	M16	**51R1645**	19.0	30	35	17.0	24.0	18.0	22	12.80	10
	M20	**51R2045**	19.0	30	39	21.0	24.0	22.0	24	13.10	10
240	M10	**52R1045**	21.0	35	39	10.5	26.0	21.5	22	16.28	10
	M12	**52R1245**	21.0	35	39	13.0	26.0	21.5	22	16.80	10
	M14	**52R1445**	21.0	35	39	15.0	26.0	21.5	22	16.40	10
	M16	**52R1645**	21.0	35	39	17.0	26.0	21.5	22	16.10	10
	M20	**52R2045**	21.0	35	39	21.0	26.0	21.5	24	16.10	10
300	M12	**53R1245**	23.5	44	43	13.0	29.5	24.0	24	24.08	5
	M14	**53R1445**	23.5	44	43	15.0	29.5	24.0	24	24.20	5
	M16	**53R1645**	23.5	44	43	17.0	29.5	24.0	24	23.23	5
	M20	**53R2045**	23.5	44	43	21.0	29.5	24.0	24	23.50	5
400	M12	**54R1245**	27.0	44	49	13.0	34.0	24.0	24	34.00	5
	M14	**54R1445**	27.0	44	49	15.0	34.0	24.0	24	33.40	5
	M16	**54R1645**	27.0	44	49	17.0	34.0	24.0	24	34.28	5
	M20	**54R2045**	27.0	44	49	21.0	34.0	24.0	24	31.80	5

Butt connectors, Cu, standard type





- For multi-stranded, round conductors e.g. to DIN EN 60228
- For pre-rounded multi-stranded sector shaped conductors
- Simple cable entry for internal chamfer

Characteristics

- Simple and safe processing due to butt mark
- Annealed material optimises material and crimping properties
- Item identification on cable lug

Material

- Copper (EN13600)

Surface

- Tin-plated to protect against corrosion

Technical instructions

- In combination with EKM 60 ID suitable for fine-stranded conductors
- Tool: see page 38
- Sleeves for compacted conductors and sleeves for 3-core and 4-core cables, see chapter „Sleeves for compacted conductors and sector shaped conductors - Cu“


Additional information

- Also available as featured article without buttmark, part number appendix „OM“

Nominal cross section mm²	Part No.	Dimension mm			Weight/ 100 pcs. ~ kg	Packing unit/pcs
		d1	d4	l		
0.75	**17R**	1.3	2.8	20	0.09	100
1.5	**18R**	1.8	3.3	25	0.12	100
2.5	**19R**	2.3	4.2	25	0.20	100
4	**20R**	3.0	5.0	25	0.26	100
6	**21R**	3.5	6.5	25	0.50	100
10	**22R**	4.5	7.0	30	0.72	100
16	**23R**	5.5	8.5	35	1.00	100
25	**24R**	7.0	10.0	40	1.41	50
35	**25R**	8.5	12.0	45	2.24	50
50	**26R**	10.0	14.0	50	3.36	50
70	**27R**	12.0	16.5	55	4.87	50
95	**28R**	13.5	18.0	60	5.91	25
120	**29R**	15.0	19.5	65	7.00	25
150	**30R**	16.5	21.0	70	8.12	10
185	**31R**	19.0	24.0	75	10.06	10
240	**32R**	21.0	26.0	85	13.82	10
300	**33R**	23.5	29.5	100	21.94	5
400	**34R**	27.0	34.0	100	29.65	5

Parallel connectors, Cu, standard type



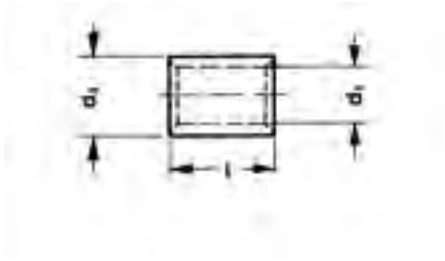







- For multi-stranded round conductors, e.g. to DIN EN 60228 Cl. 2
- Ideal for connecting differing cable cross-sections
- Simple cable entry due to internal chamfer

Characteristics
- Annealed material optimises material and crimping properties

Material
- Copper (EN13600)

Surface
- Tin-plated to protect against corrosion


Technical instructions
- Tool: see page 38

Additional information
- The stated nominal cross-section corresponds to the total cross-section of the cable
- Additional conductor types and combinations on request

Nominal cross section mm²	Part No.	Dimension mm			Weight/ 100 pcs. ~ kg	Packing unit/pcs
		d1	d4	l		
1.5	**148R**	1.8	3.3	5	0.03	100
2.5	**149R**	2.3	4.2	5	0.04	100
4	**150R**	3.0	5.0	7	0.08	100
6	**151R**	4.0	6.0	7	0.09	100
10	**152R**	4.5	7.0	9	0.17	100
16	**153R**	5.5	8.5	10	0.28	100
25	**154R**	7.0	10.0	13	0.44	100
35	**155R**	8.5	12.0	16	0.78	100
50	**156R**	10.0	14.0	19	1.22	100
70	**157R**	12.0	16.5	19	1.62	50
95	**158R**	13.5	18.0	20	1.90	50
120	**159R**	15.0	19.5	22	2.28	50
150	**160R**	16.5	21.0	26	3.00	50
185	**161R**	19.0	24.0	30	4.37	50
240	**162R**	21.0	26.0	32	5.30	25
300	**163R**	23.5	29.5	36	8.05	25

T-connectors, Cu, standard type



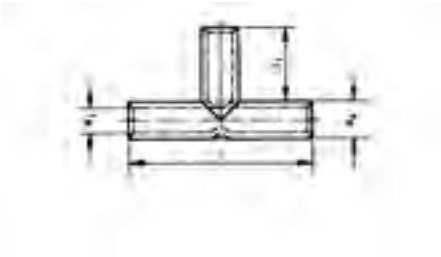

- For multi-stranded, round conductors e.g. to DIN EN 60228
- For pre-rounded multi-stranded sector shaped conductors
- Special version for cable tap conductors

Characteristics

- Annealed material optimises material and crimping properties
- Simple cable entry due to internal chamfer

Material

- Copper (EN13600)

Surface

- Tin-plated to protect against corrosion


Technical instructions

- Tool: see page 38
- Sleeves for compacted conductors and sleeves for 3-core and 4-core cables, see chapter „Sleeves for compacted conductors and sector shaped conductors - Cu“

Nominal cross section mm²	Part No.	Dimension mm				Weight/ 100 pcs. ~ kg	Packing unit/pcs
		d1	d4	l	l1		
1.5	**TV15**	1.8	3.3	30	12	0.23	50
2.5	**TV2.5**	2.3	4.2	30	12	0.37	50
4	**TV4**	3.0	5.0	30	12	0.45	50
6	**TV6**	4.0	6.0	35	14	0.73	50
10	**TV10**	4.5	7.0	35	14	1.05	50
16	**TV16**	5.5	8.5	50	21	2.20	50
25	**TV25**	7.0	10.0	55	23	2.90	25
35	**TV35**	8.5	12.0	70	30	5.20	25
50	**TV50**	10.0	14.0	80	34	7.90	25
70	**TV70**	12.0	16.5	85	35	11.20	10
95	**TV95**	13.5	18.0	90	36	13.00	10
120	**TV120**	15.0	19.5	95	38	14.70	10
150	**TV150**	16.5	21.0	110	44	18.90	10
185	**TV185**	19.0	24.0	115	45	25.00	5
240	**TV240**	21.0	26.0	130	52	31.10	5

Cross-connectors, Cu, standard type



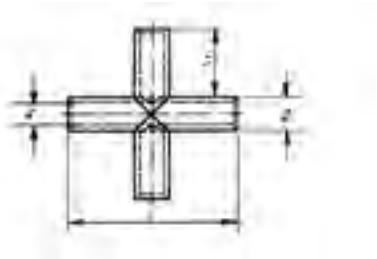

- For multi-stranded round conductors, e.g. to DIN EN 60228 Cl. 2
- For pre-rounded multi-stranded sector shaped conductors
- Version for double cable tap conductors

Characteristics

- Annealed material optimises material and crimping properties
- Simple cable entry due to internal chamfer

Material

- Copper (EN13600)

Surface

- Tin-plated to protect against corrosion


Technical instructions


- Tool: see page 38
- Sleeves for compacted conductors and sleeves for 3-core and 4-core cables, see chapter „Sleeves for compacted conductors and sector shaped conductors - Cu“

Nominal cross section mm²	Part No.	Dimension mm				Weight/ 100 pcs. ~ kg	Packing unit/pcs
		d1	d4	l	l1		
1.5	**KV15**	1.8	3.3	30	12	0.320	25
2.5	**KV2.5**	2.3	4.2	30	12	0.490	25
4	**KV4**	3.0	5.0	30	12	0.650	25
6	**KV6**	4.0	6.0	35	14	0.950	25
10	**KV10**	4.5	7.0	35	14	1.350	25
16	**KV16**	5.5	8.5	50	21	2.950	25
25	**KV25**	7.0	10.0	55	23	4.000	15
35	**KV35**	8.5	12.0	70	30	6.900	15
50	**KV50**	10.0	14.0	80	34	10.400	15
70	**KV70**	12.0	16.5	85	35	14.600	15
95	**KV95**	13.5	18.0	90	36	17.100	15
120	**KV120**	15.0	19.5	95	38	19.400	5
150	**KV150**	16.5	21.0	110	44	24.100	5
185	**KV185**	19.0	24.0	115	45	32.100	5
240	**KV240**	21.0	26.0	130	52	41.100	5

Insulated tubular cable lugs, Cu, standard type



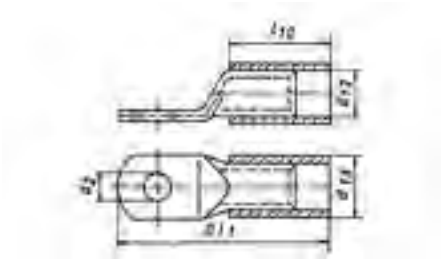



- For multi-stranded round conductors, e.g. to DIN EN 60228 Cl. 2
- For pre-rounded multi-stranded sector shaped conductors
- No additional insulation of the crimped connection required
- Is directly crimped with the insulation

Characteristics

- Annealed material optimises material and crimping properties
- Simple and safe connection due to flat contact surfaces and internal chamfer
- Heat resistant to 105° C

Material

- Cable lug: Copper to EN 13600
- Insulation sleeve: PA, halogen-free

Surface

- Tin-plated to protect against corrosion

Technical instructions

- Tool: see page 40
- Dimensions of tubular cable lugs can be found from page 14
- Sleeves for compacted conductors and sleeves for 3-core and 4-core cables, see chapter „Sleeves for compacted conductors and sector shaped conductors - Cu“

Additional information

- Also available as featured article with inspection hole, part number appendix „MS“

Nominal cross section mm²	Size of bolt dia.	Part No.	Colour	Dimension mm					weight 100 pcs. ~kg Cu	weight 100 pcs. ~kg Total	Packing unit/ pcs
				d12	d13	d2	Gl1	l10			
10	M5	**602R5**		7.0	9.0	5.5	35.5	17.0	0.50	0.548	25
	M6	**602R6**		7.0	9.0	6.5	35.5	17.0	0.49	0.538	25
	M8	**602R8**		7.0	9.0	8.5	42.0	17.0	0.58	0.628	25
	M10	**602R10**		7.0	9.0	10.5	46.0	17.0	0.62	0.668	25
	M12	**602R12**		7.0	9.0	13.0	49.0	17.0	0.64	0.688	25
16	M5	**603R5**		8.5	10.5	5.5	39.5	21.0	0.84	0.907	25
	M6	**603R6**		8.5	10.5	6.5	41.3	21.0	0.86	0.927	25
	M8	**603R8**		8.5	10.5	8.5	45.5	21.0	0.93	0.997	25
	M10	**603R10**		8.5	10.5	10.5	49.5	21.0	0.99	1.057	25
	M12	**603R12**		8.5	10.5	13.0	54.0	21.0	1.02	1.087	25
25	M5	**604R5**		10.0	12.0	5.5	45.0	24.0	1.22	1.312	25
	M6	**604R6**		10.0	12.0	6.5	46.5	24.0	1.20	1.292	25
	M8	**604R8**		10.0	12.0	8.5	51.0	24.0	1.31	1.402	25
	M10	**604R10**		10.0	12.0	10.5	55.0	24.0	1.57	1.662	25
	M12	**604R12**		10.0	12.0	13.0	57.0	24.0	1.39	1.482	25
	M14	**604R14**		10.0	12.0	15.0	61.5	24.0	1.49	1.582	25
35	M6	**605R6**		12.0	14.5	6.5	49.5	27.0	1.85	2.010	25
	M8	**605R8**		12.0	14.5	8.5	54.0	27.0	2.00	2.160	25
	M10	**605R10**		12.0	14.5	10.5	59.0	27.0	2.13	2.290	25
	M12	**605R12**		12.0	14.5	13.0	61.0	27.0	2.12	2.280	25
	M14	**605R14**		12.0	14.5	15.0	64.5	27.0	2.18	2.340	25
	M16	**605R16**		12.0	14.5	17.0	68.0	27.0	2.24	2.400	25


See next page

Insulated tubular cable lugs, Cu, standard type

Nominal cross section mm²	Size of bolt dia.	Part No.	Colour	Dimension mm					Gewicht 100 St. ~kg Cu	Gewicht 100 St. ~kg Ges.	Packing unit/ pcs
				d12	d13	d2	Gl1	l10			
50	M6	**606R6**		14.0	16.5	6.5	59.0	32.0	3.00	3.220	25
	M8	**606R8**		14.0	16.5	8.5	59.0	32.0	2.93	3.150	25
	M10	**606R10**		14.0	16.5	10.5	63.0	32.0	3.08	3.300	25
	M12	**606R12**		14.0	16.5	13.0	68.0	32.0	3.23	3.450	25
	M14	**606R14**		14.0	16.5	15.0	71.5	32.0	3.32	3.540	25
	M16	**606R16**		14.0	16.5	17.0	77.0	32.0	3.38	3.600	25
	M20	**606R20**		14.0	16.5	21.0	83.5	32.0	3.46	3.680	25
70	M6	**607R6**		16.4	18.9	6.5	65.5	33.5	4.49	4.760	25
	M8	**607R8**		16.4	18.9	8.5	65.5	33.5	4.38	4.650	25
	M10	**607R10**		16.4	18.9	10.5	66.5	33.5	4.54	4.810	25
	M12	**607R12**		16.4	18.9	13.0	70.5	33.5	4.63	4.900	25
	M14	**607R14**		16.4	18.9	15.0	73.5	33.5	4.76	5.030	25
	M16	**607R16**		16.4	18.9	17.0	78.5	33.5	4.24	4.510	25
	M20	**607R20**		16.4	18.9	21.0	84.5	33.5	5.09	5.360	25
95	M8	**608R8**		17.8	20.8	8.5	74.0	40.0	5.44	5.85	25
	M10	**608R10**		17.8	20.8	10.5	74.0	40.0	5.40	5.81	25
	M12	**608R12**		17.8	20.8	13.0	76.0	40.0	5.56	5.97	25
	M14	**608R14**		17.8	20.8	15.0	79.5	40.0	5.62	6.03	25
	M16	**608R16**		17.8	20.8	17.0	84.0	40.0	5.82	6.23	25
	M20	**608R20**		17.8	20.8	21.0	96.0	40.0	6.71	7.12	25
120	M8	**609R8**		19.3	22.3	8.5	80.5	41.5	6.72	7.18	10
	M10	**609R10**		19.3	22.3	10.5	80.5	41.5	6.57	7.03	10
	M12	**609R12**		19.3	22.3	13.0	80.5	41.5	6.38	6.84	10
	M16	**609R16**		19.3	22.3	17.0	85.5	41.5	6.51	6.97	10

Insulated butt connectors, Cu, standard type



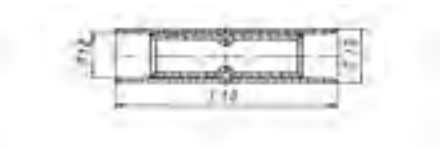











- For multi-stranded round conductors, e.g. to DIN EN 60228 Cl. 2
- For pre-rounded multi-stranded sector shaped conductors
- No additional insulation of the crimped connection required
- Is directly crimped with the insulation

Characteristics

- With buttmarks for precise cable insertion
- Annealed material optimises material and crimping properties
- Simple cable entry due to internal chamfer
- Heat resistant to 105° C

Material

- Connector: Copper (EN 13600)
- Insulation sleeve: PA, halogen-free

Surface

- Tin-plated to protect against corrosion


Technical instructions

- Tool: see page 40
- Dimensions of butt connectors can be found on page 21
- Sleeves for compacted conductors and sleeves for 3-core and 4-core cables, see chapter „Sleeves for compacted conductors and sector shaped conductors - Cu“

Nominal cross section mm²	Part No.	Colour	Dimension mm			Gewicht 100 St. ~kg Cu	Gewicht 100 St. ~kg Ges.	Packing unit/pcs
			d12	d13	l10			
10	**622R**		7.0	9.0	42	0.72	0.84	25
16	**623R**		8.5	10.5	50	1.00	1.16	25
25	**624R**		10.0	12.0	57	1.41	1.63	25
35	**625R**		12.0	14.4	65	2.24	2.60	25
50	**626R**		14.0	16.4	72	3.36	3.81	25
70	**627R**		16.4	19.0	80	4.87	5.46	25
95	**628R**		17.8	20.8	87	5.91	6.74	25

Tubular cable lugs, blue connection®, Cu





- For compacted multi-stranded round conductors to DIN EN 60228
- Accurate assignment of crimping tool/crimping die through colour-coding system
- Fewer crimps due to max. crimping width
- Reduced costs due to compact dimensions

Characteristics

- Rigid design thanks to special shaped radius
- Processing takes place without the use of additional sleeves
- Annealed material optimises material and crimping properties
- Simple and safe connection due to flat contact surfaces and internal chamfer

Material

- Copper (EN13600)

Surface

- Tin-plated to protect against corrosion

Technical instructions

- Tool: see page 41

Additional information

- 10-300 mm² IEC-tested

Nominal cross section mm²	Size of bolt dia.	Part No.	Dimension mm								Weight/ 100 pcs. ~ kg	Packing unit/pcs
			d1	a	b	d2	d4	c1	c2	l		
6	M5	**6B5**	3.20	9.0	10.50	5.30	5.00	5.00	6.50	20.50	0.24	50
	M6	**6B6**	3.20	9.0	11.00	6.40	5.00	6.00	8.00	22.00	0.26	50
	M8	**6B8**	3.20	9.0	12.50	8.40	5.00	8.00	10.00	24.00	0.29	50
	M10	**6B10**	3.20	9.00	14.00	10.50	5.00	10.00	11.50	25.50	0.30	50
10	M5	**10B5**	4.10	9.00	11.50	5.30	6.50	5.00	6.50	21.00	0.35	50
	M6	**10B6**	4.10	9.00	12.00	6.40	6.50	6.00	8.00	22.50	0.39	50
	M8	**10B8**	4.10	9.00	14.00	8.40	6.50	8.00	10.00	24.50	0.43	50
	M10	**10B10**	4.10	9.00	15.00	10.50	6.50	10.00	11.50	26.00	0.44	50
16	M6	**16B6**	5.50	10.0	13.50	6.40	7.70	6.00	8.00	25.00	0.61	50
	M8	**16B8**	5.50	10.0	15.00	8.40	7.70	8.00	10.00	27.00	0.65	50
	M10	**16B10**	5.50	10.00	16.50	10.50	7.70	10.00	11.50	28.00	0.69	50
	M12	**16B12**	5.50	10.00	18.50	13.00	7.70	12.00	13.00	29.50	0.72	50
25	M6	**25B6**	6.60	10.0	15.00	6.40	9.00	6.00	8.00	25.50	0.81	25
	M8	**25B8**	6.60	10.0	16.00	8.40	9.00	8.00	10.00	27.50	0.88	50
	M10	**25B10**	6.60	10.0	18.00	10.50	9.00	10.00	11.50	29.00	0.93	50
	M12	**25B12**	6.60	10.0	19.50	13.00	9.00	12.00	13.00	30.50	0.97	25
35	M8	**35B8**	7.70	11.0	18.00	8.40	10.60	8.00	10.00	29.50	1.34	50
	M10	**35B10**	7.70	11.0	19.50	10.50	10.60	10.00	11.50	31.00	1.42	50
	M12	**35B12**	7.70	11.0	21.00	13.00	10.60	12.00	13.00	32.50	1.48	25
50	M8	**50B8**	9.20	11.0	19.00	8.40	12.40	8.00	10.00	31.00	1.87	25
	M10	**50B10**	9.20	11.0	21.00	10.50	12.40	10.00	11.50	32.50	1.95	25
	M12	**50B12**	9.20	11.0	23.00	13.00	12.40	12.00	13.00	34.00	2.05	25
70	M8	**70B8**	11.00	21.0	22.00	8.40	14.60	8.00	10.00	41.50	3.17	25
	M10	**70B10**	11.00	21.0	24.00	10.50	14.60	10.00	11.50	43.00	3.33	25
	M12	**70B12**	11.00	21.0	25.00	13.00	14.60	12.00	13.00	44.50	3.46	25
	M16	**70B16**	11.00	21.0	28.00	17.00	14.60	15.00	17.00	48.50	3.73	10
95	M10	**95B10**	13.00	21.0	26.00	10.50	17.00	10.00	11.50	44.50	4.55	25
	M12	**95B12**	13.00	21.0	28.00	13.00	17.00	12.00	13.00	46.00	4.75	25
	M16	**95B16**	13.00	21.0	30.00	17.00	17.00	15.00	17.00	50.00	5.01	10


See next page

Rohrkabelschuhe, blue connection®, Cu

Nominal cross section mm²	Size of bolt dia.	Part No.	Dimension mm								Weight/ 100 pcs. ~ kg	Packing unit/pcs
			d1	a	b	d2	d4	c1	c2	l		
120	M10	**120B10**	14.50	22.0	28.00	10.50	19.00	10.00	11.50	47.00	6.02	25
	M12	**120B12**	14.50	22.0	29.50	13.00	19.00	12.00	13.00	48.50	6.26	25
	M16	**120B16**	14.50	22.0	32.00	17.00	19.00	15.00	17.00	52.50	6.73	10
150	M10	**150B10**	16.20	22.0	30.00	10.50	21.00	10.00	11.50	48.50	7.41	10
	M12	**150B12**	16.20	22.0	32.00	13.00	21.00	12.00	13.00	50.00	7.71	10
185	M10	**185B10**	18.00	24.0	33.00	10.50	23.00	10.00	11.50	52.00	9.21	10
	M12	**185B12**	18.00	24.0	33.00	13.00	23.00	12.00	13.00	53.50	9.43	10
	M16	**185B16**	18.00	24.0	36.00	17.00	23.00	15.00	17.00	57.70	10.14	10
240	M12	**240B12**	20.60	24.0	38.00	13.00	26.00	12.00	13.00	56.00	12.46	10
	M16	**240B16**	20.60	24.0	38.00	17.00	26.00	15.00	17.00	60.00	13.24	10
300	M12	**300B12**	23.10	33.0	41.00	13.00	28.00	12.00	13.00	67.00	14.39	5
	M16	**300B16**	23.10	33.0	41.00	17.00	28.00	15.00	17.00	71.00	15.27	5

Butt connectors, blue connection®, Cu



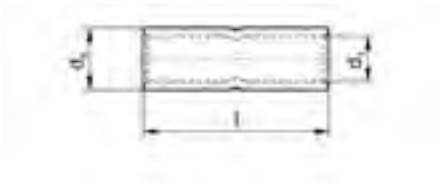

- For compacted multi-stranded round conductors, e.g. to DIN EN 60228 Cl. 2
- Accurate assignment of crimping tool/crimping die through colour-coding system
- Fewer crimps due to max. crimping width
- Reduced costs due to compact dimensions

Characteristics

- Processing takes place without the use of additional sleeves
- Annealed material optimises material and crimping properties
- Simple cable entry due to internal chamfer

Material

- Copper (EN13600)

Surface

- Tin-plated to protect against corrosion

Technical instructions

- Tool: see page 41


Additional information


- 10-300 mm² IEC-tested

Nominal cross section mm²	Part No.	Dimension mm			Weight/ 100 pcs. ~ kg	Packing unit/pcs
		d1	d4	l		
6	**6B**	3.20	5.00	25.00	0.255	50
10	**10B**	4.10	6.50	25.00	0.360	50
16	**16B**	5.50	7.70	27.00	0.543	50
25	**25B**	6.60	9.00	27.00	0.699	50
35	**35B**	7.70	10.60	28.00	1.026	50
50	**50B**	9.20	12.40	28.00	1.334	25
70	**70B**	11.00	14.60	48.00	3.065	25
95	**95B**	13.00	17.00	48.00	3.987	25
120	**120B**	14.50	19.00	50.00	5.157	25
150	**150B**	16.20	21.00	52.00	6.379	10
185	**185B**	18.00	23.00	56.00	7.889	10
240	**240B**	20.60	26.00	58.00	10.000	10
300	**300B**	23.10	28.00	76.00	13.079	5

Tubular cable lugs, Cu, solid conductor type



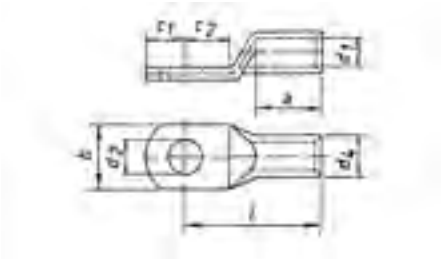



- For single-stranded round conductors, e.g. to DIN EN 60228 Cl. 1
- For pre-rounded sector shaped conductors
- Safe and secure connecting of solid conductors

Characteristics

- Annealed material optimises material and crimping properties
- Simple and safe connection due to flat contact surfaces and internal chamfer

Material

- Copper (EN13600)

Surface

- Tin-plated to protect against corrosion

Technical instructions


- Tool: see page 44

Nominal cross section mm²	Size of bolt dia.	Part No.	Dimension mm								Weight/ 100 pcs. ~ kg	Packing unit/pcs
			d1	a	b	d2	d4	c1	c2	l		
6	M5	**SR65**	3.0	8	9.0	5.3	5	4.75	6.0	17.0	0.213	25
	M6	**SR66**	3.0	8	10.0	6.5	5	6.50	6.5	19.0	0.220	25
10		**SR106**	4.0	9	10.0	6.5	6	7.00	6.5	19.0	0.300	25
	M8	**SR108**	4.0	9	14.0	8.5	6	8.50	9.5	22.0	0.320	25
16	M6	**SR166**	5.0	12	12.5	6.5	8	6.50	7.0	23.5	0.800	25
	M8	**SR168**	5.0	12	15.0	8.5	8	9.00	9.0	26.0	0.900	25
25	M6	**SR256**	6.2	15	14.0	6.5	10	7.50	7.5	30.0	1.560	25
	M8	**SR258**	6.2	15	16.0	8.5	10	10.00	10.0	32.0	1.700	25
35	M6	**SR356**	7.0	15	14.0	6.5	10	7.50	7.5	30.0	1.200	25
	M8	**SR358**	7.0	15	16.0	8.5	10	10.00	10.0	32.0	1.310	25
	M10	**SR3510**	7.0	15	18.0	10.5	10	12.00	12.0	34.0	1.570	25
50	M6	**SR506**	8.5	17	17.0	6.5	12	7.50	7.5	32.0	1.850	25
	M8	**SR508**	8.5	17	17.0	8.5	12	10.00	10.0	34.0	2.000	25
	M10	**SR5010**	8.5	17	19.0	10.5	12	12.00	12.0	37.0	2.130	25

Butt connectors, Cu, solid conductor type







- For single-stranded round conductors, e.g. to DIN EN 60228 Cl. 1
- Also pre-rounded sector shaped conductors
- Safe and secure connecting of solid conductors

Characteristics

- Annealed material optimises material and crimping properties
- Simple cable entry due to internal chamfer

Material

- Copper (EN13600)

Surface

- Tin-plated to protect against corrosion


Technical instructions


- Tool: see page 44

Nominal cross section mm²	Part No.	Dimension mm			Weight/ 100 pcs. ~ kg	Packing unit/pcs
		d1	d4	l		
1.5-2.5	**SV1525**	1.9	3.9	25	0.210	100
4	**SV4**	2.4	4.4	25	0.240	100
6	**SV6**	3.0	5.0	25	0.275	100
10	**SV10**	4.0	6.0	25	0.350	100
16	**SV16**	5.0	8.0	35	0.960	100
25	**SV25**	6.2	10.0	40	1.700	50
35	**SV35**	7.0	10.0	40	1.420	50
50	**SV50**	8.5	12.0	70	3.550	50

T-connectors, Cu, solid conductor type



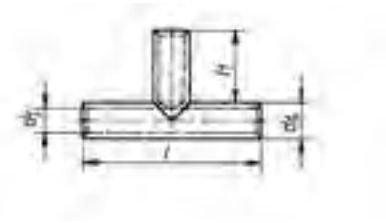



- For single-stranded round conductors, e.g. to DIN EN 60228 Cl. 1
- Also pre-rounded sector shaped conductors
- Safe and secure connecting of solid conductors
- Special version for cable tap conductors

Characteristics

- Annealed material optimises material and crimping properties
- Simple cable entry due to internal chamfer

Material

- Copper (EN13600)

Surface

- Tin-plated to protect against corrosion


Technical instructions


- Tool: see page 44

Nominal cross section mm²	Part No.	Dimension mm				Draht-Ø mm	Weight/ 100 pcs. ~ kg	Packing unit/pcs
		d1	d4	l	l1			
1.5-2.5	**STV1525**	1.9	3.9	30	12	1.38/1.78	0.34	50
4	**STV4**	2.4	4.4	30	12	2.25	0.40	50
6	**STV6**	3.0	5.0	30	12	2.75	0.48	50
10	**STV10**	4.0	6.0	35	14	3.55	0.72	50
16	**STV16**	5.0	8.0	35	14	4.5	1.40	50
25	**STV25**	6.2	10.0	50	21	5.65	3.20	25
35	**STV35**	7.0	10.0	55	23	6.7	2.95	25
50	**STV50**	8.5	12.0	76	32	8	5.60	25

Cross-connectors, Cu, solid conductor type



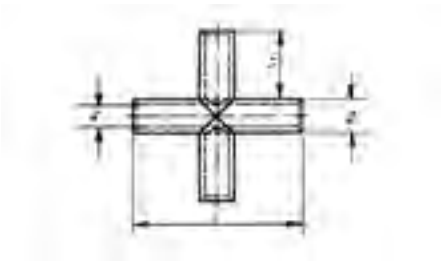



- For single-stranded round conductors, e.g. to DIN EN 60228 Cl. 1
- Also pre-rounded sector shaped conductors
- Safe and secure connecting of solid conductors
- Special version for double cable tap conductors

Characteristics

- Annealed material optimises material and crimping properties
- Simple cable entry due to internal chamfer

Material

- Copper (EN13600)

Surface

- Tin-plated to protect against corrosion


Technical instructions

- Tool: see page 44

Nominal cross section mm²	Part No.	Dimension mm				Draht-Ø mm	Weight/ 100 pcs. ~ kg	Packing unit/pcs
		d1	d4	l	l1			
1.5-2.5	**SKV1525**	1.9	3.9	30	12	1.38/1.78	0.47	25
4	**SKV4**	2.4	4.4	30	12	2.25	0.56	25
6	**SKV6**	3.0	5.0	30	12	2.75	0.67	25
10	**SKV10**	4.0	6.0	35	14	3.55	0.92	25
16	**SKV16**	5.0	8.0	35	14	4.5	1.86	25
25	**SKV25**	6.2	10.0	50	21	5.65	4.20	15
35	**SKV35**	7.0	10.0	55	23	6.7	3.80	15
50	**SKV50**	8.5	12.0	76	32	8	7.35	15

Tubular cable lugs, Cu, F-series



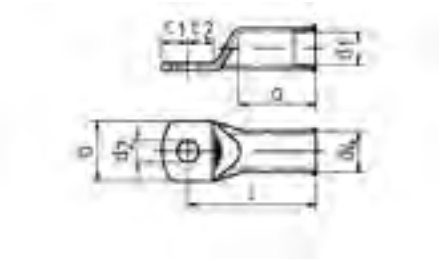

- For fine and superfine stranded round conductors, e.g. to DIN EN 60228 Cl. 5 and 6
- Pipe dimension adjusted for fine and superfine stranded conductors
- Special wide opening for the easy entry of fine conductors

Characteristics

- Annealed material optimises material and crimping properties
- To DIN EN 61373 class 1B vibration-tested
- Simple and safe connection due to flat contact surfaces and internal chamfer
- Reliable assignment owed to item designation on the cable lug

Material

- Copper (EN13600)

Surface

- Tin-plated to protect against corrosion

Technical instructions

- Tool: see page 42

Additional information

- Also available as featured article with inspection hole, part number appendix „MS“
- 10 - 240 mm² UL-tested

Nominal cross section mm²	Size of bolt dia.	Part No.	Dimension mm								Weight/ 100 pcs. ~ kg	Packing unit/pcs
			d1	a	b	d2	d4	c1	c2	l		
10	M5	**702F5**	5.5	14	12	5.3	8.0	6.25	7.5	27	0.72	100
	M6	**702F6**	5.5	14	12	6.5	8.0	6.25	7.5	27	0.71	100
	M8	**702F8**	5.5	14	16	8.5	8.0	8.50	9.5	29	0.77	100
	M10	**702F10**	5.5	14	16	10.5	8.0	10.50	11.5	31	0.82	100
	M12	**702F12**	5.5	14	19	13.0	8.0	12.00	13.0	32	0.82	100
16	M5	**703F5**	6.6	15	13	5.3	9.5	6.25	7.5	30	1.10	100
	M6	**703F6**	6.6	15	13	6.5	9.5	6.25	7.5	30	1.07	100
	M8	**703F8**	6.6	15	16	8.5	9.5	10.00	10.0	32	1.21	100
	M10	**703F10**	6.6	15	17	10.5	9.5	12.00	12.0	34	1.28	100
	M12	**703F12**	6.6	15	19	13.0	9.5	13.00	13.0	35	1.28	100
25	M5	**704F5**	7.9	17	15	5.3	11.0	7.50	7.5	32	1.52	25
	M6	**704F6**	7.9	17	15	6.5	11.0	7.50	7.5	32	1.50	100
	M8	**704F8**	7.9	17	17	8.5	11.0	10.00	10.0	34	1.61	100
	M10	**704F10**	7.9	17	17	10.5	11.0	12.00	12.0	37	1.71	100
	M12	**704F12**	7.9	17	19	13.0	11.0	13.00	13.0	38	1.74	25
35	M6	**705F6**	9.2	19	17	6.5	12.5	7.50	7.5	35	1.91	100
	M8	**705F8**	9.2	19	18	8.5	12.5	10.00	10.0	37	2.08	100
	M10	**705F10**	9.2	19	18	10.5	12.5	12.00	12.0	40	2.24	100
	M12	**705F12**	9.2	19	19	13.0	12.5	13.00	13.0	41	2.22	25
	M14	**705F14**	9.2	19	21	15.0	12.5	14.50	14.5	43	2.41	25
50	M6	**706F6**	11.0	21	21	6.5	15.0	10.00	10.0	41	3.54	25
	M8	**706F8**	11.0	21	21	8.5	15.0	10.00	10.0	41	3.44	50
	M10	**706F10**	11.0	21	21	10.5	15.0	12.00	12.0	43	3.64	50
	M12	**706F12**	11.0	21	21	13.0	15.0	13.00	13.0	46	3.73	50
	M14	**706F14**	11.0	21	23	15.0	15.0	14.50	14.5	48	3.89	25
	M16	**706F16**	11.0	21	28	17.0	15.0	16.00	16.0	50	4.02	25


See next page

Tubular cable lugs, Cu, F-series

Nominal cross section mm²	Size of bolt dia.	Part No.	Dimension mm								Weight/ 100 pcs. ~ kg	Packing unit/pcs
			d1	a	b	d2	d4	c1	c2	l		
70	M8	**707F8**	13.0	25	25	8.5	17.0	10.00	10.0	46	4.46	50
	M10	**707F10**	13.0	25	25	10.5	17.0	12.00	12.0	48	4.62	50
	M12	**707F12**	13.0	25	25	13.0	17.0	13.00	13.0	50	4.71	50
	M14	**707F14**	13.0	25	25	15.0	17.0	14.50	14.5	52	4.87	25
	M16	**707F16**	13.0	25	25	17.0	17.0	16.00	16.0	54	5.85	25
95	M8	**708F8**	14.5	26	28	8.5	19.0	12.00	12.0	52	6.35	25
	M10	**708F10**	14.5	26	28	10.5	19.0	12.00	12.0	52	6.23	50
	M12	**708F12**	14.5	26	28	13.0	19.0	13.00	13.0	53	6.31	50
	M14	**708F14**	14.5	26	28	15.0	19.0	14.50	14.5	55	6.46	25
	M16	**708F16**	14.5	26	28	17.0	19.0	16.00	16.0	56	6.56	50
120	M10	**709F10**	16.2	30	30	10.5	21.0	14.00	14.0	57	8.31	50
	M12	**709F12**	16.2	30	30	13.0	21.0	15.00	15.0	58	8.39	50
	M14	**709F14**	16.2	30	30	15.0	21.0	15.00	15.0	58	8.06	25
	M16	**709F16**	16.2	30	30	17.0	21.0	16.00	16.0	59	8.17	50
	M20	**709F20**	16.2	30	36	21.0	21.0	22.00	22.0	66	9.56	25
150	M10	**710F10**	18.0	32	34	10.5	23.0	15.00	16.0	64	10.91	10
	M12	**710F12**	18.0	32	34	13.0	23.0	16.00	17.0	65	10.89	25
	M14	**710F14**	18.0	32	34	15.0	23.0	18.00	19.0	67	11.42	10
	M16	**710F16**	18.0	32	34	17.0	23.0	19.00	20.0	68	11.30	10
	M20	**710F20**	18.0	32	40	21.0	23.0	21.00	22.0	70	11.36	10
185	M12	**711F12**	20.6	35	39	13.0	26.0	21.50	19.0	72	15.40	10
	M14	**711F14**	20.6	35	39	15.0	26.0	21.50	19.0	72	15.20	10
	M16	**711F16**	20.6	35	39	17.0	26.0	21.50	19.0	72	15.00	25
	M20	**711F20**	20.6	35	39	21.0	26.0	21.50	19.0	72	14.20	10
240	M10	**712F10**	23.1	44	41	10.5	28.0	16.00	17.0	80	16.50	10
	M12	**712F12**	23.1	44	41	13.0	28.0	16.00	17.0	80	16.30	10
	M14	**712F14**	23.1	44	41	15.0	28.0	19.00	20.0	83	16.80	10
	M16	**712F16**	23.1	44	41	17.0	28.0	19.00	20.0	83	16.71	25
	M20	**712F20**	23.1	44	41	21.0	28.0	21.00	22.0	85	17.12	10
300	M12	**713F12**	26.1	44	47	13.0	32.0	19.00	22.0	96	25.60	5
	M14	**713F14**	26.1	44	47	15.0	32.0	19.00	22.0	96	26.56	5
	M16	**713F16**	26.1	44	47	17.0	32.0	19.00	22.0	96	25.60	5
	M20	**713F20**	26.1	44	47	21.0	32.0	22.00	22.0	96	26.24	5

Angled tubular cable lugs, Cu, 90° angled, F-series



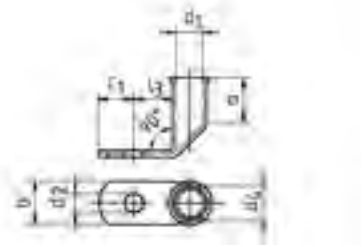

- For fine and superfine stranded round conductors, e.g. to DIN EN 60228 Cl. 5 and 6
- Tube dimension adjusted for fine and superfine stranded conductors
- Special wide opening for the easy entry of fine conductors
- Flat contact surface by special angle pressing technology

Characteristics

- Annealed material optimises material and crimping properties
- Tube dimensions suitable for fine stranded conductors
- Flat contact surface and internal chamfer for simple cable insertion

Material

- Copper (EN13600)

Surface

- Tin-plated to protect against corrosion

Technical instructions

- Tool: see page 42

Additional information

- Also available as featured article 45° angled, part number appendix „45“
- Also available as featured article with inspection hole, part number appendix „MS“
- 90° angled version: 10 - 240 mm² UL-tested

Nominal cross section mm²	Size of bolt dia.	Part No.	Dimension mm							Weight/ 100 pcs. ~ kg	Packing unit/pcs
			d1	a	b	d2	d4	c1	l3		
10	M5	**742F5**	5.5	14	12	5.3	8.0	6.25	7.5	0.80	50
	M6	**742F6**	5.5	14	12	6.5	8.0	6.25	7.5	0.78	50
	M8	**742F8**	5.5	14	16	8.5	8.0	9.00	9.5	0.84	50
	M10	**742F10**	5.5	14	16	10.5	8.0	10.50	12.0	0.88	50
	M12	**742F12**	5.5	14	19	13.0	8.0	12.00	13.0	0.90	50
16	M5	**743F5**	6.6	15	13	5.3	9.5	6.25	7.5	1.12	50
	M6	**743F6**	6.6	15	13	6.5	9.5	6.25	7.5	1.12	50
	M8	**743F8**	6.6	15	16	8.5	9.5	10.00	10.0	1.30	50
	M10	**743F10**	6.6	15	17	10.5	9.5	12.00	12.0	1.38	50
	M12	**743F12**	6.6	15	19	13.0	9.5	13.00	13.0	1.34	50
25	M5	**744F5**	7.9	17	15	5.3	11.0	7.50	7.5	1.52	25
	M6	**744F6**	7.9	17	15	6.5	11.0	7.50	7.5	1.54	25
	M8	**744F8**	7.9	17	17	8.5	11.0	10.00	10.0	1.80	25
	M10	**744F10**	7.9	17	17	10.5	11.0	12.00	12.0	1.79	25
	M12	**744F12**	7.9	17	19	13.0	11.0	13.00	13.0	1.76	25
35	M6	**745F6**	9.2	19	17	6.5	12.5	7.50	7.5	2.02	25
	M8	**745F8**	9.2	19	18	8.5	12.5	10.00	10.0	2.18	25
	M10	**745F10**	9.2	19	18	10.5	12.5	12.00	12.0	2.30	25
	M12	**745F12**	9.2	19	19	13.0	12.5	13.00	13.0	2.26	25
	M14	**745F14**	9.2	19	21	15.0	12.5	14.50	14.5	2.65	25
50	M6	**746F6**	11.0	21	21	6.5	15.0	10.00	10.0	3.75	25
	M8	**746F8**	11.0	21	21	8.5	15.0	10.00	10.0	3.57	25
	M10	**746F10**	11.0	21	21	10.5	15.0	12.00	12.0	3.83	25
	M12	**746F12**	11.0	21	21	13.0	15.0	13.00	13.0	3.74	25
	M14	**746F14**	11.0	21	23	15.0	15.0	14.50	14.5	4.20	25
	M16	**746F16**	11.0	21	28	17.0	15.0	16.00	16.0	4.35	25

See next page

Angled tubular cable lugs, Cu, 90° angled, F-series

Nominal cross section mm²	Size of bolt dia.	Part No.	Dimension mm							Weight/ 100 pcs. ~ kg	Packing unit/pcs
			d1	a	b	d2	d4	c1	l3		
70	M8	**747F8**	13.0	25	25	8.5	17.0	10.00	10.0	4.83	25
	M10	**747F10**	13.0	25	25	11.0	17.0	12.00	12.0	5.18	25
	M12	**747F12**	13.0	25	25	13.0	17.0	13.00	13.0	5.16	25
	M14	**747F14**	13.0	25	25	15.0	17.0	14.50	14.5	5.38	25
	M16	**747F16**	13.0	25	25	17.0	17.0	16.00	16.0	6.50	25
95	M8	**748F8**	14.5	26	28	8.5	19.0	12.00	12.0	6.66	25
	M10	**748F10**	14.5	26	28	11.0	19.0	12.00	12.0	6.04	25
	M12	**748F12**	14.5	26	28	13.0	19.0	13.00	13.0	6.58	25
	M14	**748F14**	14.5	26	28	15.0	19.0	14.50	14.5	7.24	25
	M16	**748F16**	14.5	26	28	17.0	19.0	16.00	16.0	7.34	25
120	M10	**749F10**	16.2	30	30	11.0	21.0	14.00	14.0	8.76	10
	M12	**749F12**	16.2	30	30	13.0	21.0	15.00	15.0	8.76	10
	M14	**749F14**	16.2	30	30	15.0	21.0	15.00	15.0	9.15	10
	M16	**749F16**	16.2	30	30	17.0	21.0	16.00	16.0	8.54	10
	M20	**749F20**	16.2	30	36	21.0	21.0	22.00	22.0	9.60	10
150	M10	**750F10**	18.0	32	34	11.0	23.0	15.00	16.0	11.54	10
	M12	**750F12**	18.0	32	34	13.0	23.0	16.00	18.0	11.58	10
	M14	**750F14**	18.0	32	34	15.0	23.0	18.00	19.0	11.90	10
	M16	**750F16**	18.0	32	34	17.0	23.0	19.00	20.0	11.80	10
	M20	**750F20**	18.0	32	40	21.0	23.0	21.00	22.0	12.00	10
185	M12	**751F12**	20.6	35	39	13.0	26.0	21.50	19.0	16.36	10
	M14	**751F14**	20.6	35	39	15.0	26.0	21.50	19.0	16.20	10
	M16	**751F16**	20.6	35	39	17.0	26.0	21.50	19.0	15.36	10
	M20	**751F20**	20.6	35	39	21.0	26.0	21.50	19.0	15.80	10
240	M16	**752F16**	23.1	44	41	17.0	28.0	19.00	20.0	17.80	5

Butt connectors, Cu, F-series





- For fine and superfine stranded round conductors, e.g. to DIN EN 60228 Cl. 5 and 6
- Pipe dimension adjusted for fine and superfine stranded conductors
- Special wide opening for the easy entry of fine conductors

Characteristics

- Simple and safe processing due to butt mark
- Annealed material optimises material and crimping properties
- Simple cable entry due to internal chamfer

Material

- Copper (EN13600)


Surface

- Tin-plated to protect against corrosion

Technical instructions

- Tool: see page 42

Nominal cross section mm²	Part No.	Dimension mm			Weight/ 100 pcs. ~ kg	Packing unit/pcs
		d1	d4	l		
10	**722F**	5.5	8.0	38	0.90	100
16	**723F**	6.6	9.5	38	1.25	100
25	**724F**	7.9	11.0	38	1.56	50
35	**725F**	9.2	12.5	45	2.19	50
50	**726F**	11.0	15.0	45	3.37	50
70	**727F**	13.0	17.0	54	4.65	50
95	**728F**	14.5	19.0	56	6.05	25
120	**729F**	16.2	21.0	60	7.58	25
150	**730F**	18.0	23.0	68	9.83	10
185	**731F**	20.6	26.0	75	13.30	10




Tool application chart

Tubular cable lugs, butt connectors, parallel connectors and T-connectors „standard type“ and tubular cable lugs for switchgear connections made from Cu
Part 1 of 2

Tool type	Crimping range corresponds to nominal cross-section mm²	Crimping Tool		Catalogue page		Crimp profile
		Part No.	Crimping head / adapter	Crimping Tool	Crimping die	
Mechanical crimping tools	0.75-16	K2		229		
	1-4	K511		239		
	6-50	K5		231		
		K05		235		
	6+10	K512		239		
	10-25	K04		234		
	10-120	K06		236		
	16-95	K95		230		
		TK95		231		
	25-150	K09		238		
	50-120	K6		232		
	120-240	K7		233		
	185-400	K07		232		
Mechanical, electrical, pneumatic crimping tools with interchangeable dies / heads	0.75-2.5	KP1	+KP232	240		
		KP1L	+KP232	240		
	0.75-10	K50		244	326	
		EK50ML		254	326	
	4-10	KP1	+KP242	240		
		KP1L	+KP242	240		
	6-150	K354		246	328	
	6-185	K18		248	337	
	6-300	K22		250	341	
Hand hydraulic crimping tools	6-185	HK6018		292	337	
		HK60UNV	+UA18	473	337	
	6-300	HK6022		294	341	
		HK60UNV	+UA22	473	341	
	10-240	HK60VP		296		
	16-300	HK60VPFT		297		
	16-400	HK12030		298	347	
		HK12042		300	347	
		HK120U		302	347	
Battery powered crimping tools	0.75-2.5	EKP1ML	+KP232	260		
	0.75-10	EK1550ML		258	326	
	4-10	EKP1ML	+KP242	260		
	6-150	EK354ML		262	328	
		EK354		266	328	
	6-185	EK5018		270	337	
		EK60UNV	+UA18	476	337	
		EKM60UNV	+UA18	475	337	
	6-240	EK505		268	333	


See next page



Tool application chart

Tubular cable lugs, butt connectors, parallel connectors and T-connectors „standard type“ and tubular cable lugs for switchgear connections made from Cu
Part 2 of 2


Tool type	Crimping range corresponds to nominal cross-section mm²	Crimping Tool		Catalogue page		Crimp profile
		Part No.	Crimping head / adapter	Crimping Tool	Crimping die	
Battery powered crimping tools	6-300	EK6022		274	341	⬡
		EKM6022		272	341	⬡
		EK60UNV	+UA22	476	341	⬡
		EKM60UNV	+UA22	475	341	⬡
	10-240	EK60VP		276		⌓
		EKM60ID		278		⌓
	16-300	EK60VPFT		277		✕
	16-400	EK12032		280	347	⬡
		EK12042		282	347	⬡
		EK120U		284	347	⬡
		EK135FT	+UA12T	286	347	⬡
		EK120UNV	+UA15T	477	347	⬡
	35-500	EK120ID		279		⌓
	500-630	EK135FT		286	352	⬡
Hydraulic crimping systems	6-185	THK18		306	337	⬡
	6-300	THK22		308	341	⬡
	16-400	HK122EL380		322	347	⬡
		HK252		320	353	⬡
		HK252EL380		322	353	⬡
Hydraulic crimping heads	6-185	PK18		306	337	⬡
		PK60UNV	+UA18	474	337	⬡
	6-300	PK22		308	341	⬡
		PK60UNV	+UA22	474	341	⬡
	10-240	PK60VP		310		✕
		PK60ID		311		⌓
	16-300	PK60VPFT		310		✕
	16-400	PK12042		312	347	⬡
		PK120U		314	347	⬡
		PK252		316	353	⌂



Tool application chart

Insulated tubular cable lugs and butt connectors „standard type“


Tool type	Crimping range corresponds to nominal cross-section mm²	Crimping Tool		Catalogue page		Crimp profile
		Part No.	Crimping head / adapter	Crimping Tool	Crimping die	
Mechanical, electrical, pneumatic crimping tools with interchangeable dies / heads	10-70	K354		246	328	⬭
	10-95	K18		248	337	⬭
	10-150	K22		250	341	⬭
Hand hydraulic crimping tools	10-95	HK6018		292	337	⬭
		HK60UNV	+UA18	473	337	⬭
	10-150	HK6022		294	341	⬭
		HK60UNV	+UA22	473	341	⬭
		HK12030		298	347	⬭
		HK12042		300	347	⬭
		HK120U		302	347	⬭
Battery powered crimping tools	10-70	EK354ML		262	328	⬭
		EK354		266	328	⬭
	10-95	EK5018		270	337	⬭
		EK505		268	333	⬭
		EK60UNV	+UA18	476	337	⬭
		EKM60UNV	+UA18	475	337	⬭
	10-150	EK6022		274	341	⬭
		EKM6022		272	341	⬭
		EK60UNV	+UA22	476	341	⬭
		EKM60UNV	+UA22	475	341	⬭
		EK12032		280	347	⬭
		EK12042		282	347	⬭
		EK120U		284	347	⬭
		EK135FT	+UA15T	286	347	⬭
		EK120UNV	+UA12T	477	347	⬭
Hydraulic crimping systems	10-95	THK18		306	337	⬭
	10-150	THK22		308	341	⬭
		HK122EL380		322	347	⬭
		HK252EL380		323	353	⬭
		HK252		320	353	⬭
Hydraulic crimping heads	10-95	PK18		306	337	⬭
		PK60UNV	+UA18	474	337	⬭
	10-150	PK22		308	341	⬭
		PK60UNV	+UA22	474	341	⬭
		PK12042		312	347	⬭
		PK120U		314	347	⬭
		PK252		316	353	⬭



Tool application chart

Tubular cable lugs and butt connectors
blue connection©

Tool type	Crimping range corresponds to nominal cross-section mm²	Crimping Tool		Catalogue page		Crimp profile
		Part No.	Crimping head / adapter	Crimping Tool	Crimping die	
Mechanical crimping tools	6-50	K05BC		234		⬡
	6-300	K22		250	342	⬡
	10-120	K06BC		236		⬡
	25-150	K09BC		237		⬡
Mechanical, electrical, pneumatic crimping tools with interchangeable dies / heads	6-150	K354		246	329	⬡
Hand hydraulic crimping tools	6-240	HK60UNV	+UA5	473	333	⬡
	6-300	HK6022		294	342	⬡
		HK60UNV	+UA22	473	342	⬡
Battery powered crimping tools	6-150	EK354ML		262	329	⬡
		EK354		266	329	⬡
	6-240	EK505		268	333	⬡
		EKM60UNV	+UA5	475	333	⬡
		EK60UNV	+UA5	475	333	⬡
	6-300	EK6022		274	342	⬡
		EKM6022		272	342	⬡
		EKM60UNV	+UA22	475	342	⬡
		EK60UNV	+UA22	476	342	⬡
Hydraulic crimping systems	6-300	THK22		308	342	⬡
	16-400	HK122EL380		322		⬡
Hydraulic crimping heads	6-300	PK22		308	342	⬡
		PK60UNV	+UA22	474	342	⬡




Tool application chart

Tubular cable lugs and butt connectors for fine stranded conductors

Part 1 of 2

Tool type	Crimping range corresponds to nominal cross-section mm²	Crimping Tool		Catalogue page		Crimp profile
		Part No.	Crimping head / adapter	Crimping Tool	Crimping die	
Mechanical crimping tools	6-50	K5		231		
	16-95	K95		230		
		TK95		231		
	50-120	K6		232		
	120-240	K7		233		
	185-400	K07		232		
Mechanical, electrical, pneumatic crimping tools with interchangeable dies / heads	10-35	K354		246	329	
	10-50	K18		248	337	
	10-70	K22		250	342	
Hand hydraulic crimping tools	10-50	HK6018		292	337	
		HK60UNV	+UA18	473	337	
	10-70	HK6022		294	342	
		HK60UNV	+UA22	473	342	
	10-240	HK60VP		296		
	16-150	HK12030		298	348	
		HK12042		300	348	
		HK120U		302	348	
	16-300	HK60VPFT		297		
Battery powered crimping tools	10-35	EK354ML		262	329	
		EK354		266	329	
	10-50	EK505		268	334	
		EK5018		270	337	
		EK60UNV	+UA18	476	337	
		EKM60UNV	+UA18	475	337	
	10-70	EK6022		274	342	
		EKM6022		272	342	
		EK60UNV	+UA22	476	342	
		EKM60UNV	+UA22	475	342	
	10-240	EK60VP		276		
		EKM60ID		278		
	16-150	EK12032		280	348	
		EK12042		282	348	
		EK120U		284	348	
		EK135FT	+UA15T	286	348	
		EK120UNV	+UA12T	322	348	
	16-300	EK60VPFT		277		
	35-500	EK120ID		279		
Hydraulic crimping systems	10-50	THK18		306	337	
	10-70	THK22		308	342	
	16-300	HK252		320	354	
		HK252EL380		323	354	

See next page




Tool application chart

Tubular cable lugs and butt connectors for fine stranded conductors

Part 2 of 2

Tool type	Crimping range corresponds to nominal cross-section mm²	Crimping Tool		Catalogue page		Crimp profile
		Part No.	Crimping head / adapter	Crimping Tool	Crimping die	
Hydraulic crimping heads	**10-50**	PK18		306	337	
		PK60UNV	+UA18	474	337	
	10-70	PK22		308	342	
		PK60UNV	+UA22	474	342	
	10-240	PK60VP		310		
		PK60ID		311		
	16-150	PK12042		312	348	
		PK120U		314	348	
	16-300	PK60VPFT		310		
		PK252		316	354	



Tool application chart

Tubular cable lugs and butt connectors for solid conductors

Tool type	Crimping range corresponds to nominal cross-section mm²	Crimping Tool		Catalogue page		Crimp profile
		Part No.	Crimping head / adapter	Crimping Tool	Crimping die	
Mechanical crimping tools	0.75-16	K02		229		⌓
	1.5-4	K93		228		⬡
	6-10	K94		228		⬡
	25-50*	K05		235		⬡
Mechanical, electrical, pneumatic crimping tools with interchangeable dies / heads	1.5-10	K50		244	326	⬡
		EK50ML		254	326	⬡
	1.5-16	K354		246	329	⬡
		K18		248	338	⬡
		K22		250	342	⬡
Hand hydraulic crimping tools	1.5-16	HK6018		292	338	⬡
		HK60UNV	+UA18	473	338	⬡
		HK6022		294	342	⬡
		HK60UNV	+UA22	473	342	⬡
Battery powered crimping tools	1.5-10	EK1550ML		258	326	⬡
	1.5-16	EK354ML		262	329	⬡
		EK354		266	329	⬡
		EK5018		270	338	⬡
		EK60UNV	+UA18	476	338	⬡
		EKM60UNV	+UA18	475	338	⬡
		EK6022		274	342	⬡
		EKM6022		272	342	⬡
		EK60UNV	+UA22	476	342	⬡
		EKM60UNV	+UA22	475	342	⬡
Hydraulic crimping systems	1.5-16	THK18		306	338	⬡
		THK22		308	342	⬡
Hydraulic crimping heads	1.5-16	PK18		306	338	⬡
		PK60UNV	+UA18	474	338	⬡
		PK22		308	342	⬡
		PK60UNV	+UA22	474	342	⬡

*For cross-sections 25 + 35 mm² use the die size 25 mm².
For cross-section 50 mm² use the die size 35 mm².
We recommend 2 crimps on each side

THE RESISTANT – TUBULAR CABLE LUGS AND CONNECTORS, NICKEL OR STAINLESS STEEL

We also develop for use in tough conditions. Our tubular cable lugs and connectors made from nickel and stainless steel are a cut above: withstanding temperatures of up to 650 °C, our Klauke products have without doubt developed to meet the requirements of the chemical industry, the foodstuff sector and foodstuff industry. You can also rely on our high-quality products for special applications. We know what we are doing.



In brief

- Tough to 650 °C
- Suitable for the chemical and foodstuff industry sectors, for instance
- Suitable even for aggressive environments, such as contact with salt water

When things get hot: Nickel cable lugs

Nickel cable lugs are especially suitable for use in applications at high temperatures of up to 650 °C. Thanks to their high resilience they no longer need to be frequently replaced at connections exposed to heat.

- High-quality nickel
- Heat-resistant to 650 °C
- No constant replacement of the cable lug at hot locations





Safe in aggressive environments with stainless steel


High-quality stainless steel ensures extra resilience, especially in aggressive environments. The resistance is retained.

- High-quality V2A and V4A stainless steel
- Acid resistant
- Can be used at temperatures to 400 °C
- V2A stainless steel for the chemical and foodstuff sectors and salt water applications
- V4A stainless steel in chlorinated environments such as swimming pools, for instance



Tubular cable lugs, stainless steel



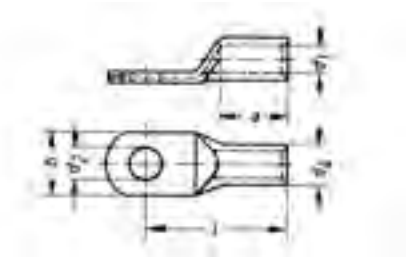













- For multi-stranded round conductors, e.g. to DIN EN 60228 Cl. 2
- For pre-rounded stranded sector shaped conductors
- Ideal for aggressive environmental conditions, acid and rust-resistant
- Heat resistant up to 400 °C

Characteristics

- Flat contact surface by special pressing technology
- Simple and safe connection due to flat contact surfaces and internal chamfer

Material

- V2A

Technical instructions

- Tool: see page 53

Additional information

- Also available as featured article in stainless steel V4A

Nominal cross section mm²	Size of bolt dia.	Part No.	Dimension mm						Weight/ 100 pcs. ~ kg	Packing unit/ pcs
			d1	a	b	d2	d4	l		
0.5-1	M4	**79V4**	1.6	6	6.5	4.3	3.2	13	0.080	100
	M5	**79V5**	1.6	6	7.5	5.3	3.2	14	0.080	100
1.5-2.5	M4	**80V4**	3.0	8	9.0	4.3	5.0	17	0.260	100
	M5	**80V5**	3.0	8	9.0	5.5	5.0	17	0.190	100
	M6	**80V6**	3.0	8	9.5	6.5	5.0	19	0.215	100
4-6	M4	**81V4**	4.0	9	9.0	4.3	6.0	18	0.260	100
	M5	**81V5**	4.0	9	9.5	5.5	6.0	19	0.280	100
	M6	**81V6**	4.0	9	10.0	6.5	6.0	19	0.280	100
10	M5	**82V5**	5.0	10	12.5	5.5	8.0	22	0.710	100
	M6	**82V6**	5.0	10	12.5	6.5	8.0	22	0.780	100
	M8	**82V8**	5.0	10	15.0	8.5	8.0	25	0.780	100
16	M5	**83V5**	6.0	13	12.0	5.5	8.0	28	0.500	50
	M6	**83V6**	6.0	13	12.0	6.5	8.0	28	0.550	50
	M8	**83V8**	6.0	13	15.0	8.5	8.0	29	0.600	50
25	M6	**84V6**	7.0	15	14.0	6.5	10.0	30	1.210	50
	M8	**84V8**	7.0	15	16.0	8.5	10.0	32	1.850	50
35	M6	**85V6**	9.0	17	17.0	6.5	12.0	32	1.600	50
	M8	**85V8**	9.0	17	17.0	8.5	12.0	35	1.850	50
50	M6	**86V6**	10.0	19	20.0	6.5	14.0	37	2.800	50
	M8	**86V8**	10.0	19	20.0	8.5	14.0	37	2.600	50
	M10	**86V10**	10.0	19	20.0	10.5	14.0	39	2.800	50
	M12	**86V12**	10.0	19	20.0	13.0	14.0	43	2.960	50
70	M8	**87V8**	12.0	21	23.0	8.5	16.0	43	3.650	25
	M10	**87V10**	12.0	21	23.0	10.5	16.0	44	3.930	25
	M12	**87V12**	12.0	21	23.0	13.0	16.0	46	3.850	25
	M16	**87V16**	12.0	21	26.0	17.0	16.0	46	3.960	25
95	M8	**88V8**	14.0	25	26.0	8.5	18.0	48	4.650	25
	M10	**88V10**	14.0	25	26.0	10.5	18.0	48	5.610	25
	M12	**88V12**	14.0	25	26.0	13.0	18.0	49	5.540	25

Butt connectors, stainless steel

















- For multi-stranded round conductors, e.g. to DIN EN 60228 Cl. 2
- Ideal for aggressive environmental conditions, acid and rust-resistant
- Heat resistant up to 400 °C

Characteristics

- Simple and safe processing due to butt mark
- Simple cable entry due to internal chamfer

Material

- V2A

Technical instructions

- Tool: see page 53


Additional information

- Also available as featured article in stainless steel V4A

Nominal cross section mm²	Part No.	Dimension mm			Weight/ 100 pcs. ~ kg	Packing unit/pcs
		d1	d4	l		
0.5-1	**79R**	1.6	3.2	25	0.135	50
1.5-2.5	**80R**	3.0	5.0	25	0.250	50
4-6	**81R**	4.0	6.0	25	0.325	50
10	**82R**	5.0	8.0	25	0.360	50
16	**83R**	6.0	8.0	30	0.510	50
25	**84R**	7.0	10.0	35	1.100	25
35	**85R**	9.0	12.0	40	1.560	25
50	**86R**	10.0	14.0	45	2.670	25
70	**87R**	12.0	16.0	50	3.400	25
95	**88R**	14.0	18.0	55	4.300	25

Tubular cable lug, Ni



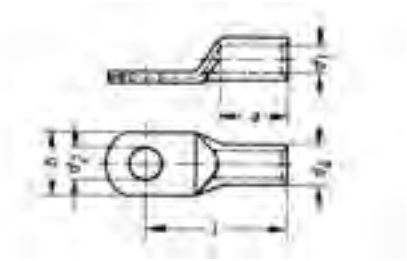













- For multi-stranded round conductors, e.g. to DIN EN 60228 Cl. 2
- Suitable for high temperatures up to 650 °C

Characteristics

- Simple and safe connection due to flat contact surfaces and internal chamfer

Material

- High-grade nickel


Technical instructions


- Tool: see page 53

Nominal cross section mm²	Size of bolt dia.	Part No.	Dimension mm						Weight/ 100 pcs. ~ kg	Packing unit/ pcs
			d1	a	b	d2	d4	l		
0.5-1	M4	**56N4**	1.6	6	6.5	4.3	3.2	13	0.080	100
	M5	**56N5**	1.6	6	7.5	5.3	3.2	14	0.080	100
1.5-2.5	M4	**57N4**	2.3	6	7.0	4.3	3.9	13	0.105	100
	M5	**57N5**	2.3	6	7.5	5.3	3.9	14	0.105	100
	M6	**57N6**	2.3	6	9.5	6.5	3.9	16	0.130	100
4-6	M4	**58N4**	3.6	9	9.5	4.3	5.6	18	0.275	100
	M5	**58N5**	3.6	9	9.5	5.3	5.6	19	0.275	100
	M6	**58N6**	3.6	9	9.5	6.5	5.6	19	0.260	100
10	M5	**59N5**	4.5	10	12.0	5.5	6.5	21	0.340	100
	M6	**59N6**	4.5	10	12.0	6.5	6.5	22	0.360	100
16	M5	**60N5**	5.5	13	12.0	5.5	7.5	26	0.470	100
	M6	**60N6**	5.5	13	12.0	6.5	7.5	27	0.480	100
	M8	**60N8**	5.5	13	13.5	8.5	7.5	29	0.560	100
25	M6	**61N6**	7.0	15	14.0	6.5	10.0	30	1.200	50
	M8	**61N8**	7.0	15	16.0	8.5	10.0	32	1.320	50
35	M6	**62N6**	8.5	17	17.0	6.5	12.0	32	1.850	50
	M8	**62N8**	8.5	17	17.0	8.5	12.0	34	2.000	50
50		**63N8**	10.0	19	20.0	8.5	14.0	37	2.900	50
	M10	**63N10**	10.0	19	20.0	10.5	14.0	39	3.100	50
70		**64N10**	12.0	21	23.0	10.5	16.5	44	4.600	25
	M12	**64N12**	12.0	21	23.0	13.0	16.5	46	4.660	25
95	M10	**65N10**	13.5	25	26.0	10.5	18.0	48	5.550	25
	M12	**65N12**	13.5	25	26.0	13.0	18.0	49	5.600	25

Tubular cable lugs, Cu, fork type



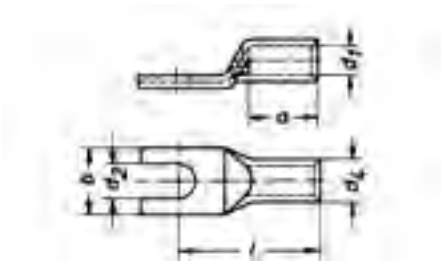



- For multi-stranded round conductors, e.g. to DIN EN 60228 Cl. 2
- Suitable for high temperatures up to 650 °C
- Simple fork-type mounting

Characteristics

- Simple and safe connection due to flat contact surfaces and internal chamfer

Material

- High-grade nickel

Technical instructions

- Tool: see page 53

Nominal cross section mm²	Size of bolt dia.	Part No.	Dimension mm						Weight/ 100 pcs. ~ kg	Packing unit/ pcs
			d1	a	b	d2	d4	l		
0.5-1	M4	**56C4**	1.6	6	6.5	4.3	3.2	13	0.070	50
	M5	**56C5**	1.6	6	7.5	5.3	3.2	14	0.075	50
1.5-2.5	M4	**57C4**	2.3	6	7.0	4.3	3.9	13	0.095	50
	M5	**57C5**	2.3	6	7.5	5.3	3.9	14	0.095	50
	M6	**57C6**	2.3	6	9.5	6.5	3.9	16	0.110	50
4-6	M4	**58C4**	3.6	9	9.5	4.3	5.6	18	0.250	50
	M5	**58C5**	3.6	9	9.5	5.3	5.6	19	0.255	50
	M6	**58C6**	3.6	9	9.5	6.5	5.6	19	0.235	50
10	M5	**59C5**	4.5	10	12.0	5.5	6.5	21	0.320	50
	M6	**59C6**	4.5	10	12.0	6.5	6.5	22	0.340	50
16	M5	**60C5**	5.5	13	12.0	5.5	7.5	26	0.440	50
	M6	**60C6**	5.5	13	12.0	6.5	7.5	27	0.450	50
	M8	**60C8**	5.5	13	13.5	8.5	7.5	29	0.520	50

Butt connectors, Ni

















- For multi-stranded round conductors, e.g. to DIN EN 60228 Cl. 2
- Suitable for high temperatures to 650 °C

Characteristics

- Simple and safe processing due to butt mark
- Simple cable entry due to internal chamfer


Material


- High-grade nickel

Technical instructions

- Tool: see page 53

Nominal cross section mm²	Part No.	Dimension mm			Weight/ 100 pcs. ~ kg	Packing unit/pcs
		d1	d4	l		
0.5-1	**62R**	1.6	3.2	25	0.135	50
1.5-2.5	**63R**	2.3	3.9	25	0.170	50
4-6	**64R**	3.6	5.6	25	0.325	50
10	**65R**	4.5	6.5	25	0.360	50
16	**66R**	5.5	7.5	30	0.510	50





Tool application chart

Tubular cable lugs and butt connectors made from stainless steel or nickel

Tool type	Crimping range corresponds to nominal cross-section mm²	Crimping Tool		Catalogue page		Crimp profile
		Part No.	Crimping head / adapter	Crimping Tool	Crimping die	
Mechanical crimping tools	0.5-6	K25		230		
Mechanical, electrical, pneumatic crimping tools with interchangeable dies / heads	0.5-16	K354		246	329	
	10-50	K22		250	342	
Hand hydraulic crimping tools	10-50	HK6022		294	342	
		HK6022	+UA22	473	342	
	70-95	HK12030		298	348	
		HK12042		300	348	
		HK120U		302	348	
Battery powered crimping tools	0.5-16	EK354ML		262	329	
		EK354		266	342	
	10-50	EKM6022		272	342	
		EK6022		274	342	
		EK60UNV	+UA22	476	342	
		EKM60UNV	+UA22	475	342	
	70-95	EK12032		280	348	
		EK12042		282	348	
		EK120U		284	348	
		EK120UNV	+UA12T	477	348	
		EK135FT	+UA15T	286	348	
Hydraulic crimping systems	10-50	THK22		308	342	
Hydraulic crimping heads	10-50	PK22		308	342	
		PK60UNV	+UA22	474	342	
	70-95	PK12042		312	348	
		PK120U		314	348	

CONFORMITY - COPPER COMPRESSION CABLE LUGS AND CONNECTORS TO DIN

Klauke products conform not only to its own standards. But also to DIN standards with strict standardised dimensions. Our compression cable lugs and connectors range to 1000 mm^2 nominal cross-section, with standardised designations and markings. We have the quality certified by the IEC test, including our special versions.



In brief

- Standardised sizes even for special versions
- Clear markings for standardised processing
- For all conductor classes to DIN EN 60228

Tested and certified for safety

Our DIN cable lugs and connectors are strictly manufactured to standard. In addition, the test suggested in the standard has been passed with ease.

- Simple processing with DIN system
- Safety through standardised tests
- For all conductor classes to DIN EN 60228 and copper wires to DIN 46267-1





Every version standardised

We offer cable lugs with tube dimension to DIN in numerous different forms and versions. If there happens to be no suitable connector for you, we will of course make you one to suit your needs.

- Flexible thanks to numerous versions
- Various surfaces available
- Many special versions based on the DIN standard available
- Manufactured to suit your particular requirements


Clear markings

Where simplicity and safety are key: Every cable lug to DIN comes with the appropriate crimping instruction. Readily visible markings indicate the crimping location required to work in compliance with the standard. Code numbers on the dies and cable lugs show the correct crimp at a glance.



Compression cable lugs to DIN, Cu





- For round conductors, e.g. to DIN EN 60228 Cl. 1, 2, 5 and 6
- For non-tension copper cables, e.g. to DIN 48201
- For pre-rounded multi-stranded sector shaped conductors
- With code number for clear tool assignment
- To DIN 46235

Characteristics

- Easy to process due to crimp markings
- Annealed material optimises material and crimping properties
- Simple and safe connection due to flat contact surfaces and internal chamfer

Material

- Copper (EN13600)

Surface

- Tin-plated to protect against corrosion

Technical instructions

- Tool: see page 69
- Sleeves for compacted conductors and sleeves for 3-core and 4-core cables, see chapter „Sleeves for compacted conductors and sector shaped conductors - Cu“

Additional information

- Part Number appendix for bright version „BK“
- Item in barrier sealed design upon request
- 10 - 800 mm² IEC-tested
- * = not standardised

Nominal cross section mm²	Size of bolt diameter	Part No.	Hint	Code	Dimension mm								Weight/ 100 pcs. ~ kg	Packing unit/pcs
					a	b	d1	d2	d4	c1	c2	l		
6	M 5	**101R5**		5	10	8.5	3.8	5.3	5.5	6.5	7.5	24	0.24	100
	M 6	**101R6**		5	10	8.5	3.8	6.4	5.5	7.5	8.0	24	0.30	100
	M 8	**101R8**	*	5	10	13.0	3.8	8.4	5.5	10.0	10.0	24	0.34	100
10	M 5	**102R5**		6	10	9.0	4.5	5.3	6.0	7.0	8.5	27	0.37	100
	M 6	**102R6**		6	10	9.0	4.5	6.4	6.0	7.5	8.5	27	0.36	100
	M 8	**102R8**	*	6	10	13.0	4.5	8.4	6.0	10.0	10.0	27	0.38	100
16	M 6	**103R6**		8	20	13.0	5.5	6.4	8.5	7.5	8.0	36	1.19	100
	M 8	**103R8**		8	20	13.0	5.5	8.4	8.5	10.0	10.0	36	1.22	100
	M 10	**103R10**		8	20	17.0	5.5	10.5	8.5	12.0	12.0	36	1.30	100
	M 12	**103R12**	*	8	20	18.0	5.5	13.0	8.5	13.0	13.0	36	1.27	100
25	M 6	**104R6**		10	20	14.0	7.0	6.4	10.0	7.5	8.0	38	1.51	50
	M 8	**104R8**		10	20	16.0	7.0	8.4	10.0	10.0	10.0	38	1.54	50
	M 10	**104R10**		10	20	17.0	7.0	10.5	10.0	12.0	12.0	38	1.62	50
	M 12	**104R12**		10	20	19.0	7.0	13.0	10.0	13.0	13.0	38	1.66	25
35	M 6	**105R6**	*	12	20	17.0	8.2	6.4	12.5	7.5	8.0	42	2.77	50
	M 8	**105R8**		12	20	17.0	8.2	8.4	12.5	10.0	10.0	42	2.85	50
	M 10	**105R10**		12	20	19.0	8.2	10.5	12.5	12.0	12.0	42	2.84	50
	M 12	**105R12**		12	20	21.0	8.2	13.0	12.5	13.0	13.0	42	2.79	50
	M 14	**105R14**	*	12	20	21.0	8.2	15.0	12.5	14.5	14.5	42	2.70	25


see next page

Compression cable lugs to DIN, Cu

Nominal cross section mm²	Size of bolt diameter	Part No.	Hint	Code	Dimension mm								Weight/ 100 pcs. ~ kg	Packing unit/pcs
					a	b	d1	d2	d4	c1	c2	l		
	M 8	**106R8**		14	28	20.0	10.0	8.4	14.5	10.0	10.0	52	4.46	50
	M 10	**106R10**		14	28	22.0	10.0	10.5	14.5	12.0	12.0	52	4.48	50
50	M 12	**106R12**		14	28	24.0	10.0	13.0	14.5	13.0	13.0	52	4.40	50
	M 14	**106R14**	*	14	28	24.0	10.0	15.0	14.5	14.5	14.5	52	4.30	25
	M 16	**106R16**		14	28	28.0	10.0	17.0	14.5	16.0	16.0	52	4.57	25
	M 8	**107R8**		16	28	24.0	11.5	8.4	16.5	10.0	10.0	55	5.92	50
	M 10	**107R10**		16	28	24.0	11.5	10.5	16.5	12.0	12.0	55	6.02	50
70	M 12	**107R12**		16	28	24.0	11.5	13.0	16.5	13.0	13.0	55	5.89	50
	M 14	**107R14**	*	16	28	24.0	11.5	15.0	16.5	14.5	14.5	55	5.80	25
	M 16	**107R16**		16	28	30.0	11.5	17.0	16.5	16.0	16.0	55	6.13	25
	M 8	**108R8**	*	18	35	28.0	13.5	8.4	19.0	12.0	12.0	65	9.21	25
	M 10	**108R10**		18	35	28.0	13.5	10.5	19.0	12.0	12.0	65	8.97	50
95	M 12	**108R12**		18	35	28.0	13.5	13.0	19.0	13.0	13.0	65	8.62	50
	M 14	**108R14**	*	18	35	28.0	13.5	15.0	19.0	14.5	14.5	65	8.78	25
	M 16	**108R16**		18	35	32.0	13.5	17.0	19.0	16.0	16.0	65	9.00	50
	M 10	**109R10**		20	35	32.0	15.5	10.5	21.0	15.0	16.0	70	11.40	50
	M 12	**109R12**		20	35	32.0	15.5	13.0	21.0	16.0	17.0	70	11.31	50
120	M 14	**109R14**	*	20	35	32.0	15.5	15.0	21.0	18.0	19.0	70	11.45	25
	M 16	**109R16**		20	35	32.0	15.5	17.0	21.0	19.0	20.0	70	11.24	50
	M 20	**109R20**		20	35	38.0	15.5	21.0	21.0	21.0	22.0	70	11.03	25
	M 10	**110R10**		22	35	34.0	17.0	10.5	23.5	15.0	16.0	78	16.38	10
	M 12	**110R12**		22	35	34.0	17.0	13.0	23.5	16.0	17.0	78	16.29	25
150	M 14	**110R14**	*	22	35	34.0	17.0	15.0	23.5	19.0	20.0	78	16.38	10
	M 16	**110R16**		22	35	34.0	17.0	17.0	23.5	19.0	20.0	78	16.17	10
	M 20	**110R20**		22	35	40.0	17.0	21.0	23.5	21.0	22.0	78	15.90	10
	M 10	**111R10**		25	40	37.0	19.0	10.5	25.5	15.0	16.0	82	18.96	10
	M 12	**111R12**		25	40	37.0	19.0	13.0	25.5	16.0	17.0	82	18.11	10
185	M 14	**111R14**	*	25	40	37.0	19.0	15.0	25.5	19.0	20.0	82	19.21	10
	M 16	**111R16**		25	40	37.0	19.0	17.0	25.5	19.0	20.0	82	18.74	25
	M 20	**111R20**		25	40	40.0	19.0	21.0	25.5	21.0	22.0	82	18.69	10
	M 12	**112R12**		28	40	42.0	21.5	13.0	29.0	16.0	17.0	92	27.00	10
	M 14	**112R14**	*	28	40	42.0	21.5	15.0	29.0	19.0	20.0	92	27.58	10
240	M 16	**112R16**		28	40	42.0	21.5	17.0	29.0	19.0	20.0	92	27.37	25
	M 20	**112R20**		28	40	45.0	21.5	21.0	29.0	21.0	22.0	92	26.88	10
	M 14	**113R14**	*	32	50	46.0	24.5	15.0	32.0	19.0	22.0	100	33.29	5
300	M 16	**113R16**		32	50	46.0	24.5	17.0	32.0	19.0	22.0	100	32.94	5
	M 20	**113R20**		32	50	46.0	24.5	21.0	32.0	22.0	22.0	100	33.24	5
	M 14	**114R14**	*	38	70	54.0	27.5	15.0	38.5	25.0	25.0	115	69.38	5
400	M 16	**114R16**		38	70	54.0	27.5	17.0	38.5	25.0	25.0	115	68.54	5
	M 20	**114R20**		38	70	54.0	27.5	21.0	38.5	25.0	25.0	115	65.40	5
500	M 16	**115R16**	*	42	70	60.0	31.0	17.0	42.0	25.0	25.0	125	83.31	1
	M 20	**115R20**		42	70	60.0	31.0	21.0	42.0	25.0	25.0	125	81.58	1
625	M 16	**116R16**	*	44	80	64.0	34.5	17.0	44.0	25.0	25.0	135	79.60	1
	M 20	**116R20**		44	80	64.0	34.5	21.0	44.0	25.0	25.0	135	79.69	1
800	M 16	**117R16**	*	52	100	75.0	40.0	17.0	52.0	30.0	30.0	165	150.00	1
	M 20	**117R20**		52	100	75.0	40.0	21.0	52.0	30.0	30.0	165	149.00	1
1000	M 16	**118R16**	*	58	100	83.0	44.0	17.0	58.0	30.0	30.0	165	199.00	1
	M 20	**118R20**		58	100	83.0	44.0	21.0	58.0	30.0	30.0	165	195.00	1

Angled compression cable lugs, Cu, 90° angled





- For round conductors, e.g. to DIN EN 60228 Cl. 1, 2, 5 and 6
- For non-tension copper cables, e.g. to DIN 48201
- For pre-rounded multi-stranded sector shaped conductors
- Tube dimensions according to DIN 46235
- With code number for clear tool assignment

Characteristics

- Flat contact surface by special angle pressing process
- Easy to process due to crimp markings
- Annealed material optimises material and crimping properties
- Simple cable entry due to internal chamfer

Material

- Copper (EN13600)

Surface

- Tin-plated to protect against corrosion

Technical instructions

- Sleeves for compacted conductors and sleeves for 3-core and 4-core cables, see chapter „Sleeves for compacted conductors and sector shaped conductors - Cu“
- Tool: see page 69

Additional information

- Part Number appendix for bright version „BK“
- 10 - 240 mm² IEC-tested

Nominal cross section mm²	Size of bolt diameter	Part No.	Code	Dimension mm							Weight/ 100 pcs. ~ kg	Packing unit/pcs
				a	b	d1	d2	d4	c1	l3		
6	M 5	**161R5**	5	10	8.5	3.8	5.3	5.5	6.5	9	0.28	50
	M 6	**161R6**	5	10	8.5	3.8	6.4	5.5	7.5	10	0.32	50
10	M 5	**162R5**	6	10	9.0	4.5	5.3	6.0	7.0	10	0.34	50
	M 6	**162R6**	6	10	9.0	4.5	6.4	6.0	7.5	10	0.35	50
	M 8	**162R8**	6	10	13.0	4.5	8.4	6.0	10.0	13	0.37	50
16	M 6	**163R6**	8	20	13.0	5.5	6.4	8.5	7.5	11	1.20	50
	M 8	**163R8**	8	20	13.0	5.5	8.4	8.5	10.0	13	1.30	50
	M 10	**163R10**	8	20	17.0	5.5	10.5	8.5	12.0	15	1.40	50
	M 12	**163R12**	8	20	18.0	5.5	13.0	8.5	13.0	18	1.33	50
25	M 6	**164R6**	10	20	14.0	7.0	6.4	10.0	7.5	11	1.54	25
	M 8	**164R8**	10	20	16.0	7.0	8.4	10.0	10.0	13	1.60	25
	M 10	**164R10**	10	20	17.0	7.0	10.5	10.0	12.0	15	1.63	25
	M 12	**164R12**	10	20	19.0	7.0	13.0	10.0	13.0	18	1.70	25
35	M 8	**165R8**	12	20	17.0	8.2	8.4	12.5	10.0	13	2.72	25
	M 10	**165R10**	12	20	19.0	8.2	10.5	12.5	12.0	15	2.76	25
	M 12	**165R12**	12	20	21.0	8.2	13.0	12.5	13.0	18	2.85	25
	M 14	**165R14**	12	20	21.0	8.2	15.0	12.5	14.5	20	2.92	25
50	M 8	**166R8**	14	28	20.0	10.0	8.4	14.5	10.0	16	4.39	25
	M 10	**166R10**	14	28	22.0	10.0	10.5	14.5	12.0	16	4.46	25
	M 12	**166R12**	14	28	24.0	10.0	13.0	14.5	13.0	18	4.49	25
	M 14	**166R14**	14	28	24.0	10.0	15.0	14.5	14.5	20	4.73	25
	M 16	**166R16**	14	28	28.0	10.0	17.0	14.5	16.0	22	4.66	25


see next page

Angled compression cable lugs, Cu, 90° angled

Nominal cross section mm²	Size of bolt diameter	Part No.	Code	Dimension mm							Weight/ 100 pcs. ~ kg	Packing unit/pcs
				a	b	d1	d2	d4	c1	l3		
70	M 8	**167R8**	16	28	24.0	11.5	8.4	16.5	10.0	14	5.92	25
	M 10	**167R10**	16	28	24.0	11.5	10.5	16.5	12.0	16	6.31	25
	M 12	**167R12**	16	28	24.0	11.5	13.0	16.5	13.0	18	6.34	25
	M 14	**167R14**	16	28	24.0	11.5	15.0	16.5	14.5	20	6.50	25
	M 16	**167R16**	16	28	30.0	11.5	17.0	16.5	16.0	22	6.63	25
95	M 10	**168R10**	18	35	28.0	13.5	10.5	19.0	12.0	17	9.03	25
	M 12	**168R12**	18	35	28.0	13.5	13.0	19.0	13.0	18	9.27	25
	M 14	**168R14**	18	35	28.0	13.5	15.0	19.0	14.5	20	9.06	25
	M 16	**168R16**	18	35	32.0	13.5	17.0	19.0	16.0	22	9.18	25
120	M 10	**169R10**	20	35	32.0	15.5	10.5	21.0	15.0	17	10.41	10
	M 12	**169R12**	20	35	32.0	15.5	13.0	21.0	16.0	18	10.65	10
	M 14	**169R14**	20	35	32.0	15.5	15.0	21.0	18.0	20	10.75	10
	M 16	**169R16**	20	35	32.0	15.5	17.0	21.0	19.0	22	10.72	10
	M 20	**169R20**	20	35	38.0	15.5	21.0	21.0	21.0	24	11.00	10
150	M 10	**170R10**	22	35	34.0	17.0	10.5	23.5	15.0	17	14.18	10
	M 12	**170R12**	22	35	34.0	17.0	13.0	23.5	16.0	18	14.33	10
	M 14	**170R14**	22	35	34.0	17.0	15.0	23.5	19.0	20	15.60	10
	M 16	**170R16**	22	35	34.0	17.0	17.0	23.5	19.0	22	15.24	10
	M 20	**170R20**	22	35	40.0	17.0	21.0	23.5	21.0	24	15.70	10
185	M 10	**171R10**	25	40	37.0	19.0	10.5	25.5	15.0	22	18.60	10
	M 12	**171R12**	25	40	37.0	19.0	13.0	25.5	16.0	22	18.69	10
	M 14	**171R14**	25	40	37.0	19.0	15.0	25.5	19.0	22	19.10	10
	M 16	**171R16**	25	40	37.0	19.0	17.0	25.5	19.0	22	19.00	10
	M 20	**171R20**	25	40	40.0	19.0	21.0	25.5	21.0	24	18.72	10
240	M 12	**172R12**	28	40	42.0	21.5	13.0	29.0	16.0	22	25.09	10
	M 14	**172R14**	28	40	42.0	21.5	15.0	29.0	19.0	22	25.70	10
	M 16	**172R16**	28	40	42.0	21.5	17.0	29.0	19.0	22	24.96	10
	M 20	**172R20**	28	40	45.0	21.5	21.0	29.0	21.0	24	25.26	10

Angled compression cable lugs, Cu, 45° angled





- For round conductors, e.g. to DIN EN 60228 Cl. 1, 2, 5 and 6
- For non-tension copper cables, e.g. to DIN 48201
- For pre-rounded multi-stranded sector shaped conductors
- Tube dimensions according to DIN 46235
- With code number for clear tool assignment

Characteristics

- Flat contact surface by special angle pressing process
- Easy to process due to crimp markings
- Annealed material optimises material and crimping properties
- Simple cable entry due to internal chamfer

Material

- Copper (EN13600)

Surface

- Tin-plated to protect against corrosion

Technical instructions

- Sleeves for compacted conductors and sleeves for 3-core and 4-core cables, see chapter „Sleeves for compacted conductors and sector shaped conductors - Cu“
- Tool: see page 69

Additional information

- Part Number appendix for bright version „BK“
- 10 - 240 mm² IEC-tested

Nominal cross section mm²	Size of bolt diameter	Part No.	Code	Dimension mm							Weight/ 100 pcs. ~ kg	Packing unit/pcs
				a	b	d1	d2	d4	c1	l3		
6	M 5	**161R545**	5	10	8.5	3.8	5.5	5.5	6.5	9	0.32	50
	M 6	**161R645**	5	10	8.5	3.8	6.5	5.5	7.5	10	0.34	50
10	M 5	**162R545**	6	10	9.0	4.5	5.5	6.0	7.0	10	0.36	50
	M 6	**162R645**	6	10	9.0	4.5	6.5	6.0	7.5	10	0.35	50
	M 8	**162R845**	6	10	13.0	4.5	8.5	6.0	10.0	13	0.39	50
16	M 6	**163R645**	8	20	13.0	5.5	6.5	8.5	7.5	11	1.20	50
	M 8	**163R845**	8	20	13.0	5.5	8.5	8.5	10.0	13	0.28	50
	M 10	**163R1045**	8	20	17.0	5.5	10.5	8.5	12.0	15	1.34	50
	M 12	**163R1245**	8	20	18.0	5.5	13.0	8.5	13.0	18	1.35	50
25	M 6	**164R645**	10	20	14.0	7.0	6.5	10.0	7.5	11	1.49	25
	M 8	**164R845**	10	20	16.0	7.0	8.5	10.0	10.0	13	1.60	25
	M 10	**164R1045**	10	20	17.0	7.0	10.5	10.0	12.0	15	1.64	25
	M 12	**164R1245**	10	20	19.0	7.0	13.0	10.0	13.0	18	1.73	25
35	M 8	**165R845**	12	20	17.0	8.2	8.5	12.5	10.0	13	2.72	25
	M 10	**165R1045**	12	20	19.0	8.2	10.5	12.5	12.0	15	2.92	25
	M 12	**165R1245**	12	20	21.0	8.2	13.0	12.5	13.0	18	2.98	25
	M 14	**165R1445**	12	20	21.0	8.2	15.0	12.5	14.5	20	3.03	25
50	M 8	**166R845**	14	28	20.0	10.0	8.5	14.5	10.0	13	4.63	25
	M 10	**166R1045**	14	28	22.0	10.0	10.5	14.5	12.0	16	4.84	25
	M 12	**166R1245**	14	28	24.0	10.0	13.0	14.5	13.0	18	4.94	25
	M 14	**166R1445**	14	28	24.0	10.0	15.0	14.5	14.5	20	4.96	25
	M 16	**166R1645**	14	28	28.0	10.0	17.0	14.5	16.0	22	4.92	25


see next page

Angled compression cable lugs, Cu, 45° angled

Nominal cross section mm²	Size of bolt diameter	Part No.	Code	Dimension mm							Weight/ 100 pcs. ~ kg	Packing unit/pcs
				a	b	d1	d2	d4	c1	l3		
70	M 8	**167R845**	16	28	24.0	11.5	8.5	16.5	10.0	14	6.40	25
	M 10	**167R1045**	16	28	24.0	11.5	10.5	16.5	12.0	16	6.76	25
	M 12	**167R1245**	16	28	24.0	11.5	13.0	16.5	13.0	18	6.90	25
	M 14	**167R1445**	16	28	24.0	11.5	15.0	16.5	14.5	20	6.72	25
	M 16	**167R1645**	16	28	30.0	11.5	17.0	16.5	16.0	22	6.96	25
95	M 10	**168R1045**	18	35	28.0	13.5	10.5	19.0	12.0	17	9.64	25
	M 12	**168R1245**	18	35	28.0	13.5	13.0	19.0	13.0	18	9.21	25
	M 14	**168R1445**	18	35	28.0	13.5	15.0	19.0	14.5	20	9.51	25
	M 16	**168R1645**	18	35	32.0	13.5	17.0	19.0	16.0	22	9.40	25
120	M 10	**169R1045**	20	35	32.0	15.5	10.5	21.0	15.0	17	11.09	10
	M 12	**169R1245**	20	35	32.0	15.5	13.0	21.0	16.0	18	11.45	10
	M 14	**169R1445**	20	35	32.0	15.5	15.0	21.0	18.0	20	11.55	10
	M 16	**169R1645**	20	35	32.0	15.5	17.0	21.0	19.0	22	11.76	10
	M 20	**169R2045**	20	35	38.0	15.5	21.0	21.0	21.0	24	11.55	10
150	M 10	**170R1045**	22	35	34.0	17.0	10.5	23.5	15.0	17	15.93	10
	M 12	**170R1245**	22	35	34.0	17.0	13.0	23.5	16.0	18	16.08	10
	M 14	**170R1445**	22	35	34.0	17.0	15.0	23.5	19.0	20	16.38	10
	M 16	**170R1645**	22	35	34.0	17.0	17.0	23.5	19.0	22	16.90	10
	M 20	**170R2045**	22	35	40.0	17.0	21.0	23.5	21.0	24	16.49	10
185	M 10	**171R1045**	25	40	37.0	19.0	10.5	25.5	15.0	22	20.16	10
	M 12	**171R1245**	25	40	37.0	19.0	13.0	25.5	16.0	22	19.60	10
	M 14	**171R1445**	25	40	37.0	19.0	15.0	25.5	19.0	22	20.05	10
	M 16	**171R1645**	25	40	37.0	19.0	17.0	25.5	19.0	22	19.68	10
	M 20	**171R2045**	25	40	40.0	19.0	21.0	25.5	21.0	24	19.95	10
240	M 12	**172R1245**	28	40	42.0	21.5	13.0	29.0	16.0	22	26.46	10
	M 14	**172R1445**	28	40	42.0	21.5	15.0	29.0	19.0	22	26.99	10
	M 16	**172R1645**	28	40	42.0	21.5	17.0	29.0	19.0	22	26.92	10
	M 20	**172R2045**	28	40	45.0	21.5	21.0	29.0	21.0	24	26.88	10

Compression cable lugs to DIN special type, Cu with 2 holes



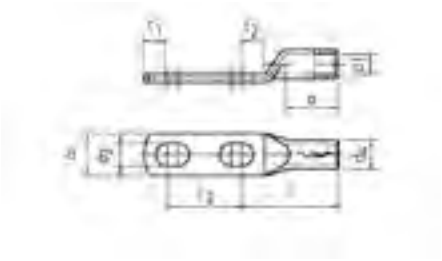

- For round conductors, e.g. to DIN EN 60228 Cl. 1, 2, 5 and 6
- For non-tension copper cables, e.g. to DIN 48201
- For pre-rounded sector shaped conductors
- Tube dimensions according to DIN 46235
- With code number for clear tool assignment

Characteristics

- Easy to process due to crimp markings
- Annealed material optimises material and crimping properties
- Flat contact surface by special pressing technique
- Internal chamfer for simple cable insertion

Material

- Copper (EN13600)

Surface

- Tin-plated to protect against corrosion

Technical instructions

- Sleeves for compacted conductors and sleeves for 3-core and 4-core cables, see chapter „Sleeves for compacted conductors and sector shaped conductors - Cu“
- Tool: see page 69


Additional information

- Part Number appendix for bright version „BK“

Nominal cross section mm²	Size of bolt diameter	Part No.	Code	Dimension mm									Weight/ 100 pcs. ~ kg	Packing unit/pcs
				a	b	d1	d2	d4	c1	c2	l	l2		
70	2 x M 12	**147D212**	16	28	24	11.5	13	16.5	13	13	55	50 - 62	10.82	5
95		**148D212**	18	35	28	13.5	13	19.0	13	13	65	50 - 62	15.24	5
120		**149D212**	20	35	32	15.5	13	21.0	16	17	70	50 - 62	18.62	5
150		**150D212**	22	35	34	17.0	13	23.5	16	17	78	50 - 62	26.10	5
185		**151D212**	25	40	37	19.0	13	25.5	16	17	82	50 - 62	30.48	5
240		**152D212**	28	40	42	21.5	13	29.0	16	17	92	50 - 62	41.52	5

Compression cable lugs, special type, Cu with 1 hole, double crimping



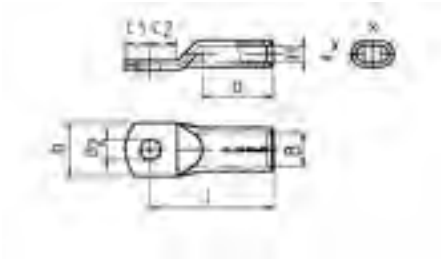







- **Special design for mounting of 2 multi-stranded cables, e.g. to DIN EN 60228 Cl. 2**
- **With crimp markings for correct crimp positioning**

Characteristics
- Annealed material optimises material and crimping properties
- Simple and safe connection due to flat contact surfaces and internal chamfer

Material
- Copper (EN13600)

Surface
- Tin-plated to protect against corrosion


Technical instructions
- Tool: see page 70

Additional information
- Part Number appendix for bright version „BK“

Nominal cross section mm²	Size of bolt diameter	Part No.	Code	Dimension mm						H	B	Weight/ 100 pcs. ~ kg	Packing unit/pcs
				a	b	d2	c1	c2	l				
2 x 50	M 12	**136DP12**	22 DP	35	34	13	16	17	78	10.0	20	16.30	5
2 x 70		**137DP12**	24 DP	40	37	13	16	17	82	11.5	23	18.90	5
2 x 95		**138DP12**	29 DP	40	42	13	16	17	92	13.5	27	27.12	5
2 x 120		**139DP12**	32 DP	50	48	13	19	22	100	15.5	31	33.50	5

Compression cable lugs, special type, Cu with 2 long holes, double crimping



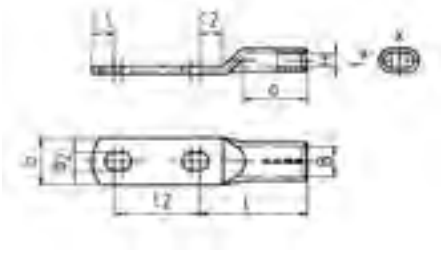







- **Special design for mounting of 2 multi-stranded cables, e.g. to DIN EN 60228 Cl. 2**
- **With crimp markings for correct crimp positioning**

Characteristics
- Annealed material optimises material and crimping properties
- Simple cable entry due to internal chamfer
- Flat contact surface by special pressing technique

Material
- Copper (EN13600)

Surface
- Tin-plated to protect against corrosion

Technical instructions
- Tool: see page 70

Additional information
- Part Number appendix for bright version „BK“

Nominal cross section mm²	Size of bolt diameter	Part No.	Code	Dimension mm							H	B	Weight/ 100 pcs. ~ kg	Packing unit/pcs
				a	b	d2	c1	c2	l	l2				
2 x 50	2 x M 12	**136DP212**	22 DP	35	34	13	16	17	78	50 - 62	10.0	20	23.20	5
2 x 70		**137DP212**	24 DP	40	37	13	16	17	82	50 - 62	11.5	23	29.64	5
2 x 95		**138DP212**	29 DP	40	42	13	16	17	92	50 - 62	13.5	27	38.50	5
2 x 120		**139DP212**	32 DP	50	48	13	19	22	100	50 - 62	15.5	31	45.80	5

Compression joints to DIN, Cu





- For round conductors, e.g. to DIN EN 60228 Cl. 1, 2, 5 and 6 and pre-rounded sector shaped conductors
- For non-tension copper cables, e.g. to DIN 48201
- To DIN 46267, Part 1
- With code number for clear tool assignment
- With crimp markings for correct crimp positioning

Characteristics

- Simple and safe processing due to butt mark
- Annealed material optimises material and crimping properties
- Simple cable entry due to internal chamfer

Material

- Copper (EN13600)

Surface

- Tin-plated to protect against corrosion

Technical instructions

- Sleeves for compacted conductors and sleeves for 3-core and 4-core cables, see chapter „Sleeves for compacted conductors and sector shaped conductors - Cu“
- Tool: see page 69
- Reduction sleeves for connecting unequal cross-sections can be found on page 68

Additional information

- Part Number appendix for bright version „BK“
- 10 - 800 mm² IEC-tested

Nominal cross section mm²	Part No.	Code	Dimension mm			Weight/ 100 pcs. ~ kg	Packing unit/pcs
			d1	d4	l		
6	**121R**	5	3.8	5.5	30	0.31	100
10	**122R**	6	4.5	6.0	30	0.34	100
16	**123R**	8	5.5	8.5	50	1.45	100
25	**124R**	10	7.0	10.0	50	1.77	50
35	**125R**	12	8.2	12.5	50	2.89	50
50	**126R**	14	10.0	14.5	56	4.26	50
70	**127R**	16	11.5	16.5	56	5.41	50
95	**128R**	18	13.5	19.0	70	8.62	25
120	**129R**	20	15.5	21.0	70	9.66	25
150	**130R**	22	17.0	23.5	80	14.50	10
185	**131R**	25	19.0	25.5	85	17.00	10
240	**132R**	28	21.5	29.0	90	23.41	10
300	**133R**	32	24.5	32.0	100	29.23	5
400	**134R**	38	27.5	38.5	150	74.32	5
500	**135R**	42	31.0	42.0	160	89.09	1
625	**136R**	44	34.5	44.0	160	79.10	1
800	**137R**	52	40.0	52.0	200	151.00	1
1000	**138R**	58	44.0	58.0	200	198.00	1

Compression joints, Cu





- For round conductors, e.g. to DIN EN 60228 Cl. 1, 2, 5 and 6 and pre-rounded sector shaped conductors
- For non-tension copper cables, e.g. to DIN 48201
- Barrier design with oil stop
- Tube dimension to DIN 46267, part 1
- With code number for clear tool assignment

Characteristics

- Easy to process due to crimp markings
- Annealed material optimises material and crimping properties
- Simple cable entry due to internal chamfer

Suitable for

- Non-tension connections

Material

- Copper (EN13600)

Surface

- Tin-plated to protect against corrosion

Technical instructions


- Sleeves for compacted conductors and sleeves for 3-core and 4-core cables, see chapter „Sleeves for compacted conductors and sector shaped conductors - Cu“
- Tool: see page 69
- Reduction sleeves for connecting unequal cross-sections can be found on page 68


Additional information

- Part Number appendix for bright version „BK“

Nominal cross section mm²	Part No.	Code	Dimension mm			Weight/ 100 pcs. ~ kg	Packing unit/pcs
			d1	d4	l		
16	**523R**	8	5.5	8.5	50	1.54	25
25	**524R**	10	7.0	10.0	50	1.84	25
35	**525R**	12	8.2	12.5	50	2.99	25
50	**526R**	14	10.0	14.5	56	4.46	25
70	**527R**	16	11.5	16.5	56	5.61	25
95	**528R**	18	13.5	19.0	70	8.88	25
120	**529R**	20	15.5	21.0	70	10.06	5
150	**530R**	22	17.0	23.5	80	14.89	5
185	**531R**	25	19.0	25.5	85	17.57	5
240	**532R**	28	21.5	29.0	90	24.23	5
300	**533R**	32	24.5	32.0	100	30.15	5
400	**534R**	38	27.5	38.5	150	75.60	5
500	**535R**	42	31.0	42.0	160	92.00	1
625	**536R**	44	34.5	44.0	160	81.50	1

Compression joint for cable connections 10-30 kV, copper



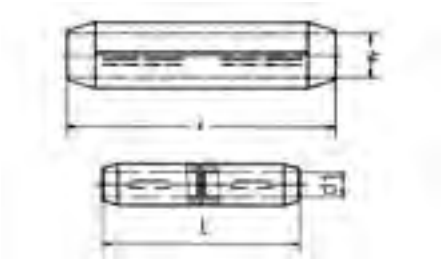

- For round conductors, e.g. to DIN EN 60228 Cl. 2 and pre-rounded sector shaped conductors
- For non-tension copper cables, e.g. to DIN 48201
- Tube dimension to DIN 46267, part 1
- For copper medium-voltage cable connections 10 - 30 kV
- With chamfered edges for reduced electrical stress in the assembly

Characteristics
- Also available as barrier design with oil stop
- Easy to process due to crimp markings
- Annealed material optimises material and crimping properties
- Simple cable entry due to internal chamfer

Suitable for
- Non-tension connections

Material
- Copper (EN13600)

Surface
- Bright

Technical instructions
- Tool: see page 69
- Reduction sleeves for connecting unequal cross-sections can be found on page 68

Additional information
- Part Number appendix for tinned version „V“

Nominal cross section mm²	Part No.	Code	Dimension mm		Number of crimps		Weight/ 100 pcs. ~ kg	Packing unit/pcs
			d1	l	Cu (5 mm)	Cu (wide)		
Standard version								
25	**504R**	12	7.5	60	2/2	1/1	4.08	10
35	**505R**	12	8.2	60	2/2	1/1	3.56	10
50	**506R**	14	10.0	65	3/3	1/1	4.90	10
70	**507R**	16	11.5	65	3/3	1/1	6.10	10
95	**508R**	18	13.5	90	4/4	2/2	10.98	10
120	**509R**	20	15.5	90	4/4	2/2	12.68	5
150	**510R**	22	17.0	105	4/4	2/2	18.09	5
185	**511R**	25	19.0	105	4/4	2/2	20.35	5
240	**512R**	28	21.5	125		2/2	31.64	5
300	**513R**	32	24.5	125		2/2	35.40	1
400	**514R**	38	27.5	160		3/3	75.42	1
Barrier version								
25	**504RLD**	12	7.5	60	2/2	1/1	4.08	25
35	**505RLD**	12	8.2	60	2/2	1/1	3.56	10
50	**506RLD**	14	10.0	65	3/3	1/1	4.90	10
70	**507RLD**	16	11.5	65	3/3	1/1	6.40	10
95	**508RLD**	18	13.5	90	4/4	2/2	10.98	10
120	**509RLD**	20	15.5	90	4/4	2/2	12.68	5
150	**510RLD**	22	17.0	105	4/4	2/2	18.84	5
185	**511RLD**	25	19.0	105	4/4	2/2	20.35	5
240	**512RLD**	28	21.5	125		2/2	31.64	5
300	**513RLD**	32	24.5	125		2/2	35.40	1
400	**514RLD**	38	27.5	160		3/3	75.42	1

Compression joints to DIN, Cu





- For connecting copper cables to DIN 48201, Part 1
- For full tension cable connections
- To DIN 48085, Part 1
- With code number for clear tool assignment
- With crimp markings for correct crimping

Characteristics

- Easy to process due to crimp markings
- Simple and safe processing due to butt mark
- Simple cable entry due to internal chamfer

Material

- Copper (EN13600)

Surface

- Bright

Technical instructions

- To process item 192R use crimping die HAD45240
- Tool: see page 69

Additional information

- * = not standardised
- 16 - 70 mm² IEC-tested

Nominal cross section mm²	Part No.	Hint	Code	Dimension mm			Number of crimps		conductor dia. mm	Weight/ 100 pcs. ~ kg	Packing unit/pcs
				d1	d4	l	Cu (5 mm)	Cu (wide)			
6	**181R**	*	6	3.5	6.5	65	4/4		3.00	1.4	10
10	**182R**		8	4.5	8.5	80	5/5		4.05	3.0	10
16	**183R**		8	5.5	8.5	95	5/5		5.10	2.8	10
25	**184R**		10	7.0	10.0	95	5/5		6.30	3.4	10
35	**185R**		12	8.2	12.5	95	5/5		7.50	5.6	10
50	**186R**		14	10.0	14.5	110	5/5		9.00	8.6	10
70	**187R**		16	11.5	16.5	110	5/5		10.50	10.8	10
95	**188R**		20	13.5	21.0	145	8/8	4/4	12.50	26.2	10
120	**189R**		22	15.0	23.5	160	8/8	4/4	14.00	36.8	10
150	**190R**		25	16.5	25.5	180	8/8	4/4	15.70	47.5	5
185	**191R**	*	32	18.5	31.5	260		5/5	17.50	118.0	5
240	**192R**	*	34	21.0	34.5	310		6/6	20.20	163.0	5
300	**193R**	*	38	23.5	38.5	360		7/7	22.50	235.0	1

Reduction sleeves, Cu





- For multi-stranded, round conductors e.g. to DIN EN 60228
- For connecting different conductor cross-sections
- For use in DIN compression joints and connectors, standard type
- For non-tension copper cables acc. to DIN 48201 part 1

Characteristics
- Simple cable entry due to internal chamfer


Suitable for
- For non-tension compression joints

Material
- Copper (EN13600)

Surface
- Bright

Technical instructions
- Refer to the installation instructions in the technical appendix on page i-7


Part No.	Nominal cross section mm² from	Nominal cross section mm² to	Dimension mm			Weight/ 100 pcs. ~ kg	Packing unit/pcs
			d1	d4	l		
RH2510	25	10	4.6	6.6	25	0.358	25
RH2516	25	16	5.5	6.6	25	0.350	25
RH3510	35	10	4.5	8.0	25	0.707	25
RH3516	35	16	5.5	8.0	25	0.570	25
RH3525	35	25	7.0	8.0	25	0.253	25
RH5016	50	16	5.5	9.5	33	1.326	25
RH5025	50	25	7.0	9.5	33	0.923	25
RH5035	50	35	8.5	9.5	33	0.404	25
RH7025	70	25	7.0	11.0	33	1.580	25
RH7035	70	35	8.5	11.0	33	1.102	25
RH7050	70	50	10.0	11.0	33	0.486	25
RH9535	95	35	8.5	13.0	45	2.940	25
RH9550	95	50	10.0	13.0	45	2.136	25
RH9570	95	70	11.5	13.0	45	1.100	25
RH12050	120	50	10.0	15.0	45	3.802	25
RH12070	120	70	11.5	15.0	45	2.874	25
RH12095	120	95	13.5	15.0	45	1.340	25
RH15070	150	70	11.5	16.5	53	5.008	5
RH15095	150	95	13.5	16.5	53	3.212	5
RH150120	150	120	15.5	16.5	53	1.248	5
RH18595	185	95	13.5	18.5	53	5.824	5
RH185120	185	120	15.5	18.5	53	3.756	5
RH185150	185	150	17.0	18.5	53	1.660	5
RH240120	240	120	15.5	21.0	55	7.412	5
RH240150	240	150	17.0	21.0	55	5.740	5
RH240185	240	185	19.0	21.0	55	3.036	5
RH300150	300	150	17.0	24.0	58	11.200	5
RH300185	300	185	19.0	24.0	58	8.390	5
RH300240	300	240	21.5	24.0	58	4.526	5
RH400185	400	185	19.0	27.0	80	20.100	5
RH400240	400	240	21.5	27.0	80	14.270	5
RH400300	400	300	24.5	27.0	80	8.800	5



Tool application chart

Compression cable lugs and compression joints

Tool type	Crimping range corresponds to nominal cross-section mm²	Crimping Tool		Catalogue page		Crimp profile
		Part No.	Crimping head / adapter	Crimping Tool	Crimping die	
Mechanical crimping tools	6-50	K05D		235		⬡
	10-120	K06D		237		⬡
	25-150	K09D		238		⬡
Mechanical, electrical, pneumatic crimping tools with interchangeable dies / heads	6-120	K354		246	330	⬡
	6-185	K18		248	338	⬡
	6-240	K22		250	343	⬡
Hand hydraulic crimping tools	6-185	HK6018		292	338	⬡
		HK60UNV	+UA18	473	338	⬡
	6-300	HK6022		294	343	⬡
		HK60UNV	+UA22	473	343	⬡
	16-300	HK12030		298	348	⬡
		HK12042		300	348	⬡
		HK120U		302	348	⬡
	120-1000	HK45		321	358	⬡
Battery powered crimping tools	6-120	EK354ML		262	330	⬡
		EK354		266	330	⬡
	6-185	EK505		268	334	⬡
		EK5018		270	338	⬡
		EK60UNV	+UA18	476	338	⬡
		EKM60UNV	+UA18	475	338	⬡
	6-300	EK6022		247	343	⬡
		EKM6022		272	343	⬡
		EK60UNV	+UA22	476	343	⬡
		EKM60UNV	+UA22	475	343	⬡
	16-300	EK12032		280	348	⬡
		EK12042		282	348	⬡
		EK120U		284	348	⬡
		EK120UNV	+UA12T	477	348	⬡
		EK135FT	+UA15T	286	348	⬡
	400-625	EK135FT		286	352	⬡
Hydraulic crimping systems	6-185	THK18		306	338	⬡
	6-240	THK22		308	343	⬡
		HK122EL380		322	343	⬡
	16-625	HK252		320	354	⬡
		HK252EL380		323	354	⬡
Hydraulic crimping heads	6-185	PK18		306	338	⬡
		PK60UNV	+UA18	474	338	⬡
	6-300	PK22		308	343	⬡
		PK60UNV	+UA22	474	343	⬡
	16-300	PK12042		312	348	⬡
		PK120U		314	348	⬡
	16-625	PK252		316	354	⬡
	120-1000	PK45		318	358	⬡



Tool application chart

Double compression cable lugs

Tool type	Crimping range corresponds to nominal cross-section mm²	Crimping Tool		Catalogue page		Crimp profile
		Part No.	Crimping head / adapter	Crimping Tool	Crimping die	
Mechanical, electrical, pneumatic crimping tools with interchangeable dies / heads	**2x50-2x70**	K22		250	343	⬭
Hand hydraulic crimping tools	**2x50-2x70**	HK6022		294	343	⬭
		HK60UNV	+UA22	473	343	⬭
	2x50-2x95	HK12030		298	348	⬭
		HK12042		300	348	⬭
		HK120U		302	348	⬭
Battery powered crimping tools	**2x50-2x70**	EK6022		274	343	⬭
		EKM6022		272	343	⬭
		EK60UNV	+UA22	476	343	⬭
		EKM60UNV	+UA22	475	343	⬭
	2x50-2x95	EK12032		280	348	⬭
		EK12042		282	348	⬭
		EK120U		284	348	⬭
		EK135FT	+UA15T	286	348	⬭
		EK120UNV	+UA12T	477	348	⬭
Hydraulic crimping systems	**2x50-2x70**	THK22		308	343	⬭
	2x50-2x95	HK122EL380		322	348	⬭
	2x50-2x120	HK252		320	354	⬭
		HK252EL380		323	354	⬭
Hydraulic crimping heads	**2x50-2x70**	PK22		308	343	⬭
		PK60UNV	+UA22	474	343	⬭
	2x50-2x95	PK12042		312	348	⬭
		PK120U		314	348	⬭
	2x50-2x120	PK252		316	354	⬭

PUNCHED - SOLDERLESS TERMINALS MADE FROM COPPER TO DIN 46234

Unlike the tubular cable lugs, Klauke solderless terminals are punched from a sheet, bent and then hard soldered in the crimp area. The grooved profile on the inside ensures higher conductor pull-out values. This product's small dimensions make it the ideal solution for confined areas.




In brief


- Reliable crimping due to high-quality solder seam
- Small dimensions for confined areas
- Suitable for multi-stranded, fine-stranded and superfine-stranded conductors

Hard soldered for reliable contact

The quality of Klauke cable lugs is also evident during the crimping operation: The solderless terminal always remains intact due to the high-quality solder seam. Guaranteed quality.

- Reliable contact due to high-quality solder seam and tinning
- Best possible contacting with ribbed profile
- Optimum solution for confined areas thanks to highly-compact dimensions
- Insulated and non-insulated versions

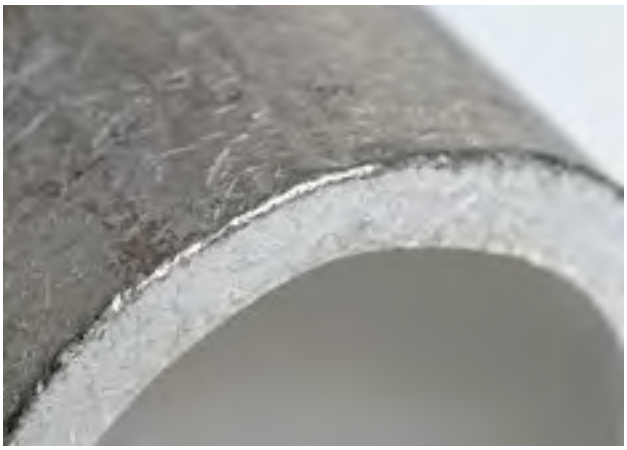

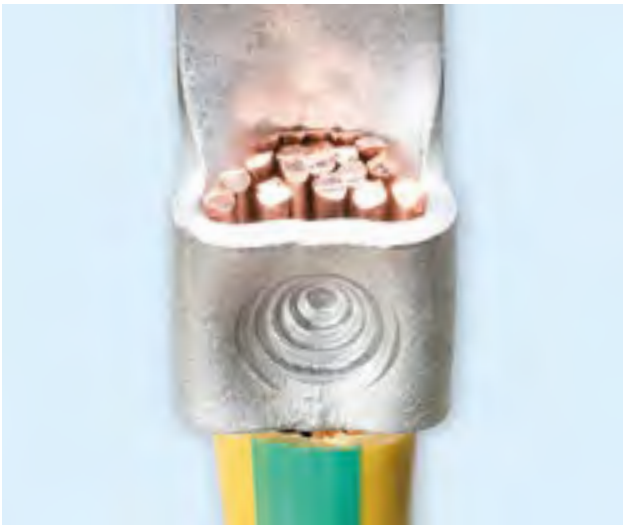

Well insulated


Klauke products make your day-to-day work easier. Thanks to the widened insulation, the conductor can be very conveniently inserted into our insulated solderless terminals. The insulation remains intact even after crimping, eliminating the need for retrospective insulation. Everything accomplished in one operation.

- Easy to use thanks to widened sleeve
- No additional insulation, hence fast processing
- As a fork-type, ideal for connecting meters in confined areas for example
- Easy conductor insertion thanks to widened sleeve



Solderless terminals to DIN, Cu





- For round conductors, e.g. to DIN EN 60228 Cl. 2, 5 and 6
- To DIN 46234
- High-quality brazing process in the crimp area

Characteristics
- Improved contact properties due to grooved profile

Material
- Copper (ETP)

Surface
- Tin-plated to protect against corrosion

Technical instructions
- Tool: see page 82

Additional information
- * = not standardised
- 0.5 - 6 mm² not UL-tested

Nominal cross section mm²	Nominal size to DIN	Part No.	Hint	Dimension mm						Weight/ 100 pcs. ~ kg	Packing unit/pcs
				a	b	d1	d2	l	s		
0.5 - 1	2.5 - 1	**162025**		5	6	1.6	2.8	11	0.8	0.060	100
	3 - 1	**16203**		5	6	1.6	3.2	11	0.8	0.060	100
	3.5 - 1	**162035**		5	6	1.6	3.7	11	0.8	0.055	100
	4 - 1	**16204**		5	8	1.6	4.3	12	0.8	0.070	100
	5 - 1	**16205**		5	10	1.6	5.3	13	0.8	0.090	100
	6 - 1	**16206**	*	5	11	1.6	6.5	15	0.8	0.080	100
	8 - 1	**16208**	*	5	14	1.6	8.4	17	0.8	0.130	100
	10 - 1	**162010**	*	5	18	1.6	10.5	19	0.8	0.130	100
1.5 - 2.5	3 - 2.5	**16303**		5	6	2.3	3.2	11	0.8	0.065	100
	4 - 2.5	**16304**		5	8	2.3	4.3	12	0.8	0.080	100
	3.5 - 2.5	**163035**		5	6	2.3	3.7	11	0.8	0.065	100
	5 - 2.5	**16305**		5	10	2.3	5.3	14	0.8	0.090	100
	6 - 2.5	**16306**		5	11	2.3	6.5	16	0.8	0.110	100
	8 - 2.5	**16308**		5	14	2.3	8.4	17	0.8	0.130	100
	10 - 2.5	**163010**	*	5	15	2.3	10.5	17	0.8	0.160	100
	12 - 2.5	**163012**	*	5	18	2.3	13.0	19	0.8	0.160	100
4 - 6	4 - 6	**16504**		6	8	3.6	4.3	14	1.0	0.140	100
	5 - 6	**16505**		6	10	3.6	5.3	15	1.0	0.160	100
	6 - 6	**16506**		6	11	3.6	6.5	16	1.0	0.170	100
	8 - 6	**16508**		6	14	3.6	8.4	19	1.0	0.220	100
	10 - 6	**165010**		6	18	3.6	10.5	21	1.0	0.290	100
	12 - 6	**165012**	*	6	18	3.6	13.0	21	1.0	0.280	100
10	5 - 10	**16525**		8	10	4.5	5.3	16	1.1	0.230	100
	6 - 10	**16526**		8	11	4.5	6.5	17	1.1	0.24	100
	8 - 10	**16528**		8	14	4.5	8.4	20	1.1	0.340	100
	10 - 10	**165210**		8	18	4.5	10.5	21	1.1	0.340	100
	12 - 10	**165212**		8	22	4.5	13.9	23	1.1	0.420	100
16	5 - 16	**16535**		10	11	5.8	5.3	20	1.2	0.390	100
	6 - 16	**16536**		10	11	5.8	6.5	20	1.2	0.380	100
	8 - 16	**16538**		10	14	5.8	8.4	22	1.2	0.43	100
	10 - 16	**165310**		10	18	5.8	10.5	24	1.2	0.500	100
	12 - 16	**165312**		10	18	5.8	10.5	24	1.2	0.500	100


see next page


Solderless terminals to DIN, Cu

Nominal cross section mm²	Nominal size to DIN	Part No.	Hint	Dimension mm						Weight/ 100 pcs. ~ kg	Packing unit/pcs
				a	b	d1	d2	l	s		
25	5 - 25	**16545**		11	12	7.5	5.3	25	1.5	0.750	100
	6 - 25	**16546**		11	12	7.5	6.5	25	1.5	0.750	100
	8 - 25	**16548**		11	16	7.5	8.4	25	1.5	0.750	100
	10 - 25	**165410**		11	18	7.5	10.5	26	1.5	0.750	100
	12 - 25	**165412**		11	22	7.5	13.0	31	1.5	0.920	100
	16 - 25	**165416**		11	28	7.5	17.0	35	1.5	1.320	100
35	6 - 35	**16556**		12	16	9.0	8.4	26	1.6	0.980	100
	8 - 35	**16558**		12	16	9.0	8.4	26	1.6	0.980	100
	10 - 35	**165510**		12	18	9.0	10.5	27	1.6	1.000	100
	12 - 35	**165512**		12	22	9.0	13.0	31	1.6	1.260	100
	16 - 35	**165516**		12	28	9.0	17.0	36	1.6	1.550	100
50	6 - 50	**16566**		16	18	11.0	6.5	34	1.8	1.650	100
	8 - 50	**16568**		16	18	11.0	8.4	34	1.8	1.650	100
	10 - 50	**165610**		16	18	11.0	10.5	34	1.8	1.600	100
	12 - 50	**165612**		16	22	11.0	13.0	36	1.8	1.800	100
	16 - 50	**165616**		16	28	11.0	17.0	40	1.8	2.100	100
70	6 - 70	**16576**		18	22	13.0	6.5	38	2.0	2.600	50
	8 - 70	**16578**		18	22	13.0	8.4	38	2.0	2.500	50
	10 - 70	**165710**		18	22	13.0	10.5	38	2.0	2.500	50
	12 - 70	**165712**		18	22	13.0	13.0	38	2.0	2.400	50
	16 - 70	**165716**		18	28	13.0	17.0	42	2.0	2.700	50
95	8 - 95	**16588**		20	24	15.0	8.4	42	2.5	4.300	50
	10 - 95	**165810**		20	24	15.0	10.5	42	2.5	4.1	50
	12 - 95	**165812**		20	24	15.0	13.0	42	2.5	3.900	50
	16 - 95	**165816**		20	28	15.0	17.0	44	2.5	4.100	50
120	8 - 120	**16598**		22	24	17.0	8.4	44	3.0	5.601	50
	10 - 120	**165910**		22	24	17.0	10.5	44	3.0	5.600	50
	12 - 120	**165912**		22	24	17.0	13.0	44	3.0	5.400	50
	16 - 120	**165916**		22	28	17.0	17.0	48	3.0	5.800	50
150	10 - 150	**166010**		24	30	19.0	10.5	50	3.2	7.600	50
	12 - 150	**166012**		24	30	19.0	13.0	50	3.2	7.600	50
	16 - 150	**166016**		24	30	19.0	17.0	50	3.2	7.500	50
185	12 - 185	**166112**		28	36	21.0	13.0	50	3.5	11.300	50
	16 - 185	**166116**		28	36	21.0	17.0	50	3.5	11.300	50
240	12 - 240	**166212**		32	38	23.5	13.0	56	4.0	15.900	25
	16 - 240	**166216**		32	38	23.5	17.0	56	4.0	15.900	25

Insulated solderless terminals, Cu with Easy-Entry







- For round conductors, e.g. to DIN EN 60228 Cl. 2, 5 and 6
- High-quality brazing process in the crimp area
- Fast preparation as no additional insulation of the crimped connection is required
- Simple processing due to crimping over the insulation

Characteristics

- Insulating, halogen-free with easy-entry cable insertion
- Dimensions in tube according to DIN 46234
- Improved contact properties due to grooved profile
- Cross-section-dependent colour-coding
- Heat resistant to 105° C

Material

- Copper (ETP)
- Insulation sleeve: PA

Surface

- Tin-plated to protect against corrosion

Technical instructions

- Tool: see page 84

Nominal cross section mm²	Part No.	Colour	Dimension mm					Gewicht 100 St. ~kg Cu	Gewicht 100 St. ~kg Ges.	Packing unit/ pcs
			d12	d13	d2	Gl1	l10			
10	**6525**		6.7	8.6	5.3	34.0	19.0	0.27	0.27	100
	6526		6.7	8.6	6.5	34.0	19.0	0.24	0.28	100
	6528		6.7	8.6	8.4	37.5	19.0	0.29	0.33	100
	65210		6.7	8.6	10.5	41.5	19.0	0.34	0.38	100
	65212		6.7	8.6	13.0	45.5	19.0	0.42	0.46	100
16	**6535**		7.7	9.6	5.3	39.5	20.5	0.39	0.44	100
	6536		7.7	9.6	6.5	39.5	20.5	0.38	0.43	100
	6538		7.7	9.6	8.4	41.5	20.5	0.43	0.48	100
	65310		7.7	9.6	10.5	43.5	20.5	0.50	0.55	100
	65312		7.7	9.6	13.0	50.5	20.5	0.58	0.63	100
25	**6545**		11.0	13.0	5.3	40.0	20.0	0.75	0.84	50
	6546		11.0	13.0	6.5	42.5	20.0	0.69	0.78	50
	6548		11.0	13.0	8.4	43.0	20.0	0.75	0.84	50
	65410		11.0	13.0	10.5	45.0	20.0	0.80	0.89	50
	65412		11.0	13.0	13.0	51.0	20.0	0.92	1.00	50
	65416		11.0	13.0	17.0	59.0	20.0	1.32	1.40	50
35	**6556**		12.7	15.0	6.5	44.0	22.5	1.01	1.14	50
	6558		12.7	15.0	8.4	44.5	22.5	0.98	1.10	50
	65510		12.7	15.0	10.5	46.5	22.5	1.00	1.12	50
	65512		12.7	15.0	13.0	52.5	22.5	1.26	1.38	50
	65516		12.7	15.0	17.0	54.5	22.5	1.55	1.67	50
50	**6566**		15.4	18.0	6.5	54.5	27.5	1.65	1.90	50
	6568		15.4	18.0	8.4	60.5	27.5	1.65	1.90	50
	65610		15.4	18.0	10.5	60.5	27.5	1.60	1.85	50
	65612		15.4	18.0	13.0	60.5	27.5	1.80	2.05	50
	65616		15.4	18.0	17.0	67.5	27.5	2.10	2.35	50


see next page


Insulated solderless terminals, Cu with Easy-Entry

Nominal cross section mm²	Part No.	Colour	Dimension mm					Weight 100 pcs. ~kg Cu	Weight 100 pcs. ~kg Total	Packing unit/ pcs
			d12	d13	d2	Gl1	l10			
70	**6576**		17.4	20.0	6.5	61.5	30.5	2.60	2.90	50
	6578		17.4	20.0	8.4	61.5	30.5	2.50	2.80	50
	65710		17.4	20.0	10.5	66.5	30.5	2.50	2.80	50
	65712		17.4	20.0	13.0	66.5	30.5	2.40	2.70	50
	65716		17.4	20.0	17.0	70.5	30.5	2.70	3.00	50
95	**65810**		20.5	23.5	10.5	70.0	34.0	4.10	4.50	25
	65812		20.5	23.5	13.0	70.0	34.0	3.90	4.40	25
	65816		20.5	23.5	17.0	76.0	34.0	4.10	4.50	25
120	**65910**		23.5	26.7	10.5	79.0	36.0	5.60	6.10	25
	65912		23.5	26.7	13.0	82.0	36.0	5.40	5.90	25
	65916		23.5	26.7	17.0	90.0	36.0	5.80	6.30	25
150	**66010**		26.0	29.2	10.5	80.0	39.0	7.60	8.40	25
	66012		26.0	29.2	13.0	83.0	39.0	7.60	8.40	25
	66016		26.0	29.2	17.0	83.0	39.0	7.50	8.30	25

Insulated pin terminals, Cu with Easy-Entry







- For round conductors, e.g. to DIN EN 60228 Cl. 2, 5 and 6
- High-quality brazing process in the crimp area
- Fast preparation as no additional insulation of the crimped connection is required

Characteristics

- Insulating, halogen-free with easy-entry cable insertion
- Improved contact properties due to grooved profile
- Cross-section-dependent colour-coding
- Heat resistant to 105° C

Material

- Copper (ETP)
- Insulation sleeve: PA

Surface

- Tin-plated to protect against corrosion


Technical instructions

- Tool: see page 84

Nominal cross section mm²	Part No.	Colour	Dimension mm					Weight 100 pcs. ~kg Cu	Weight 100 pcs. ~kg Total	Packing unit/ pcs
			b	d12	d13	Gl1	l10			
10	**ST1716IS**		4.3	7.4	9.4	33.0	19.0	0.27	0.31	100
16	**ST1717IS**		5.5	8.6	10.6	38.0	20.0	0.39	0.44	100
25	**ST1718IS**		6.8	12.5	14.5	43.5	23.5	0.63	0.73	50
35	**ST1719IS**		8.0	14.0	16.4	51.5	27.5	1.17	1.34	50
50	**ST1720IS**		9.5	15.5	18.0	59.0	33.0	1.79	2.10	50
70	**ST1721IS**		11.0	18.0	20.5	69.0	38.0	2.92	3.20	50
95	**ST1722IS**		12.5	20.7	23.5	71.0	40.0	4.30	4.70	25

Solderless terminals, Cu, fork type





- For round conductors, e.g. to DIN EN 60228 Cl. 2, 5 and 6
- Dimensions in tube to 6 mm² to DIN 46234
- Simple fork-type mounting
- High-quality brazing process in the crimp area

Characteristics
- Improved contact properties due to grooved profile

Material
- Copper (ETP)

Surface
- Tin-plated to protect against corrosion


Technical instructions
- Tool: see page 82

Additional information
- 0.5 - 6 mm² not UL-certified

Nominal cross section mm²	Nominal size to DIN	Part No.	Dimension mm						Weight 100 pcs. ~kg	Packing unit/ pcs
			a	b	d1	d2	l	s		
0.5 - 1	3 - 1	**1620C3**	5.0	6.0	1.6	3.2	11.0	0.8	0.060	100
	3.5 - 1	**1620C35**	5.0	6.0	1.6	3.7	11.0	0.8	0.060	100
	4 - 1	**1620C4**	5.0	6.8	1.6	4.3	12.0	0.8	0.070	100
	5 - 1	**1620C5**	5.0	10.0	1.6	5.3	13.0	0.8	0.090	100
	6 - 1	**1620C6**	5.0	11.0	1.6	6.5	15.0	0.8	0.080	100
1.5 - 2.5	3 - 2.5	**1630C3**	5.0	5.5	2.3	3.2	13.8	0.8	0.065	100
	3.5 - 2.5	**1630C35**	5.0	6.0	2.3	3.7	11.0	0.8	0.065	100
	4 - 2.5	**1630C4**	5.0	6.8	2.3	4.3	12.0	0.8	0.080	100
	5 - 2.5	**1630C5**	5.0	10.0	2.3	5.3	14.0	0.8	0.090	100
	6 - 2.5	**1630C6**	5.0	11.0	2.3	6.5	16.0	0.8	0.110	100
4 - 6	4 - 6	**1650C4**	6.0	8.0	3.6	4.3	14.0	1.0	0.140	100
	5 - 6	**1650C5**	6.0	10.0	3.6	5.3	15.0	1.0	0.160	100
	6 - 6	**1650C6**	6.0	11.0	3.6	6.5	16.0	1.0	0.170	100
	8 - 6	**1650C8**	6.0	14.0	3.6	8.4	19.0	1.0	0.220	100
10	5 - 10	**1652C5**	10.0	10.0	4.3	5.3	19.0	1.0	0.240	100
	6 - 10	**1652C6**	10.0	11.0	4.3	6.4	21.0	1.0	0.260	100
16	6 - 16	**1653C6**	11.5	11.0	5.4	6.4	24.0	1.0	0.350	100
	8 - 16	**1653C8**	11.5	15.0	5.4	8.4	27.0	1.0	0.420	100

Pin terminals to DIN, Cu



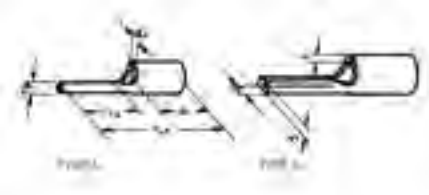







- For round conductors, e.g. to DIN EN 60228 Cl. 2, 5 and 6
- Nominal cross-sections 0.5 - 6 mm² to DIN 46230
- High-quality brazing process in the crimp area

Characteristics

- Improved contact properties due to grooved profile

Material

- Copper (ETP)

Surface

- Tin-plated to protect against corrosion

Technical instructions

- Tool: see page 82


Additional information


- * = not standardised
- 0.5 - 6 mm² not UL-tested

Nominal cross section mm²	Nominal size to DIN	Part No.	Typ	Hint	Dimension mm								Weight 100 pcs. ~kg	Packing unit/pcs
					a	b	d1	d2	l1	l2	s	h		
0.5 - 1	1	**ST1705**	A		5.0	--	1.8	1.9	17.0	10	0.8	--	0.060	100
1.5 - 2.5	2.5	**ST1710**	A		5.0	--	2.3	1.9	17.0	10	0.8	--	0.072	100
4 - 6	6	**ST1715**	A		6.0	--	3.6	2.7	20.0	11	1.0	--	0.160	100
10	--	**ST1716**	B	*	10.0	4.3	4.3	--	24.5	11	1.0	2.0	0.270	100
16	--	**ST1717**	B	*	11.5	5.8	5.4	--	29.5	15	1.0	2.0	0.390	100
25	--	**ST1718**	B	*	13.5	6.8	6.7	--	33.5	15	1.2	2.4	0.630	100
35	--	**ST1719**	B	*	16.0	8.0	8.2	--	40.5	20	1.5	3.2	1.170	50
50	--	**ST1720**	B	*	19.0	9.5	9.5	--	45.0	20	1.8	3.6	1.790	50
70	--	**ST1721**	B	*	24.0	11.0	11.2	--	55.0	23	2.0	4.0	2.920	50
95	--	**ST1722**	B	*	24.0	12.5	13.5	--	55.0	23	2.5	5.0	4.300	50

Insulated solderless terminals for meter connections, Cu, fork type







- For round conductors, e.g. to DIN EN 60228 Cl. 2, 5 and 6
- Special design for meter connection
- High-quality brazing process in the crimp area
- Fast preparation as no additional insulation of the crimped connection is required

Characteristics

- Improved contact properties due to grooved profile
- Cross-section-dependent colour-coding
- Heat resistant to 105° C

Material

- Copper (ETP)
- Insulation sleeve: PA

Surface

- Tin-plated to protect against corrosion


Technical instructions


- Tool: see page 84

Nominal cross section mm²	Part No.	Colour	Dimension mm					Gewicht 100 St. ~kg Cu	Gewicht 100 St. ~kg Ges.	Packing unit/ pcs
			d12	d13	d2	Gl1	l10			
10	**652C5**		7.0	9.6	5.3	33.5	19.0	0.24	0.28	100
	652C6		7.0	9.6	6.4	33.5	19.0	0.26	0.30	100
16	**653C6**		8.6	10.6	6.4	37.5	20.5	0.35	0.40	100

Solderless connectors to DIN, Cu, short type







- For round conductors, e.g. to DIN EN 60228 Cl. 2, 5 and 6
- To DIN 46341, Part 1, Form A
- Ideal for connecting differing conductor cross-sections

Characteristics

- Simple cable entry due to internal chamfer
- Annealed material optimises material and crimping properties

Material

- Copper (EN13600)

Surface

- Tin-plated to protect against corrosion


Technical instructions

- Tool: see page 82

Nominal cross section mm²	Nominal size to DIN	Part No.	Dimension mm			Weight 100 pcs. ~kg	Packing unit/pcs
			d1	d4	l		
0.5 - 1	1	**1620K**	1.6	3.2	8	0.045	100
1.5 - 2.5	2.5	**1630K**	2.3	3.9	8	0.055	100
4 - 6	6	**1650K**	3.6	5.6	9	0.090	100
10	10	**1652K**	4.5	6.7	10	0.170	100
16	16	**1653K**	5.8	8.2	11	0.260	100
25	25	**1654K**	7.5	10.5	14	0.510	100
35	35	**1655K**	9.0	12.2	16	0.730	100
50	50	**1656K**	11.0	14.6	19	1.200	100
70	70	**1657K**	13.0	17.0	19	1.530	50
95	95	**1658K**	15.0	20.0	20	2.370	50
120	120	**1659K**	16.5	22.5	22	3.450	50
150	150	**1660K**	19.0	25.4	26	5.060	50

Solderless connectors to DIN, Cu, long type



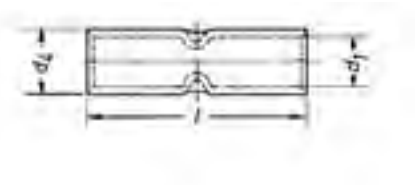











- For round conductors, e.g. to DIN EN 60228 Cl. 2, 5 and 6
- To DIN 46341, Part 1, Form B
- Simple and safe processing due to butt mark

Characteristics

- Simple cable entry due to internal chamfer
- Annealed material optimises material and crimping properties

Material

- Copper (EN13600)


Surface

- Tin-plated to protect against corrosion

Technical instructions

- Tool: see page 82

Nominal cross section mm²	Nominal size to DIN	Part No.	Dimension mm			Weight 100 pcs. ~kg	Packing unit/pcs
			d1	d4	l		
0.5 - 1	1	**1620L**	1.6	3.2	15	0.08	100
1.5 - 2.5	2.5	**1630L**	2.3	3.9	15	0.10	100
4 - 6	6	**1650L**	3.6	5.6	15	0.19	100
10	10	**1652L**	4.5	6.7	21	0.36	100
16	16	**1653L**	5.8	8.2	26	0.62	100
25	25	**1654L**	7.5	10.5	29	1.11	100
35	35	**1655L**	9.0	12.2	32	1.50	100
50	50	**1656L**	11.0	14.6	38	2.44	100
70	70	**1657L**	13.0	17.0	42	3.54	50
95	95	**1658L**	15.0	20.0	48	5.87	50
120	120	**1659L**	16.5	22.5	52	8.46	50
150	150	**1660L**	19.0	25.4	56	10.86	50




Tool application chart

Solderless terminals to DIN 46234, pin terminals to DIN 46230, solderless connectors to DIN 46341
Part 1 of 2

Tool type	Crimping range corresponds to nominal cross-section mm²	Crimping Tool		Catalogue page		Crimp profile
		Part No.	Crimping head / adapter	Crimping Tool	Crimping die	
Mechanical crimping tools	0.5-16	K25		230		
	16-95	K95		230		
		TK95		231		
Mechanical, electrical, pneumatic crimping tools with interchangeable dies / heads	0.5-10	K50		244	326	
		EK50ML		254	326	
		K507		243		
	0.75-2.5	KP1	+KP232	240		
		KP1L	+KP232	240		
	4-10	KP1	+KP242	240		
		KP1L	+KP242	240		
	10-35	K354		246	330	
	10-70	K18		248	338	
		K22		250	343	
Hand hydraulic crimping tools	10-70	HK6018		292	338	
		HK60UNV	+UA18	473	338	
		HK6022		294	343	
		HK60UNV	+UA22	473	343	
	16-150	HK12030		298	349	
		HK12042		300	349	
		HK120U		302	349	
Battery powered crimping tools	0.5-10	EK1550ML		258	326	
	0.75-2.5	EKP1ML	+KP232	260		
	4-10	EKP1ML	+KP242	260		
	10-35	EK354ML		262	330	
		EK354		266	330	
	10-50	EK505		268	334	
	10-70	EK5018		270	338	
		EK60UNV	+UA18	476	338	
		EKM60UNV	+UA18	475	338	
		EK6022		247	343	
		EKM6022		272	343	
		EK60UNV	+UA22	476	343	
		EKM60UNV	+UA22	475	343	
	10-240	EKM60ID		278		
	16-150	EK12032		280	349	
		EK12042		282	349	
		EK120U		284	349	
		EK135FT	+UA15T	286	349	
		EK120UNV	+UA12T	477	349	
	35-240	EK120ID		279		


see next page



Tool application chart

Solderless terminals to DIN 46234, pin terminals to DIN 46230, solderless connectors to DIN 46341
Part 2 of 2

Tool type	Crimping range corresponds to nominal cross-section mm²	Crimping Tool		Catalogue page		Crimp profile
		Part No.	Crimping head / adapter	Crimping Tool	Crimping die	
Hydraulic crimping systems	**10-70**	THK18		306	338	
		THK22		308	343	
	16-150	HK122EL380		322	349	
	16-240	HK252		320	354	
		HK252EL380		323	354	
Hydraulic crimping heads	**10-70**	PK18		306	338	
		PK60UNV	+UA18	474	338	
		PK22		308	343	
		PK60UNV	+UA22	474	343	
	10-240	PK60ID		311		
	16-150	PK12042		312	349	
		PK120U		314	349	
	16-240	PK252		316	354	



Tool application chart

Isolierte Quetschkabelschuhe
Isolierte Stiftkabelschuhe

Tool type	Crimping range corresponds to nominal cross-section mm²	Crimping Tool		Catalogue page		Crimp profile
		Part No.	Crimping head / adapter	Crimping Tool	Crimping die	
Mechanical crimping tools	10-16	K16		223		⬭
Mechanical, electrical, pneumatic crimping tools with interchangeable dies / heads	10-16	K50		244	327	⬭
		EK50ML		254	327	⬭
		K354		246	327	⬭
	10-50	K18		248	338	◡
	10-70	K22		250	343	◡
Hand hydraulic crimping tools	10-50	HK6018		292	338	◡
		HK60UNV	+UA18	473	338	◡
	10-70	HK6022		294	343	◡
		HK60UNV	+UA22	473	343	◡
	10-95	HK12030		298	349	◡
		HK12042		300	349	◡
		HK120U		302	349	◡
Battery powered crimping tools	10-16	EK1550ML		258	327	⬭
		EK354ML		262	330	◡
		EK354		266	330	◡
	10-50	EK5018		270	338	◡
		EK60UNV	+UA18	476	338	◡
		EKM60UNV	+UA18	475	338	◡
	10-70	EK6022		274	343	◡
		EKM6022		272	343	◡
		EK60UNV	+UA22	476	343	◡
		EKM60UNV	+UA22	475	343	◡
	10-95	EK12032		280	349	◡
		EK12042		282	349	◡
		EK120U		284	349	◡
		EK135FT	+UA15T	286	349	◡
		EK120UNV	+UA12T	477	349	◡
Hydraulic crimping systems	10-50	THK18		306	338	◡
	10-70	THK22		308	343	◡
	10-150	HK252		320	355	◡
Hydraulic crimping heads	10-50	PK18		306	338	◡
		PK60UNV	+UA18	474	338	◡
	10-70	PK22		308	343	◡
		PK60UNV	+UA22	474	343	◡
	10-95	PK12042		312	349	◡
		PK120U		314	349	◡
	10-150	PK252		316	355	◡

COMPENSATING - SLEEVES FOR COPPER SECTOR-SHAPED AND COMPACTED CONDUCTORS

With the right sleeve, copper sector-shaped conductors are easy to crimp all the way round and can then be conveniently inserted into the cable lug. Klauke sleeves for compacted conductors compensate the difference between the compacted conductor and cable lug - ensuring reliable connections.



In brief

- For round crimping sector-shaped conductors
- Brings compacted conductors to the required volume
- Good conductivity due to high-quality copper
- Available for DIN and tubular cable lugs

Note: The sleeves for sector-shaped conductors must be crimped with pre-rounding dies.

Filled in two steps

Making it easy for you: Use the Klauke sleeves to bring compacted conductors to the required volume in just two work steps: Simply attach the sleeve to the stripped conductor and insert it into the appropriate cable lug - done.

No additional tools and no special solutions required.

- Simple filling of compacted conductors
- For nominal cross-sections of up to 400 mm²
- High-quality material reduces contact resistance
- No special solutions required: existing tool can be used for reliable crimping

Pre-rounded sector-shaped conductors

Pre-rounds 3 and 4-sector-shaped conductors without special cable lugs - using Klauke sleeves.

- For pre-rounding of sector-shaped conductors
- Suitable for 3- and 4-sector-shaped conductors at angles of 120° and 90°
- Nominal cross-section up to 240 mm²
- No splicing of conductors
- No special cable lugs required
- Lower storage costs





The right sleeve for every cable lug


With Klauke, everything fits together. The diameter and length of the sleeve are adapted to the required cable lug to ensure optimum crimping.


- Reliable crimping in a just a few steps
- Sleeves accurately matched to the Klauke system



Sleeves for compacted conductors, for tubular cable lugs and connector standard type



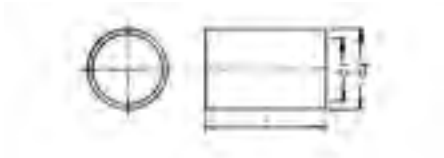



- For multi-stranded, compacted conductors e.g. to DIN EN 60228 Cl. 2
- Allows the use of Klauke tubular cable lugs and connectors, standard type, on compacted conductors

Characteristics

- Annealed material optimises material and crimping properties

Material

- Copper (HCP)

Surface

- Tin-plated to protect against corrosion


Technical instructions


- Refer to the installation instructions in the technical appendix on page i-7

Nominal cross section mm²	Part No.	Dimension mm			Weight 100 pcs. ~kg	Packing unit/pcs
		d1	d4	l		
16	**VHR16**	5.0	5.3	11	0.024	100
25	**VHR25**	6.4	6.7	14	0.038	100
35	**VHR35**	7.7	8.2	15	0.083	100
50	**VHR50**	9.0	9.5	18	0.118	50
70	**VHR70**	10.6	11.2	19	0.173	50
95	**VHR95**	12.4	13.0	21	0.223	50
120	**VHR120**	13.9	14.5	22	0.261	50
150	**VHR150**	15.4	16.0	26	0.342	25
185	**VHR185**	17.6	18.2	26	0.396	25
240	**VHR240**	19.9	20.5	30	0.508	25
300	**VHR300**	22.4	23.0	38	0.723	10
400	**VHR400**	25.4	26.2	38	1.108	10

Sleeves for compacted conductors, for tubular cable lugs and connector DIN type







- For multi-stranded, compacted conductors e.g. to DIN EN 60228 Cl. 2
- Allows the use of Klauke DIN compression cable lugs and connectors for compacted conductors

Characteristics

- Annealed material optimises material and crimping properties

Material

- Copper (HCP)

Surface

- Tin-plated to protect against corrosion


Technical instructions

- Refer to the installation instructions in the technical appendix on page i-7

Nominal cross section mm²	Part No.	Dimension mm			Weight 100 pcs. ~kg	Packing unit/pcs
		d1	d4	l		
16	**VHD16**	5.0	5.3	16	0.035	100
25	**VHD25**	6.4	6.7	16	0.043	100
35	**VHD35**	7.7	8.2	17	0.094	100
50	**VHD50**	9.0	9.5	23	0.151	50
70	**VHD70**	10.6	11.2	24	0.219	50
95	**VHD95**	12.4	13.0	28	0.298	50
120	**VHD120**	13.9	14.5	30	0.357	50
150	**VHD150**	15.4	16.0	30	0.395	25
185	**VHD185**	17.6	18.2	38	0.579	25
240	**VHD240**	19.9	20.5	38	0.645	25
300	**VHD300**	22.4	23.0	48	0.913	5
400	**VHD400**	25.4	26.2	58	1.692	5

Sleeves for sector shaped conductors, 3-core cable



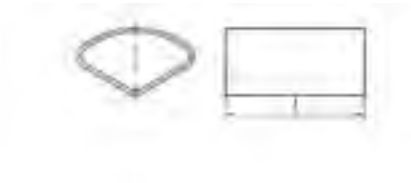





- For multi-stranded, sector shaped conductors, e.g. to DIN EN 60228
- For tubular cable lugs and connectors, standard version and DIN compression cable lugs and connectors
- To simplify pre-rounding of 3-core cables (120° angle)
- Prevents sector shaped conductors from de-stranding during pre-rounding

Characteristics

- Annealed material optimises material and crimping properties

Material

- Copper (HCP)

Surface

- Tin-plated to protect against corrosion


Technical instructions

- For round crimping dies, see „Crimping dies“
- Refer to the installation instructions in the technical appendix on page i-7

Nominal cross section mm²	Part No.	Dimension mm für l	Weight 100 pcs. ~kg	Packing unit/pcs
Standard type				
35	**VHR353**	14	0.08	100
50	**VHR503**	17	0.17	50
70	**VHR703**	18	0.29	50
95	**VHR953**	22	0.45	50
120	**VHR1203**	23	0.49	50
150	**VHR1503**	25	0.58	25
185	**VHR1853**	25	0.80	25
240	**VHR2403**	30	1.04	25
DIN version				
35	**VHD353**	17,5	0.11	100
50	**VHD503**	25,0	0.26	50
70	**VHD703**	25,0	0.39	50
95	**VHD953**	32,0	0.66	50
120	**VHD1203**	32,0	0.68	50
150	**VHD1503**	32,0	0.74	25
185	**VHD1853**	35,0	1.13	25
240	**VHD2403**	35,0	1.22	25

Sleeves for sector shaped conductors, 4-core cable









- For multi-stranded, sector shaped conductors, e.g. to DIN EN 60228
- For tubular cable lugs and connectors, standard version and DIN compression cable lugs and connectors
- To simplify pre-rounding of 4-core cables (90° angle)
- Prevents sector shaped conductors from de-stranding during pre-rounding

Characteristics

- Annealed material optimises material and crimping properties

Material

- Copper (HCP)

Surface

- Tin-plated to protect against corrosion

Technical instructions

- Refer to the installation instructions in the technical appendix on page i-7
- For round crimping dies, see „Crimping dies“

Nominal cross section mm²	Part No.	Dimension mm für l	Weight 100 pcs. ~kg	Packing unit/pcs
Standard type				
35	**VHR354**	14	0.13	100
50	**VHR504**	17	0.17	50
70	**VHR704**	18	0.28	50
95	**VHR954**	22	0.40	50
120	**VHR1204**	23	0.51	50
150	**VHR1504**	25	0.57	25
185	**VHR1854**	25	0.78	25
240	**VHR2404**	30	0.85	25
DIN version				
35	**VHD354**	17.5	0.11	100
50	**VHD504**	25.0	0.25	50
70	**VHD704**	25.0	0.38	50
95	**VHD954**	32.0	0.63	50
120	**VHD1204**	32.0	0.71	50
150	**VHD1504**	32.0	0.73	25
185	**VHD1854**	35.0	1.09	25
240	**VHD2404**	35.0	1.13	25

RELIABLE - ALUMINIUM COMPRESSION CABLE LUGS AND CONNECTORS TO DIN

Light and extremely reliable: Klauke aluminium compression cable lugs are both. Contact grease breaks down the oxidation layer, high-quality tinning facilitates the contact with copper in dry environments. For the toughest demands, all cable lugs and most cable lugs and connectors are IEC-tested for safety.
We offer a solution for practically every problem.



In brief

- Aluminium cable lugs and connectors according to and based on DIN standards
- Tested to the stringent IEC 61238-1
- Appropriate solutions to 30 kV
- Also for power lines and conductor wires
- Tinned and non-tinned versions available

Deep drawn

Deep-drawn connectors are produced with barrier and precisely to DIN 46329. Thanks to the special production method, there is absolutely no ingress or escaping of liquids through the cable lug flange.

- Barrier design with oil stop
- Filled with contact grease as standard
- In the tinned version, also suitable for connecting to copper in dry environments
- For moist environments, we recommend Klauke connectors made from aluminium/copper

Same excellent quality

Because we at Klauke have our own manufacturing facilities, our products are always the same consistently high quality. No matter which cable lug or connector you need, the Klauke system guarantees you the best results.

- Constant qualities in many forms
- Connections according to or based on DIN standards
- Simple processing with DIN hexagonal crimping or optionally EKM60ID
- Guaranteed safety through IEC 61238-1 tests






Flexibility in power line construction


In power line construction too, Klauke products provide the flexible and reliable solution.

For special solutions, contact us directly. We can make them for you.

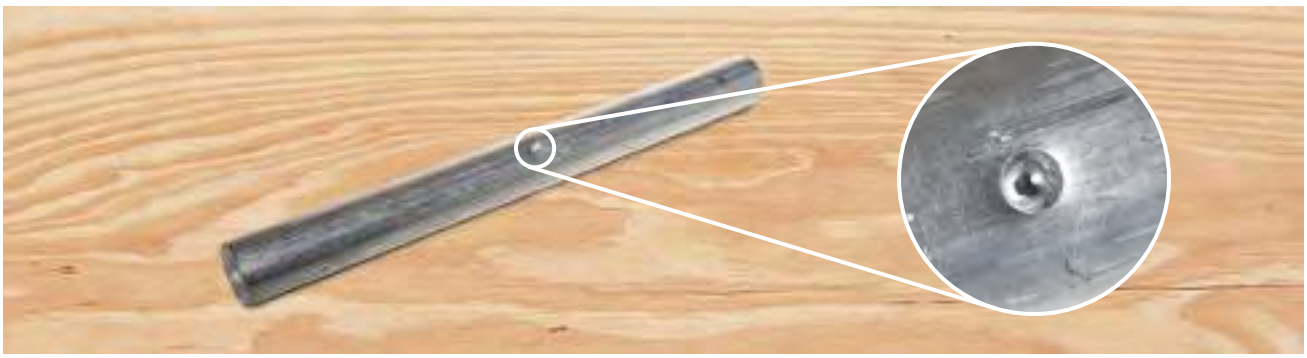

Compression cable lugs to DIN, Al



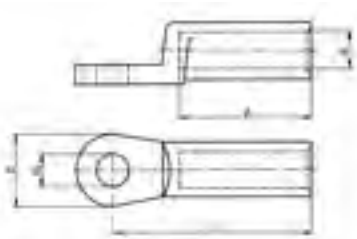

- For non-tension connections of aluminium conductors to DIN EN 60228 and aluminium cables to DIN EN 50182
- For pre-rounded sector shaped conductors
- To DIN 46329
- Filled with contact grease for optimum crimp characteristics

Characteristics

- Barrier design with oil stop
- Optional tin-plated (20 µm) version to connect copper bus bars in dry indoor areas
- Simple and safe connection due to flat contact surfaces and internal chamfer
- Unique tool assignment due to DIN die coding

Material

- E-aluminium

Surface

- Bright

Technical instructions

- Tool: see page 103

Additional information

- Part Number appendix for tinned version „V“
- re = round single solid wire, rm = round multi-stranded, se = sector shaped single solid wire, sm = sector shaped multi-stranded, sector shaped conductors must be pre-rounded
- 70 - 240 mm² UL-tested
- * = not standardised

Size of bolt dia.	Part No.	Nominal cross section mm²		Hint	Code	Dimension mm					Number of crimps		Weight 100 pcs. ~kg	Packing unit/pcs
		rm/sm	se			a	b	d1	d2	l	Al (7 mm)	Al (wide)		
M 8	**263R8**	16	--	*	12	30	20	5.8	8.4	50	4	2	1.20	4
M 10	**263R10**	16	--	*	12	30	20	5.8	10.5	50	4	2	1.20	4
M 8	**264R8**	25	--		12	30	25	6.8	8.4	50	4	2	1.30	4
M 10	**264R10**	25	--		12	30	25	6.8	10.5	50	4	2	1.24	4
M 12	**264R12**	25	--		12	30	25	6.8	13.0	50	4	2	1.22	4
M 8	**265R8**	35	50		14	42	25	8.0	8.4	62	5	2	2.50	4
M 10	**265R10**	35	50		14	42	25	8.0	10.5	62	5	2	1.98	4
M 12	**265R12**	35	50		14	42	25	8.0	13.0	62	5	2	2.50	4
M 8	**266R8**	50	70		16	42	25	9.8	8.4	62	5	2	2.75	4
M 10	**266R10**	50	70		16	42	25	9.8	10.5	62	5	2	2.70	4
M 12	**266R12**	50	70		16	42	25	9.8	13.0	62	5	2	2.65	4
M 8	**267R8**	70	95		18	52	25	11.2	8.4	72	6	3	3.45	4
M 10	**267R10**	70	95		18	52	25	11.2	10.5	72	6	3	3.80	4
M 12	**267R12**	70	95		18	52	25	11.2	13.0	72	6	3	3.35	4
M 10	**268R10**	95	120		22	56	25	13.2	10.5	75	6	3	6.90	4
M 12	**268R12**	95	120		22	56	25	13.2	13.0	75	6	3	4.92	4
M 16	**268R16**	95	120	*	22	56	25	13.2	17.0	75	6	3	6.00	4
M 10	**269R10**	120	150		22	56	30	14.7	10.5	80	6	3	5.95	4
M 12	**269R12**	120	150		22	56	30	14.7	13.0	80	6	3	5.84	4
M 16	**269R16**	120	150		22	56	30	14.7	17.0	80	6	3	6.60	4
M 10	**270R10**	150	185		25	60	30	16.3	10.5	90	6	3	8.50	4


See next page

Compression cable lugs to DIN, Al

Size of bolt dia.	Part No.	Nominal cross section mm²		Hint	Code	Dimension mm					Number of crimps		Weight 100 pcs. ~kg	Packing unit/pcs
		rm/sm	se			a	b	d1	d2	l	Al (7 mm)	Al (wide)		
M 12	**270R12**	150	185		25	60	30	16.3	13.0	90	6	3	7.73	4
M 16	**270R16**	150	185		25	60	30	16.3	17.0	90	6	3	7.60	4
M 20	**270R20**	150	185	*	25	60	30	16.3	21.0	90	6	3	8.20	4
M 10	**271R10**	185	240		28	60	30	18.3	10.5	91	6	3	11.00	4
M 12	**271R12**	185	240		28	60	30	18.3	13.0	91	6	3	9.88	4
M 16	**271R16**	185	240		28	60	30	18.3	17.0	91	6	3	10.10	4
M 20	**271R20**	185	240	*	28	60	30	18.3	21.0	91	6	3	10.00	4
M 10	**272R10**	240	300	*	32	70	38	21.0	10.5	103	8	3	15.50	4
M 12	**272R12**	240	300		32	70	38	21.0	13.0	103	8	3	13.80	4
M 16	**272R16**	240	300		32	70	38	21.0	17.0	103	8	3	13.48	4
M 20	**272R20**	240	300		32	70	38	21.0	21.0	103	8	3	15.00	4
M 12	**273R12**	300	--		34	70	38	23.3	13.0	103	8	3	17.60	1
M 16	**273R16**	300	--		34	70	38	23.3	17.0	103	8	3	17.28	1
M 20	**273R20**	300	--		34	70	38	23.3	21.0	103	8	3	17.40	1
M 12	**274R12**	400	--		38	73	38	26.0	13.0	116	--	4	38.00	1
M 16	**274R16**	400	--		38	73	38	26.0	17.0	116	--	4	37.40	1
M 20	**274R20**	400	--		38	73	38	26.0	21.0	116	--	4	40.20	1
M 12	**275R12**	500	--		44	79	44	29.0	13.0	122	--	4	43.70	1
M 16	**275R16**	500	--		44	79	44	29.0	17.0	122	--	4	43.30	1
M 20	**275R20**	500	--		44	79	44	29.0	21.0	122	--	4	43.00	1

Compression cable lugs, Al



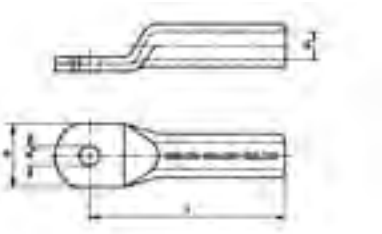

IEC

- For non-tension connections of aluminium conductors to DIN EN 60228 and aluminium cables to DIN EN 50182
- For pre-rounded sector shaped conductors
- Tube dimension to DIN 46329
- With code number for clear tool assignment
- Filled with contact grease for optimum crimp characteristics

Characteristics
- Easy to process due to crimp markings
- Simple and safe connection due to flat contact surfaces and internal chamfer

Material
- E-aluminium

Surface
- Bright


Technical instructions
- Tool: see page 103

Additional information
- re = round single solid wire, rm = round multi-stranded, se = sector shaped single solid wire, sm = sector shaped multi-stranded, sector shaped conductors must be pre-rounded
- 16 - 400 mm² IEC-tested


Size of bolt dia.	Part No.	Nominal cross section mm²		Code	Dimension mm				Number of crimps		Weight 100 pcs. ~kg	Packing unit/pcs
		rm/sm	se		b	d1	d2	l	Al (7 mm)	Al (wide)		
M 6	**202R6**	10	--	10	16	5.0	6.5	52	4	2	0.86	25
M 8	**202R8**	10	--	10	18	5.0	8.5	52	4	2	0.88	25
	203R8	16	--	12	18	5.8	8.5	52	4	2	1.37	10
M 10	**203R10**	16	--	12	18	5.8	10.5	52	4	2	1.39	10
M 8	**204R8**	25	--	12	18	6.8	8.5	60	4	2	1.41	10
M 10	**204R10**	25	--	12	18	6.8	10.5	60	4	2	1.46	10
	205R10	35	50	14	21	8.0	10.5	67	5	2	2.08	10
M 12	**205R12**	35	50	14	21	8.0	13.0	67	5	2	2.05	10
M 10	**206R10**	50	70	16	25	9.8	10.5	72	5	2	2.68	10
M 12	**206R12**	50	70	16	25	9.8	13.0	72	5	2	2.73	10
M 10	**207R10**	70	95	18	28	11.2	10.5	86	6	3	4.42	10
M 12	**207R12**	70	95	18	28	11.2	13.0	86	6	3	4.27	10
M 10	**208R10**	95	120	22	32	13.2	10.5	90	6	3	7.40	4
M 12	**208R12**	95	120	22	32	13.2	13.0	90	6	3	7.50	4
M 16	**208R16**	95	120	22	34	13.2	17.0	90	6	3	7.30	4
M 12	**209R12**	120	150	22	32	14.7	13.0	91	6	3	6.68	4
M 16	**209R16**	120	150	22	34	14.7	17.0	91	6	3	6.41	4
M 12	**210R12**	150	185	25	35	16.3	13.0	103	6	3	9.64	4
M 16	**210R16**	150	185	25	35	16.3	17.0	103	6	3	9.24	4
M 20	**210R20**	150	185	25	41	16.3	21.0	103	6	3	9.40	4
M 12	**211R12**	185	240	28	40	18.3	13.0	106	6	3	12.61	1
M 16	**211R16**	185	240	28	40	18.3	17.0	106	6	3	11.92	1
M 20	**211R20**	185	240	28	40	18.3	21.0	106	6	3	13.10	1
M 12	**212R12**	240	300	32	45	21.0	13.0	116	8	3	18.30	1
M 16	**212R16**	240	300	32	45	21.0	17.0	116	8	3	17.60	1
M 20	**212R20**	240	300	32	45	21.0	21.0	116	8	3	17.30	1
M 16	**213R16**	300	--	34	49	23.3	17.0	124	8	3	17.50	1
M 20	**213R20**	300	--	34	49	23.3	21.0	124	8	3	17.30	1
M 16	**214R16**	400	--	38	58	26.0	17.0	165	--	4	32.20	1
M 20	**214R20**	400	--	38	58	26.0	21.0	165	--	4	31.90	1

Compression joint to DIN, Al





IEC



- For non-tension connections of aluminium conductors to DIN EN 60228 and aluminium cables to DIN EN 50182
- To DIN 46267, Part 2
- With code number for clear tool assignment
- Filled with contact grease for optimum crimp characteristics
- For pre-rounded sector shaped conductors

Characteristics

- Easy to process due to crimp markings
- Simple cable entry due to internal chamfer
- Simple and safe processing due to butt mark

Material

- E-aluminium

Surface

- Bright

Technical instructions

- Tool: see page 103


Additional information

- re = round single solid wire, rm = round multi-stranded, se = sector shaped single solid wire, sm = sector shaped multi-stranded, sector shaped conductors must be pre-rounded
- 16 - 500 mm² IEC-tested
- * = not standardised


Part No.	Nominal cross section mm²		Hint	Code	Dimension mm		Number of crimps		Weight 100 pcs. ~kg	Packing unit/ pcs
	rm/sm	se			d1	l	Al (7 mm)	Al (wide)		
222R	10	--	*	10	5.0	55	3/3	--	0.95	10
223R	16	--	*	12	5.8	55	3/3	--	1.40	10
224R	25	--		12	6.8	70	4/4	2/2	1.60	10
225R	35	50		14	8.0	85	5/5	2/2	2.60	10
226R	50	70		16	9.8	85	5/5	2/2	3.20	10
227R	70	95		18	11.2	105	6/6	3/3	5.30	10
228R	95	120		22	13.2	105	6/6	3/3	7.60	10
229R	120	150		22	14.7	105	6/6	3/3	7.80	10
230R	150	185		25	16.3	125	6/6	3/3	10.70	10
231R	185	240		28	18.3	125	6/6	3/3	14.30	5
232R	240	300		32	21.0	145	8/8	3/3	20.30	5
233R	300	--		34	23.3	145	8/8	3/3	22.20	1
234R	400	--		38	26.0	210	--	5/5	40.80	1
235R	500	--		44	29.0	210	--	5/5	56.00	1

Compression joints, Al





IEC



- For non-tension connections of medium-voltage aluminium cable 10-30 kV
- For non-tension connections of aluminium conductors to DIN EN 60228 and aluminium cables to DIN EN 50182 and pre-rounded sector shaped conductors
- Tube dimension to DIN 46267, Part 2
- With code number for clear tool assignment
- Filled with contact grease for optimum crimp characteristics

Characteristics

- Also available as barrier design with oil stop
- With chamfered edges for reduced wrapping during assembly
- Easy to process due to crimp markings
- Simple cable entry due to internal chamfer

Material

- E-aluminium

Surface

- Bright

Technical instructions

- Tool: see page 103

Additional information


- re = round single solid wire, rm = round multi-stranded, se = sector shaped single solid wire, sm = sector shaped multi-stranded, sector shaped conductors must be pre-rounded

Part No.	Nominal cross section mm²		Code	Dimension mm		Number of crimps		Weight 100 pcs. ~kg	Packing unit/ pcs
	rm/sm	se		d1	l	Al (7 mm)	Al (wide)		
Standard type									
405R	35	50	14	8.20	90	4/4	2/2	2.7	10
406R	50	70	16	10.00	90	4/4	2/2	3.4	10
407R	70	95	18	11.50	95	4/4	2/2	4.6	10
408R	95	120	22	13.50	100	4/4	2/2	6.8	10
409R	120	150	22	15.00	105	4/4	2/2	7.4	10
410R	150	185	25	16.50	105	4/4	2/2	8.7	10
411R	185	240	28	18.50	125	5/5	2/2	13.4	5
412R	240	300	32	21.30	125	5/5	2/2	15.7	5
413R	300	--	34	23.60	125	5/5	2/2	16.3	1
414R	400	--	38	26.25	150	--	3/3	25.8	1
Barrier version									
415R	35	50	14	8.0	95	4/4	2/2	3.1	5
416R	50	70	16	9.8	95	4/4	2/2	5.6	5
417R	70	95	18	11.2	100	4/4	2/2	6.1	5
418R	95	120	22	13.2	105	4/4	2/2	9.2	5
419R	120	150	22	14.7	110	4/4	2/2	10.3	5
420R	150	185	25	16.3	110	4/4	2/2	12.0	5
421R	185	240	28	18.3	130	5/5	2/2	15.6	5
422R	240	300	32	21.0	130	5/5	2/2	19.1	5
423R	300	--	34	23.3	135	5/5	2/2	30.7	1
424R	400	--	38	26.0	165	--	3/3	30.0	1

Reduction compression joints, Al, barrier type







- For non-tension connections of aluminium conductors to DIN EN 60228 and aluminium cables to DIN EN 50182
- In nominal cross-section area tube dimension to DIN 46267, part 2
- For pre-rounded sector shaped conductors
- Ideal for connecting differing conductor cross-sections
- Filled with contact grease for optimum crimp characteristics

Characteristics

- Barrier design with oil stop
- Unique tool assignment due to DIN die coding
- Easy to process due to crimp markings
- Simple cable entry due to internal chamfer

Material

- E-aluminium

Surface

- Bright

Technical instructions

- Tools: see chart page 103


Additional information


- re = round single solid wire, rm = round multi-stranded, se = sector shaped single solid wire, sm = sector shaped multi-stranded, sector shaped conductors must be pre-rounded

Part No.	Nominal cross section mm²		Code	Dimension mm			Number of crimps		Weight 100 pcs. ~kg	Packing unit/pcs
	von	auf		d1	d2	l	Al (7 mm)	Al (wide)		
425R25	35	25	14	8.0	6.8	95	4/4	2/2	2.800	5
426R35	50	35	16	9.8	8.0	95	4/4	2/2	3.450	5
427R35	70	35	18	11.2	8.0	100	4/4	2/2	4.790	5
427R50	70	50	18	11.2	9.8	100	4/4	2/2	4.420	5
428R50	95	50	22	13.2	9.8	105	4/4	2/2	7.600	5
428R70	95	70	22	13.2	11.2	105	4/4	2/2	7.350	5
429R70	120	70	22	14.7	11.2	110	4/4	2/2	7.100	5
429R95	120	95	22	14.7	13.2	110	4/4	2/2	6.550	5
430R70	150	70	25	16.3	11.2	110	4/4	2/2	9.800	5
430R95	150	95	25	16.3	13.2	110	4/4	2/2	9.500	5
430R120	150	120	25	16.3	14.7	110	4/4	2/2	8.650	5
431R70	185	70	28	18.3	11.2	130	--	2/2	15.050	5
431R95	185	95	28	18.3	13.2	130	--	2/2	14.400	5
431R120	185	120	28	18.3	14.7	130	5/5	2/2	13.700	5
431R150	185	150	28	18.3	16.3	130	5/5	2/2	13.050	5
432R120	240	120	32	21.0	14.7	130	--	2/2	18.800	5
432R150	240	150	32	21.0	16.3	130	5/5	2/2	18.125	5
432R185	240	185	32	21.0	18.3	130	5/5	2/2	17.275	5
433R150	300	150	34	23.3	16.3	135	5/5	2/2	21.100	1
433R185	300	185	34	23.3	18.3	135	5/5	2/2	20.120	1
433R240	300	240	34	23.3	21.0	135	5/5	2/2	18.730	1
434R300	400	300	38	26.0	23.3	165	--	3/3	31.200	1

Reduction-compression joints, Al







- For non-tension connections of aluminium conductors to DIN EN 60228 and aluminium cables to DIN EN 50182
- For pre-rounded sector shaped conductors
- In nominal cross-section area tube dimension to DIN 46267, part 2
- With code number for clear tool assignment
- Filled with contact grease for optimum crimp characteristics

Characteristics

- For connecting different conductor cross-sections
- Easy to process due to crimp markings
- Simple cable entry due to internal chamfer

Material

- E-aluminium

Surface

- Bright

Technical instructions

- Tool: see page 103

Additional information

- re = round single solid wire, rm = round multi-stranded, se = sector shaped single solid wire, sm = sector shaped multi-stranded, sector shaped conductors must be pre-rounded

Part No.	Nominal cross section mm²		Code	Dimension mm			Number of crimps		Weight 100 pcs. ~kg	Packing unit/pcs
	von	auf		d1	d2	l	Al (7 mm)	Al (wide)		
284R16	25	16	12	7.0	5.8	75	4/4	2/2	1.53	10
285R25	35	25	14	8.2	6.8	90	5/5	2/2	2.50	10
286R25	50	25	16	10.0	6.8	90	5/5	2/2	3.24	10
286R35	50	35	16	10.0	8.0	90	5/5	2/2	3.09	10
287R25	70	25	18	11.5	6.8	110	6/6	3/3	5.50	10
287R35	70	35	18	11.5	8.0	110	6/6	3/3	5.35	10
287R50	70	50	18	11.5	9.8	110	6/6	3/3	4.96	10
288R25	95	25	22	13.5	6.8	110	6/6	3/3	9.10	10
288R35	95	35	22	13.5	8.0	110	6/6	3/3	8.90	10
288R50	95	50	22	13.5	9.8	110	6/6	3/3	8.51	10
288R70	95	70	22	13.5	11.2	110	6/6	3/3	8.15	10
289R50	120	50	22	15.0	9.8	110	6/6	3/3	8.04	10
289R70	120	70	22	15.0	11.2	110	6/6	3/3	7.66	10
289R95	120	95	22	15.0	13.2	110	6/6	3/3	7.14	10
290R70	150	70	25	16.5	11.2	130	6/6	3/3	11.70	10
290R95	150	95	25	16.5	13.2	130	6/6	3/3	11.05	10
290R120	150	120	25	16.5	14.7	130	6/6	3/3	10.49	10
291R120	185	120	28	18.5	14.7	130	6/6	3/3	13.80	5
291R150	185	150	28	18.5	16.3	130	6/6	3/3	13.19	5
292R95	240	95	32	21.3	13.2	150	--	3/3	22.24	5
292R120	240	120	32	21.3	14.7	150	--	3/3	21.59	5
292R150	240	150	32	21.3	16.3	150	--	3/3	20.87	5

Compression joint to DIN, Al, full tension









- For full tension connections of aluminium cables to DIN EN 50182
- To DIN 48085, Part 2
- With code number for clear tool assignment
- Filled with contact grease for optimum crimp characteristics

Characteristics

- Easy to process due to crimp markings
- Simple cable entry due to internal chamfer

Material

- E-aluminium to 95 mm²
- AlMgSi from 120 mm²

Surface

- Bright

Technical instructions

- Tool: see page 103

Additional information

- * = not standardised

Nominal cross section mm²	Part No.	Hint	Code	Dimension mm			Number of crimps		Conductor mm dia.	Weight 100 pcs. ~kg	Packing unit/pcs
				d1	d4	l	Al (7 mm)	Al (wide)			
16	**243R**	*	12	5.8	12.0	140	8/8	4/4	5.1	3.4	10
25	**244R**		12	6.8	12.0	140	8/8	4/4	6.3	2.9	10
35	**245R**		14	8.0	14.0	140	8/8	4/4	7.5	3.9	10
50	**246R**		16	10.0	16.0	155	8/8	4/4	9.0	5.2	10
70	**247R**		18	11.5	18.5	165	8/8	4/4	10.5	7.4	10
95	**248R**		22	13.5	22.0	165	8/8	4/4	12.5	12.2	10
120	**249R**		25	15.5	25.5	250	12/12	6/6	14.0	21.8	10
150	**250R**		28	16.5	28.5	300	--	7/7	15.7	34.4	10
185	**251R**		28	18.5	28.5	330	--	7/7	17.5	33.0	5
240	**252R**		34	21.5	34.5	350	--	7/7	20.2	54.0	5
300	**253R**		38	23.5	38.5	400	--	8/8	22.5	79.0	1

Compression joints, Al, full tension









- For full tension connections of Aldrey cables according to DIN EN 50182
- With code number for clear tool assignment
- Filled with contact grease for optimum crimp characteristics

Characteristics

- Tube diameters adjusted to Aldrey cables
- Easy to process due to crimp markings

Material

- AlMgSi F20

Surface

- Bright


Technical instructions

- Tool: see page 103

Nominal cross section mm²	Part No.	Code	Dimension mm		Number of crimps		Conductor mm dia.	Weight 100 pcs. ~kg	Packing unit/ pcs
			d1	l	Aldrey (7 mm)	Aldrey (wide)			
35	**295AD**	14	8.0	140	8/8	--	7.5	4.7	5
50	**296AD**	16	10.0	155	8/8	--	9.0	5.9	5
70	**297AD**	18	11.5	165	8/8	--	10.5	9.0	5

Compression joint to DIN, Al/St



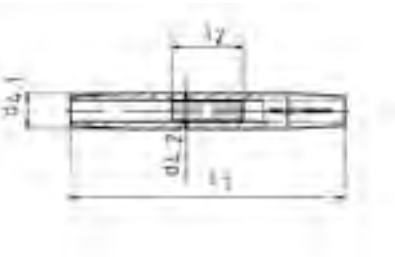





- For full tension connections of Al/St conductors to DIN EN 50182
- To DIN 48085, Part 3
- Unique tool assignment due to coding
- Filled with contact grease for optimum crimp characteristics

Characteristics

- Easy to process due to crimp markings
- Simple cable entry due to internal chamfer

Material

- Sleeve: E-aluminium
- Sleeve: Steel (St 52)


Surface

- Al sleeve: bright
- St sleeve: hot zinc galvanised

Technical instructions

- Tool: see page 105

Nominal cross section mm²	Part No.	Code	Dimension mm				Code Al	Number of crimps				Conductor mm dia.	Weight 100 pcs. ~kg	Packing unit/pcs
			d41	d42	l1	l2		Stahl (5 mm)	Stahl (wide)	Al (7 mm)	Al (wide)			
35 - 6	**455R**	6	14.0	6.3	235	75	14	5/5	--	8/8	--	8.1	7	5
50 - 8	**456R**	7	16.0	7.5	270	95	16	6/6	--	9/9	--	9.6	11	5
70 - 12	**457R**	9	18.5	9.5	270	95	18	6/6	--	9/9	--	11.7	15	5
95 - 15	**458R**	9	22.5	9.6	310	95	22	6/6	--	11/11	--	13.6	23	5
120 - 20	**459R**	13	25.0	13.0	380	110	25	7/7	4/4	13/13	6/6	15.5	36	5




Tool application chart

Compression cable lugs and connectors made from E-Al

Compression cable lugs for full-tension connections from Al conductors DIN EN 50182, 16-95 mm²

Tool type	Crimping range corresponds to nominal cross-section mm²	Crimping Tool		Catalogue page		Crimp profile
		Part No.	Crimping head / adapter	Crimping Tool	Crimping die	
Mechanical, electrical, pneumatic crimping tools with interchangeable die / head	10-70	K354		246	331	⬡
	10-185	K18		248	339	⬡
	10-240	K22		250	344	⬡
Hand hydraulic crimping tools	10-185	HK6018		292	339	⬡
		HK60UNV	+UA18	473	339	⬡
	10-300	HK6022		294	344	⬡
		HK60UNV	+UA22	473	344	⬡
		HK12030		298	350	⬡
		HK12042		300	350	⬡
		HK120U		302	350	⬡
	150-500	HK45		321	358	⬡
Battery powered crimping tools	10-70	EK354ML		262	331	⬡
		EK354		266	331	⬡
	10-150	EK505		268	335	⬡
	10-185	EK5018		270	339	⬡
		EK60UNV	+UA18	476	339	⬡
		EKM60UNV	+UA18	475	339	⬡
	10-300	EK6022		274	344	⬡
		EKM6022		272	344	⬡
	50-240	EKM60ID*		278		◡
		EK60UNV	+UA22	476	344	⬡
		EKM60UNV	+UA22	475	344	⬡
		EK120UNV		477	350	⬡
		EK12032		280	350	⬡
		EK12042		282	350	⬡
		EK120U	+UA15T	284	350	⬡
		EK135FT	+UA12T	286	350	⬡
Hydraulic crimping systems	10-185	THK18		306	339	⬡
	10-300	THK22		308	344	⬡
		HK122EL380		322	350	⬡
	10-500	HK252		320	355	⬡
		HK252EL380		323	355	⬡
Hydraulic crimping heads	10-185	PK18		306	339	⬡
		PK60UNV	+UA18	474	339	⬡
	10-300	PK22		308	344	⬡
		PK60UNV	+UA22	474	344	⬡
		PK12042		312	350	⬡
		PK120U		314	350	⬡
	10-500	PK252		316	355	⬡
	50-240	PK60ID*		311		◡
	150-500	PK45		318	358	⬡


* Not suitable for full-tension connections



Tool application chart

Compression joints for full-tension connections from Aldrey conductors to DIN EN 50182 and Al conductors to DIN EN 50182, 120-300 mm²

Tool type	Crimping range corresponds to nominal cross-section mm²	Crimping Tool		Catalogue page		Crimp profile
		Part No.	Crimping head / adapter	Crimping Tool	Crimping die	
Mechanical, electrical, pneumatic crimping tools with interchangeable die / head	25-50	K354		246	331	⬡
	25-95	K18		248	339	⬡
	25-185	K22		250	344	⬡
Hand hydraulic crimping tools	25-95	HK6018		292	339	⬡
		HK60UNV	+UA18	473	339	⬡
	25-185	HK6022		294	344	⬡
		HK60UNV	+UA22	473	344	⬡
		HK12030		298	350	⬡
		HK12042		300	350	⬡
		HK120U		302	350	⬡
	150-300	HK45		321	358	⬡
Battery powered crimping tools	25-50	EK354ML		262	331	⬡
		EK354		266	331	⬡
	25-95	EK505		268	335	⬡
		EK5018		270	339	⬡
		EK60UNV	+UA18	476	339	⬡
		EKM60UNV	+UA18	475	339	⬡
	25-185	EK6022		274	344	⬡
		EKM6022		272	344	⬡
		EK60UNV	+UA22	476	344	⬡
		EKM60UNV	+UA22	475	344	⬡
		EK12032		280	350	⬡
		EK12042		282	350	⬡
		EK120U		284	350	⬡
		EK135FT	+UA15T	286	350	⬡
		EK120UNV	+UA12T	477	350	⬡
Hydraulic crimping systems	25-95	THK18		306	339	⬡
	25-185	THK22		308	344	⬡
		HK122EL380		322	350	⬡
	25-300	HK252		320	355	⬡
		HK252EL380		323	355	⬡
Hydraulic crimping heads	25-95	PK18		306	339	⬡
		PK60UNV	+UA18	474	339	⬡
	25-185	PK22		308	344	⬡
		PK60UNV	+UA22	474	344	⬡
		PK12042		312	350	⬡
		PK120U		314	350	⬡
	25-300	PK252		316	355	⬡
	150-300	PK45		318	358	⬡



Tool application chart

Compression joints for non-tension connections from Al/St. cables and full-tension connections to DIN 48085, part 3 for Al/St. cables to DIN EN 50182

Tool type	Crimping range corresponds to nominal cross-section mm²	Crimping Tool		Catalogue page		Crimp profile
		Part No.	Crimping head / adapter	Crimping Tool	Crimping die	
Mechanical, electrical, pneumatic crimping tools with interchangeable die / head	25/4-120/20	K22		250	345	⬡
Hand hydraulic crimping tools	25/4-120/20	HK6022		294	345	⬡
		HK60UNV	+UA22	473	345	⬡
		HK12030		298	350	⬡
		HK12042		300	350	⬡
		HK120U		302	350	⬡
Battery powered crimping tools	25/4-120/20	EK6022		274	345	⬡
		EKM6022		272	345	⬡
		EK60UNV	+UA22	476	345	⬡
		EKM60UNV	+UA22	475	345	⬡
		EK12032		280	350	⬡
		EK12042		282	350	⬡
		EK120U		284	350	⬡
		EK135FT	+UA15T	286	350	⬡
		EK120UNV	+UA12T	477	350	⬡
Hydraulic crimping systems	25/4-120/20	THK22		308	345	⬡
		HK122EL380		322	350	⬡
		HK252		320	356	⬡
		HK252EL380		323	356	⬡
Hydraulic crimping heads	25/4-120/20	PK22		308	345	⬡
		PK60UNV	+UA22	474	345	⬡
		PK12042		312	350	⬡
		PK120U		314	350	⬡
		PK252		316	356	⬡

CONNECTED - COMPRESSION CABLE LUGS MADE FROM ALUMINIUM AND COPPER

Two components reliably connected. Copper and aluminium have different material properties. That's not always a good thing. Our compression cable lugs and connectors made from aluminium and copper are intricately produced by special processes and join together what belongs together. No matter which material you use: Your contacts are reliable with Klauke.



In brief

- Simple processing based on DIN standards
- Reliable connection of copper and aluminium, even in contact with water
- Special manufacturing methods ensure high quality
- Also suitable for sector shaped conductors and wires

As good as always

Cable lugs and connectors made from aluminium and copper can be processed in exactly the same way as DIN standard aluminium cable lugs. No special tools are required, you simply use the right Klauke dies. And so the result is as good as always.

- For round and sector shaped conductors to DIN EN 60228 and aluminium wires to DIN 50182
- No additional costs for new crimping dies
- Reliable connection by preventing contact corrosion

Numerous versions available

The great thing about the broad Klauke range is: You can select the suitable cable lug for your project and optimally process your choice using the Klauke tools. Everything fitting together.

- Processing as usual with standard aluminium cable lugs
- Different versions available, for instance, as a cable lug with a copper eye or Cupal washers or as a rotational friction welded cable lug






Well connected in every situation


Reduction compression joints enable aluminium conductors to be integrated into copper-containing systems. They connect the two different materials regardless of the physical cable dimensions.


- Suitable for round or sector shaped conductors
- Suitable for multi-stranded and single-stranded sector shaped conductors

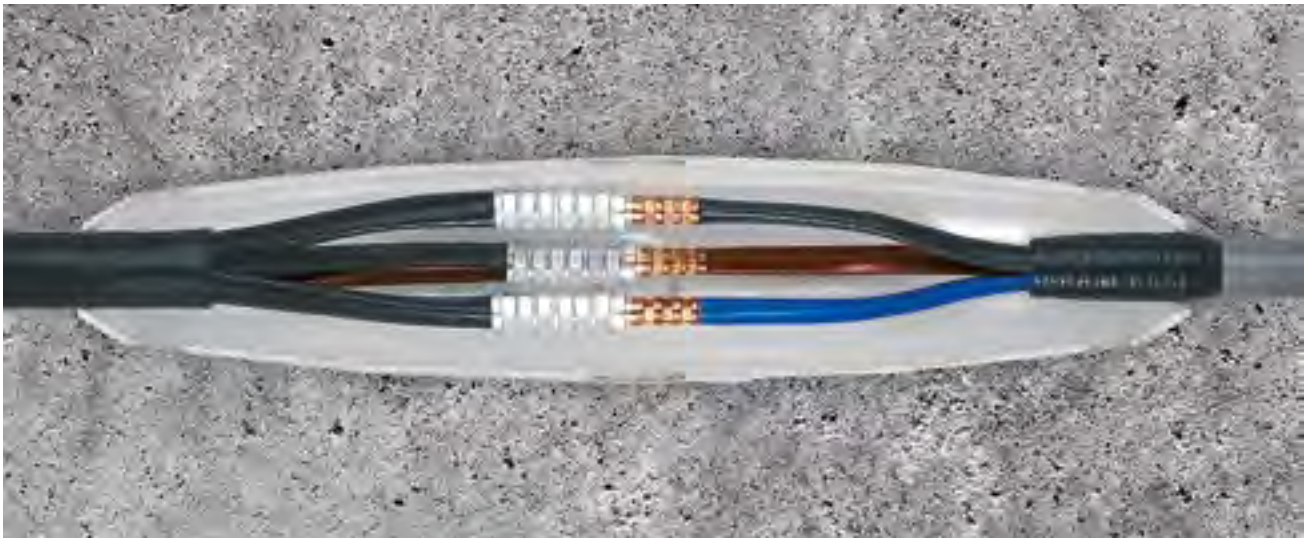

Compression cable lugs, Al/Cu



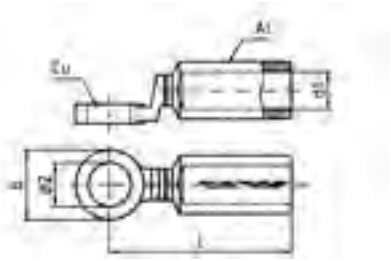



- Tube dimension to DIN 46329
- For non-tension connections of Al cables to DIN EN 60228 and aluminium cables to DIN EN 50182 as well as pre-rounded sector shaped conductors
- For connecting aluminium connections to copper rails in humid areas
- With code number for clear tool assignment
- Filled with contact grease for optimum crimp characteristics

Characteristics
- Barrier design with oil stop and solid copper palm
- Easy to process due to crimp markings
- Internal chamfer for simple cable insertion

Suitable for
- Pre-rounded sector shaped conductors

Material
- E-aluminium
- Copper (EN13600)

Surface
- Bright

Technical instructions
- Tool: see page 115

Additional information
- re = round single solid wire, rm = round multi-stranded, se = sector shaped single solid wire, sm = sector shaped multi-stranded, sector shaped conductors must be pre-rounded

Size of bolt dia.	Part No.	Nominal cross section mm²		Code	Dimension mm				Number of crimps		Weight 100 St. ~kg Cu	Weight 100 St. ~kg total	Packing unit/pcs
		rm/sm	se		b	d1	d2	l	Al (7 mm)	Al (wide)			
M 8	**363R8**	16		12	25	6.0	8.5	67.5	4	2	4.4	5.9	10
M 10	**363R10**	16		12	25	6.0	10.5	67.5	4	2	4.2	5.7	10
M 8	**364R8**	25		12	25	6.8	8.5	67.5	4	2	4.4	5.8	10
M 10	**364R10**	25		12	25	6.8	10.5	67.5	4	2	4.2	5.6	10
M 12	**364R12**	25		12	25	6.8	13.0	67.5	4	2	3.9	5.3	10
M 8	**365R8**	35	50	14	25	8.0	8.5	76.5	5	2	4.4	6.3	10
M 10	**365R10**	35	50	14	25	8.0	10.5	76.5	5	2	4.2	6.1	10
M 12	**365R12**	35	50	14	25	8.0	13.0	76.5	5	2	3.8	5.8	10
M 8	**366R8**	50	70	16	25	9.8	8.5	76.5	5	2	4.4	6.4	10
M 10	**366R10**	50	70	16	25	9.8	10.5	76.5	5	2	4.2	6.2	10
M 12	**366R12**	50	70	16	25	9.8	13.0	76.5	5	2	3.9	5.9	10
M 10	**367R10**	70	95	18	25	11.2	10.5	84.5	6	3	4.2	7.4	10
M 12	**367R12**	70	95	18	25	11.2	13.0	84.5	6	3	3.9	7.1	10
M 10	**368R10**	95	120	22	30	13.2	10.5	90.5	6	3	7.4	11.4	10
M 12	**368R12**	95	120	22	30	13.2	13.0	90.5	6	3	6.8	10.8	10
M 16	**368R16**	95	120	22	30	13.2	17.0	90.5	6	3	6.4	10.4	10
M 12	**369R12**	120	150	22	30	14.7	13.0	92.0	6	3	6.8	11.4	5
M 16	**369R16**	120	150	22	30	14.7	17.0	92.0	6	3	6.4	10.8	5
M 12	**370R12**	150	185	25	30	16.3	13.0	104.0	6	3	6.8	13.1	5
M 16	**370R16**	150	185	25	30	16.3	17.0	104.0	6	3	6.4	12.7	5
M 20	**370R20**	150	185	25	35	16.3	21.0	107.5	6	3	10.1	16.4	5
M 10	**371R10**	185	240	28	30	18.3	10.5	105.0	6	3	10.3	18.6	5
M 12	**371R12**	185	240	28	35	18.3	13.0	105.0	6	3	10.1	18.4	5
M 16	**371R16**	185	240	28	30	18.3	17.0	105.0	6	3	9.3	17.6	5


see next page

Compression cable lugs, Al/Cu

Size of bolt dia.	Part No.	Nominal cross section mm²		Code	Dimension mm				Number of crimps		Weight 100 St. ~kg Cu	Weight 100 St. ~kg total	Packing unit/pcs
		rm/sm	se		b	d1	d2	l	Al (7 mm)	Al (wide)			
M 20	**371R20**	185	240	28	35	18.3	21.0	107.5	6	3	10.1	18.4	5
M 10	**372R10**	240	300	32	35	21.0	10.5	118.5	8	3	12.1	22.5	5
M 12	**372R12**	240	300	32	35	21.0	13.0	118.5	8	3	11.8	22.2	5
M 16	**372R16**	240	300	32	35	21.0	17.0	118.5	8	3	11.0	21.4	5
M 20	**372R20**	240	300	32	35	21.0	21.0	118.5	8	3	10.1	20.5	5
M 12	**373R12**	300	--	34	40	23.3	13.0	123.5	8	3	17.7	33.7	2
M 16	**373R16**	300	--	34	40	23.3	17.0	123.5	8	3	16.9	32.9	2
M 20	**373R20**	300	--	34	40	23.3	21.0	123.5	8	3	16.0	32.0	1
M 12	**374R12**	400	--	38	40	26.0	13.0	150.5	--	4	25.6	37.4	1

Compression cable lugs, Al/Cu with Cu eye





- For non-tension connections of aluminium conductors to DIN EN 60228 and aluminium cables to DIN EN 50182
- Tube dimension to DIN 46329
- For pre-rounded sector shaped conductors
- Unique tool assignment due to coding
- Filled with contact grease for optimum crimp characteristics

Characteristics

- For connecting non-tension aluminium connections using Cu-washers in humid areas
- With Cu eyelet in screw-on area
- Easy to process due to crimp markings
- Simple cable entry due to internal chamfer

Material

- E-aluminium
- Copper (EN13600)

Surface

- Bright

Technical instructions

- Tool: see page 115

Additional information

- re = round single solid wire, rm = round multi-stranded, se = sector shaped single solid wire, sm = sector shaped multi-stranded, sector shaped conductors must be pre-rounded

Size of bolt dia.	Part No.	Nominal cross section mm²		Code	Dimension mm				Number of crimps		Weight 100 St. ~kg Cu	Weight 100 St. ~kg total	Packing unit/pcs
		rm/sm	se		b	d1	d2	l	Cu (5 mm)	Cu (wide)			
M 6	**302R6**	10	--	10	18	5.0	6.5	52	4	2	0.260	1.20	10
M 8	**302R8**	10	--	10	22	5.0	8.5	52	4	2	0.580	1.50	10
	303R8	16	25	12	22	5.8	8.5	52	4	2	0.600	1.95	10
M 10	**303R10**	16	25	12	25	5.8	10.5	52	4	2	0.600	2.00	10
M 8	**304R8**	25	35	12	22	6.8	8.5	60	4	2	0.625	2.00	10
M 10	**304R10**	25	35	12	25	6.8	10.5	60	4	2	0.900	2.10	10
	305R10	35	50	14	26	8.0	10.5	67	5	2	0.800	3.00	10
M 12	**305R12**	35	50	14	30	8.0	13.0	67	5	2	1.120	3.10	10
M 10	**306R10**	50	70	16	27	9.8	10.5	72	5	2	0.900	3.60	10
M 12	**306R12**	50	70	16	30	9.8	13.0	72	5	2	1.120	3.80	10
M 10	**307R10**	70	95	18	29	11.2	10.5	86	6	3	1.075	5.60	10


see next page

Compression cable lugs, Al/Cu with Cu eye

Size of bolt dia.	Part No.	Nominal cross section mm²		Code	Dimension mm				Number of crimps		Weight 100 St. ~kg Cu	Weight 100 St. ~kg total	Packing unit/pcs
		rm/sm	se		b	d1	d2	l	Cu (5 mm)	Cu (wide)			
M 12	**307R12**	70	95	18	32	11.2	13.0	86	6	3	1.300	5.70	10
M 10	**308R10**	95	120	22	32	13.2	10.5	90	6	3	1.435	10.00	5
M 12	**308R12**	95	120	22	35	13.2	13.0	90	6	3	1.735	9.50	5
M 16	**308R16**	95	120	22	38	13.2	17.0	90	6	3	2.655	10.00	5
M 12	**309R12**	120	150	22	35	14.7	13.0	91	6	3	1.810	8.70	5
M 16	**309R16**	120	150	22	38	14.7	17.0	91	6	3	2.230	8.80	5
M 12	**310R12**	150	185	25	35	16.3	13.0	103	6	3	2.025	12.20	5
M 16	**310R16**	150	185	25	41	16.3	17.0	103	6	3	2.655	12.30	5
M 20	**310R20**	150	185	25	44	16.3	21.0	103	6	3	3.620	12.80	5
M 12	**311R12**	185	240	28	40	18.3	13.0	106	6	3	2.320	15.00	5
M 16	**311R16**	185	240	28	42	18.3	17.0	106	6	3	4.975	15.50	5
M 20	**311R20**	185	240	28	46	18.3	21.0	106	6	3	4.610	15.50	5
M 12	**312R12**	240	300	32	45	21.0	13.0	116	8	3	2.750	20.00	5
M 16	**312R16**	240	300	32	45	21.0	17.0	116	8	3	3.400	21.00	5
M 20	**312R20**	240	300	32	49	21.0	21.0	116	8	3	4.600	22.00	5
M 16	**313R16**	300	--	34	51	23.3	17.0	124	8	3	3.980	21.60	1
M 20	**313R20**	300	--	34	51	23.3	21.0	124	8	3	5.510	22.20	1
M 16	**314R16**	400	--	38	58	26.0	17.0	165	--	4	4.200	35.00	1
M 20	**314R20**	400	--	38	58	26.0	21.0	165	--	4	5.950	35.00	1

Compression joints, Al/Cu







- For non-tension connections of aluminium conductors to DIN EN 60228 and aluminium cables to DIN EN 50182
- For Cu round conductors, e.g. to DIN EN 60228 Cl. 1, 2, 5 and 6
- For non-tension copper cables, to DIN 48201
- Tube dimensions to DIN 46267, part 1 and 2 and pre-rounded sector shaped conductors
- Unique tool assignment due to coding

Characteristics

- For connecting non-tension aluminium and copper connections
- Easy to process due to crimp markings
- Simple cable entry due to internal chamfer

Material

- E-aluminium
- Copper (EN13600)

Surface

- Bright

Technical instructions

- Sleeves for compacted conductors and sleeves for 3-core and 4-core cables, see chapter „Sleeves for compacted conductors and sector shaped conductors - Cu“
- Reduction sleeves for connecting unequal cross-sections can be found on page 68
- Tool: see page 115

Additional information

- re = round single solid wire, rm = round multi-stranded, se = sector shaped single solid wire, sm = sector shaped multi-stranded, sector shaped conductors must be pre-rounded

Part No.	Nominal cross section mm²			Dimension mm			Code		Weight 100 St. ~kg Cu	Weight 100 St. ~kg total	Packing unit/pcs
	rm/sm	Al se	Cu rm/sm	l	Al	Cu	Al	Cu			
322R10	10	16	10	55.0	5.0	4.5	10	6	0.212	1.100	4
322R16	10	16	16	61.0	5.0	5.4	10	8	0.714	1.550	4
323R10	16	25	10	55.0	6.0	4.5	12	6	0.212	1.500	4
323R16	16	25	16	61.0	6.0	5.4	12	8	0.714	1.750	4
324R10	25	35	10	55.0	6.8	4.5	12	6	0.212	1.400	4
324R16	25	35	16	61.0	6.8	5.5	12	8	0.714	1.650	4
324R25	25	35	25	61.0	6.8	7.0	12	10	0.892	1.900	4
324R35	25	35	35	61.0	6.8	8.2	12	12	1.624	2.000	4
324R50	25	35	50	72.0	6.8	10.0	12	14	2.362	3.500	4
324R416	25/4	35	16	61.0	7.6	5.5	12	8	0.714	1.600	4
324R425	25/4	35	25	61.0	7.6	7.0	12	10	0.892	1.850	4
325R16	35	50	16	71.0	8.0	5.5	14	8	0.714	2.500	4
325R25	35	50	25	71.0	8.0	7.0	14	10	0.892	2.650	4
325R35	35	50	35	71.0	8.0	8.2	14	12	1.519	3.300	4
325R50	35	50	50	77.0	8.0	10.0	14	14	2.362	3.530	4
325R616	35/6	50	16	71.0	9.0	5.5	14	8	0.714	2.450	4
325R625	35/6	50	25	71.0	9.0	7.0	14	10	0.892	2.600	4
325R635	35/6	50	35	71.0	9.0	8.2	14	12	1.624	3.250	4
326R16	50	70	16	71.5	9.8	5.5	16	8	0.714	2.850	4
326R25	50	70	25	71.5	9.8	7.0	16	10	0.892	3.200	4
326R35	50	70	35	71.5	9.8	8.2	16	12	1.624	3.800	4
326R50	50	70	50	77.5	9.8	10.0	16	14	2.362	4.550	4
327R16	70	95	16	79.0	11.2	5.5	18	8	0.714	4.100	4


see next page


Compression joints, Al/Cu

Part No.	Nominal cross section mm²			Dimension mm			Code		Weight 100 St. ~kg Cu	Weight 100 St. ~kg total	Packing unit/pcs
	rm/sm	Al se	Cu rm/sm	l	Al	Cu	Al	Cu			
327R25	70	95	25	79.0	11.2	7.0	18	10	0.892	3.950	4
327R35	70	95	35	79.0	11.2	8.2	18	12	1.624	4.900	4
327R50	70	95	50	85.0	11.2	10.0	18	14	2.362	5.700	4
327R70	70	95	70	86.0	11.2	11.5	18	16	2.921	7.250	4
327R95	70	95	95	95.0	11.2	13.5	18	18	4.957	9.360	4
327R120	70	95	120	99.0	11.2	15.5	18	20	5.640	10.540	4
328R16	95	120	16	79.0	13.2	5.5	22	8	0.714	6.150	4
328R25	95	120	25	79.0	13.2	7.0	22	10	0.892	6.300	4
328R35	95	120	35	79.0	13.2	8.2	22	12	1.519	6.800	4
328R50	95	120	50	85.0	13.2	10.0	22	14	2.362	8.050	4
328R70	95	120	70	87.0	13.2	11.5	22	16	3.105	8.200	4
328R95	95	120	95	95.0	13.2	13.5	22	18	4.957	10.350	4
328R120	95	120	120	95.0	13.2	15.5	22	20	5.640	11.550	4
329R35	120	150	35	81.0	14.7	8.2	22	12	1.519	7.600	4
329R50	120	150	50	87.0	14.7	10.0	22	14	2.362	7.900	4
329R70	120	150	70	89.0	14.7	11.5	22	16	3.105	8.500	4
329R95	120	150	95	97.0	14.7	13.5	22	18	4.857	11.000	4
329R120	120	150	120	97.0	14.7	15.5	22	20	5.640	10.280	4
330R16	150	185	16	91.5	16.3	5.4	25	8	0.714	7.800	4
330R25	150	185	25	91.5	16.3	6.8	25	10	0.892	8.000	4
330R35	150	185	35	91.5	16.3	8.2	25	12	1.624	8.400	4
330R50	150	185	50	98.5	16.3	10.0	25	14	2.362	10.200	4
330R70	150	185	70	99.5	16.3	11.5	25	16	3.105	10.350	4
330R95	150	185	95	107.5	16.3	13.5	25	18	4.957	12.650	4
330R120	150	185	120	107.5	16.3	15.5	25	20	5.640	13.900	4
330R150	150	185	150	124.0	16.3	17.0	25	22	8.231	16.700	4
331R50	185	240	50	99.0	18.3	10.0	28	14	2.362	12.100	1
331R70	185	240	70	100.0	18.3	11.5	28	16	3.105	13.000	1
331R95	185	240	95	108.0	18.3	13.5	28	18	4.957	14.450	1
331R120	185	240	120	108.0	18.3	15.5	28	20	5.640	13.720	1
331R150	185	240	150	113.0	18.3	17.0	28	22	8.231	19.550	1
331R185	185	240	185	116.0	18.3	19.0	28	25	9.621	21.000	1
332R50	240	300	50	110.0	21.0	10.0	32	14	2.362	16.500	1
332R70	240	300	70	111.0	21.0	11.5	32	16	3.105	18.000	1
332R95	240	300	95	119.0	21.0	13.5	32	18	4.957	19.000	1
332R120	240	300	120	119.0	21.0	15.5	32	20	5.640	20.500	1
332R150	240	300	150	124.0	21.0	17.0	32	22	8.231	23.300	1
332R185	240	300	185	127.0	21.0	19.0	32	25	9.621	25.500	1
332R240	240	300	240	128.0	21.0	21.5	32	28	12.705	30.100	1
333R120	300	--	120	119.0	23.5	15.5	34	20	5.640	27.800	1
333R150	300	--	150	124.0	23.5	17.0	34	22	8.234	31.100	1
333R185	300	--	185	127.0	23.5	19.0	34	25	9.621	32.700	1
333R240	300	--	240	128.0	23.5	21.5	34	28	12.705	37.500	1
333R300	300	--	300	134.0	23.5	24.5	34	32	16.099	41.700	1

Compression joints with Cu bolts, Al



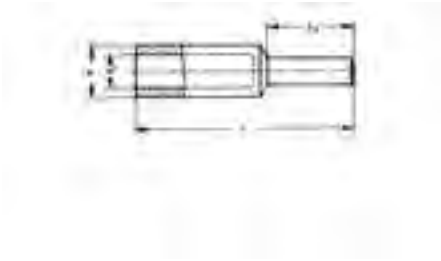



- For non-tension connections of aluminium conductors to DIN EN 60228 and aluminium cables to DIN EN 50182
- For pre-rounded sector shaped conductors
- Tube dimension to DIN 46267, part 2
- Unique tool assignment due to coding

Characteristics

- For connecting non-tension Al connections in Cu clamps
- Easy to process due to crimp markings
- Simple cable entry due to internal chamfer

Material

- E-aluminium
- Copper (EN13600)

Surface

- Bright

Technical instructions

- Tool: see page 115


Additional information

- re = round single solid wire, rm = round multi-stranded, se = sector shaped single solid wire, sm = sector shaped multi-stranded, sector shaped conductors must be pre-rounded

Part No.	Nominal cross section mm²		Code	Dimension mm				Bolt mm dia.	Conductor mm dia.	Weight 100 St. ~kg Cu	Weight 100 St. ~kg total	Packing unit/pcs
	rm/sm	se		d Ø	d1	l	l1					
344R	25	35	12	12.0	6.8	58	20	6	6.3	0.462	1.6	10
345R	35	50	14	14.0	8.0	71	22	7	7.5	0.695	2.5	10
346R	50	70	16	16.0	10.0	74	25	8	9.0	1.037	3.3	10
347R	70	95	18	18.5	11.5	87	30	10	10.5	1.958	5.4	10
348R	95	120	22	23.0	13.2	91	33	12	12.5	3.112	8.7	10
349R	120	150	22	23.0	15.0	97	38	12	14.0	3.598	9.0	10
350R	150	185	25	25.5	16.5	108	38	12	15.8	3.598	10.9	10
351R	185	240	28	28.5	18.5	116	44	14	17.5	3.692	15.7	5
352R	240	300	32	32.5	21.5	128	44	16	20.3	7.435	21.8	5
353R	300	--	34	34.5	23.5	131	46	18	22.5	9.410	26.7	1

Cupal washers



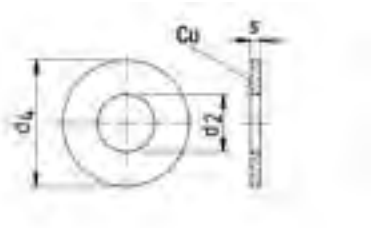

- Flat washer for processing aluminium and copper cable lugs
- For connecting copper conductors to aluminium rails


Characteristics

- Processing only in dry environments

Material

- E-Al, one side copper plated

Size of bolt dia.	Part No.	Dimension mm			Weight 100 pcs. ~kg	Packing unit/pcs
		d2	d4	s		
M 6	**CS615**	6.5	15	2	0.06	10
M 8	**CS818**	8.5	18	2	0.09	10
M 10	**CS1022**	11.0	22	2	0.26	10
M 12	**CS1228**	13.0	28	2	0.44	10
M 14	**CS1428**	15.0	28	2	0.40	10
M 16	**CS1635**	17.0	35	2	0.66	10



Tool application chart

Compression cable lugs and connectors made from Al/Cu
The tools of the copper side of our Al/Cu compression joints you will find in the tool application chart of copper compression cable lugs and connectors acc. to DIN

Tool type	Crimping range corresponds to nominal cross-section mm²	Crimping Tool		Catalogue page		Crimp profile
		Part No.	Crimping head / adapter	Crimping Tool	Crimping die	
mechanical, electrical, pneumatic crimping tools with interchangeable die / head	10-70	K354		246	331	⬡
	10-185	K18		248	339	⬡
	10-240	K22		250	344	⬡
Hand hydraulic crimping tools	10-185	HK6018		292	339	⬡
		HK60UNV	+UA18	473	339	⬡
	10-300	HK6022		294	344	⬡
		HK60UNV	+UA22	473	344	⬡
		HK12030		298	350	⬡
		HK12042		300	350	⬡
		HK120U		302	350	⬡
	150-500	HK45		321	358	⬡
Battery powered crimping tools	10-7	EK354ML		262	331	⬡
		EK354		266	331	⬡
	10-185	EK5018		270	339	⬡
		EK60UNV	+UA18	476	339	⬡
		EKM60UNV	+UA18	475	339	⬡
	10-300	EK6022		274	344	⬡
		EKM6022		272	344	⬡
		EK60UNV	+UA22	476	344	⬡
		EKM60UNV	+UA22	475	344	⬡
		EK12032		280	350	⬡
		EK12042		282	350	⬡
		EK120U		284	350	⬡
		EK135FT	+UA15T	286	350	⬡
		EK120UNV	+UA12T	477	350	⬡
	50-240	EKM60ID		278		◡
Hydraulic crimping systems	10-185	THK18		306	339	⬡
	10-300	THK22		308	344	⬡
		HK122EL380		322	350	⬡
	10-500	HK252		320	355	⬡
		HK252EL380		323	355	⬡
Hydraulic crimping heads	10-185	PK18		306	339	⬡
		PK60UNV	+UA18	474	339	⬡
	10-300	PK22		308	344	⬡
		PK60UNV	+UA22	474	344	⬡
		PK12042		312	350	⬡
		PK120U		314	350	⬡
	10-500	PK252		316	355	⬡
	150-500	PK45		318	358	⬡

UNCOMPLICATED – CLAMPS AND SCREW CONNECTORS

Simple connecting of dissimilar materials and cross-sections. Made possible by Klauke clamps and screw connectors: They suit all standard sizes and materials. In compliance with the specified safety measures, compact tab connectors, for instance, can be installed even when live. All very straightforward.



In brief

- Simple branching without having to cut the main conductor with Klauke H and C clamps
- H clamps to DIN EN 50164-1 short-circuit current tested
- Also available in a barrier version for Al/Cu connections

Continuously connected

Save yourself the trouble, the conductor does not need to be cut. Various nominal cross-sections can be clamped with multi-purpose clamps.

- Flexible due to the large cross-sectional range, C-clamps from 2.5 mm² to 185 mm² nominal cross-sections, H-clamps from 70 mm² nominal cross-section
- Efficient connections, without having to cut the main conductor.
- Straightforward connection of various cross-sections.





Screwing instead of crimping

Connect the conductors using screws. Why? Because no special tools are needed. Screws are available for every application. To make sure they last, all our screw connectors are produced from high-quality materials. Simply an efficient solution!

- Connections from 2.5 mm² to 185 mm² nominal cross-section
- No special tool required
- The right screw solution to suit a host of requirements
- For aluminium and copper conductors
- For round and sector shaped conductors
- For conductors and wires
- High-quality aluminium alloy

Clamps for continuous supply


We don't abandon your supply. With Klauke clamps, your operation can continue without outage, you carry out the installation even while live. No standstill, the operation continues.

- Especially suitable for the energy supply industry
- Can be installed while live
- Main conductor remains intact
- Different versions available for 3 and 4 core cables



Punched cable lugs, Cu



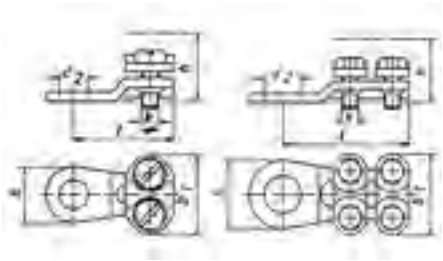







▸ **For connecting of round conductors to DIN EN 60228 Cl. 1 and 2, for example in lightning protection areas**

Characteristics
- Also for outdoor assembly
- Available with 2 or 4 screws

Material
- Copper (ETP)
- Screws: DIN 84 / DIN 933 bronze, F 60


Surface
- Tin-plated to protect against corrosion


Additional information
- Part Number appendix for bright version „BK“

Nominal cross section mm²	Part No.	Dimension mm						Number of screws	Torque Nm	Weight/pcs. ~kg	Packing unit/pcs
		b	b1	d2	k	h	l				
6 - 10	**572R6**	15.0	18.0	6.5	M4	10	23.0	2	4	1.30	50
10 - 16	**573R6**	15.0	20.5	6.5	M5	14	27.0	2	6	1.30	50
	573R8	15.0	20.5	8.5	M5	14	27.0	2	6	1.30	50
16 - 25	**574R8**	15.0	25.0	8.5	M5	16	30.0	2	6	2.75	50
	584R8	18.5	22.5	8.5	M5	16	36.0	4	6	3.70	25
	584R10	19.5	22.5	10.5	M5	16	37.0	4	6	3.75	25
25 - 35	**575R8**	18.5	24.0	8.5	M5	16	25.5	2	6	2.50	50
	585R8	18.5	24.0	8.5	M5	16	38.5	4	6	4.30	25
	585R10	21.5	24.0	10.5	M5	16	42.0	4	6	4.65	25
	585R12	21.5	24.0	13.0	M5	16	42.0	4	6	4.50	25
35 - 50	**586R10**	19.0	28.0	10.5	M6	19	46.0	4	8	6.75	25
	586R12	21.0	28.0	13.0	M6	19	47.0	4	8	6.70	25
50 - 70	**587R10**	23.5	31.0	10.5	M6	19	51.0	4	8	9.35	10
	587R12	23.5	31.0	13.0	M6	19	51.0	4	8	9.30	10
70 - 95	**588R10**	24.0	34.0	10.5	M6	25	57.0	4	8	12.00	10
	588R12	24.0	34.0	13.0	M6	25	57.0	4	8	11.85	10
95 - 150	**589R10**	30.0	42.0	10.5	M8	32	61.0	4	20	20.15	10
	589R12	30.0	42.0	13.0	M8	32	61.0	4	20	20.20	10
	589R16	30.0	42.0	17.0	M8	32	61.5	4	20	20.10	10
150 - 240	**590R10**	34.0	48.5	10.5	M8	32	68.5	4	20	24.40	5
	590R12	34.0	48.5	13.0	M8	32	68.5	4	20	24.35	5
	590R16	34.0	48.5	17.0	M8	32	68.5	4	20	24.30	5
	590R20	36.0	48.5	21.0	M8	32	70.5	4	20	24.25	5
185 - 300	**592R12**	32.0	50.0	13.0	M8	37	68.5	4	20	27.95	5
	592R16	32.0	50.0	17.0	M8	37	68.5	4	20	28.00	5
	592R20	34.5	50.5	21.0	M8	37	70.0	4	20	27.95	5

Tubular soldering sleeves, CuZn



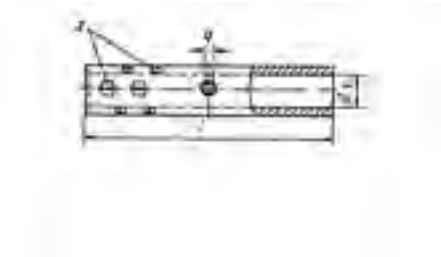



- For round conductors, e.g. to DIN EN 60228 Cl. 1, 2, 5 and 6
- Processed without using a crimping tool

Characteristics

- Simple processing due to fixed screws and solder hole

Material

- CuZn 40 Pb 2
- Screws: Steel to DIN 551

Surface

- Tin-plated to protect against corrosion


Technical instructions


- z = number of grub screws
- A connection needs to be soldered

Nominal cross section mm²	Part No.	Dimension mm				Weight/pcs. ~kg	Packing unit/pcs
		d1	l	Ø q	z		
6	**551R**	3.5	25	3.3	2	0.60	10
10	**552R**	4.5	30	3.3	2	1.20	10
16	**553R**	5.5	40	4.2	4	1.90	10
25	**554R**	7.0	45	4.2	4	2.85	10
35	**555R**	8.5	45	5.0	4	3.00	10
50	**556R**	10.0	48	5.0	4	4.00	10
70	**557R**	12.0	52	6.8	4	6.30	10
95	**558R**	13.5	55	6.8	4	8.05	10
120	**559R**	15.0	60	6.8	4	9.90	10
150	**560R**	17.0	64	6.8	4	11.80	5
185	**561R**	19.0	70	6.8	10	14.30	5
240	**562R**	21.0	70	6.8	10	15.50	5
300	**563R**	24.0	75	6.8	10	19.30	1

Parallel groove clamps, Cu, 1 screw



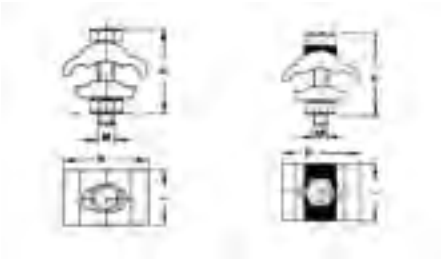



- For non-tension copper cables acc. to DIN 48201 part 1
- For screwing conductors acc. to DIN EN 60228 Class 1 and 2, for example in lightning protection areas

Characteristics

- Also for outdoor assembly
- Version with 1 screw
- Optionally available with thrust plate for equal pressure distribution

Material

- Copper (ETP)
- Screws:Bronze F 60
- Nut: copper


Surface


- Bright

Nominal cross section mm²	Part No.	Dimension mm			M	Torque Nm	Weight/pcs. ~kg	Packing unit/pcs
		b	h	l				
Without thrust plate								
2.5 - 16	**SAK10**	19.5	16	16	M5	6	2.10	10
2.5 - 25	**SAK12**	25.0	21	18	M6	8	4.10	10
	SAK14	25.0	22	20	M7	14	3.95	10
6 - 35	**SAK16**	28.0	23	20	M7	14	6.0	10
6 - 50	**SAK18**	32.5	26	24	M7	14	8.0	10
	SAK20	33.5	27	22	M8	20	8.6	10
6 - 70	**SAK22**	37.5	29	24	M8	20	11.1	5
10 - 95	**SAK24**	41.0	36	28	M8	20	15.6	5
With thrust plate								
2.5 - 16	**SAK11**	19.5	16	16	M5	6	2.6	10
2.5 - 25	**SAK13**	25.0	21	18	M6	8	4.30	10
	SAK15	25.0	22	18	M7	14	4.6	10
6 - 35	**SAK17**	28.0	23	20	M7	14	6.3	10
6 - 50	**SAK19**	32.5	26	20	M7	14	7.9	10
	SAK21	33.5	27	22	M8	20	9.1	10
6 - 70	**SAK23**	37	29	24	M8	20	11.6	5
10 - 95	**SAK25**	45.0	36	31	M10	39	19.60	5

Parallel groove clamps, Cu, 2 screws



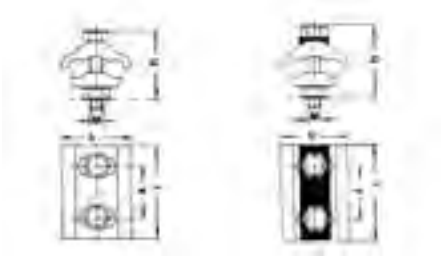



- For non-tension copper cables acc. to DIN 48201 part 1
- For screwing conductorsacc. to DIN EN 60228 Cl. 1 and 2, for example in lightning protection areas

Characteristics

- Also for outdoor assembly
- Version with 2 screws
- Optionally available with thrust plate for equal pressure distribution

Material

- Copper (ETP)
- Screws:Bronze F 60
- Nut: copper

Surface

- Bright


Technical instructions

- When connecting cross sections 95, 120 and 150 mm² two power branch clamps are to be used due to the current carrying capacity.

Nominal cross section mm²	Part No.	Dimension mm			A	M	Torque Nm	Weight/pcs. ~kg	Packing unit/ pcs
		b	h	l					
Without thrust plate									
2.5 - 16	**SAK30**	20.5	16.0	24	13.0	M5	6	3.7	10
2.5 - 25	**SAK32**	25.5	21	27	13.5	M6	8	6.4	10
	SAK34	25.0	22	30	15.0	M7	14	7.7	10
6 - 35	**SAK36**	30.0	23	30	15	M7	14	8.5	10
6 - 50	**SAK38**	33.0	26	32	16.0	M7	14	12.3	10
10 - 50	**SAK40**	32.5	27	36	18.0	M8	20	12.9	10
10 - 95	**SAK44**	45.0	36	46	25.5	M10	39	28.7	5
16 - 150	**SAK46**	52.5	40	52	26.0	M10	39	37.4	5
With thrust plate									
2.5 - 16	**SAK31**	19.5	16	24	13.0	M5	6	4.1	10
2.5 - 25	**SAK33**	25.5	21	27	14.0	M6	8	7.0	10
	SAK35	25.0	22	30	15.0	M7	14	7.9	10
6 - 35	**SAK37**	28.0	23	32	16.0	M7	14	10.2	10
6 - 50	**SAK39**	33.0	26	32	17.0	M7	14	12.8	10
10 - 50	**SAK41**	32.5	27	34.5	18.0	M8	20	14.7	10
6 - 70	**SAK43**	37.0	29	38.5	19.0	M8	20	19.1	5
10 - 95	**SAK45**	41.0	36	43	20.0	M8	20	25.0	5
16 - 150	**SAK47**	52.5	40	52	26.0	M10	39	39.0	5

Branch clamps in C-type, Cu



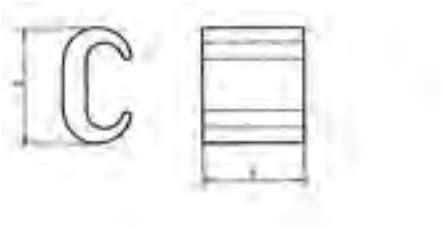

- Ideal for clamping identical conductor cross-sections e.g. to VDE 60228 Cl. 1 and 2
- No need to cut the main conductor

Material
- Copper (ETP)

Surface
- Tin-plated to protect against corrosion


Technical instructions
- Optimum conducting characteristics in combination with compound
- Tool: see page 133

Additional information
- Part Number appendix for bright version „BK“
- rm = round multi-stranded; re = round single solid
- * = Also suitable for 25 mm² round solid

Part No.	Hint	Cross section mm² rm/re		Dimension mm		Weight/pcs. ~kg	Packing unit/pcs
		Main conductor	Tab conductor	b	l		
CK16		16/25	16/25	16.0	15	0.94	25
CK25	*	25/35	25/35	20.0	16	1.68	25
CK35		35/50	35/50	25.7	22	3.42	25
CK50		50/-	50/-	28.0	23	4.88	25
CK70		70/-	70/-	34.0	28	9.69	10
CK95		95/-	95/-	35.0	28	7.30	10

Branch clamps in C-type, Cu, multi-purpose clamps



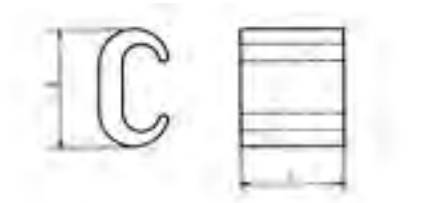

- Ideal for clamping non-identical conductor cross-sections e.g. to VDE 60228 Cl. 1 and 2
- No need to cut the main conductor

Material
- Copper (ETP)

Surface
- Tin-plated to protect against corrosion

Technical instructions
- Optimum conducting characteristics in combination with compound
- Tool: see page 133

Additional information
- Part Number appendix for bright version „BK“
- rm = round multi-stranded; re = round single solid

Part No.	Cross section mm² rm/re		Dimension mm		Weight/pcs. ~kg	Packing unit/pcs
	Main conductor	Tab conductor	b	l		
MCK44	2.5 - 4/2.5 - 4	2.5 - 4/2.5 - 4	9.8	8	0.185	25
MCK1010	6 - 10/10	4 - 6/4 - 10	12.0	12	0.460	25
MCK1016	10 - 16/16	4 - 10/4 - 10	19.0	17	1.900	25
MCK1025	16 - 25/25	4 - 10/4 - 10	19.0	17	1.900	25
MCK3535	16 - 25/25 - 35	16 - 25/16 - 35	20.0	17	1.750	25
MCK2550	35/50	4 - 25/4 - 25	24.8	23	4.400	25
MCK5050	35/50	16 - 35/25 - 50	26.5	23	4.200	25
MCK3570	50 - 70/-	4 - 35/4 - 35	33.8	28	10.700	10


See next page


Branch clamps in C-type, Cu, multi-purpose clamps

Part No.	Cross section mm² rm/re		Dimension mm		Weight/pcs. ~kg	Packing unit/pcs
	Main conductor	Tab conductor	b	l		
MCK3595	95/-	16 - 35	41.0	30	15.000	10
MCK7095	95/-	35 - 70	41.0	30	14.000	10
MCK120120	120/-	35 - 120	45.0	30	16.550	10
MCK150150	150/-	70 - 150	53.0	35	23.000	5
MCK185185	185/-	95 - 185	60.0	40	33.000	5

Branch clamps in H-type, Cu



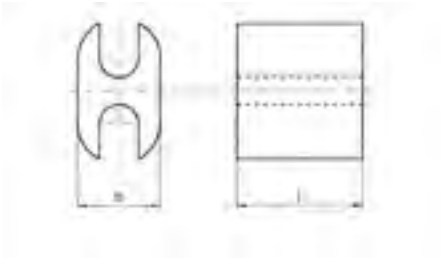



- **Ideal for clamping identical conductor cross-sections e.g. to DIN EN 60228**
- **Lightning protection tested to EN 50164-1**
- **No need to cut the main conductor**

Characteristics
- H-shape allows simple processing
- Optimum conducting characteristics when used with compound

Material
- Copper (ETP)

Surface
- Tin-plated to protect against corrosion

Technical instructions
- Tool: see page 134

Additional information
- Part Number appendix for bright version „BK“
- * = To EN 50164-1 lightning current tested

Part No.	Cross section mm² rm/re		Hint	Dimension mm		Weight/pcs. ~kg	Packing unit/pcs
	Main conductor	Tab conductor		b	l		
AH7070	70	70	*	17.0	28.0	6.5	25
AH9595	95	95		22.0	30.0	10.0	25
AH120120	120	120		24.0	25.0	9.8	25

Compound for branch clamps




- **Optimum conductivity properties for processing aluminium cable lugs and connectors and branch clamps (C and H-type)**

Characteristics
- Water-resistant, with corundum for destroying the oxidation layer
- Content/tin: 0.125 kg

Part No.
KF125

Screw connectors for shielded copper wires











- For connecting different conductor types and materials, e.g. to DIN EN 60228 Class 1 and 2
- Ideal for connecting identical and different conductor cross-sections

Characteristics
- Special groove profile inside to destroy the oxidation layer when crimping
- With inspection hole for monitoring full cable insertion

Material
- Insulated body: brass (CuZn)
- Screws: stainless steel, tin-plated

Surface
- Tin-plated to protect against corrosion


Technical instructions
- Refer to the installation instructions in the technical appendix on page i-9

Additional information
- rm = round multi-stranded; re = round single solid

Part No.	Nominal cross section mm²		Dimension mm				Torque Nm	Weight/pcs. ~kg	Packing unit/ pcs
	re	rm	D	d1	L	AF			
SV100	6 - 35	6 - 25	14	7.2	40	4	10	3.9	4

Screw connectors for street lighting











- Ideal for connecting various conductor types and materials, e.g. to DIN EN 60228 Cl. 1 and 2
- Suitable cross-section range for street lighting

Characteristics
- Special groove profile inside to destroy the oxidation layer when crimping
- With inspection hole for monitoring full cable insertion

Material
- Insulated body: brass (CuZn)
- Screws: stainless steel, tin-plated

Surface
- Either bright or tin-plated


Technical instructions
- Refer to the installation instructions in the technical appendix on page i-9


Additional information
- rm = round multi-stranded; re = round single solid

Part No.	Nominal cross section mm²		Dimension mm				Torque Nm	Weight/pcs. ~kg	Packing unit/ pcs
	re	rm	D	d1	L	AF			
With threaded pin, tin-plated									
SV200	1.5 - 16	1.5 - 16	10	5.5	30	2.5	4	1.35	4
With threaded pin, bright finished									
SV200BK	1.5 - 16	1.5 - 16	10	5.5	30	2.5	4	1.35	4

Screw connector with 2 screws







- For connecting various conductor types and materials, e.g. to DIN EN 60228 Cl. 1 and 2
- Ideal for connecting identical and different conductor cross-sections
- Reliable processing due to cable insertion control (dissimilar materials must not come into contact)

Characteristics

- Special groove profile inside to destroy the oxidation layer when crimping
- Either with threaded pin or shear head, shear head partly fixed
- Version with 2 screws

Material

- Insulated body: high-tensile aluminium alloy
- Screws: copper alloy, tin-plated

Surface

- Either bright or tin-plated

Technical instructions

- Refer to the installation instructions in the technical appendix on pagei-9


Additional information


- * = fixed version, Part Number appendix „NL“
- **= version with fixed countersink shear head, Part Number appendix „VK“
- re = round single solid wire, rm = round multi-stranded, se = sector shaped single solid wire, sm = sector shaped multi-stranded, (r) = pre-rounded, (v) = compacted

Part No.	Nominal cross section mm²				Hint	Dimension mm			Torque Nm	Weight/ pcs. ~kg	Packing unit/pcs
	re	rm	se	sm		D	L	AF			
With threaded pin, bright finished											
SV303	6 - 35	6 - 25, Cu 2.5 - 50 (v)	--	Cu 2.5 - 35		14	40	4	8	1.5	4
SV300	--	Al 6 - 50 (v)	--	Al 6 - 35, 35 - 70		16.5	40	4	9	1.7	4
SV301	16 - 95	16 - 95	50 - 95, 50 - 120 (120°)	35 - 95 (r)		25	55	5	20	6.6	4
SV308	25 - 150	25 - 150	50 - 150 (90°), 50 - 150 (120°)	--		28	70	6	25	11.3	4
SV302	35 - 50	95 - 185	50 - 185 (90°)	35 - 150		32	80	6	25	16	4
Without threaded pin, bright finished											
SV303V	6 - 35	6 - 25, Cu 2.5 - 50 (v)	--	Cu 2.5 - 35		14	40	4	8	1.5	4
SV300V	--	Al 6 - 50 (v)	--	Al 6 - 35		16.5	40	4	9	1.7	4
SV307V	50 - 70	10 - 70	50 - 70	35 - 70, 35 - 70		22	57	5	15	4.7	4
SV301V	16 - 95	16 - 95	50 - 95, 50 - 150 (120°)	35 - 95 (r)		25	55	5	20	6.6	4
SV302V	35 - 50	35*185	50 - 185 (90°)	35 - 150		32	80	6	25	16	4
With shear head, bright finished											
SV303AK	6 - 35	6 - 25	--	--	*	14	40	4	8	1.5	1
SV303AKNL	6 - 35	6 - 25, Cu 2.5 - 50 (v)	--	Cu 2.5 - 35	*	14	40	4	8	1.5	1
SV304AKNL	--	Al 6 - 50 (v)	--	Al 6 - 35		16.5	40	4	9	1.7	4
SV307AKNL	10 - 70	10 - 70	50 - 70	35 - 70, 35 - 70		22	57	5	15	4.7	4
SV301AK	16 - 95	16 - 95	50 - 95, 50 - 150 (120°)	35 - 95 (r), 35 - 150		25	55	5	20	6.6	4
SV302AK	35 - 50	35 - 185	50 - 185 (90°)	35 - 185 (r)		32	80	6	25	16	4
With shear head, tin - plated											
SV304AKNLV	--	Cu 2.5 - 50 (v), Al 6 - 50 (v)	--	Cu 2.5 - 35, Al 6 - 35		16.5	40	4	9	1.7	4
SV301AKV	16 - 95	16 - 95	50 - 95	35 - 70, 35 - 95 (r)	**	25	55	5	20	6.6	4
SV302AKV	35 - 50	35 - 185	50 - 150 (120°), 50 - 185 (90°)	35 - 150		32	80	6	25	16	4

Screw connector with barrier



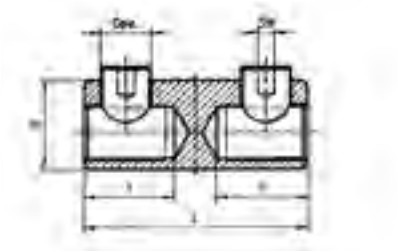



- For connecting various conductor types and materials, e.g. to DIN EN 60228 Cl. 1 and 2
- Ideal for connecting identical and different conductor cross-sections

Characteristics

- Special groove profile inside to destroy the oxidation layer when crimping
- Either with threaded pin or shear head, shear head partly fixed
- Version with 2 screws and barrier

Material

- Insulated body: high-tensile aluminium alloy
- Screws: copper alloy, tin-plated

Surface

- Either bright or tin-plated

Technical instructions

- Refer to the installation instructions in the technical appendix on page i-9


Additional information


- re = round single solid wire, rm = round multi-stranded, se = sector shaped single solid wire, sm = sector shaped multi-stranded, (r) = pre-rounded, (v) = compacted

Part No.	Nominal cross section mm²				Hint	Dimension mm				Torque Nm	Weight/ pcs. ~kg	Packing unit/pcs
	re	rm	se	sm		D	l	L	AF			
With threaded pin, bright finished												
SV315	--	Cu 2.5 - 50 (v), Al 6 - 50 (v)	--	Cu 2.5 - 35, Al 6 - 35		16	17.5	40	4	9	1.7	4
SV309	16 - 95	16 - 95	50 - 95, 50 - 120 (120°)	35 - 70 (r)		25	22	55	5	20	6.6	4
SV320	25 - 150	25 - 150	50 - 150 (90°), 50 - 150 (120°)	35 - 150		28	31	70	6	25	11.3	4
SV310	35 - 50	35 - 185	50 - 185 (90°)	35 - 185 (r)		32	32	80	6	25	16	4
With threaded pin, tin-plated												
SV315V	--	Cu 2.5 - 50 (v), Al 6 - 50 (v)	--	Cu 2.5 - 35, Al 6 - 35		16	17.5	40	4	9	1.7	4
SV309V	16 - 95	16 - 95	50 - 95, 50 - 120 (120°)	35 - 95 (r)		25	22	55	5	20	6.6	4
SV320V	25 - 150	25 - 150	50 - 150 (90°), 50 - 150 (120°)	--		28	31	70	6	25	11.3	4
SV310V	35 - 50	35 - 185	50 - 185 (90°)	35 - 185 (r)		32	32.5	80	6	25	16	4
With shear head, bright finished												
SV311AKNL	6 - 35	6 - 25, Cu 2.5 - 50 (v)	--	Cu 2.5 - 35		14	17.5	40	4	8	1.5	4
SV312AKNL	--	Al 6 - 50 (v)	--	Al 6 - 35, 35 - 70		16	17.5	40	4	9	1.7	4
SV309AK	16 - 95	16 - 95	50 - 95, 50 - 150 (120°)	35 - 95 (r), 35 - 150		25	22	55	5	20	6.6	4
SV310AK	35 - 50	35 - 185	50 - 185 (90°)	35 - 185 (r)		32	32.5	80	6	25	16	4
With shear head, tin-plated												
SV312AKNLV	--	Cu 2.5 - 50 (v), Al 6 - 50 (v)	--	Cu 2.5 - 35, Al 6 - 35		16	17.5	40	4	9	1.7	4
SV319AKNLV	10 - 70	10 - 70	50 - 70	35 - 70		22	24	57	5	15	7.6	4
SV309AKV	16 - 95	16 - 95	50 - 95, 50 - 150 (120°)	35 - 95 (r), 35 - 150	*	25	22	55	5	20	6.6	4
SV310AKV	35 - 50	35 - 185	50 - 185 (90°)	35 - 185 (r)	*	32	32.5	80	6	25	16	4

Screw connector with 4 screws



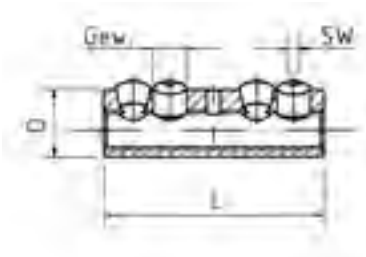



- For connecting various conductor types and materials, e.g. to DIN EN 60228 Cl. 1 and 2
- Ideal for connecting identical and different conductor cross-sections
- Reliable processing due to cable insertion control (dissimilar materials must not come into contact)

Characteristics

- Special groove profile inside to destroy the oxidation layer when crimping
- Available with threaded pin or shear head
- Version with 4 screws

Material

- Insulated body: high-tensile aluminium alloy
- Screws: copper alloy, tin-plated

Surface

- Either bright or tin-plated

Technical instructions

- Refer to the installation instructions in the technical appendix on page i-9


Additional information


- re = round single solid wire, rm = round multi-stranded, se = sector shaped single solid wire, sm = sector shaped multi-stranded

Part No.	Nominal cross section mm²				Dimension mm			Torque Nm	Weight/pcs. ~kg	Packing unit/pcs
	re	rm	se	sm	D	L	AF			
With threaded pin, bright finished										
SV305	16 - 95	16 - 95	50 - 95	35 - 70, 35 - 70 (r)	25	92	5	20	12	4
SV306	35 - 50	35 - 185	50 - 150 (120°), 50 - 185 (90°)	35 - 185 (r)	32	108	6	25	25	4
With threaded pin, tin-plated										
SV305V	16 - 95	16 - 95	50 - 95	35 - 70, 35 - 70 (r)	25	92	5	20	12	4
SV306V	35 - 50	35 - 185	50 - 150 (120°), 50 - 185 (90°)	35 - 150, 35 - 185 (r)	32	108	6	25	25	4
With shear head, bright finished										
SV305AK	16 - 95	16 - 95	50 - 95	35 - 70, 35 - 70 (r)	25	92	5	20	12	4
SV306AK	35 - 50	35 - 185	50 - 150 (120°), 50 - 185 (90°)	35 - 150, 35 - 185 (r)	32	108	6	25	25	4
With shear head, tin-plated										
SV305AKV	16 - 95	16 - 95	50 - 95	35 - 70, 35 - 70 (r)	25	92	5	20	12	4
SV306AKV	35 - 50	35 - 185	50 - 150 (120°), 50 - 185 (90°)	35 - 150, 35 - 185 (r)	32	108	6	25	25	4

Insulated screw connector



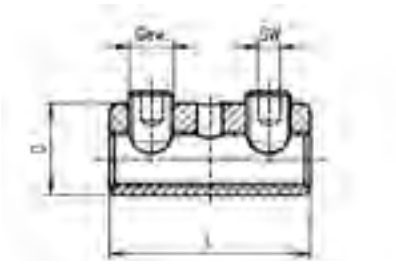



- For connecting various conductor types and materials, e.g. to DIN EN 60228 Cl. 1 and 2
- Ideal for connecting identical and different conductor cross-sections
- Reliable processing due to cable insertion control (dissimilar materials must not come into contact)

Characteristics

- Special groove profile inside to destroy the oxidation layer when crimping
- Insulated body
- Version with 2 screws, without barrier
- Available with threaded pin or shear head

Material

- Insulated body: high-tensile aluminium alloy
- Screws: copper alloy, tin-plated

Surface

- Either bright or tin-plated

Technical instructions

- Refer to the installation instructions in the technical appendix on page i-9


Additional information


- re = round single solid wire, rm = round multi-stranded, se = sector shaped single solid wire, sm = sector shaped multi-stranded

Part No.	Nominal cross section mm²				Dimension mm			Torque Nm	Weight/pcs. ~kg	Packing unit/pcs
	re	rm	se	sm	D	L	AF			
With threaded pin, bright finished										
SV400	6 - 35	6 - 25	50 - 70 (120°)	35 - 70	14	60	4	8	1.7	4
SV410	16 - 50	16 - 95	50 - 95 (90°), 50 - 150 (120°)	35 - 95 (r), 35 - 150	28.2	58.2	5	20	6	4
SV420	35 - 50	35 - 185	50 - 185 (90°)	35 - 185 (r)	36	84	6	25	14.5	4
With threaded pin, tin-plated										
SV405V	10 - 70	10 - 70	50 - 70, 50 - 150 (120°)	35 - 70, 35 - 150	25	87	5	15	5	4
SV420V	35 - 50	35 - 185	50 - 185 (90°)	35 - 185 (r)	36	84	6	25	14.5	4
With shear head, bright finished										
SV410AK	16 - 50	16 - 95	50 - 70 (120°), 50 - 95 (90°)	35 - 70, 35 - 95 (r)	28.2	58.2	5	20	6	4
SV420AK	35 - 50	35 - 185	50 - 150 (120°), 50 - 185 (90°)	35 - 150, 35 - 185 (r)	36	84	6	25	14.5	4

Screw connector with barrier







- For connecting various conductor types and materials, e.g. to DIN EN 60228 Cl. 1 and 2
- Ideal for connecting identical and different conductor cross-sections

Characteristics

- Special groove profile inside to destroy the oxidation layer when crimping
- Either with threaded pin or shear head, shear head partly fixed
- Version with 2 screws and barrier

Material

- Insulated body: high-tensile aluminium alloy
- Screws: copper alloy, tin-plated

Surface

- Either bright or tin-plated

Technical instructions

- Refer to the installation instructions in the technical appendix on page i-9

Additional information

- re = round single solid wire, rm = round multi-stranded, se = sector shaped single solid wire, sm = sector shaped multi-stranded, (r) = pre-rounded, (v) = compacted

Part No.	Nominal cross section mm²				Hint	Dimension mm				Torque Nm	Weight/ pcs. ~kg	Packing unit/pcs
	re	rm	se	sm		D	l	L	AF			
With threaded pin, bright												
SV430	16-50	16-95	50 - 70 (120°), 50 - 95 (90°)	35 - 70, 35 - 95 (r)		28.2	23.6	58.2	5	20	6.6	4
SV440	35-50	35-185	50 - 150 (120°), 50 - 185 (90°)	35 - 150, 35 - 185 (r)		36	34.5	84	6	25	16.0	4
With shear head												
SV430AK	16 - 50	16 - 95	50 - 70 (120°), 50 - 95 (90°)	35 - 70, 35 - 95 (r)		28.2	23.6	58.2	5	20	6.6	4
SV440AK	35 - 50	35 - 185	50 - 150 (120°), 50 - 185 (90°)	35 - 150, 35 - 185 (r)	**	36	34.5	84	6	25	16.0	4

Compact tap connectors with shear heads, three conductor cables















- Suitable for main and branch conductors made from Al and Cu
- No need to cut the main conductor
- For use e.g. with energy suppliers

Characteristics

- VDE: can be installed under voltage with corresponding fully insulated assembly tools
- With shear heads for the main conductor, fixed

Technical instructions

- A mounting instruction is included with every clamp

Additional information

- re = round single solid wire, rm = round multi-stranded, se = sector shaped single solid wire, sm = sector shaped multi-stranded
- Creepage and elongation processes are compensated for by spring washers
- Sequence of contacting can be freely determined

Part No.	Main conductor		Tap conductor		Dimension mm				Torque Nm	Weight/pcs. ~kg	Packing unit/pcs
	se	sm	se	sm	la	lb	Width	AF			
KSK1503	70 - 150	150	95 (r)	6 - 70 (r)	84	76	45	5	20	0.35	1

Compact tap connectors with shear heads, four conductor cables













- Suitable for main and branch conductors made from Al and Cu
- No need to cut the main conductor
- For use e.g. with energy suppliers

Characteristics

- VDE: can be installed under voltage with corresponding fully insulated assembly tools
- With shear heads for the main conductor, fixed

Technical instructions

- A mounting instruction is included with every clamp

Additional information


- re = round single solid wire, rm = round multi-stranded, se = sector shaped single solid wire, sm = sector shaped multi-stranded
- Creepage and elongation processes are compensated for by spring washers
- Sequence of contacting can be freely determined

Part No.	Main conductor		Tap conductor		Dimension mm				Torque Nm	Weight/pcs. ~kg	Packing unit/pcs
	se	sm	se	sm	la	lb	Width	AF			
KSK1504	70 - 150	150	95 (r)	6 - 70 (r)	107	90	46	5	20	0.63	1
KSK1854	70 - 150	150	95 (r)	6 - 70 (r)	107	90	46	5	20	0.58	1

Compact tap connectors, four conductor cables, for main conductor 25 - 50 mm²







- Suitable for main and branch conductors made from Al and Cu
- No need to cut the main conductor
- For use e.g. with energy suppliers

Characteristics

- VDE: can be installed under voltage with corresponding fully insulated assembly tools

Technical instructions

- A mounting instruction is included with every clamp

Additional information


- re = round single solid wire, rm = round multi-stranded, se = sector shaped single solid wire, sm = sector shaped multi-stranded
- Creepage and elongation processes are compensated for by spring washers
- Sequence of contacting can be freely determined

Part No.	Main conductor			Tap conductor		Dimension mm				Torque Nm	Weight/ pcs. ~kg	Packing unit/pcs
	se	sm	rm	se	sm	la	lb	Width	AF			
KSK504	Cu 25 - 50, Al 35 - 50	Cu 25 - 50	Cu 25 - 50	50	6-35	88	75	50	5	15	0.46	1

Compact tap connectors, four conductor cables, for main conductor 70 - 185 mm²







- Suitable for main and branch conductors made from Al and Cu
- No need to cut the main conductor
- For use e.g. with energy suppliers

Characteristics

- VDE: can be installed under voltage with corresponding fully insulated assembly tools
- With threaded pins for the main conductor

Technical instructions

- A mounting instruction is included with every clamp

Additional information

- re = round single solid wire, rm = round multi-stranded, se = sector shaped single solid wire, sm = sector shaped multi-stranded
- Creepage and elongation processes are compensated for by spring washers
- Sequence of contacting can be freely determined

Part No.	Main conductor			Tap conductor			Dimension mm				Torque Nm	Weight/ pcs. ~kg	Packing unit/pcs
	se	sm	re	se	sm	rm	la	lb	Width	AF			
SKR1204	120	70 - 95		50 (r)	6 - 35 (r)		90	77	50	5	20	0.46	1
SKR150504	150	70 - 150	50	50	6 - 35		93	80	50	5	20	0.46	1
SKR1504	70 - 150	150		95 (r)	6 - 70 (r)		107	90	46	5	20	0.62	1
SKR1501504	95 - 150	150		150	16 - 120	16 - 120	118	118	93	5	20	1.34	1
SKR1854	185	95 - 150		95 (r)	6 - 70		107	96	46	5	20	0.58	1

Compact tap connectors, three conductor cables





- Suitable for main and branch conductors made from Al and Cu
- No need to cut the main conductor
- For use e.g. with energy suppliers

Characteristics

- VDE: can be installed under voltage with corresponding fully insulated assembly tools
- With threaded pins for the main conductor


Technical instructions

- A mounting instruction is included with every clamp

Additional information

- re = round single solid wire, rm = round multi-stranded, se = sector shaped single solid wire, sm = sector shaped multi-stranded


Part No.	Main conductor				Tap conductor		Dimension mm					Thread DIN 13	Weight/ pcs. ~kg	Packing unit/pcs
	se	sm	rm	re	se	sm	la	lb	Width	Bolts Circle dia.	AF			
SKR1503	70 - 150	70 - 150	70 - 150	70 - 150	6 - 70	6 - 95	84	76	45	90	5	M10x1/ M10	0.38	1



Tool application chart

C-Clamps

Tool type	Crimping range corresponds to nominal cross-section mm²	Crimping Tool		Catalogue page			Crimp profile
		Part No.	Crimping head / adapter	Crimping Tool	Crimping die		
Mechanical, electrical, pneumatic crimping tools with interchangeable die / head	4-35	K354		246	331	331	⬭
	4-50	K18		248	339	339	⬭
		K22		250	345	345	⬭
Hand hydraulic crimping tools	4-50	HK6018		292	339	339	⬭
		HK60UNV	+UA18	473	339	339	⬭
		HK6022		294	345	345	⬭
		HK60UNV	+UA22	473	345	345	⬭
	10-70	HK12030		298	351	351	⬭
		HK12042		300	351	351	⬭
		HK120U		302	351	351	⬭
Battery powered crimping tools	4-35	EK354ML		262	331	331	⬭
		EK354		266	331	331	⬭
	4-50	EK5018		270	339	339	⬭
		EK60UNV	+UA18	476	339	339	⬭
		EKM60UNV	+UA18	475	339	339	⬭
		EK6022		274	345	345	⬭
		EKM6022		272	345	345	⬭
		EK60UNV	+UA22	476	345	345	⬭
		EKM60UNV	+UA22	475	345	345	⬭
	10-70	EK12032		280	351	351	⬭
		EK12042		282	351	351	⬭
		EK120U		284	351	351	⬭
		EK135FT	+UA15T	286	351	351	⬭
		EK120UNV	+UA12T	477	351	351	⬭
Hydraulic crimping systems	4-50	THK18		306	339	339	⬭
		THK22		308	345	345	⬭
	10-70	HK122EL380		322	351	351	⬭
	10-185	HK252		320	356	356	⬭
		HK252EL380		323	356	356	⬭
Hydraulic crimping heads	4-50	PK18		306	339	339	⬭
		PK60UNV	+UA18	474	339	339	⬭
		PK22		308	345	345	⬭
		PK60UNV	+UA22	474	345	345	⬭
	10-70	PK12042		312	351	351	⬭
		PK120U		314	351	351	⬭
	10-185	PK252		316	356	356	⬭



Tool application chart

H-Clamps

Tool type	Crimping range corresponds to nominal cross-section mm²	Crimping Tool		Catalogue page		Crimp profile
		Part No.	Crimping head / adapter	Crimping Tool	Crimping die	
Mechanical, electrical, pneumatic crimping tools with interchangeable die / head	70	K22		250	345	⬭
Hand hydraulic crimping tools	70	HK6022		294	345	⬭
	70-120	HK12030		298	351	⬭
		HK12042		300	351	⬭
		HK120U		302	351	⬭
Battery powered crimping tools	70	EK6022		274	345	⬭
		EKM6022		272	345	⬭
		EK60UNV	+UA22	476	345	⬭
	70-120	EK12032		280	351	⬭
		EK12042		282	351	⬭
		EK120U		284	351	⬭
		EK135FT	+UA15T	286	351	⬭
		EK120UNV	+UA12T	477	351	⬭
Hydraulic crimping systems	70	THK22		308	345	⬭
	70-120	HK122EL380		322	351	⬭
		HK252		320	356	⬭
		HK252EL380		323	356	⬭
Hydraulic crimping heads	70	PK22		308	345	⬭
	70-120	PK12042		312	351	⬭
		PK120U		314	351	⬭
		PK252		316	356	⬭

PROTECTION - CABLE END-SLEEVES, INSULATED AND NON-INSULATED

Klauke joins together what belongs together. Cable end-sleeves prevent the conductors splicing before they are connected in clamps. All wires remain together. Easy-Entry insulation speeds up the insertion of wires into the sleeve. Fine-stranded conductors in particular benefit from a special trapezoidal crimp. No splicing, no time wasted. Your conductors are protected and can be cleanly processed



In brief

- Stops conductors splicing
- Improved contact
- No risk of short-circuit due to bent strands
- Produced from high-quality copper
- Surface treatment with tin or in special versions with silver

Simple diversity

We have to admit: Cable end-sleeves are a simple product. Due to the differing crimp shapes in the range and the high-quality materials used in production, the sleeves are just incredibly good.

- Broad range: To DIN standards, for short circuit-resistant conductors, in various lengths, with and without insulating collars
- Marked to DIN colour code
- Twin cable end-sleeves for connecting in confined areas
- High-quality material for optimum conducting properties
- CSA-approved



Always the right crimp shape

We give every cable end-sleeve its perfect crimp shape. No matter where the conductor is to be laid later, we have a solution for you.

- The correct crimp shape for every connecting terminal
- Crimp shapes matched to the DIN dimensions
- For compacted conductors
- Connect without risk of short-circuit



The easy-entry insulation enables fast insertion of conductors with no splicing.

Easy-Entry insulation

The special Easy-Entry insulation makes it easier to insert the conductor into the sleeves. In addition, the insulation is highly-resistant, to temperatures of up to 105 °C for example.

- Easy-Entry insulation for convenient insertion of the conductor
- Temperature-resistant to 105 °C
- No toxic vapours in case of fire
- Ageing-resistant plastic collars



Cable end-sleeves to DIN, Cu











- For fine and superfine stranded conductors, e.g. to DIN EN 60228 Cl. 5 and 6
- Optimal cable entry due to widened sleeve

Characteristics
- To DIN 46228, part 1 and similar

Material
- Copper (EN13600)

Surface
- Tin-plated to protect against corrosion

Technical instructions
- Tool: see page 150

Additional information
- Silvered version also available, without Part Number appendix “V“, exception: Part Number 705V in silvered version = Part No. 7050
- * = not standardised

Nominal cross section mm²	Part No.	Hint	Dimension mm				Weight/ 1000 pcs. ~ kg	Packing unit/pcs
			d1	d2	l	s		
0.25	**695V**	*	0.75	1.7	5	0.15	0.02	1000
	697V	*	0.75	1.7	7	0.15	0.03	1000
0.34	**705V**	*	0.85	1.8	5	0.15	0.02	1000
	707V	*	0.85	1.8	7	0.15	0.03	1000
0.5	**71S6V**		1.00	2.1	6	0.15	0.03	1000
	71S8V	*	1.00	2.1	8	0.15	0.04	1000
	71S10V		1.00	2.1	10	0.15	0.05	1000
0.75	**716V**		1.20	2.3	6	0.15	0.04	1000
	718V	*	1.20	2.3	8	0.15	0.05	1000
	7110V		1.20	2.3	10	0.15	0.06	1000
	7112V	*	1.20	2.3	12	0.15	0.08	1000
	7115V	*	1.20	2.3	15	0.15	0.09	1000
1	**72S6V**		1.40	2.5	6	0.15	0.04	1000
	72S8V	*	1.40	2.5	8	0.15	0.06	1000
	72S10V		1.40	2.5	10	0.15	0.07	1000
	72S12V	*	1.40	2.5	12	0.15	0.08	1000
	72S15V	*	1.40	2.5	15	0.15	0.10	1000
1.5	**726V**	*	1.70	2.8	6	0.15	0.05	1000
	727V		1.70	2.8	7	0.15	0.06	1000
	728V	*	1.70	2.8	8	0.15	0.07	1000
	7210V		1.70	2.8	10	0.15	0.09	1000
	7212V		1.70	2.8	12	0.15	0.10	1000
	7215V	*	1.70	2.8	15	0.15	0.13	1000
	7218V		1.70	2.8	18	0.15	0.15	1000
	7220V	*	1.70	2.8	20	0.15	0.17	1000
2.5	**737V**		2.20	3.4	7	0.15	0.08	1000
	738V	*	2.20	3.4	8	0.15	0.09	1000
	7310V		2.20	3.4	10	0.15	0.11	1000
	7312V		2.20	3.4	12	0.15	0.13	1000
	7315V	*	2.20	3.4	15	0.15	0.17	1000
	7318V		2.20	3.4	18	0.15	0.20	1000
	7320V	*	2.20	3.4	20	0.15	0.22	1000

See next page

Cable end-sleeves nach DIN, Cu

Nominal cross section mm²	Part No.	Hint	Dimension mm				Weight/ 1000 pcs. ~ kg	Packing unit/pcs
			d1	d2	l	s		
4	**748V**	*	2.80	4.0	8	0.20	0.14	1000
	749V		2.80	4.0	9	0.20	0.16	1000
	7410V	*	2.80	4.0	10	0.20	0.17	1000
	7412V		2.80	4.0	12	0.20	0.20	1000
	7415V		2.80	4.0	15	0.20	0.27	1000
	7418V		2.80	4.0	18	0.20	0.32	1000
	7420V	*	2.80	4.0	20	0.20	0.35	1000
6	**7510V**		3.50	4.7	10	0.20	0.23	100
	7512V		3.50	4.7	12	0.20	0.27	100
	7515V		3.50	4.7	15	0.20	0.34	100
	7518V		3.50	4.7	18	0.20	0.40	100
	7520V	*	3.50	4.7	20	0.20	0.45	100
	7525V	*	3.50	4.7	25	0.20	0.56	100
10	**7610V**	*	4.5	5.8	10	0.2	0.27	100
	7612V		4.5	5.8	12	0.2	0.33	100
	7615V		4.5	5.8	15	0.2	0.41	100
	7618V		4.5	5.8	18	0.2	0.49	100
	7620V	*	4.5	5.8	20	0.2	0.55	100
	7625V	*	4.5	5.8	25	0.2	0.68	100
16	**7712V**		5.8	7.5	12	0.2	0.43	100
	7715V		5.8	7.5	15	0.2	0.53	100
	7718V		5.8	7.5	18	0.2	0.60	100
	7720V	*	5.8	7.5	20	0.2	0.70	100
	7725V		5.8	7.5	25	0.2	0.87	100
	7732V		5.8	7.5	32	0.2	1.11	100
25	**7812V**	*	7.3	9.5	12	0.2	0.80	50
	7815V		7.3	9.5	15	0.2	0.99	50
	7818V		7.3	9.5	18	0.2	1.18	50
	7820V	*	7.3	9.5	20	0.2	1.31	50
	7825V		7.3	9.5	25	0.2	1.63	50
	7828V	*	7.3	9.5	28	0.2	1.82	50
	7832V		7.3	9.5	32	0.2	2.07	50
35	**7912V**	*	8.3	11.0	12	0.2	0.90	50
	7915V	*	8.3	11.0	15	0.2	1.12	50
	7918V		8.3	11.0	18	0.2	1.34	50
	7920V	*	8.3	11.0	20	0.2	1.48	50
	7922V	*	8.3	11.0	22	0.2	1.63	50
	7925V		8.3	11.0	25	0.2	1.80	50
	7930V	*	8.3	11.0	30	0.2	2.20	50
	7932V		8.3	11.0	32	0.2	2.35	50
50	**8018V**		10.5	13.0	18	0.3	1.69	50
	8022V	*	10.5	13.0	22	0.3	2.05	50
	8025V		10.5	13.0	25	0.3	2.32	50
	8030V	*	10.5	13.0	30	0.3	2.77	50
	8032V		10.5	13.0	32	0.3	2.95	50


See next page


Cable end-sleeves nach DIN, Cu

Nominal cross section mm²	Part No.	Hint	Dimension mm				Weight/ 1000 pcs. ~ kg	Packing unit/pcs
			d1	d2	l	s		
70	**8122V**	*	12.7	15.0	22	0.4	3.31	25
	8125V	*	12.7	15.0	25	0.4	3.75	25
	8130V	*	12.7	15.0	30	0.4	4.48	25
	8132V	*	12.7	15.0	32	0.4	4.78	25
95	**8225V**	*	14.7	17.0	25	0.4	4.32	25
	8230V	*	14.7	17.0	30	0.4	5.17	25
	8232V	*	14.7	17.0	32	0.4	5.17	25
	8234V	*	14.7	17.0	34	0.4	5.84	25
120	**8330V**	*	16.7	19.0	30	0.5	7.35	25
	8332V	*	16.7	19.0	32	0.5	7.83	25
	8334V	*	16.7	19.0	34	0.5	8.31	25
	8338V	*	16.7	19.0	38	0.5	9.28	25
	8340V	*	16.7	19.0	40	0.5	9.76	25
150	**8432V**	*	18.7	21.0	32	0.5	8.75	25
	8434V	*	18.7	21.0	34	0.5	9.28	25
	8438V	*	18.7	21.0	38	0.5	10.36	25
	8440V	*	18.7	21.0	40	0.5	10.89	25
185	**8532V**	*	20.2	23.5	32	0.6	11.38	25
	8540V	*	20.2	23.5	40	0.6	14.17	25
240	**8634V**	*	23.0	24.0	34	0.5	11.25	25
	8640V	*	23.0	24.0	40	0.5	13.23	25

Cable end-sleeves to DIN, CuZn



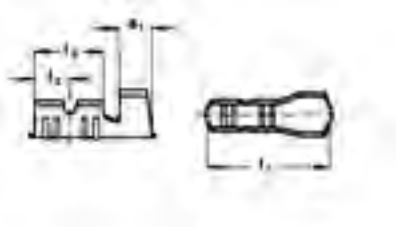



▸ For fine and superfine stranded conductors, e.g. to DIN EN 60228 Cl. 5 and 6

Characteristics
- To DIN 46228, part 2

Material
- Brass (CuZn)


Surface
- Tin-plated to protect against corrosion

Technical instructions
- Tool: see page 152

Nominal cross section mm²	Nominal size to DIN	Part No.	Dimension mm					Weight/ 1000 pcs. ~ kg	Packing unit/ pcs
			a1	l1	l2	l3	s		
0.5-1	B 1 - 7	**SH271**	2.5	11	3.5	7	0.3	0.20	100
1.5	B 1.5 - 7	**SH272**	2.5	11	3.5	7	0.3	0.23	100
2.5	B 2.5 - 7	**SH273**	2.5	11	3.5	7	0.3	0.32	100

Insulated cable end-sleeves to DIN, with Easy-Entry



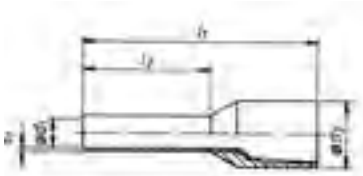

- For fine and superfine stranded conductors, e.g. to DIN EN 60228 Cl. 5 and 6
- Easy-Entry insulation for splice-free cable insertion

Characteristics

- Colour-coding and tube dimension to DIN 46228, part 4
- Halogen-free
- Heat resistant to 105° C

Material

- Copper (EN13600)
- Synthetic material: polypropylene

Surface

- Tin-plated to protect against corrosion

Technical instructions

- Tool: see page 150

Additional information

- * = not standardised
- *** = quantities in one bag

Nominal cross section mm²	Part No.	Colour	Hint	Dimension mm					Weight/ 1000 pcs. ~ kg	Packing unit/ pcs
				d1	d3	l1	l2	s1		
0.5	**4696**			1.0	3.1	12	6	0.15	0.070	1000
	4698			1.0	3.1	14	8	0.15	0.070	1000
	GR4698		***	1.0	3.1	14	8	0.15	0.070	500
	46910			1.0	3.1	16	10	0.15	0.085	1000
0.75	**4706**			1.2	3.3	12	6	0.15	0.080	1000
	4708			1.2	3.3	14	8	0.15	0.080	1000
	GR4708		***	1.2	3.3	14	8	0.15	0.080	500
	47010			1.2	3.3	16	10	0.15	0.100	1000
	47012			1.2	3.3	18	12	0.15	0.105	1000
1	**4716**			1.4	3.5	12	6	0.15	0.090	1000
	4718			1.4	3.5	14	8	0.15	0.100	1000
	GR4718		***	1.4	3.5	14	8	0.15	0.100	500
	47110			1.4	3.5	16	10	0.15	0.120	1000
	47112			1.4	3.5	18	12	0.15	0.125	1000
1.5	**4726**			1.7	4.0	12	6	0.15	0.105	1000
	4728			1.7	4.0	14	8	0.15	0.110	1000
	GR4728		***	1.7	4.0	14	8	0.15	0.110	500
	47210			1.7	4.0	16	10	0.15	0.130	1000
	47212			1.7	4.0	18	12	0.15	0.150	1000
	47218			1.7	4.0	24	18	0.15	0.190	1000
2.5	**4738**			2.2	4.7	14	8	0.15	0.150	1000
	GR4738		***	2.2	4.7	14	8	0.15	0.150	500
	47312			2.2	4.7	18	12	0.15	0.200	1000
	47318			2.2	4.7	24	18	0.15	0.250	1000
4	**47410**			2.8	5.4	17	10	0.20	0.210	100
	47412			2.8	5.4	20	12	0.20	0.250	100
	47418			2.8	5.4	26	18	0.20	0.320	100
6	**47512**			3.5	6.9	20	12	0.20	0.350	100
	47518			3.5	6.9	26	18	0.20	0.460	100
10	**47612**			4.5	8.4	22	12	0.20	0.450	100
	47618			4.5	8.4	28	18	0.20	0.650	100


See next page

Insulated cable end-sleeves to DIN, with Easy-Entry

Nominal cross section mm²	Part No.	Colour	Hint	Dimension mm					Weight/ 1000 pcs. ~ kg	Packing unit/ pcs
				d1	d3	l1	l2	s1		
16	**47712**			5.8	9.6	24	12	0.20	0.650	100
	47718			5.8	9.6	28	18	0.20	0.800	100
25	**47816**			7.3	12.0	30	16	0.20	1.600	50
	47818			7.3	12.0	30	18	0.20	1.700	50
	47822			7.3	12.0	36	22	0.20	2.000	50
35	**47916**			8.3	13.5	30	16	0.20	1.900	50
	47918			8.3	13.5	30	18	0.20	2.100	50
	47925			8.3	13.5	39	25	0.20	2.500	50
50	**48020**			10.3	16.0	36	20	0.30	3.300	50
	48025			10.3	16.0	40	25	0.30	3.600	50
70	**48121**		*	13.5	17.2	37	21	0.40	4.620	25
95	**48225**		*	14.5	19.2	44	25	0.40	6.000	25
120	**48327**		*	16.7	21.4	48	27	0.45	7.850	25
150	**48432**		*	19.5	25.0	58	32	0.50	12.330	25

Insulated cable end-sleeves to DIN with Easy-Entry, colour code 1



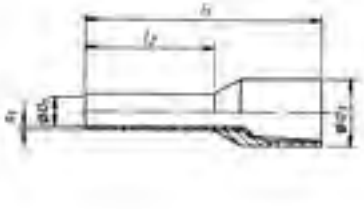

- For fine and superfine stranded conductors, e.g. to DIN EN 60228 Cl. 5 and 6
- Easy-Entry insulation for splice-free cable insertion

Characteristics
- To DIN 46228, part 4, (0.5 - 50 mm²)
- Halogen-free
- Heat resistant to 105° C

Material
- Copper (EN13600)
- Synthetic material: polypropylene

Surface
- Tin-plated to protect against corrosion

Technical instructions
- Tool: see page 150

Additional information
- * = not standardised
- ** = quantities in one bag

Nominal cross section mm²	Part No.	Colour	Hint	Dimension mm					Weight/ 1000 pcs. ~ kg	Packing unit/ pcs
				d1	d3	l1	l2	s1		
0.14	**166GR**		*	0.7	2.1	10.0	6	0.15	0.035	1000
	166GRL		*	0.7	2.1	12.0	8	0.15	0.040	1000
0.25	**167H**		*	0.8	2.3	10.0	6	0.15	0.045	1000
	167HL		*	0.8	2.3	12.0	8	0.15	0.050	1000
0.34	**168T**		*	0.8	2.5	10.0	6	0.15	0.045	1000
	168TL		*	0.8	2.5	12.0	8	0.15	0.050	1000
0.5	**1690K**			1.0	3.1	12.0	6	0.15	0.070	1000
	1690			1.0	3.1	14.0	8	0.15	0.070	1000
	GR1690		**	1.0	3.1	14.0	8	0.15	0.070	500
	1690H			1.0	3.1	16.0	10	0.15	0.085	1000


See next page

Insulated cable end-sleeves to DIN with Easy-Entry, colour code 1

Nominal cross section mm²	Part No.	Colour	Hint	Dimension mm					Weight/ 1000 pcs. ~ kg	Packing unit/ pcs
				d1	d3	l1	l2	s1		
0.75	**170WK**			1.2	3.3	12.0	6	0.15	0.080	1000
	170W			1.2	3.3	14.0	8	0.15	0.080	1000
	GR170W		**	1.2	3.3	14.0	8	0.15	0.080	500
	170WH			1.2	3.3	16.0	10	0.15	0.100	1000
	170WL			1.2	3.3	18.0	12	0.15	0.105	1000
1	**171GK**			1.4	3.5	12.0	6	0.15	0.090	1000
	171G			1.4	3.5	14.0	8	0.15	0.100	1000
	GR171G		**	1.4	3.5	14.0	8	0.15	0.100	500
	171GH			1.4	3.5	16.0	10	0.15	0.120	1000
	171GL			1.4	3.5	18.0	12	0.15	0.125	1000
1.5	**172RK**			1.7	4.0	12.0	6	0.15	0.105	1000
	172RO			1.7	4.0	14.0	8	0.15	0.110	1000
	GR172RO		**	1.7	4.0	14.0	8	0.15	0.110	500
	172RH			1.7	4.0	16.0	10	0.15	0.130	1000
	172RM			1.7	4.0	18.0	12	0.15	0.140	1000
	172RL			1.7	4.0	24.0	18	0.15	0.190	1000
2.5	**173B**			2.2	4.7	14.0	8	0.15	0.150	1000
	GR173B		**	2.2	4.7	14.0	8	0.15	0.150	500
	173BH			2.2	4.7	18.0	12	0.15	0.200	1000
	173BL			2.2	4.7	24.0	18	0.15	0.250	1000
4	**174GR**			2.8	5.4	17.0	10	0.20	0.210	100
	174GRH			2.8	5.4	20.0	12	0.20	0.250	100
	174GRL			2.8	5.4	26.0	18	0.20	0.320	100
6	**175S**			3.5	6.9	20.0	12	0.20	0.350	100
	175SL			3.5	6.9	26.0	18	0.20	0.460	100
10	**176E**			4.5	8.4	22.0	12	0.20	0.450	100
	176EL			4.5	8.4	28.0	18	0.20	0.650	100
16	**177GR**			5.8	9.6	24.0	12	0.20	0.650	100
	177GRL			5.8	9.6	28.0	18	0.20	0.800	100
25	**178BR**			7.3	12.0	30.0	16	0.20	1.600	50
	178BRL			7.3	12.0	36.0	22	0.20	2.000	50
35	**179B**			8.3	13.5	30.0	16	0.20	1.900	50
	179BL			8.3	13.5	39.0	25	0.20	2.500	50
50	**180O**			10.3	16.0	36.0	20	0.30	3.300	50
	180OL			10.3	16.0	40.0	25	0.30	4.000	50

Insulated cable end-sleeves to DIN with Easy-Entry, colour code 2



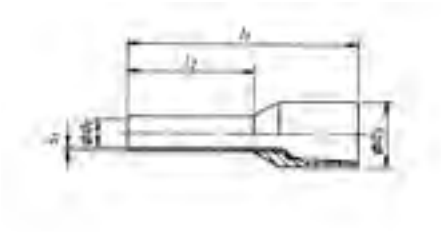

- For fine and superfine stranded conductors, e.g. to DIN EN 60228 Cl. 5 and 6
- Easy-Entry insulation for splice-free cable insertion

Characteristics
- To DIN 46228, part 4, (0.5 - 25 mm²)
- Halogen-free
- Heat resistant to 105° C

Material
- Copper (EN13600)
- Synthetic material: polypropylene

Surface
- Tin-plated to protect against corrosion

Technical instructions
- Tool: see page 150

Additional information
- * = not standardised
- ** = quantities in one bag

Nominal cross section mm²	Part No.	Colour	Hint	Dimension mm					Weight/ 1000 pcs. ~ kg	Packing unit/ pcs
				d1	d3	l1	l2	s1		
0.14	**1666**		*	0.7	2.1	10.0	6	0.15	0.035	1000
	1668		*	0.7	2.1	12.0	8	0.15	0.040	1000
0.25	**1676**		*	0.8	2.3	10.0	6	0.15	0.045	1000
	1678		*	0.8	2.3	12.0	8	0.15	0.050	1000
0.34	**1686**		*	0.8	2.5	10.0	6	0.15	0.045	1000
	1688		*	0.8	2.5	12.0	8	0.15	0.050	1000
0.5	**1696**			1.0	3.1	12.0	6	0.15	0.070	1000
	1698			1.0	3.1	14.0	8	0.15	0.080	1000
	GR1698		**	1.0	3.1	14.0	8	0.15	0.080	500
0.75	**1706**			1.2	3.3	12.0	6	0.15	0.080	1000
	1708			1.2	3.3	14.0	8	0.15	0.095	1000
	GR1708		**	1.2	3.3	14.0	8	0.15	0.095	500
1	**1716**			1.4	3.5	12.0	6	0.15	0.085	1000
	1718			1.4	3.5	14.0	8	0.15	0.100	1000
	GR1718		**	1.4	3.5	14.0	8	0.15	0.100	500
1.5	**1726**			1.7	4.0	12.0	6	0.15	0.100	1000
	1728			1.7	4.0	14.0	8	0.15	0.120	1000
	GR1728		**	1.7	4.0	14.0	8	0.15	0.120	500
	17210			1.7	4.0	16.0	10	0.15	0.130	1000
	17212			1.7	4.0	18.0	12	0.15	0.140	1000
	17218			1.7	4.0	24.0	18	0.15	0.220	1000
2.5	**1738**			2.2	4.7	14.0	8	0.15	0.140	1000
	GR1738		**	2.2	4.7	14.0	8	0.15	0.140	500
	17312			2.2	4.7	18.0	12	0.15	0.200	1000
	17318			2.2	4.7	24.0	18	0.15	0.280	1000
4	**17410**			2.8	5.4	17.0	10	0.20	0.260	100
	17412			2.8	5.4	20.0	12	0.20	0.300	100
	17418			2.8	5.4	26.0	18	0.20	0.390	100
6	**17512**			3.5	6.9	20.0	12	0.20	0.410	100
	17518			3.5	6.9	26.0	18	0.20	0.530	100


See next page


Insulated cable end-sleeves to DIN with Easy-Entry, colour code 2

Nominal cross section mm²	Part No.	Colour	Hint	Dimension mm					Weight/ 1000 pcs. ~ kg	Packing unit/ pcs
				d1	d3	l1	l2	s1		
10	**17612**			4.5	8.4	22.0	12	0.20	0.550	100
	17618			4.5	8.4	28.0	18	0.20	0.710	100
16	**17712**			5.8	9.6	24.0	12	0.20	0.660	100
	17718			5.8	9.6	28.0	18	0.20	0.850	100
25	**17816**			7.3	12.0	30.0	16	0.20	1.500	50
	17818			7.3	12.0	30.0	18	0.20	1.550	50
	17822			7.3	12.0	36.0	22	0.20	2.000	50

Insulated cable end-sleeves with lug







- **For fine and superfine stranded conductors, e.g. to DIN EN 60228 Cl. 5 and 6**
- **With identification system for max. 6 identification rings**

Characteristics

- Dimensions to DIN 46228, part 4
- Insulated, halogen-free
- Heat resistant to 105° C

Material

- Copper (EN13600)
- Synthetic material: polypropylene

Surface

- Tin-plated to protect against corrosion

Technical instructions

- Tool: see page 150

Nominal cross section mm²	Part No.	Colour	Dimension mm					Weight/ 1000 pcs. ~ kg	Packing unit/pcs
			d1	d3	l1	l2	s1		
0.5	**3698**		1.0	3.1	13.0	8	0.15	0.16	1000
0.75	**3708**		1.2	3.2	13.5	8	0.15	0.16	1000
1	**3718**		1.4	3.4	13.5	8	0.15	0.18	1000
1.5	**3728**		1.7	3.9	13.5	8	0.15	0.20	1000
2.5	**3738**		2.2	4.7	14.5	8	0.15	0.22	1000

Designation ring and insert fork



▸ For identifying the insulated cable end-sleeves with lugs

Characteristics


- Differing numbers / letters in the designation rings
- Packaging unit in booklet format, 200 of each symbol
- Insert fork A300 for inserting in the designation ring on the insulated cable end-sleeves with tabs


Additional information


- * = without letters “I“ and “O“

Part No.	Colour	Hint	Packing unit/pcs
Designation rings			
380/-			1 Heft
380/+			1 Heft
380/0 bis 9			1 Heft
380/A bis Z		*	1 Heft
Insert fork			
A300			1

Insulated cable end-sleeves for short circuit resistant conductors



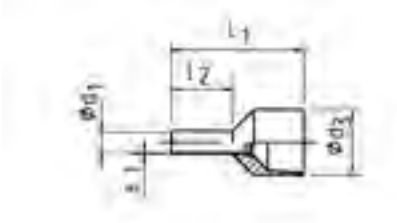



▸ For fine and superfine stranded conductors, e.g. to DIN EN 60228 Cl. 5 and 6
▸ For short circuit resistant conductors (e.g. NSGAFÖU)

Characteristics

- Insulated, halogen-free
- Heat resistant to 105° C
- Easy-Entry insulation for simple cable insertion
- Colour-coded cross-section assignment

Material

- Copper (EN13600)
- Synthetic material: polypropylene

Surface

- Tin-plated to protect against corrosion


Technical instructions

- Tool: see page 150

Nominal cross section mm²	Part No.	Colour	Dimension mm					Weight/ 1000 pcs. ~ kg	Packing unit/pcs
			d1	d3	l1	l2	s1		
1.5	**4328**	■	1.7	8.1	17.5	8	0.15	0.22	100
	43210	■	1.7	8.1	19.5	10	0.15	0.27	100
2.5	**4338**	■	2.2	8.6	17.5	8	0.15	0.24	100
	43312	■	2.2	8.6	21.5	12	0.15	0.36	100
4	**43410**	■	2.9	10.5	19.5	10	0.20	0.36	100
6	**43512**	■	3.5	11.0	23.0	12	0.20	0.49	100
10	**43612**	■	4.5	12.5	24.0	12	0.20	0.65	100
16	**43712**	■	5.8	14.5	25.5	12	0.20	0.93	100

Insulated twin cable end-sleeves



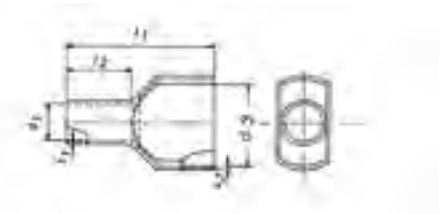

- For fine and superfine stranded conductors, e.g. to DIN EN 60228 Cl. 5 and 6
- For looping of clamps
- Colour-coding following DIN 46228 part 4 (0.5 - 16 mm²)

Characteristics

- Insulated, halogen-free
- Heat resistant to 105° C

Material

- Copper (EN13600)
- Synthetic material: polypropylene

Surface


- Tin-plated to protect against corrosion


Technical instructions

- Tool: see page 153

Nominal cross section mm²	Part No.	Colour	Dimension mm						Weight/ 1000 pcs. ~ kg	Packing unit/ pcs
			d1	d3	l1	l2	s1	s2		
2 x 0.25	**8678**		1.20	2.3/3.9	15.0	8	0.15	0.25	0.110	1000
2 x 0.34	**8688**		1.20	2.3/3.9	15.0	8	0.15	0.25	0.110	1000
2 x 0.5	**8698**		1.40	3.0/5.2	15.0	8	0.15	0.25	0.110	1000
2 x 0.75	**8708**		1.70	3.3/5.5	15.0	8	0.15	0.25	0.130	1000
	87010		1.70	3.3/5.5	17.0	10	0.15	0.25	0.150	1000
2 x 1	**8718**		2.00	4.0/6.0	15.0	8	0.15	0.30	0.170	1000
	87110		2.00	4.0/6.0	17.0	10	0.15	0.30	0.170	1000
2 x 1.5	**8728**		2.20	4.2/7.2	16.0	8	0.15	0.30	0.183	1000
	87212		2.20	4.2/7.2	20.0	12	0.15	0.30	0.237	1000
2 x 2.5	**87310**		2.80	4.8/8.4	18.5	10	0.20	0.30	0.312	100
	87313		2.80	4.8/8.4	21.5	13	0.20	0.30	0.340	100
2 x 4	**87412**		3.70	5.7/9.6	23.0	12	0.20	0.40	0.467	100
2 x 6	**87514**		4.80	7.7/10.8	26.0	14	0.20	0.40	0.730	100
2 x 10	**87614**		6.40	8.0/13.8	26.0	14	0.20	0.40	0.884	100
2 x 16	**87714**		8.20	10.4/19.2	30.0	14	0.20	0.40	1.273	100

Insulated cable end-sleeves, strip form











- For fine and superfine stranded conductors, e.g. to DIN EN 60228 Cl. 5 and 6
- Crimped cable end-sleeves for simple mounting to cable clamps

Characteristics

- Colour-coding and tube dimension to DIN 46228, part 4
- Insulated, halogen-free
- Heat resistant to 105° C

Material

- Copper (EN13600)
- Synthetic material: polypropylene

Surface

- Tin-plated to protect against corrosion

Nominal cross section mm²	Part No.	Colour	Dimension mm		Weight/ 1000 pcs. ~ kg	Packing unit/pcs
			l1	l2		
0.5	**ST9698**		14	8	0.100	500
0.75	**ST9708**		14	8	0.100	500
1	**ST9718**		14	8	0.100	500
1.5	**ST9728**		14	8	0.100	500
2.5	**ST9738**		14	8	0.100	500

Insulated cable end-sleeves, small coil









- For fine and superfine stranded conductors, e.g. to DIN EN 60228 Cl. 5 and 6
- Easy-Entry insulation for optimal cable insertion
- Automatic processing due to coil shape

Characteristics

- Colour-coding and tube dimension to DIN 46228, part 4
- Insulated, halogen-free
- Heat resistant to 105° C

Material

- Copper (EN13600)
- Synthetic material: polypropylene


Surface

- Tin-plated to protect against corrosion

Nominal cross section mm²	Part No.	Colour	Dimension mm		Weight/ 1000 pcs. ~ kg	Packing unit/pcs
			l1	l2		
0.5	**BAK9698**		14	8	0.136	1100
0.75	**BAK9708**		14	8	0.154	1100
1	**BAK9718**		14	8	0.187	800
1.5	**BAK9728**		14	8	0.200	800
2.5	**BAK9738**		14	8	0.300	500

Insulated cable end-sleeves, large coil





- For fine and superfine stranded conductors, e.g. to DIN EN 60228 Cl. 5 and 6
- Easy-Entry insulation for splice-free cable insertion
- Automatic processing due to coil shape

Characteristics

- Colour-coding and tube dimension to DIN 46228, part 4
- Insulated, halogen-free
- Heat resistant to 105° C


Material

- Copper (EN13600)
- Synthetic material: polypropylene

Surface

- Tin-plated to protect against corrosion

Nominal cross section mm²	Part No.	Colour	Dimension mm		Weight/ 1000 pcs. ~ kg	Packing unit/pcs
			l1	l2		
0.5	**BAG9698**		14	8	0.120	10000
0.75	**BAG9708**		14	8	0.130	10000
1	**BAG9718**		14	8	0.160	7500
1.5	**BAG9728**		14	8	0.173	7500
2.5	**BAG9738**		14	8	0.230	5000




Tool application chart

Cable end-sleeves to DIN 46228, part 1 and DIN 46228, part 4
Insulated cable end-sleeves for short circuit resistant conductors

Part 1 of 2

Tool type	Crimping range corresponds to nominal cross-section mm²	Crimping Tool		Catalogue page		Crimp profile
		Part No.	Crimping head / adapter	Crimping Tool	Crimping die	
Mechanical crimping tools	0.08-10	K303		217		
	0.08-16	K304K		217		
		K306K		217		
	0.14-2.5	K1		212		
		K48		212		
	0.14-6	K32		213		
		K37		214		
	0.14-10	K3014K		218		
	0.25-6	K38ERGO		216		
	0.5-2.5	K4		210		
	0.5-6	K36		213		
		K382		215		
	0.5-16	K3		211		
	1.5-6	K46		210		
	6-16	K34		214		
	10-25	K39		215		
	10-35	K35		211		
	10-50	K271		218		
		K28		219		
	50-95	K272		219		
		K29		220		
Mechanical, electrical, pneumatic crimping tools with interchangeable die / head	0.14-10	K507		243		
		KP1	+KP303	240		
		KP1L	+KP303	240		
	0.14-50	K50		244	326	
		EK50ML		254	326	
	1.5-6	KP1	+KP351	240		
		KP1L	+KP351	240		
	2.5-16	KP1	+KP304	240		
		KP1L	+KP304	240		
	10-16	KP1	+KP352	240		
		KP1L	+KP352	240		
	10-50	K354		246	332	
	10-95	K18		248	340	
	10-240	K22		250	346	




Tool application chart

Cable end-sleeves to DIN 46228, part 1 and DIN 46228, part 4
Insulated cable end-sleeves for short circuit resistant conductors

Part 2 of 2


Tool type	Crimping range corresponds to nominal cross-section mm²	Crimping Tool		Catalogue page		Crimp profile
		Part No.	Crimping head / adapter	Crimping Tool	Crimping die	
Hand hydraulic crimping tools	10-95	HK6018		292	340	
		HK60UNV	+UA18	473	340	
	10-240	HK6022		294	346	
		HK60UNV	+UA22	473	351	
	25-240	HK12030		298	351	
		HK12042		300	351	
		HK120U		302		
Battery powered crimping tools	0.14-10	EKP1ML	+KP303	260		
	0.14-50	EK1550ML		258		
	1.5-6	EKP1ML	+KP351	260		
	2.5-16	EKP1ML	+KP304	260		
	10-16	EKP1ML	+KP352	260		
	10-50	EK354ML		262	332	
		EK354		266	332	
		EK505		268	326	
	10-95	EK5018		270	340	
		EK60UNV	+UA18	476	340	
		EKM60UNV	+UA18	475	340	
	10-240	EK6022		274	346	
		EKM6022		272	346	
		EK60UNV	+UA22	476	346	
		EKM60UNV	+UA22	475	346	
	25-240	EK12032		280	351	
		EK12042		282	351	
		EK120U		284	351	
		EK135FT	+UA15T	286	351	
		EK120UNV	+UA12T	284	351	
Hydraulic crimping systems	10-95	THK18		306	340	
	10-150	THK22		308	346	
	25-240	HK252		320	357	
Hydraulic crimping heads	10-95	PK18		306	340	
		PK60UNV	+UA18	474	340	
	10-240	PK22		308	346	
		PK60UNV	+UA22	474	346	
	25-240	PK12042		312	351	
		PK120U		314	351	
		PK252		316	357	



Tool application chart

Cable end-sleeves acc. to DIN 46228, part 2

Tool type	Crimping range corresponds to nominal cross-section mm²	Crimping Tool		Catalogue page		Crimp profile
		Part No.	Crimping head / adapter	Crimping Tool	Crimping die	
Mechanical, electrical, pneumatic crimping tools with interchangeable die / head	**0.5x2.5**	KP1	+KP66	240		♡
		KP1L	+KP66	240		♡
		KPM15	+KP66			♡
Battery powered crimping tools	**0.5x2.5**	EKP1ML	+KP66	260		♡



Tool application chart

Insulated twin cable end-sleeves

Tool type	Crimping range corresponds to nominal cross-section mm²	Crimping Tool		Catalogue page		Crimp profile
		Part No.	Crimping head / adapter	Crimping Tool	Crimping die	
Mechanical crimping tools	2x0.5 - 2x2.5	K32		213		
		K382		215		
		K38ERGO		216		
	2x0.5 - 2x4	K303		217		
		K36		213		
	2x0.5 - 2x6	K306K		217		
		K304K		217		
		K3014K		218		
	2x4 - 2x6	K34		214		
	2x4 - 2x16	K271		218		
		K28		219		
Mechanical, electrical, pneumatic crimping tools with interchangeable die / head	2x0.5 - 2x4	KP1	+KP303	240		
		KP1L	+KP303	240		
	2x4 - 2x6	KP1		240		
	2x4 - 2x16	K354		246	332	
		K18		248	340	
		K22		250	346	
Hand hydraulic crimping tools	2x4 - 2x16	HK6018		292	340	
		HK60UNV	+UA18	473	340	
		HK6022		294	346	
		HK60UNV	+UA22	473	346	
Battery powered crimping tools	2x0.5 - 2x4	EKP1ML	+KP303	260		
	2x4 - 2x6	EKP1ML	+KP304	260		
	2x4 - 2x16	EK354ML		262	346	
		EK354		266	346	
		EK505		268	336	
		EK5018		270	340	
		EK60UNV	+UA18	476	340	
		EKM60UNV	+UA18	475	340	
		EK6022		274	346	
		EKM6022		272	346	
		EK60UNV	+UA22	476	346	
		EKM60UNV	+UA22	475	346	
Hydraulic crimping systems	2x4-2x16	THK18		306	340	
		THK22		308	346	
Hydraulic crimping heads	2x4-2x16	PK18		306	340	
		PK60UNV	+UA18	474	340	
		PK22		308	346	
		PK60UNV	+ UA22	474	346	

PRECISION - CABLE CONNECTIONS, INSULATED AND NON-INSULATED

Electrical power is the product of voltage and current strength. An optimum connection guarantees to transfer this power without thermal losses. This requires materials, design and tool to be correctly processed and matched to one another. If you want optimum power at all times, you can rely on Klauke's best work.



In brief

- High requirements in detail
- Solutions available for small cross-sections
- Broad range of versions
- Optimum connection without thermal loss
- Grooved profile for improved conductor hold

Easy insulation

All insulation is produced in the Easy-Entry version, for simple cable insertion without splicing. For small ranges with big effect.

- Cable connections with nominal cross-sections from 0.1 mm^2 to 6 mm^2
- Resistant to temperatures of up to 105 °C
- Flame retardant polyamide insulation: No toxic vapours in case of fire
- Halogen-free
- Insensitive to corrosion due to tinning ander the insulation
- Simple processing thanks to Easy-Entry
- Grooved profile on the inside for improved hold

More hold with grooved profile

The detail is key. Not only are there numerous models of Klauke tabs and receptacles, they are also equipped with special features. No matter whether as a standardised connector or with grooved profile for improved hold - Klauke will always provide the right feature for your requirements.

- Broad range of models
- All-purpose
- Also as standardised connectors with various tab widths
- Available with strain relief
- Fully-insulated receptacles
- Grooved profile and additional copper ring in the insulation area for higher stresses






Quality in detail

In a machine, everything has to pull together. For the machine to run, every component has to function. Even when it comes to small parts, better to go for high quality products with a high capacity, for our receptacles with snap-in point for example. The snap-in point guarantees a reliable connection even after repeated insertions.

- High conductivity and reliable insulation thanks to high-quality materials
- Improved spring properties by the use of bronze

Insulated solderless terminals



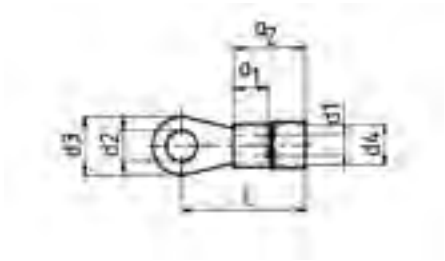

- For fine and superfine stranded conductors, e.g. to DIN EN 60228 Cl. 5 and 6
- To DIN 46237
- High-quality brazing process in the crimp area

Characteristics
- Insulated, halogen-free
- Heat resistant to 105° C
- Easy-Entry insulation for simple cable insertion
- Cross-section-dependent colour-coding

Material
- Copper (ETP)
- Insulation sleeve: PA

Surface
- Tin-plated to protect against corrosion


Technical instructions
- Tool: see page 175

Additional information
- * = not standardised
- 0.1 - 0.4 mm² not CSA-tested

Nominal cross section mm²	Nominal size to DIN	Part No.	Colour	Hint	Dimension mm								Weight/ pcs. ~kg	Packing unit/pcs
					a1	a2	d1	d2	d3	d4	l	s		
0.1 - 0.4	--	**6192**		*	--	--	1.0	2.3	5.0	2.2	14.0	0.5	0.020	100
	--	**61925**		*	--	--	1.0	2.6	5.0	2.2	14.0	0.5	0.020	100
	--	**6193**		*	--	--	1.0	3.3	5.0	2.2	14.0	0.5	0.020	100
	--	**61935**		*	--	--	1.0	3.8	6.5	2.2	16.0	0.5	0.025	100
	--	**6194**		*	--	--	1.0	4.4	7.0	2.2	16.0	0.5	0.025	100
	--	**6195**		*	--	--	1.0	5.4	8.0	2.2	15.0	0.5	0.025	100
0.5 - 1	2.5 - 1	**62025**			5	10.5	1.6	2.8	6.0	4.5	16.5	0.8	0.060	100
	3.0 - 1	**6203**			5	10.5	1.6	3.2	6.0	4.5	16.5	0.8	0.060	100
	3.5 - 1	**62035**			5	10.5	1.6	3.7	6.0	4.5	16.5	0.8	0.550	100
	4.0 - 1	**6204**			5	10.5	1.6	4.3	8.0	4.5	17.5	0.8	0.070	100
	5.0 - 1	**6205**			5	10.5	1.6	5.3	10.0	4.5	18.5	0.8	0.090	100
	--	**6206**		*	5	10.5	1.6	6.5	11.0	4.5	20.5	0.8	0.080	100
	--	**6208**		*	5	10.5	1.6	8.4	14.0	4.5	22.5	0.8	0.130	100
	--	**62010**		*	5	10.5	1.6	10.5	18.0	4.5	24.5	0.8	0.130	100
1.5 - 2.5	3.0 - 2.5	**6303**			5	11.5	2.3	3.2	6.0	5.1	17.5	0.8	0.065	100
	3.5 - 2.5	**63035**			5	11.5	2.3	3.7	6.0	5.1	17.5	0.8	0.065	100
	4.0 - 2.5	**6304**			5	11.5	2.3	4.3	8.0	5.1	18.5	0.8	0.080	100
	5.0 - 2.5	**6305**			5	11.5	2.3	5.3	10.0	5.1	20.5	0.8	0.090	100
	6.0 - 2.5	**6306**			5	11.5	2.3	6.5	11.0	5.1	22.5	0.8	0.110	100
	8.0 - 2.5	**6308**			5	11.5	2.3	8.4	14.0	5.1	23.5	0.8	0.130	100
	--	**63010**		*	5	11.5	2.3	10.5	18.0	5.1	25.5	0.8	0.160	100
4 - 6	4.0 - 6	**6504**			6	12.5	3.6	4.3	8.0	6.5	20.5	1.0	0.140	100
	5.0 - 6	**6505**			6	12.5	3.6	5.3	10.0	6.5	21.5	1.0	0.160	100
	6.0 - 6	**6506**			6	12.5	3.6	6.5	11.0	6.5	22.5	1.0	0.170	100
	8.0 - 6	**6508**			6	12.5	3.6	8.4	14.0	6.5	25.5	1.0	0.220	100
	10.0 - 6	**65010**			6	12.5	3.6	10.5	18.0	6.5	27.5	1.0	0.290	100

Insulated solderless terminals, fork type



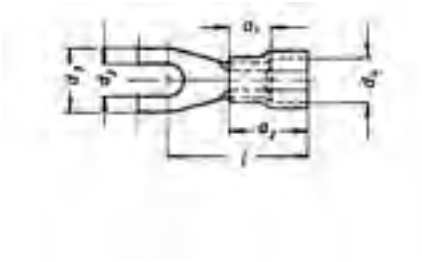

- For fine and superfine stranded conductors, e.g. to DIN EN 60228 Cl. 5 and 6
- Dimensions in the crimp area to DIN 46237
- High-quality brazing process in the crimp area
- Simple fork-type mounting

Characteristics

- Insulated, halogen-free
- Heat resistant to 105° C
- Easy-Entry insulation for simple cable insertion
- Cross-section-dependent colour-coding

Material

- Copper (ETP)
- Insulation sleeve: PA

Surface

- Tin-plated to protect against corrosion

Technical instructions

- Tool: see page 175


Additional information

- 0.1 - 0.4 mm² not CSA-tested
- * = not standardised

Nominal cross section mm²	Nominal size to DIN	Part No.	Colour	Hint	Dimension mm								Weight/ pcs. ~kg	Packing unit/pcs
					a1	a2	d1	d2	d3	d4	l	s		
0.1 - 0.4	--	**619C3**		*	--	--	--	3.2	5.0	--	14.0	0.5	0.020	100
0.5 - 1	3.0 - 1	**620C3**			5	10.5	1.6	3.2	6.0	4.5	16.5	0.8	0.060	100
	3.5 - 1	**620C35**			5	10.5	1.6	3.7	6.8	4.5	17.5	0.8	0.060	100
	4.0 - 1	**620C4**			5	10.5	1.6	4.3	6.8	4.5	17.5	0.8	0.070	100
	5.0 - 1	**620C5**			5	10.5	1.6	5.3	10.0	4.5	18.5	0.8	0.090	100
	- -	**620C6**		*	5	10.5	1.6	6.5	11.0	4.5	20.5	0.8	0.080	100
1.5 - 2.5	3.0 - 2.5	**630C3**			5	11.5	2.3	3.2	6.0	5.1	17.5	0.8	0.060	100
	3.5 - 2.5	**630C35**			5	11.5	2.3	3.7	6.8	5.1	18.5	0.8	0.065	100
	4.0 - 2.5	**630C4**			5	11.5	2.3	4.3	6.8	5.1	18.5	0.8	0.080	100
	5.0 - 2.5	**630C5**			5	11.5	2.3	5.3	10.0	5.1	20.5	0.8	0.090	100
	6.0 - 2.5	**630C6**			5	11.5	2.3	6.5	11.0	5.1	22.5	0.8	0.110	100
4 - 6	4.0 - 6	**650C4**			6	12.5	3.6	4.3	8.0	6.5	20.5	1.0	0.140	100
	5.0 - 6	**650C5**			6	12.5	3.6	5.3	10.0	6.5	21.5	1.0	0.160	100
	6.0 - 6	**650C6**			6	12.5	3.6	6.5	11.0	6.5	22.5	1.0	0.170	100
	8.0 - 6	**650C8**			6	12.5	3.6	8.4	14.0	6.5	25.5	1.0	0.220	100
	10.0 - 6	**650C10**			6	12.5	3.6	10.5	18.0	6.5	27.5	1.0	0.280	100

Insulated pin terminals



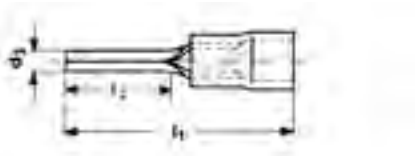

- For fine and superfine stranded conductors, e.g. to DIN EN 60228 Cl. 5 and 6
- To DIN 46231
- High-quality brazing process in the crimp area

Characteristics

- Insulated, halogen-free
- Cross-section-dependent colour-coding
- Heat resistant to 105° C
- Easy-Entry insulation for simple cable insertion

Material

- Copper (ETP)
- Insulation sleeve: PA

Surface

- Tin-plated to protect against corrosion

Technical instructions

- Tool: see page 175


Additional information

- 0.1 - 0.4 mm² not CSA-tested
- * = not standardised

Nominal cross section mm²	Nominal size to DIN	Part No.	Colour	Hint	Dimension mm						Weight/ pcs. ~kg	Packing unit/pcs
					a1	a2	d3	d4	l1	l2		
0.1 - 0.4	--	**704**		*	--	--	1.4	--	18.0	9.0	0.020	100
0.5 - 1	1	**705**			5	10.5	1.9	4.5	22.0	10.0	0.065	100
		705K		*	5	10.5	1.9	4.5	18.0	6.0	0.060	100
1.5 - 2.5	2.5	**710**			5	11.5	1.9	5.1	23.0	10.0	0.065	100
		710K		*	5	11.5	1.9	5.1	19.5	6.5	0.060	100
		710L		*	5	11.5	1.9	5.1	27.5	16.0	0.100	100
4 - 6	6	**715**			6	12.5	2.7	6.5	26.0	11.0	0.160	100

Insulated pin receptacles



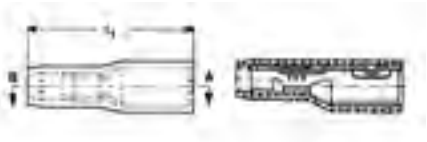

- For fine and superfine stranded conductors, e.g. to DIN EN 60228 Cl. 5 and 6
- High quality bronze material provides optimum spring characteristic and improved contact strength

Characteristics
- Cross-section-dependent colour-coding
- Heat resistant to 70° C

Material
- Bronze (CuSnZn)
- Insulation sleeve: PVC

Surface
- Tin-plated to protect against corrosion


Technical instructions
- Tool: see page 175

Additional information
- 1.5 - 2.5 mm² and 4 - 6 mm² not CSA-tested

Nominal cross section mm²	Part No.	Colour	Dimension mm		Weight/pcs. ~kg	Packing unit/pcs
			Pin dia.	l1		
0.5 - 1	**920**		4	22	0.060	100
1.5 - 2.5	**930**		5	22	0.120	100
4 - 6	**950**		5	22	0.125	100

Insulated pin receptacles





- For fine and superfine stranded conductors, e.g. to DIN EN 60228 Cl. 5 and 6

Characteristics
- Cross-section-dependent colour-coding
- Heat resistant to 70° C

Material
- Brass (CuZn)
- Insulation sleeve: PVC

Surface
- Tin-plated to protect against corrosion

Technical instructions
- Tool: see page 175

Additional information
- 1.5 - 2.5 mm² and 4 - 6 mm² not CSA-tested

Nominal cross section mm²	Part No.	Colour	Dimension mm			Weight/pcs. ~kg	Packing unit/pcs
			Pin dia.	l1	l2		
0.5 - 1	**1020**		4	22	9	0.060	100
1.5 - 2.5	**1030**		5	22	9	0.075	100
4 - 6	**1050**		5	22	9	0.110	100

Insulated pin receptacles, fully insulated



- For fine and superfine stranded conductors, e.g. to DIN EN 60228 Cl. 5 and 6
- High quality bronze material provides optimum spring characteristic and improved contact strength
- Fast processing as no additional insulation of the crimped connection is required

Characteristics
- Insulated, halogen-free
- Cross-section-dependent colour-coding
- Heat resistant to 105° C

Material
- Bronze (CuSnZn)
- Insulation sleeve: PA

Surface
- Tin-plated to protect against corrosion

Technical instructions
- Tool: see page 175

Additional information
- 4 - 6 mm² not CSA-tested

Nominal cross section mm²	Part No.	Colour	Dimension mm			Weight/pcs. ~kg	Packing unit/pcs
			Pin dia.	l1	s		
0.5 - 1	**920V**		4	24	0.38	0.065	100
4 - 6	**950V**		5	27	0.40	0.150	100

Insulated pin receptacles, fully insulated



- For fine and superfine stranded conductors, e.g. to DIN EN 60228 Cl. 5 and 6
- High quality bronze material provides optimum spring characteristic and improved contact strength
- Fast processing as no additional insulation of the crimped connection is required

Characteristics
- Insulated, halogen-free
- Cross-section-dependent colour-coding
- Heat resistant to 105° C

Material
- Bronze (CuSnZn)
- Insulation sleeve: PA

Surface
- Tin-plated to protect against corrosion


Technical instructions
- Tool: see page 175

Additional information
- 1.5 - 2.5 mm² and 4 - 6 mm² not CSA-tested

Nominal cross section mm²	Part No.	Colour	Dimension mm			Weight/pcs. ~kg	Packing unit/pcs
			Pin dia.	l1	l2		
0.5 - 1	**1020V**		4	25	11	0.065	100
1.5 - 2.5	**1030V**		5	25	11	0.080	100
4 - 6	**1050V**		5	27	13	0.120	100

Insulated receptacles, tinned brass



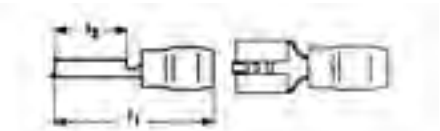









▸ **For fine and superfine stranded conductors, e.g. to DIN EN 60228 Cl. 5 and 6**

Characteristics

- To DIN 46245, part 1 – 3 and similar versions
- Insulated, halogen-free
- Cross-section-dependent colour-coding
- Temperature resistance: PVC to 70° C, PA to 105° C

Material

- Brass (CuZn)
- Insulation sleeve: PVC/PA

Surface

- Tin-plated to protect against corrosion


Technical instructions

- Tool: see page 175

Nominal cross section mm²	Nominal size to DIN	Part No.	Colour	Tab Thickn.	Tab Width	Dimension mm		Insulation material	Weight/pcs. ~kg	Packing unit/pcs
						l1	l2			
0.5 - 1		**8201**		0.5	2.8	17.5	8.0	PVC	0.035	100
		8201A		0.8	2.8	17.5	8.0	PVC	0.045	100
		8202		0.5	4.8	18.0	6.0	PVC	0.065	100
	4.8 - 1	**8203**		0.8	4.8	18.0	6.0	PVC	0.065	100
	6.3 - 1	**720**		0.8	6.3	22.0	7.5	PVC	0.090	100
		7208		0.8	7.7	25.0	9.5	PVC	0.110	100
1.5 - 2.5		**8301**		0.5	2.8	18.0	8.0	PA	0.050	100
		8301A		0.8	2.8	18.0	8.0	PA	0.060	100
		8302		0.5	4.8	18.0	6.0	PVC	0.070	100
	4.8 - 2.5	**8303**		0.8	4.8	18.0	6.0	PVC	0.070	100
	6.3 - 2.5	**730**		0.8	6.3	21.0	7.4	PVC	0.090	100
		7308		0.8	7.7	25.0	9.5	PVC	0.115	100
4 - 6		**8503**		0.8	4.8	23.0	7.5	PA	0.138	100
	6.3 - 6	**750**		0.8	6.3	21.0	7.5	PVC	0.100	100
		7509		1.2	9.5	26.5	12.0	PVC	0.150	100

Insulated receptacles, tinned bronze



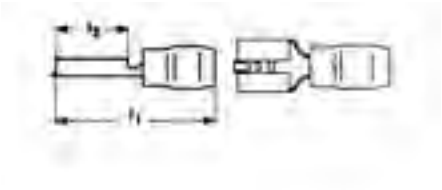

- For fine and superfine stranded conductors, e.g. to DIN EN 60228 Cl. 5 and 6
- High quality bronze material provides optimum spring characteristic and improved contact strength

Characteristics
- To DIN 46245, part 3
- Cross-section-dependent colour-coding
- Heat resistant to 70° C

Material
- Bronze (CuSnZn)
- Insulation sleeve: PVC


Surface
- Tin-plated to protect against corrosion

Technical instructions
- Tool: see page 175

Nominal cross section mm²	Nominal size to DIN	Part No.	Colour	Tab Thickn.	Tab Width	Dimension mm		Insulation material	Weight/pcs. ~kg	Packing unit/ pcs
						l1	l2			
0.5 - 1	6.3 - 1	**720BZ**		0.8	6.3	22	7.5	PVC	0.09	100
1.5 - 2.5	6.3 - 2.5	**730BZ**		0.8	6.3	21	7.4	PVC	0.09	100
4 - 6	6.3 - 6	**750BZ**		0.8	6.3	21	7.5	PVC	0.10	100

Insulated receptacles, multiple type



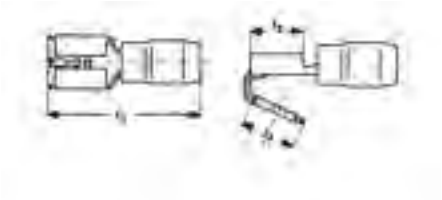

- For fine and superfine stranded conductors, e.g. to DIN EN 60228 Cl. 5 and 6

Characteristics
- Cross-section-dependent colour-coding
- Heat resistant to 70° C

Material
- Brass (CuZn)
- Insulation sleeve: PVC


Surface
- Tin-plated to protect against corrosion

Technical instructions
- Tool: see page 175

Nominal cross section mm²	Part No.	Colour	Tab Thickn.	Tab Width	Dimension mm			Insulation material	Weight/pcs. ~kg	Packing unit/ pcs
					l1	l2	l3			
0.5 - 1	**720AZ**		0.8	6.3	22	7.5	8	PVC	0.11	100
1.5 - 2.5	**730AZ**		0.8	6.3	22	7.5	8	PVC	0.11	100
4 - 6	**750AZ**		0.8	6.3	25	8.0	8	PVC	0.18	100

Insulated receptacles, fully insulated



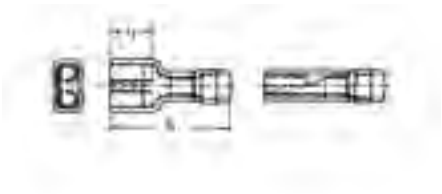

- For fine and superfine stranded conductors, e.g. to DIN EN 60228 Cl. 5 and 6
- Fast processing as no additional insulation of the crimped connection is required

Characteristics

- Insulated, halogen-free
- Cross-section-dependent colour-coding
- Temperature resistance: PVC to 70° C, PA to 105° C

Material

- Brass (CuZn)
- Insulation sleeve: PVC/PA

Surface

- Tin-plated to protect against corrosion


Technical instructions

- Tool: see page 175

Nominal cross section mm²	Part No.	Colour	Tab Thickn.	Tab Width	Dimension mm		Insulation material	Weight/pcs. ~kg	Packing unit/pcs
					l1	l2			
0.5 - 1	**8201V**		0.5	2.8	19.0	5.5	PA	0.07	100
	8201AV		0.8	2.8	19.0	5.5	PA	0.07	100
	8202V		0.5	4.8	20.0	7.0	PVC	0.10	100
	8203V		0.8	4.8	20.0	7.0	PVC	0.10	100
	720V		0.8	6.3	21.0	7.5	PVC	0.08	100
1.5 - 2.5	**8301V**		0.5	2.8	20.0	8.0	PVC	0.14	100
	8301AV		0.8	2.8	20.0	8.0	PVC	0.14	100
	8302V		0.5	4.8	20.5	7.0	PVC	0.11	100
	8303V		0.8	4.8	20.5	7.0	PVC	0.11	100
	730V		0.8	6.3	21.0	7.5	PVC	0.15	100
4 - 6	**8502V**		0.5	4.8	20.5	9.5	PVC	0.15	100
	8503V		0.8	4.8	20.5	9.5	PVC	0.15	100
	750V		0.8	6.3	25.5	11.5	PVC	0.16	100

Insulated tabs



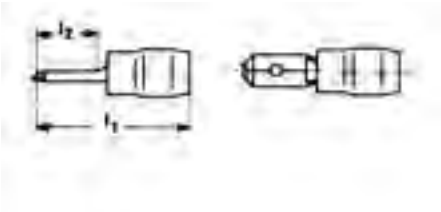

- For fine and superfine stranded conductors, e.g. to DIN EN 60228 Cl. 5 and 6

Characteristics
- Insulated, halogen-free
- Cross-section-dependent colour-coding
- Temperature resistance: PVC to 70° C, PA to 105° C

Material
- Brass (CuZn)
- Insulation sleeve: PVC/PA


Surface
- Tin-plated to protect against corrosion

Technical instructions
- Tool: see page 175

Nominal cross section mm²	Part No.	Colour	Tab Thickn.	Tab Width	Dimension mm		Insulation material	Weight/pcs. ~kg	Packing unit/pcs
					l1	l2			
0.5 - 1	**8201C**	red	0.5	2.8	22.0	11.5	PA	0.040	100
	8201B	red	0.8	2.8	14.6	5.5	PVC	0.060	100
	8202B	red	0.5	4.8	22.0	11.5	PA	0.070	100
	8203B	red	0.8	4.8	22.0	11.5	PA	0.070	100
	820	red	0.8	6.3	22.0	8.0	PVC	0.060	100
1.5 - 2.5	**8302B**	blue	0.5	4.8	22.0	11.5	PA	0.070	100
	8303B	blue	0.8	4.8	22.0	11.5	PA	0.070	100
	830	blue	0.8	6.3	22.0	8.0	PVC	0.065	100
4 - 6	**8502B**	yellow	0.5	4.8	24.5	10.5	PA	0.120	100
	8503B	yellow	0.8	4.8	24.5	10.5	PA	0.120	100
	850	yellow	0.8	6.3	22.0	8.0	PVC	0.110	100

Insulated end-splices



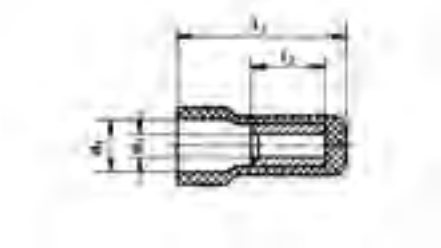

- For fine and superfine stranded conductors, e.g. to DIN EN 60228 Cl. 5 and 6
- Safe sealing of open conductors

Characteristics
- Insulated, halogen-free
- Cross-section-dependent colour-coding
- Heat resistant to 105° C

Material
- Copper (ETP)
- Insulation sleeve: PA


Surface
- Tin-plated to protect against corrosion

Technical instructions
- Tool: see page 175

Nominal cross section mm²	Part No.	Colour	Dimension mm				Weight/pcs. ~kg	Packing unit/pcs
			d1	d2	l1	l2		
1.5 - 2.5	**1130**	blue	2.3	5.2	16	7	0.05	100
4 - 6	**1150**	yellow	3.6	7.0	18	7	0.14	100

Insulated butt connectors





- For fine and superfine stranded conductors, e.g. to DIN EN 60228 Cl. 5 and 6
- Simple and safe connecting owed to butt mark
- Fast processing as no additional insulation of the crimped connection is required

Characteristics
- Insulated, halogen-free
- Cross-section-dependent colour-coding
- Heat resistant to 105° C

Material
- Copper (ETP)
- Insulation sleeve: PA

Surface
- Tin-plated to protect against corrosion


Technical instructions
- Tool: see page 175

Additional information
- 0.1 - 0.4 mm² not CSA-tested

Nominal cross section mm²	Part No.	Colour	Dimension mm			Weight/pcs. ~kg	Packing unit/pcs
			d1	l1	l2		
0.1 - 0.4	**669**		1.2	20	12	0.030	100
0.5 - 1	**670**		1.6	25	15	0.090	100
1.5 - 2.5	**680**		2.3	25	15	0.115	100
4 - 6	**700**		3.6	27	15	0.250	100

Insulated butt connectors with heat shrink insulation





- For fine and superfine stranded conductors, e.g. to DIN EN 60228 Cl. 5 and 6
- Simple and safe processing due to butt mark
- Fast processing as no additional insulation of the crimped connection is required

Characteristics
- Insulated, halogen-free
- Cross-section-dependent colour-coding
- Special crimping tool required
- Heat resistant to 105° C

Material
- Copper (ETP)
- Insulation sleeve: PE


Surface
- Tin-plated to protect against corrosion

Technical instructions
- Tool: see page 175

Nominal cross section mm²	Part No.	Colour	Dimension mm			Weight/pcs. ~kg	Packing unit/pcs
			d1	l1	l2		
0.5 - 1	**670WS**		1.6	36	15	0.12	100
1.5 - 2.5	**680WS**		2.3	36	15	0.15	100
4 - 6	**700WS**		3.4	41	15	0.25	100

Insulated parallel connectors



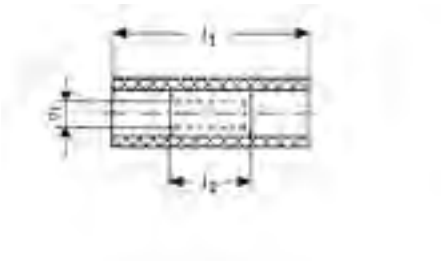

- For fine and superfine stranded conductors, e.g. to DIN EN 60228 Cl. 5 and 6
- Fast processing as no additional insulation of the crimped connection is required

Characteristics
- Insulated, halogen-free
- Cross-section-dependent colour-coding
- Heat resistant to 105° C

Material
- Copper (ETP)
- Insulation sleeve: PA

Surface
- Tin-plated to protect against corrosion


Technical instructions
- Tool: see page 175

Additional information
- 0.1 - 0.4 mm² not CSA-tested

Nominal cross section mm²	Part No.	Colour	Dimension mm			Weight/pcs. ~kg	Packing unit/pcs
			d1	l1	l2		
0.1 - 0.4	**769**		1.2	13	5	0.020	100
0.5 - 1	**770**		1.6	17	7	0.030	100
1.5 - 2.5	**780**		2.3	17	7	0.035	100
4 - 6	**790**		3.6	21	7	0.105	100

Non-insulated receptacles



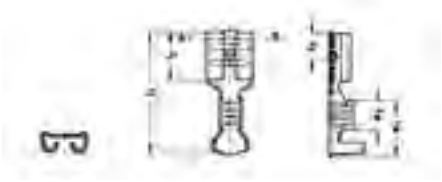

For fine and superfine stranded conductors, e.g. to DIN EN 60228 Cl. 5 and 6

Characteristics
- To DIN 46247, part 1 – 3 and similar versions
- Improved contact properties due to grooved profile

Material
- Brass (CuZn)

Surface
- Tin-plated to protect against corrosion


Technical instructions
- Tool: see page 176

Additional information
- * = nickel-plated steel version also available, Part Number appendix “ST“

Nominal cross section mm²	Nominal size to DIN	Part No.	Tab Thickn.	Tab Width	Dimension mm a1	a2	l1	l2	l3	s	Weight/ pcs. ~kg	Packing unit/pcs
0.5 - 1	--	**18251**	0.5	2.8	5.0	2.8	12.5	5.0	3.3	0.30	0.025	100
		18251A	0.8	2.8	5.5	2.5	12.5	5.0	3.3	0.30	0.025	100
	B 2.8 - 1	**18201A**	0.8	2.8	5.5	2.5	14.0	6.3	3.3	0,35	0.025	100
	--	**18202**	0.5	4.8	6.0	3.4	15.6	6.0	3.8	0.35	0.050	100
	4.8 - 1	**18203**	0.8	4.8	6.0	3.4	15.6	6.0	3.8	0.35	0.050	100
	6.3 - 1	**1720**	0.8	6.3	8.5	4.5	19.0	7.4	4.0	0.45	0.085	100
1.5 - 2.5	4.8 - 2.5	**18303**	0.8	4.8	6.0	3.4	15.6	6.0	3.8	0.35	0.055	100
	6.3 - 2.5	***1730**	0.8	6.3	8.5	4.5	19.0	7.4	4.0	0.45	0.082	100
4 - 6	6.3 - 6	***1750**	0.8	6.3	8.5	4.5	19.0	7.4	4.0	0.45	0.100	100

Non-insulated receptacles, multiple type



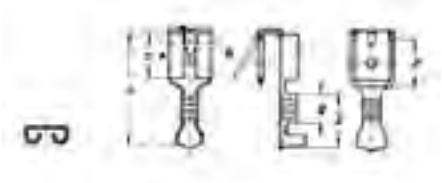

For fine and superfine stranded conductors, e.g. to DIN EN 60228 Cl. 5 and 6

Characteristics
- To DIN 46247, part 1 – 3 and similar versions
- Improved contact properties due to grooved profile

Material
- Brass (CuZn)


Surface
- Tin-plated to protect against corrosion

Technical instructions
- Tool: see page 176

Additional information
- * = corresponds to DIN 46345

Nominal cross section mm²	Part No.	Tab Thickn.	Tab Width	Hint	Dimension mm a1	a2	l1	l2	l3	s	Weight/ pcs. ~kg	Packing unit/pcs
0.5 - 1	**18203AZ**	0.8	4.8		6.0	3.4	15.6	7	6.0	0.38	0.09	100
1.5 - 2.5	**18303AZ**	0.8	4.8		6.0	3.4	15.6	7	6.0	0.38	0.09	100
	1730AZ	0.8	6.3	*	8.5	4.5	19.2	8	7.5	0.38	0.13	100

Non-insulated receptacles with locking latch





- For fine and superfine stranded conductors, e.g. to DIN EN 60228 Cl. 5 and 6

Characteristics
- To DIN 46340, sheet 3
- With latch to engage in housing
- Improved contact properties due to grooved profile

Material
- Brass (CuZn)


Surface
- Tin-plated to protect against corrosion

Technical instructions
- Tool: see page 176

Nominal cross section mm²	Part No.	Tab Thickn.	Tab Width	Dimension mm						Weight/pcs. ~kg	Packing unit/pcs
				a1	a2	l1	l2	l3	s		
0.5 - 1	**2720**	0.8	6.3	8.5	4.5	19.2	7.4	7	0.38	0.070	100
1.5 - 2.5	**2730**	0.8	6.3	8.5	4.5	19.2	7.4	7	0.38	0.075	100
4 - 6	**2750**	0.8	6.3	8.5	4.5	19.2	7.4	7	0.38	0.090	100

Non-insulated receptacles with lateral conductor connector



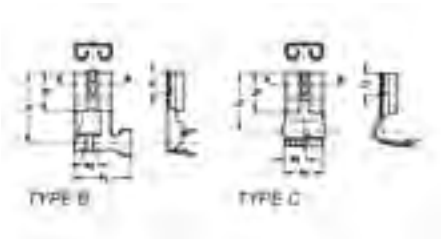

- For fine and superfine stranded conductors, e.g. to DIN EN 60228 Cl. 5 and 6
- Improved contact properties due to grooved profile


Material
- Brass (CuZn)


Surface
- Tin-plated to protect against corrosion

Technical instructions
- Tool: see page 176

Nominal cross section mm²	Part No.	Tab Thickn.	Tab Width	Typ	Dimension mm						Weight/ pcs. ~kg	Packing unit/pcs
					a1	a2	l1	l2	l3	l4		
0.5 - 1	**3720**	0.8	6.3	B	11.0	3.0	12.5	7.4	4.0	7.2	0.080	100
0.5 - 1.5	**3725**	0.8	6.3	C	7.5	4.0	11.00	7.4	4.0	7.2	0.085	100
1.5 - 2.5	**3735**	0.8	6.3	B	11.0	3.0	13.5	7.0	4.0	7.2	0.085	100

Non-insulated tabs



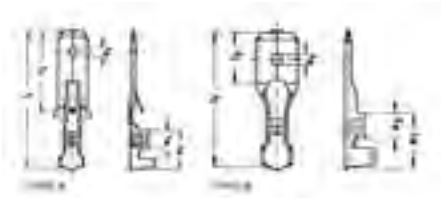

- For fine and superfine stranded conductors, e.g. to DIN EN 60228 Cl. 5 and 6
- Improved contact properties due to grooved profile

Material
- Brass (CuZn)

Surface
- Tin-plated to protect against corrosion

Technical instructions
- Tool: see page 176

Additional information
- * = dimensions in the plug sector to DIN 46244

Nominal cross section mm²	Nominal size to DIN	Part No.	Tab Thickn.	Tab Width	Typ	Hint	Dimension mm a1	a2	d2	l1	l2	Weight/ pcs. ~kg	Packing unit/pcs
0.5 - 1		**2235**	0.8	2.8	A	*	6.0	3.2	1.30	22.5	12.7	0.045	100
	46343 B6.3 - 1	**2220**	0.8	6.3	A		8.2	4.0	1.65	28.0	16.0	0.085	100
1.5 - 2.5	46248 A6.3 - 2.5	**1830**	0.8	6.3	B		9.0	4.5	1.65	20.0	8.0	0.065	100
	46343 B6.3 - 2.5	**2230**	0.8	6.3	A		8.2	4.0	1.65	28.0	16.0	0.090	100
4 - 6	46343 B6.3 - 6	**2250**	0.8	6.3	A		8.2	4.0	1.65	28.0	16.0	0.100	100

Insulation sleeves





- For non-insulated tabs
- Perfectly-matched to the different versions

Characteristics
- For post-insulation of crimped non-insulated receptacles

Material
- PA / PE / PVC

Nominal cross section mm²	Nominal size to DIN	Part No.	Colour	Typ	Dimension mm b1	l	h1	Insulation material	for item	Weight/pcs. ~kg	Packing unit/pcs
0.5 - 1	2.8	**2755**		A	6.5	20.0	4.0	PE	18251,18251A, 18201A	0.015	100
0.5 - 1.5	4.8	**2760**		A	7.0	20.0	5.0	PE	18202,18203	0.015	100
1.5 - 2.5		**2765**		A	9.5	20.0	5.5	PE	18302,18303	0.025	100

see next page

Insulation sleeves

Nominal cross section mm²	Nominal size to DIN	Part No.	Colour	Typ	Dimension mm			Insulation material	for item	Weight/pcs. ~kg	Packing unit/pcs
					b1	l	h1				
0.5 - 2.5	6.3	**2770**	☐	A	12.5	23.0	8.5	PE	1720,1730	0.035	100
		2775	☐	A	9.5	25.0	5.0	PE	1820,1830	0.030	100
0.5 - 4		**2780**	☐	A	9.5	25.0	6.0	PE	1720,1730, 1820,1830	0.030	100
0.5 - 6		**2785**	☐	B	9.2	24.5	5.6	PA	1720,1730,1750, 2720,2730,2750	0.055	100
		2790	☐	C	13.5	15.0	3.1	PVC	3720,3725, 3735	0.060	100


Non-insulated tabs, angled version



Characteristics
- To DIN 46342, part 1 and similar versions
- Dimensions in the plug sector to DIN 46244

Material
- Brass (CuZn)


Surface
- Tin-plated to protect against corrosion

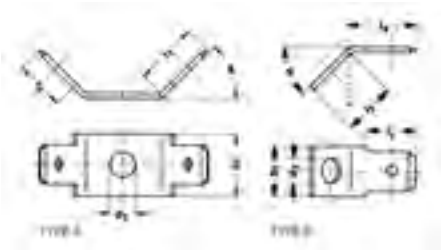

Nominal size to DIN	Part No.	Tab Thickn.	Tab Width	Typ	Dimension mm						Weight/ pcs. ~kg	Packing unit/pcs
					b1	d2	l2	l3	l4	w		
--	**2040**	0.8	2.8	A	5.0	3.2	5.5	6.5	--	60°	0.040	100
	2045	0.8	6.3	A	10.0	4.3	8.0	10.0	--	45°	0.160	100
	2060	0.8	6.3	B	8.0	4.3	8.0	8.0	10.7	30°	0.085	100
	2070	0.8	6.3	B	8.0	3.2	8.0	8.0	10.7	45°	0.085	100
	2075	0.8	6.3	B	8.0	4.1	8.0	8.0	10.7	45°	0.085	100
B 6.3 - 0.8	**2080**	0.8	6.3	B	8.0	4.3	8.0	8.5	10.7	45°	0.085	100
--	**2083**	0.8	6.3	B	8.0	5.3	8.0	8.5	10.7	45°	0.080	100
	2090	0.8	6.3	B	8.0	5.3	8.0	8.0	10.7	45°	0.080	100
	2100	0.8	6.3	B	7.5	2.5	8.0	5.7	11.5	90°	0.075	100
	2105	0.8	6.3	B	8.0	3.2	8.0	8.0	11.5	90°	0.085	100
C 6.3 - 0.8	**2115**	0.8	6.3	B	8.0	4.3	8.0	8.5	11.5	90°	0.090	100

Non-insulated tabs, straight version






Characteristics
- To DIN 46342, part 1 and similar versions
- Dimensions in the plug sector to DIN 46244

Material
- Brass (CuZn)

Surface
- Tin-plated to protect against corrosion

Nominal size to DIN	Part No.	Tab Thickn.	Tab Width	Typ	Dimension mm					Weight/pcs. ~kg	Packing unit/pcs
					b1	d2	l1	l2	s		
--	**2123**	0.8	2.8	A	4.5	3.1	13.0	5.5	0.8	0.028	100
A 6.3 - 0.8	**2140**	0.8	6.3	A	8.0	4.3	19.0	8.0	0.8	0.086	100
--	**2145**	0.8	6.3	A	8.0	5.3	19.0	8.0	0.8	0.080	100

Non-insulated tabs for soldering



▸ **Material used offers very good soldering characteristics**


Characteristics
- Dimensions in the plug sector to DIN 46244
- For soldering in printed circuits

Material
- Brass (CuZn)

Surface
- Tin-plated to protect against corrosion

Part No.	Tab Thickn.	Tab Width	Typ	Dimension mm								Weight/ pcs. ~kg	Packing unit/pcs
				b1	b2	b3	l1	l2	l3	l4	s		
2010	0.8	2.8	A	--	--	--	10.5	6.5	--	--	0.8	0.015	100
2020	0.5	2.8	C	1.0	5	--	--	7.1	8	13.4	0.5	0.025	100
2025	0.8	2.8	C	1.0	5	--	--	7.1	8	13.4	0.8	0.040	100
2030	0.8	6.3	D	3.5	5	6.4	16.0	8.0	4	12.0	0.8	0.065	100
2035	0.8	6.3	E	3.8	5	6.2	16.0	8.0	3	12.0	0.8	0.085	100

Non-insulated multiple tabs





Characteristics
- Dimensions in the plug sector to DIN 46244


Material
- Brass (CuZn)

Surface
- Tin-plated to protect against corrosion

Part No.	Tab Thickn.	Tab Width	Typ	Dimension mm									Weight/ pcs. ~kg	Packing unit/pcs
				a1	b2	b3	l1	l2	l3	h	w	s		
735	0.8	2.8	A	5	3.2	3.1	16.0	6.7	--	--	--	0.38	0.060	100
755	0.8	4.8	C	--	4.4	--	20.0	7.0	7.0	8.0	--	0.38	0.155	100
725	0.8	6.3	D	--	--	--	--	8	7.5	--	15°	0.38	0.115	100
775	0.8	6.3	C	--	--	--	20.5	12	7.5	9.6	--	0.38	0.200	100

Flexible connector, tab width 2.8 mm, 4.8 mm and 6.3 mm



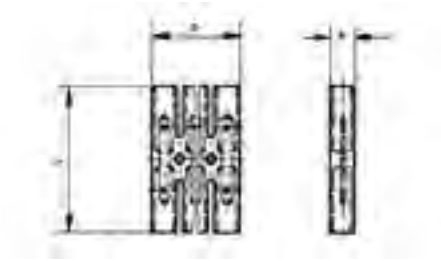


No additional insulation required

Characteristics
- With tabs 2.8, 4.8 or 6.3 x 0.8 mm
- 1, 2 and 12-poles
- Further poles on request

Part No.	Tab Thickn.	Tab Width	Poles	Dimension mm				Insulation material	Bolt size mm		Weight/ pcs. ~kg	Packing unit/pcs
				b	l	h	s		Distance	Diameter		
Tab Width 2.8 mm												
8101	0.8	2.8	1	7.5	35	5.5	0.8	PVC	--	--	0.2	100
8102	0.8	2.8	2	15.0	35	5.5	0.8	PVC	--	2.7	0.3	50
81012	0.8	2.8	12	88.0	35	5.5	0.8	PVC	75	2.7	1.6	10
Tab Width 4.8 mm												
8051	0.8	4.8	1	12.5	28	6.6	0.8	PVC	--	--	0.25	100
8052	0.8	4.8	2	25.0	28	6.6	0.8	PVC	--	3.2	0.50	50
80512	0.8	4.8	12	142.0	28	6.6	0.8	PVC	120	3.2	2.80	10
Tab Width 6.3 mm												
8001	0.8	6.3	1	12.5	28	6.6	0.8	PVC	--	--	0.30	100
8002	0.8	6.3	2	25.0	28	6.6	0.8	PVC	--	3.7	0.55	50
80012	0.8	6.3	12	142.0	28	6.6	0.8	PVC	120	3.7	3.20	10

Polyamide connector, tab width 2.8 and 6.3 mm



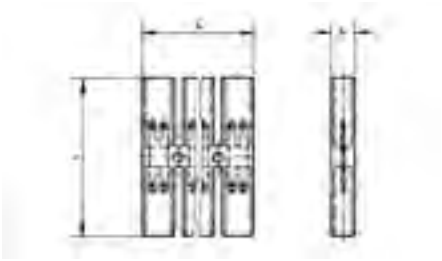

▸ No additional insulation required


Characteristics

- With tabs 2.8 x 0.8 mm and 6.3 x 0.8 mm
- 1, 2 and 12-poles
- Further poles on request

Part No.	Tab Thickn.	Tab Width	Poles	Dimension mm				Insulation material	Bolt size mm		Weight/ pcs. ~kg	Packing unit/pcs
				b	l	h	s		Distance	Diameter		
8011	0.8	6.3 and 2 x 2.8	1	10.0	50	7.5	0.8	PA	--	--	0.25	100
8012	0.8	6.3 and 2 x 2.8	2	22.5	50	7.5	0.8	PA	--	3.1	0.50	50
80112	0.8	6.3 and 2 x 2.8	12	147.5	50	7.5	0.8	PA	125	3.1	3.10	10

Flexible circuit distributor, tab width 2.8 mm



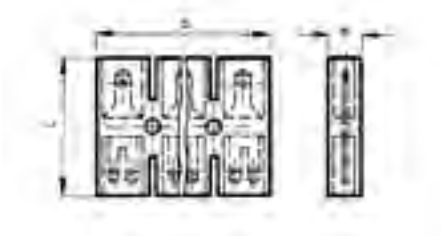

▸ No additional insulation required


Characteristics

- With tabs 2.8 x 0.8 mm
- 1 and 12-poles
- Further poles on request

Part No.	Tab Thickn.	Tab Width	Poles	Dimension mm				Insulation material	Bolt size mm		Weight/ pcs. ~kg	Packing unit/pcs
				b	l	h	s		Distance	Diameter		
8151	0.8	2.8	1	12.5	28	7	0.8	PVC	--	--	0.25	100
81512	0.8	2.8	12	147.0	28	7	0.8	PVC	123	3.2	2.80	10

Flexible circuit distributor, tab width 6.3 mm



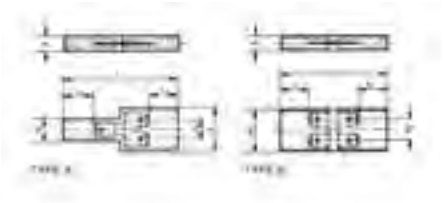


▸ **No additional insulation required**

Characteristics

- With tabs 6.3 x 0.8 mm


Part No.	Tab Thickn.	Tab Width	Typ	Dimension mm							Insulation material	Weight/ pcs. ~kg	Packing unit/pcs
				b	b1	b2	l	l1	h	s			
816	0.8	6.3	A	21	11.3	9	53	15	7.5	0.8	PVC	0.60	10
817	0.8	6.3	B	20	11.3	9	51	13	7.0	0.8	PVC	0.65	10



Tool application chart

Insulated cable connections


Tool type	Crimping range corresponds to nominal cross-section mm²	Crimping Tool		Catalogue page		Crimp profile
		Part No.	Crimping head / adapter	Crimping Tool	Crimping die	
Mechanical crimping tools	0.1-1	K80		221		⬭
	0.5-2.5	K81		222		⬭
	0.5-6	K82		222		⬭
Mechanical, electrical, pneumatic crimping tools with interchangeable die / head	0.1-1	KP1	+KP80	240		⬭
		KP1L	+KP80	240		⬭
	0.5-2.5	KP1	+KP81	240		⬭
		KP1L	+KP81	240		⬭
	0.5-6	K50		244	327	⬭
		EK50ML		254	327	⬭
	4-6	KP1	+KP83	240		⬭
		KP1L	+KP83	240		⬭
Battery powered crimping tools	0.1-1	EKP1ML	+KP80	260		⬭
	0.5-2.5	EKP1ML	+KP81	260		⬭
	0.5-6	EK1550ML		258	327	⬭
	4-6	EKP1ML	+KP83	260		⬭



Tool application chart

Butt connectors with heat shrink insulation


Tool type	Crimping range corresponds to nominal cross-section mm²	Crimping Tool		Catalogue page		Crimp profile
		Part No.	Crimping head / adapter	Crimping Tool	Crimping die	
Mechanical, electrical, pneumatic crimping tools with interchangeable die / head	0.5-6	K50		244	327	⬭
		EK50ML		254	327	⬭
Battery powered crimping tools	0.5-6	EK1550ML		258	327	⬭



Tool application chart

Non-insulated receptacles, straight type

Tool type	Crimping range corresponds to nominal cross-section mm²	Crimping Tool		Catalogue page		Crimp profile
		Part No.	Crimping head / adapter	Crimping Tool	Crimping die	
Mechanical crimping tools	0.1-1	K572		224		
		K67		225		
	0.5-2.5	K582		224		
		K65		226		
	0.5-6	K592		225		
		K60		223		
Mechanical, electrical, pneumatic crimping tools with interchangeable die / head	0.25-6	K50		244	327	
		EK50ML		254	327	
Battery powered crimping tools	0.25-6	EK1550ML		258	327	



Tool application chart

Non-insulated receptacles, with lateral conductor connector

Tool type	Crimping range corresponds to nominal cross-section mm²	Crimping Tool		Catalogue page		Crimp profile
		Part No.	Crimping head / adapter	Crimping Tool	Crimping die	
Mechanical crimping tools	3720, 3735	K63		226		
	3725	K64		227		
Mechanical, electrical, pneumatic crimping tools with interchangeable die / head	3720, 3735	K50		244	327	
		EK50ML		254	327	
		SKP6		242		
	3725	K50		244	327	
		EK50ML		254	327	
		SKP6		242		
Battery powered crimping tools	3720, 3735	EK1550ML		258	327	
	3725	EK1550ML		258	327	

PRACTICAL - POCKET BOXES AND ASSORTMENT BOXES

A good professional is always well sorted. The most important thing is the availability of tool and connector material. In Klauke assortment boxes from robust metal, the tools are supplied with matching cable lugs and connectors. Everything matches. Materials and tools have their own space - clearly arranged and immediately to hand. The boxes equip you for every application. On request, we can also stock them to suit your individual needs.



In brief

- Brings order to the workplace due to clearly arranged design
- Everything to hand in one box
- Stocked to suit your needs and numerous versions available

Practical and always to hand

With the practical pocket boxes, everything has its place and is always to hand, on the go and in the workshop. Chute openings for stackable pocket boxes simplify the removal of cable end-sleeves.


- Cable-end sleeves with and without insulation always to hand
- Practical chute opening for easy removal
- Stackable box
- Tough and impact-proof plastic



Our range, your order

We have already compiled an assortment for you.
We offer pre-filled boxes for various applications.
You can also fill the robust box yourself if you want.

- High-quality boxes made from plastic or metal
- Contains tool and connectors matched to one other
- Even if exposed to severe vibrations or dropped, everything remains in the right compartment
- Boxes also available empty or custom-filled

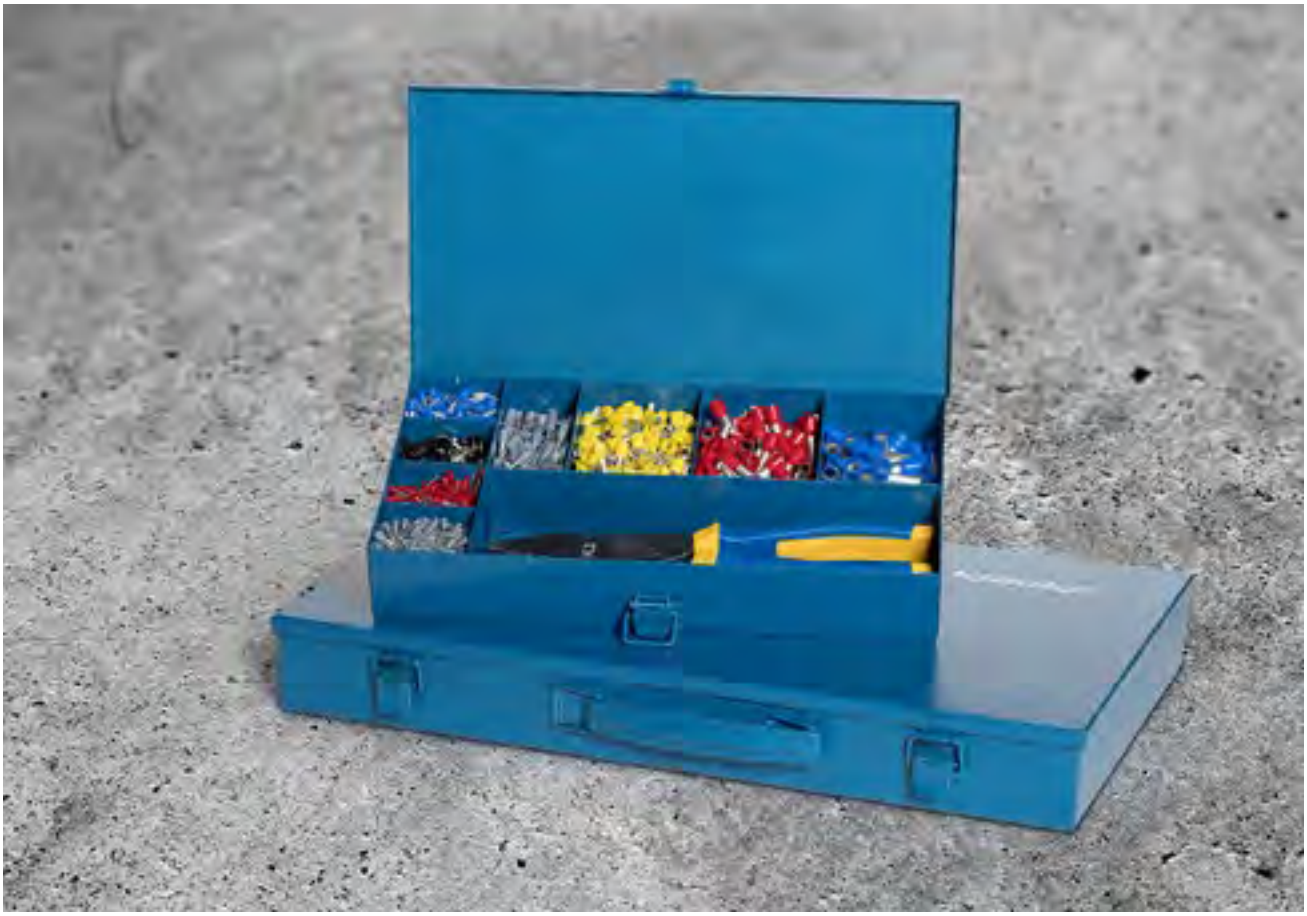

ST 23 B Pocket box with cable end-sleeves 0.25 - 1 mm²



▸ Pocket box made from impact-resistant plastic

Characteristics

- Stackable and resealable

Item			Part No.
Pocket box with cable end-sleeves 0.25 - 1 mm² to DIN 46228 part 1			**ST23B**
Scope of supply	Description	Quantity	Page
ST23L	Pocket box	1	
695V	Cable end-sleeve, 0.25 mm², 5 mm	1000	138
705V	Cable end-sleeve, 0.34 mm², 5 mm, Cu tinned	1000	138
716V	Cable end-sleeve, 0.75 mm², 6 mm	1000	138
71S6V	Cable end-sleeve, 0.5 mm², 6 mm, Cu tinned	500	138
72S6V	Cable end-sleeve, 1.0 mm², 6 mm	500	138

ST 21 B Pocket box with cable end-sleeves 0.5 - 2.5 mm²



▸ Pocket box made from impact-resistant plastic

Characteristics

- Stackable and resealable

Item			Part No.
Pocket box with cable end-sleeves 0.5 - 2.5 mm² to DIN 46228 part 1			**ST21B**
Scope of supply	Description	Quantity	Page
ST21L	Pocket box	1	
71S6V	Cable end-sleeve, 0.5 mm², 6 mm, Cu tinned	1000	138
716V	Cable end-sleeve, 0.75 mm², 6 mm	500	138
72S6V	Cable end-sleeve, 1.0 mm², 6 mm	500	138
727V	Cable end-sleeve, 1.5 mm², 7 mm	500	138
737V	Cable end-sleeve, 2.5 mm², 7 mm	500	138

ST 22 B Pocket box with cable end-sleeves 4 - 16 mm²



▸ Pocket box made from impact-resistant plastic

Characteristics

- Stackable and resealable

Item			Part No.
Pocket box with cable end-sleeves 4 - 16 mm² to DIN 46228 part 1			**ST22B**
Scope of supply	Description	Quantity	Page
ST22L	Pocket box	1	
749V	Cable end-sleeve, 4 mm², 9 mm	200	139
7512V	Cable end-sleeve, 6 mm², 12 mm, Cu tinned	100	139
7612V	Cable end-sleeve, 10 mm², 12 mm, Cu tinned	70	139
7712V	Cable end-sleeve, 16 mm², 12 mm, Cu tinned	70	139

ST 15 B Pocket box with insulated twin cable end-sleeves 2 x 0.75 - 2 x 2.5 mm²



▸ Pocket box made from impact-resistant plastic

Characteristics

- Stackable and resealable

Item				Part No.
Pocket box with twin cable end-sleeves 2 x 0.75 - 2 x 2.5 mm²				**ST15B**
Scope of supply	Colour	Description	Quantity	Page
ST15L		Pocket box	1	
8708		Insl. twin cable end-sleeve, 2 x 0.75 mm²	50	147
8718		Insl. twin cable end-sleeve, 2 x 1 mm²	50	147
8728		Insl. twin cable end-sleeve, 2 x 1.5 mm²	50	147
87310		Insl. twin cable end-sleeve, 2 x 2.5 mm²	50	147

ST 1 B pocket box with insl. cable end-sleeves 0.5 - 2.5 mm², DIN 46228 Part 4



▸ Pocket box made from impact-resistant plastic

Characteristics

- Stackable and resealable

Item				Part No.
Pocket box with insl. cable end-sleeves 0.5 - 2.5 mm², DIN 46228 Part 4, colour code 1				**ST1B**
Scope of supply	Colour	Description	Quantity	Page
ST1L		Pocket box	1	
1690		Insl. cable end-sleeve, 0.5 mm², 14 mm	50	142
170W		Insl. cable end-sleeve, 0.75 mm², 14.6 mm	100	143
171G		Insl. cable end-sleeve, 1 mm², 14.6 mm	100	143
172RO		Insl. cable end-sleeve, 1.5 mm², 14.6 mm	100	143
173B		Insl. cable end-sleeve, 2.5 mm², 15.2 mm	50	143

ST 11 B pocket box with insl. cable end-sleeves 0.5 - 2.5 mm², DIN 46228 Part 4



▸ Pocket box made from impact-resistant plastic

Characteristics

- Stackable and resealable

Item				Part No.
Pocket box with insl. cable end-sleeves 0.5 - 2.5 mm², DIN 46228 Part 4				**ST11B**
Scope of supply	Colour	Description	Quantity	Page
ST11L		Pocket box	1	
4698		Insl. Cable end-sleeve, 0.5 mm², 14 mm	50	141
4708		Insl. cable end-sleeve, 0.75 mm², 14 mm	100	141
4718		Insl. cable end-sleeve, 1 mm², 14 mm	100	141
4728		Insl. cable end-sleeve, 1.5 mm², 14 mm	100	141
4738		Insl. cable end-sleeve, 2.5 mm², 14 mm	50	141

ST 31 B pocket box with insl. cable end-sleeves 0.5 - 2.5 mm², DIN 46228 Part 4, colour code 2



▸ Pocket box made from impact-resistant plastic

Characteristics

- Stackable and resealable

Item				Part No.
Pocket box with insl. cable end-sleeves 0.5 - 2.5 mm², DIN 46228 Part 4, colour code 2				**ST31B**
Scope of supply	Colour	Description	Quantity	Page
ST31L		Pocket box	1	
1698		Insl. cable end-sleeve, 0.5 mm², 13 mm	50	144
1708		Insl. cable end-sleeve, 0.75 mm², 13.5 mm	100	144
1718		Insl. cable end-sleeve, 1 mm², 13.5 mm	100	144
1728		Insl. cable end-sleeve, 1.5 mm², 13.5 mm	100	144
1738		Insl. cable end-sleeve, 2.5 mm², 14.5 mm	50	144

ST 12 B pocket box with insl. cable end-sleeves 4 - 16 mm², DIN 46228 Part 4



▸ Pocket box made from impact-resistant plastic

Characteristics

- Stackable and resealable

Item				Part No.
Pocket box with insl. cable end-sleeves 4 - 16 mm², DIN 46228 Part 4				**ST12B**
Scope of supply	Colour	Description	Quantity	Page
ST12L		Pocket box	1	
47410		Insl. cable end-sleeve, 4 mm², 17 mm	50	141
47512		Insl. cable end-sleeve, 6 mm², 20 mm	20	141
47612		Insl. cable end-sleeve, 10 mm², 22 mm	20	141
47712		Insl. cable end-sleeve, 16 mm², 24 mm	10	142

ST 2 B pocket box with insl. cable end-sleeves 4 - 16 mm², DIN 46228 Part 4, colour code 1



▸ Pocket box made from impact-resistant plastic

Characteristics

- Stackable and resealable

Item				Part No.
Pocket box with insl. cable end-sleeves 4 - 16 mm², DIN 46228 Part 4, colour code 1				**ST2B**
Scope of supply	Colour	Description	Quantity	Page
ST2L		Pocket box	1	
174GR		Insl. cable end-sleeve, 4 mm², 16.5 mm	50	143
175S		Insl. cable end-sleeve, 6 mm², 20 mm	20	143
176E		Insl. cable end-sleeve, 10 mm², 21.5 mm	20	143
177GR		Insl. cable end-sleeve, 16 mm², 22.2 mm	10	143

ST 32 B pocket box with insl. cable end-sleeves 4 - 16 mm², DIN 46228 Part 4, colour code 2



▸ Pocket box made from impact-resistant plastic

Characteristics

- Stackable and resealable

Item				Part No.
Pocket box with insl. cable end-sleeves 4 - 16 mm², DIN 46228 Part 4, colour code 2				**ST32B**
Scope of supply	Colour	Description	Quantity	Page
ST32L		Pocket box	1	
17410		Insl. cable end-sleeve, 4 mm², 16.5 mm	50	144
17512		Insl. cable end-sleeve, 6 mm², 20 mm	20	144
17612		Insl. cable end-sleeve, 10 mm², 21.5 mm	20	145
17712		Insl. cable end-sleeve, 16 mm², 23.5 mm	10	145

ST 3 B pocket box with insl. cable end-sleeves 0.25 - 1 mm², DIN 46228 Part 4, colour code 1



▸ Pocket box made from impact-resistant plastic

Characteristics

- Stackable and resealable

Item				Part No.
Pocket box with insl. cable end-sleeves 0.25 - 1 mm², DIN 46228 Part 4, colour code 1				**ST3B**
Scope of supply	Colour	Description	Quantity	Page
ST3L		Pocket box	1	
167H		Insl. cable end-sleeve, 0.25 mm², 10.4 mm	30	142
168T		Insl. cable end-sleeve, 0.34 mm², 10.4 mm	30	142
169O		Insl. cable end-sleeve, 0.5 mm², 14 mm	30	142
170W		Insl. cable end-sleeve, 0.75 mm², 14.6 mm	30	143
171G		Insl. cable end-sleeve, 1 mm², 14.6 mm	30	143

ST 13 B pocket box with insl. cable end-sleeves 0.25 - 1 mm², DIN 46228 Part 4 & similar, colour code 1



▸ Pocket box made from impact-resistant plastic

Characteristics

- Stackable and resealable

Item				Part No.
Pocket box with insl. cable end-sleeves 0.25 - 1 mm², DIN 46228 Part 4 & similar, colour code 1				**ST13B**
Scope of supply	Colour	Description	Quantity	Page
ST13L		Pocket box	1	
167H		Insl. cable end-sleeve, 0.25 mm², 10.4 mm	30	142
168T		Insl. cable end-sleeve, 0.34 mm², 10.4 mm	30	142
4698		Insl. Cable end-sleeve, 0.5 mm², 14 mm	30	141
4708		Insl. cable end-sleeve, 0.75 mm², 14 mm	30	141
4718		Insl. cable end-sleeve, 1 mm², 14 mm	30	141

ST 33 B pocket box with insl. cable end-sleeves 0.25-1 mm², DIN 46228 Part 4 & similar, colour code 2



▸ Pocket box made from impact-resistant plastic

Characteristics

- Stackable and resealable

Item	Part No.
Pocket box with insl. cable end-sleeves 0.25 - 1 mm², DIN 46228 Part 4 & similar, colour code 2	**ST33B**

Scope of supply	Colour	Description	Quantity	Page
ST33L		Pocket box	1	
1676		Insl. cable end-sleeve, 0.25 mm², 11 mm	30	144
1686		Insl. cable end-sleeve, 0.34 mm², 11 mm	30	144
1698		Insl. cable end-sleeve, 0.5 mm², 13 mm	30	144
1708		Insl. cable end-sleeve, 0.75 mm², 13.5 mm	30	144
1718		Insl. cable end-sleeve, 1 mm², 13.5 mm	30	144

GR 4698 DO Pocket box with insulated cable end-sleeves 0.5 mm²



▸ Pocket box made from impact-resistant plastic

Characteristics

- Stackable and resealable

Item	Part No.
Pocket box with insulated cable end-sleeves 0.5 mm² to DIN 46228 part 4	**GR4698DO**

Scope of supply	Colour	Description	Quantity	Page
4698		Insl. Cable end-sleeve, 0.5 mm², 14 mm	1000	141

GR 4708 DO Pocket box with insulated cable end-sleeves 0.75 mm²



▸ Pocket box made from impact-resistant plastic

Characteristics

- Stackable and resealable

Item	Part No.
Pocket box with insulated cable end-sleeves 0.75 mm² DIN 46228 part 4	**GR4708DO**

Scope of supply	Colour	Description	Quantity	Page
4708		Insl. cable end-sleeve, 0.75 mm², 14 mm	1000	141

GR 4718 DO Pocket box with insulated cable end-sleeves 1 mm²



▸ Pocket box made from impact-resistant plastic

Characteristics

- Stackable and resealable

Item	Part No.
Pocket box with insulated cable end-sleeves 1 mm² DIN 46228 part 4	**GR4718DO**

Scope of supply	Colour	Description	Quantity	Page
4718		Insl. cable end-sleeve, 1 mm², 14 mm	1000	141

GR 4728 DO Pocket box with insulated cable end-sleeves 1.5 mm²



▸ Pocket box made from impact-resistant plastic

Characteristics

- Stackable and resealable

Item				Part No.
Pocket box with insulated cable end-sleeves 1.5 mm² DIN 46228 part 4				**GR4728DO**
Scope of supply	Colour	Description	Quantity	Page
4728	■	Insl. cable end-sleeve, 1.5 mm², 14 mm	1000	141

GR 4738 DO Pocket box with insulated cable end-sleeves 2.5 mm²



▸ Pocket box made from impact-resistant plastic

Characteristics

- Stackable and resealable

Item				Part No.
Pocket box with insulated cable end-sleeves 2.5 mm² DIN 46228 part 4				**GR4738DO**
Scope of supply	Colour	Description	Quantity	Page
4738	■	Insl. cable end-sleeve, 2.5 mm², 14 mm	1000	141

ST 5 L assortment of empty pocket boxes



▸ Pocket box made from impact-resistant plastic

Characteristics

- Stackable and resealable

Item	Part No.
Assortment of pocket boxes	**ST5L**

SK 30 B Steel assortment box with cable end-sleeves and crimping tool



▸ Hammer-tone finished assortment box
▸ Ideal for workshop equipment

Item	Dimension mm	Part No.
Steel assortment box with cable end-sleeves and crimping tool	200 x 140 x 40	**SK30B**

Scope of supply	Description	Quantity	Page
SK30L	Steel carrying case	1	193
K48	Crimping tool for cable end-sleeves 0.14 - 2.5 mm²	1	212
716V	Cable end-sleeve, 0.75 mm², 6 mm	1000	138
72S6V	Cable end-sleeve, 1.0 mm², 6 mm	1000	138
727V	Cable end-sleeve, 1.5 mm², 7 mm	1000	138
737V	Cable end-sleeve, 2.5 mm², 7 mm	1000	138

SK 32 B Steel assortment box with cable end-sleeves and crimping tool



- Broad cable end-sleeve assortment appropriate crimping tool
- Hammer-tone finished assortment box
- Ideal for workshop equipment

Item	Dimension mm	Part No.
Steel assortment box with cable end-sleeves and crimping tool	285 x 155 x 45	**SK32B**

Scope of supply	Description	Quantity	Page
SK32L	Steel carrying case	1	193
K3	Crimping tool for cable end-sleeves 0.5 - 16 mm²	1	211
716V	Cable end-sleeve, 0.75 mm², 6 mm	1000	138
72S6V	Cable end-sleeve, 1.0 mm², 6 mm	1000	138
727V	Cable end-sleeve, 1.5 mm², 7 mm	1000	138
737V	Cable end-sleeve, 2.5 mm², 7 mm	500	138
749V	Cable end-sleeve, 4 mm², 9 mm	500	139
7510V	Cable end-sleeve, 6 mm², 10 mm	500	139
7618V	Cable end-sleeve, 10 mm², 18 mm	250	139
7718V	Cable end-sleeve, 16 mm², 18 mm	150	139

SK 45 B Steel assortment box with insl. cable end-sleeves and crimping tool



- Four of the most important insulated cable end-sleeve types in a steel carrying case including an appropriate crimping tool
- Hammer-tone finished assortment box
- Ideal for workshop equipment

Item	Dimension mm	Part No.
Steel assortment box with insl. cable end-sleeves and crimping tool	200 x 140 x 40	**SK45B**

Scope of supply	Colour	Description	Quantity	Page
SK30L		Steel carrying case	1	193
K48		Crimping tool for cable end-sleeves 0.14 - 2.5 mm²	1	212
4708		Insl. cable end-sleeve, 0.75 mm², 14 mm	300	141
4718		Insl. cable end-sleeve, 1 mm², 14 mm	300	141
4728		Insl. cable end-sleeve, 1.5 mm², 14 mm	300	141
4738		Insl. cable end-sleeve, 2.5 mm², 14 mm	200	141

SK 47 B Steel assortment box with insl. cable end-sleeves and crimping tool



- Flexible use due to large cross-sectional range
- Hammer-tone finished assortment box
- Ideal for workshop equipment

Item	Dimension mm	Part No.
Steel assortment box with insl. cable end-sleeves and crimping tool	285 x 155 x 45	**SK47B**

Scope of supply	Colour	Description	Quantity	Page
SK32L		Steel carrying case	1	193
K3		Crimping tool for cable end-sleeves 0.5 - 16 mm²	1	211
4708		Insl. cable end-sleeve, 0.75 mm², 14 mm	200	141
4718		Insl. cable end-sleeve, 1 mm², 14 mm	200	141
4728		Insl. cable end-sleeve, 1.5 mm², 14 mm	200	141
4738		Insl. cable end-sleeve, 2.5 mm², 14 mm	200	141
47410		Insl. cable end-sleeve, 4 mm², 17 mm	100	141
47512		Insl. cable end-sleeve, 6 mm², 20 mm	100	141
47618		Insl. cable end-sleeve, 10 mm², 28 mm	100	141
47718		Insl. cable end-sleeve, 16 mm², 28 mm	50	142

SK 30/3 P Assortment box from plastic with insl. cable end-sleeves and tools



- With everything needed for conductor preparation
- The exact-shaped foam inlays of the case prevent the contents slipping even with severe impacts

Item	Dimension mm	Part No.
Plastic assortment box with insl. cable end-sleeves and tools	395 x 295 x 106	**SK303P**

Scope of supply	Colour	Description	Quantity	Page
K432		Automatic wire stripper K43/2 0.02 - 10 mm²	1	545
K303		Crimping tool for cable end-sleeves and twin cable end-sleeves 0.08 - 10 mm²	1	217
4698		Insl. Cable end-sleeve, 0.5 mm², 14 mm	400	141
4708		Insl. cable end-sleeve, 0.75 mm², 14 mm	400	141
4718		Insl. cable end-sleeve, 1 mm², 14 mm	400	141
4728		Insl. cable end-sleeve, 1.5 mm², 14 mm	400	141
4738		Insl. cable end-sleeve, 2.5 mm², 14 mm	200	141
47410		Insl. cable end-sleeve, 4 mm², 17 mm	200	141
47512		Insl. cable end-sleeve, 6 mm², 20 mm	100	141
47612		Insl. cable end-sleeve, 10 mm², 22 mm	100	141

SK 30/3 S Assortment box from plastic with insl. cable end-sleeves and crimping tool



- With everything needed for conductor preparation
- The exact-shaped foam inlays of the case prevent the contents slipping even with severe impacts

Item	Dimension mm	Part No.
Plastic assortment box with insl. cable end-sleeves and crimping tool	275 x 230 x 83	**SK303S**

Scope of supply	Colour	Description	Quantity	Page
K303		Crimping tool for cable end-sleeves and twin cable end-sleeves 0.08 - 10 mm²	1	217
4698		Insl. Cable end-sleeve, 0.5 mm², 14 mm	100	141
4708		Insl. cable end-sleeve, 0.75 mm², 14 mm	100	141
4718		Insl. cable end-sleeve, 1 mm², 14 mm	100	141
4728		Insl. cable end-sleeve, 1.5 mm², 14 mm	100	141
4738		Insl. cable end-sleeve, 2.5 mm², 14 mm	50	141
47410		Insl. cable end-sleeve, 4 mm², 17 mm	50	141
47512		Insl. cable end-sleeve, 6 mm², 20 mm	30	141
47612		Insl. cable end-sleeve, 10 mm², 22 mm	30	141

SK 43 NB Assortment box from plastic with insl. cable end-sleeves and tools



- With everything needed for conductor preparation
- Ideal for workshop equipment

Item	Dimension mm	Part No.
Steel assortment box with insl. cable end-sleeves and tools	370 x 210 x 40	**SK43NB**

Scope of supply	Colour	Description	Quantity	Page
SK43L		Steel carrying case	1	193
K432		Automatic wire stripper K43/2 0.02 - 10 mm²	1	545
K303		Crimping tool for cable end-sleeves and twin cable end-sleeves 0.08 - 10 mm²	1	217
4698		Insl. Cable end-sleeve, 0.5 mm², 14 mm	500	141
4708		Insl. cable end-sleeve, 0.75 mm², 14 mm	500	141
4718		Insl. cable end-sleeve, 1 mm², 14 mm	400	141
4728		Insl. cable end-sleeve, 1.5 mm², 14 mm	400	141
4738		Insl. cable end-sleeve, 2.5 mm², 14 mm	300	141
47410		Insl. cable end-sleeve, 4 mm², 17 mm	100	141
47512		Insl. cable end-sleeve, 6 mm², 20 mm	100	141
47612		Insl. cable end-sleeve, 10 mm², 22 mm	100	141

SK 65 B Assortment box from steel with tubular cable lugs and crimping tool



- Hammer-tone finished assortment box
- Ideal for workshop equipment

Characteristics

- Sturdy steel carrying case with lock and handle

Item	Dimension mm	Part No.
Steel assortment box with tubular cable lugs "standard type" and crimping tool K05	400 x 250 x 50	**SK65B**

Scope of supply	Description	Quantity	Page
SK65L	Steel carrying case	1	195
K05	Crimping tool for tubular cable lugs and connectors, standard type 6 - 50 mm²	1	235
1R6	Tubular cable lug without inspection hole, 6 mm², M6, Cu tinned	25	14
1R8	Tubular cable lug without inspection hole, 6 mm², M8, Cu tinned	25	14
2R6	Tubular cable lug without inspection hole, 10 mm², M6, Cu tinned	25	14
2R8	Tubular cable lug without inspection hole, 10 mm², M8, Cu tinned	25	14
3R8	Tubular cable lug without inspection hole, 16 mm², M8, Cu tinned	25	14
3R10	Tubular cable lug without inspection hole, 16 mm², M10, Cu tinned	25	14
4R8	Tubular cable lug without inspection hole, 25 mm², M8, Cu tinned	25	14
4R10	Tubular cable lug without inspection hole, 25 mm², M10, Cu tinned	25	14
5R8	Tubular cable lug without inspection hole, 35 mm², M8, Cu tinned	20	14
5R10	Tubular cable lug without inspection hole, 35 mm², M10, Cu tinned	20	14
6R10	Tubular cable lug without inspection hole, 50 mm², M10, Cu tinned	20	15
6R12	Tubular cable lug without inspection hole, 50 mm², M12, Cu tinned	20	15

SK 50 B Steel assortment box with DIN compressed cable lugs and crimping tool



- Hammer-tone finished assortment box
- Ideal for workshop equipment

Characteristics

- Sturdy steel carrying case with lock and handle

Item	Dimension mm	Part No.
Steel assortment box with DIN compression cable lugs and crimping tool	400 x 250 x 50	**SK50B**

Scope of supply	Description	Quantity	Page
SK65L	Steel carrying case	1	195
K05D	Crimping tool for compression cable lugs and connectors (DIN 46235 / DIN 46267, Part 1) 6 - 50 mm²	1	235
101R5	Compression cable lug, DIN 46235, 6 mm², M5, Cu tinned	50	56
101R6	Compression cable lug, DIN 46235, 6 mm², M6, Cu tinned	50	56
102R5	Compression cable lug, DIN 46235, 10 mm², M5, Cu tinned	50	56
102R6	Compression cable lug, DIN 46235, 10 mm², M6, Cu tinned	50	56
103R8	Compression cable lug, DIN 46235, 16 mm², M8, Cu tinned	25	56
103R10	Compression cable lug, DIN 46235, 16 mm², M10, Cu tinned	25	56
104R8	Compression cable lug, DIN 46235, 25 mm², M8, Cu tinned	25	56
104R10	Compression cable lug, DIN 46235, 25 mm², M10, Cu tinned	25	56
105R8	Compression cable lug, DIN 46235, 35 mm², M8, Cu tinned	20	56
105R10	Compression cable lug, DIN 46235, 35 mm², M10, Cu tinned	20	56
106R10	Compression cable lug, DIN 46235, 50 mm², M10, Cu tinned	15	57
106R12	Compression cable lug, DIN 46235, 50 mm², M12, Cu tinned	15	57

MK 230 B 507 Steel assortment box with insl. cable connections and crimping tool



- Hammer-tone finished assortment box
- Ideal for workshop equipment

Item	Dimension mm	Part No.
Steel assortment box with insl. cable connections and crimping tool	366 x 230 x 51	**MK230B507**

Scope of supply	Colour	Description	Quantity	Page
MK230L		Steel carrying case	1	194
K507		Crimping tool with replaceable dies	1	243
6204		Insl. solderless terminal M4, 0.5 - 1 mm²	50	156
6205		Insl. solderless terminal M5, 0.5 - 1 mm²	50	156
6206		Insl. solderless terminal M6, 0.5 - 1 mm²	50	156
6304		Insl. solderless terminal M4, 1.5 - 2.5 mm²	50	156
6305		Insl. solderless terminal M5, 1.5 - 2.5 mm²	50	156
6306		Insl. solderless terminal M6, 1.5 - 2.5 mm²	50	156
670		Insl. butt connector, 0.5 - 1 mm²	50	165
680		Insl. butt connector, 1.5 - 2.5 mm²	50	165
705		Insl. pin terminal, 0.5 - 1 mm², 22 mm	50	158
710		Insl. pin terminal, 1.5 - 2.5 mm², 23 mm	50	158
730		Insl. receptacle 6.3 x 0.8 mm, 1.5 - 2.5 mm²	50	161
830		Insl. tab 6.3 x 0.8 mm, 1.5 - 2.5 mm²	50	164
620C4		Insl. solderless terminal M4, 0.5 - 1 mm²	50	157
630C4		Insl. solderless terminal M4, 1.5 - 2.5 mm²	50	157
715		Insl. pin terminal, 0.1 - 0.4 mm², 26 mm	25	158
700		Insl. butt connector, 4 - 6 mm²	25	165
6505		Insl. solderless terminal M5, 4 - 6 mm²	25	156
6506		Insl. solderless terminal M6, 4 - 6 mm²	25	156
650C6		Insl. solderless terminal M6, 4 - 6 mm²	25	157

SK 82 P Assortment box from plastic with insl. cable connections and tools



- With everything needed for conductor preparation
- The exact-shaped foam inlays of the case prevent the contents slipping even with severe impacts

Item			Dimension mm	Part No.
Plastic assortment box with insl. cable connections and tools			395 x 295 x 106	**SK82P**
Scope of supply	Colour	Description	Quantity	Page
K432		Automatic wire stripper K43/2 0.02 - 10 mm²	1	545
K82A		Crimping tool for insulated cable connections 0.5 - 6 mm²	1	222
6204		Insl. solderless terminal M4, 0.5 - 1 mm²	50	156
6205		Insl. solderless terminal M5, 0.5 - 1 mm²	50	156
670		Insl. butt connector, 0.5 - 1 mm²	50	165
720		Insl. receptacle 6.3 x 0.8 mm, 0.5 - 1 mm²	50	161
6304		Insl. solderless terminal M4, 1.5 - 2.5 mm²	50	156
6305		Insl. solderless terminal M5, 1.5 - 2.5 mm²	50	156
680		Insl. butt connector, 1.5 - 2.5 mm²	50	165
730		Insl. receptacle 6.3 x 0.8 mm, 1.5 - 2.5 mm²	50	161
6505		Insl. solderless terminal M5, 4 - 6 mm²	20	156
6506		Insl. solderless terminal M6, 4 - 6 mm²	20	156
700		Insl. butt connector, 4 - 6 mm²	20	165
715		Insl. pin terminal, 0.1 - 0.4 mm², 26 mm	20	158
620C4		Insl. solderless terminal M4, 0.5 - 1 mm²	20	157
630C4		Insl. solderless terminal M4, 1.5 - 2.5 mm²	20	157
705		Insl. pin terminal, 0.5 - 1 mm², 22 mm	20	158
710		Insl. pin terminal, 1.5 - 2.5 mm², 23 mm	20	158

SK 82 S Assortment box from plastic with insl. cable connections and crimping tool



- The exact-shaped foam inlays of the case prevent the contents slipping even with severe impacts

Item				Part No.
Plastic assortment box with insl. cable connections and crimping tool				**SK82S**
Scope of supply	Colour	Description	Quantity	Page
K82A		Crimping tool for insulated cable connections 0.5 - 6 mm²	1	222
6204		Insl. solderless terminal M4, 0.5 - 1 mm²	20	156
6205		Insl. solderless terminal M5, 0.5 - 1 mm²	20	156
670		Insl. butt connector, 0.5 - 1 mm²	20	165
720		Insl. receptacle 6.3 x 0.8 mm, 0.5 - 1 mm²	20	161
6304		Insl. solderless terminal M4, 1.5 - 2.5 mm²	20	156
680		Insl. butt connector, 1.5 - 2.5 mm²	20	165
730		Insl. receptacle 6.3 x 0.8 mm, 1.5 - 2.5 mm²	20	161
6305		Insl. solderless terminal M5, 1.5 - 2.5 mm²	20	156

SK 30 L Steel carrying case



▸ Hammer-tone finished assortment box

Characteristics
- 4 small and 1 large additional compartments with lock

Suitable for
- For optional storage of crimping tools type K1, K4, K46 and K48

Item	Dimension mm	Weight kg	Part No.
Steel carrying case	200 x 140 x 40	1.2	**SK30L**

SK 32 L Steel carrying case



▸ Hammer-tone finished assortment box

Characteristics
- 8 small and 1 large additional compartments with lock

Suitable for
- For optional storage of crimping tools type K3 and K35

Item	Dimension mm	Weight kg	Part No.
Steel carrying case	285 x 155 x 45	1.3	**SK32L**

SK 4 L Steel carrying case



▸ Hammer-tone finished assortment box

Characteristics
- 6 small and 1 large additional compartments with lock

Suitable for
- For optional storage of crimping tools type K02, K2, K16, K25, K28 and K29

Item	Dimension mm	Weight kg	Part No.
Steel carrying case	370 x 160 x 40	1.4	**SK4L**

SK 43 L Steel carrying case



▸ Hammer-tone finished assortment box

Characteristics
- 8 small and 2 large additional compartments with lock

Suitable for
- For storage of crimping tool K 32 and wire stripper K 41

Item	Dimension mm	Weight kg	Part No.
Steel carrying case	370 x 210 x 40	1.9	**SK43L**

MK 55 Steel carrying case



▸ Hammer-tone finished assortment box

Characteristics
- 8 small and 1 large additional compartments with lock

Suitable for
- For storage of 8 pairs of dies and crimping tool K50

Item	Dimension mm	Weight kg	Part No.
Steel carrying case	245 x 130 x 37	0.7	**MK55**

MK 210 L Steel carrying case



▸ Hammer-tone finished assortment box

Characteristics
- 4 small and 1 large additional compartments with lock

Suitable for
- For storage of crimping tools K 10 or K 82

Item	Dimension mm	Weight kg	Part No.
Steel carrying case	250 x 155 x 40	1.0	**MK210L**

MK 220 L Steel carrying case



▸ Hammer-tone finished assortment box

Characteristics
- 8 small and 1 large additional compartments with lock

Suitable for
- For storage of crimping tools K 10 or K 82

Item	Dimension mm	Weight kg	Part No.
Steel carrying case	370 x 160 x 40	1.4	**MK220L**

MK 230 L Steel carrying case



▸ Hammer-tone finished assortment box

Characteristics
- 19 small and 1 large additional compartments with lock and handle

Suitable for
- For storage of crimping tools K 10 or K 82

Item	Dimension mm	Weight kg	Part No.
Steel carrying case	366 x 230 x 51	2.4	**MK230L**

SK 65 L Steel carrying case




▸ Hammer-tone finished assortment box

Characteristics
- 12 small and 1 large additional compartments with lock and handle

Suitable for
- For storage of crimping tools type K 05, K 05 BC, K 35/4

Item	Dimension mm	Weight kg	Part No.
Steel carrying case	400 x 250 x 50	2.3	**SK65L**

MK 18 Steel carrying case



▸ Hammer-tone finished assortment box

Characteristics
- 34 small and 1 large additional compartments with lock and handle

Suitable for
- For storage of 34 pairs of dies and crimping tool K 18

Item	Dimension mm	Weight kg	Part No.
Steel carrying case	605 x 300 x 50	4.6	**MK18**

MK 22 Steel carrying case



▸ Hammer-tone finished assortment box

Characteristics
- 17 small and 1 large additional compartments with lock and handle

Suitable for
- For storage of 17 pairs of dies and crimping tool K 22

Item	Dimension mm	Weight kg	Part No.
Steel carrying case	600 x 220 x 65	3.5	**MK22**

KKPE Plastic case



Characteristics
- With lock and handle

Suitable for
- For storing complete crimping die sets

Item	Part No.
Plastic case	**KKPE**
Plastic case	**KKPEH25**
Plastic case for crimping dies of series 13	**KKPE13**

MK/KP 1 Plastic case



Characteristics
- With lock and handle

Suitable for
- For storage of crimping tools KP1 and KP1L and 10 crimping heads of the Klauke Pro Series

Item	Dimension mm	Weight kg	Part No.
Plastic case	395 x 295 x 106	1.0	**MKKP1**

MKU Steel carrying case with wheels



▸ **Hammer-tone finished assortment box**

Characteristics
- With additional compartment for dies with lock and handle

Suitable for
- For storage of hydraulic crimping tools HK12/2, HK25/2 or HK45

Item	Dimension mm	Weight kg	Part No.
Steel carrying case	810 x 310 x 210	10.0	**MKU**

TT2 Carrying case



Suitable for
- For storing all crimping and cutting heads (excluding SDK 105, SDK 120 and PK1000)

Item	Weight kg	Part No.
Carrying bag	0.48	**TT2**

TT4 Carrying case



Suitable for
- For storage of cutting heads SDK 105 and SDK 120

Item	Weight kg	Part No.
Carrying bag	0.73	**TT4**

SYSTEMATIC ORDER - L-BOXX FROM BS SYSTEMS

We must have order, especially when on the go. L-Boxx from BS Systems is a well thought out arrangement system for safely transporting your Klauke tool and connectors no matter what. Klauke products are safely stowed in the L-Boxx - matched to your individual equipment. Keep the overview!



In brief

- Available in various sizes
- Maximum protection due to shock and impact resistant materials
- Easy to transport with practical handle on the cover and the sides
- Simple stacking of several boxes thanks to click system

Large or small?

The L-Boxx provides the right tool every time. Select what you need from the broad range of sizes. The boxes are always shock and impact resistant and and can be stacked without risk of slipping due to a click system.

- Available in various sizes
- Shock and impact resistant
- Easy to transport with practical handles on the cover and on the sides
- Safe transportation and storage due to click system





Everything practically packed

The L-Box doesn't just stow your tools - they also assign them exactly the right storage location. Trust in our Klauke system of pre-stocked boxes for various applications.

- Pre-stocked boxes equipped to your needs
- Choice for differing areas of applications
- Everything to hand in one box

Sorted on the go

Do you need your toolboxes on the go? With the TÜV-tested Sortimo vehicle equipment, all Klauke tools and ranges can be systematically and safely transported in L-Boxxes.

- Quickly located thanks to the Sortimo system overview
- Avoid injury by securing the boxes against accidents and braking actions
- Short searching time for efficient operations



L-BOXX 65B from plastic with standard equipment for electrical installations



Comprehensive equipment for conductor preparation, comprising cable cutter, cable knife, crimping tool and connectors

Characteristics

- Manufactured from shock and impact resistant ABS plastic, very robust, 100 kg capacity
- Stackable using an Easy-Click system, which allows easy opening and closing

Item	Dimension mm	Part No.
L-BOXX from plastic with standard equipment for electrical installations	442 x 357 x 117	**LBOXX65B**

Scope of supply	Description	Quantity	Page
K05	Crimping tool for tubular cable lugs and connectors, standard type 6 - 50 mm²	1	235
K100	Hand-operated cutting tool for Cu and Al cables to 14 mm dia.	1	364
KL740416	Cable knife, without blade 4 - 16 mm dia.	1	547
1R6	Tubular cable lug without inspection hole, 6 mm², M6, Cu tinned	25	14
1R8	Tubular cable lug without inspection hole, 6 mm², M8, Cu tinned	25	14
2R6	Tubular cable lug without inspection hole, 10 mm², M6, Cu tinned	25	14
2R8	Tubular cable lug without inspection hole, 10 mm², M8, Cu tinned	25	14
3R10	Tubular cable lug without inspection hole, 16 mm², M10, Cu tinned	25	14
4R8	Tubular cable lug without inspection hole, 25 mm², M8, Cu tinned	20	14
4R10	Tubular cable lug without inspection hole, 25 mm², M10, Cu tinned	20	14
5R8	Tubular cable lug without inspection hole, 35 mm², M8, Cu tinned	20	14
5R10	Tubular cable lug without inspection hole, 35 mm², M10, Cu tinned	20	14
6R10	Tubular cable lug without inspection hole, 50 mm², M10, Cu tinned	15	15
LBOXX102LFG	L-BOXX with front handle	1	

L-BOXX 50B from plastic with standard equipment for electrical installations



Comprehensive equipment for conductor preparation, comprising cable cutter, cable knife, crimping tool and connectors

Characteristics

- Manufactured from shock and impact resistant ABS plastic, very robust, 100 kg capacity
- Stackable using an Easy-Click system, which allows easy opening and closing

Item	Dimension mm	Part No.
L-BOXX from plastic with standard equipment for electrical installations	442 x 357 x 117	**LB0XX65B**

Scope of supply	Description	Quantity	Page
K05D	Crimping tool for compression cable lugs and connectors (DIN 46235 / DIN 46267, Part 1) 6 - 50 mm²	1	235
K100	Hand-operated cutting tool for Cu and Al cables to 14 mm dia.	1	364
KL740416	Cable knife, without blade 4 - 16 mm dia.	1	547
101R6	Compression cable lug, DIN 46235, 6 mm², M6, Cu tinned	25	14
101R8	Compression cable lug, 6 mm², M8, Cu tinned	25	14
102R6	Compression cable lug, DIN 46235, 10 mm², M6, Cu tinned	25	14
102R8	Compression cable lug, 10 mm², M8, Cu tinned	25	14
103R10	Compression cable lug, DIN 46235, 16 mm², M10, Cu tinned	25	14
104R8	Compression cable lug, DIN 46235, 25 mm², M8, Cu tinned	20	14
104R10	Compression cable lug, DIN 46235, 25 mm², M10, Cu tinned	20	14
105R8	Compression cable lug, DIN 46235, 35 mm², M8, Cu tinned	15	14
106R8	Compression cable lug, DIN 46235, 50 mm², M8, Cu tinned	10	14
106R10	Compression cable lug, DIN 46235, 50 mm², M10, Cu tinned	10	15
LB0XX102LFG	L-BOXX with front handle	1	

L-BOXX 65BCB from plastic with blue connection® - equipment



Extensive equipment based on the blue connection® product line, including crimping tool, cutting tool and cable knife

Characteristics

- Manufactured from shock and impact resistant ABS plastic, very robust, 100 kg capacity
- Stackable using an Easy-Click system, which allows easy opening and closing

Item	Dimension mm	Part No.
L-BOXX from plastic with blue connection® equipment	442 x 357 x 117	**LBOXX65BCB**

Scope of supply	Description	Quantity	Page
K05BC	Crimping tool for tubular cable lugs and connectors, blue connection® 6 - 50 mm²	1	234
K100	Hand-operated cutting tool for Cu and Al cables to 14 mm dia.	1	364
KL740416	Cable knife, without blade 4 - 16 mm dia.	1	547
6B6	Tubular cable lugs, blue connection®, 6 mm², M6, Cu	25	28
6B8	Tubular cable lugs, blue connection®, 6 mm², M8, Cu	25	28
10B6	Tubular cable lugs, blue connection®, 10 mm², M6, Cu	25	28
10B8	Tubular cable lugs, blue connection®, 10 mm², M8, Cu	25	28
16B10	Tubular cable lugs, blue connection®, 16 mm², M10, Cu	25	28
25B8	Tubular cable lugs, blue connection®, 25 mm², M8, Cu	20	28
25B10	Tubular cable lugs, blue connection®, 25 mm², M10, Cu	20	28
35B8	Tubular cable lugs, blue connection®, 35 mm², M8, Cu	20	28
35B10	Tubular cable lugs, blue connection®, 35 mm², M10, Cu	20	28
50B10	Tubular cable lugs, blue connection®, 50 mm², M10, Cu	20	28
LBOXX102LFG	L-BOXX with front handle	1	

L-BOXX 230 B from plastic with standard equipment for electrical installations



Item	Dimension mm	Part No.
L-BOXX from plastic with standard equipment for electrical installations	442 x 357 x 117	**LBOXX230B**

Scope of supply	Colour	Description	Quantity	Page
K432		Automatic wire stripper K43/2 0.02 - 10 mm²	1	545
K507		Crimping tool with replaceable dies	1	243
720		Insl. receptacle 6.3 x 0.8 mm, 0.5 - 1 mm²	50	161
730		Insl. receptacle 6.3 x 0.8 mm, 1.5 - 2.5 mm²	50	161
820		Insl. tab 6.3 x 0.8 mm, 0.5 - 1 mm²	50	164
830		Insl. tab 6.3 x 0.8 mm, 1.5 - 2.5 mm²	50	164
6204		Insl. solderless terminal M4, 0.5 - 1 mm²	50	156
6305		Insl. solderless terminal M5, 1.5 - 2.5 mm²	50	156
6506		Insl. solderless terminal M6, 4 - 6 mm²	50	156
670		Insl. butt connector, 0.5 - 1 mm²	50	165
680		Insl. butt connector, 1.5 - 2.5 mm²	50	165
700		Insl. butt connector, 4 - 6 mm²	25	165
1652C5		Solderless terminals 10 mm², M5	50	78
1652C6		Solderless terminals 10 mm², M6	50	78
4708		Insl. cable end-sleeve, 0.75 mm², 14 mm	400	141
4718		Insl. cable end-sleeve, 1 mm², 14 mm	400	141
4728		Insl. cable end-sleeve, 1.5 mm², 14 mm	400	141
4738		Insl. cable end-sleeve, 2.5 mm², 14 mm	200	141
47410		Insl. cable end-sleeve, 4 mm², 17 mm	100	141
47512		Insl. cable end-sleeve, 6 mm², 20 mm	100	141
47612		Insl. cable end-sleeve, 10 mm², 22 mm	100	141
LBOXX102LFG		L-BOXX with front handle	1	

L-BOXX Mini from plastic with crimping tool and insl. cable end-sleeves 0.5-16 mm² NEW



Item	Part No.
L-BOXX from plastic with crimping tool and cable end-sleeves 0.5 - 16 mm²	**LBOXXMINIK3**

Scope of supply	Colour	Description	Quantity	Page
K3		Crimping tool for cable end-sleeves 0.5 - 16 mm²	1	211
K118		Hand-operated cutting tool for Cu and Al cables to 12 mm dia.	1	364
4728		Insl. cable end-sleeve, 1.5 mm², 14 mm	100	141
47312		Insl. cable end-sleeve, 2.5 mm², 18 mm	100	141
47412		Insl. cable end-sleeve, 4 mm², 20 mm	50	141
47512		Insl. cable end-sleeve, 6 mm², 20 mm	50	141
47612		Insl. cable end-sleeve, 10 mm², 22 mm	30	141
LBOXXMINIL		L-BOXX “Mini“	1	

L-BOXX Mini from plastic with crimping tool and insl. cable end-sleeves 1.5 - 10 mm²

NEW



Item			Part No.	
L-BOXX from plastic with crimping tool and insl. cable end-sleeves 1.5 - 10 mm²			**LBOXXMINIK306K**	
Scope of supply	Colour	Description	Quantity	Page
K306K		Crimping tool for cable end-sleeves and twin cable end-sleeves 0.08 - 16 mm²	1	217
K118		Hand-operated cutting tool for Cu and Al cables to 12 mm dia.	1	364
4728		Insl. cable end-sleeve, 1.5 mm², 14 mm	100	141
47312		Insl. cable end-sleeve, 2.5 mm², 18 mm	100	141
47412		Insl. cable end-sleeve, 4 mm², 20 mm	50	141
47512		Insl. cable end-sleeve, 6 mm², 20 mm	50	141
47612		Insl. cable end-sleeve, 10 mm², 22 mm	30	141
LBOXXMINIL		L-BOXX “Mini“	1	

L-BOXX Mini from plastic with crimping tool and insl. cable end-sleeves 1.5 - 10 mm²

NEW



Item			Part No.	
L-BOXX from plastic with crimping tool and insl. cable end-sleeves 1.5 - 10 mm²			**LBOXXMINIK304K**	
Scope of supply	Colour	Description	Quantity	Page
K304K		K 30/4 K crimping tool for cable end-sleeves 0.08 to 16 mm² and twin cable end-sleeves 2 x 0,5 - 2 x 6 mm²	1	217
K118		Hand-operated cutting tool for Cu and Al cables to 12 mm dia.	1	364
4728		Insl. cable end-sleeve, 1.5 mm², 14 mm	100	141
47312		Insl. cable end-sleeve, 2.5 mm², 18 mm	100	141
47412		Insl. cable end-sleeve, 4 mm², 20 mm	50	141
47512		Insl. cable end-sleeve, 6 mm², 20 mm	50	141
47612		Insl. cable end-sleeve, 10 mm², 22 mm	30	141
LBOXXMINIL		L-BOXX “Mini“	1	

L-BOXX Mini from plastic with crimping tool and insl. cable end-sleeves 1.5 - 10 mm²

NEW



Item			Part No.	
L-BOXX from plastic with crimping tool and insl. cable end-sleeves 1.5 - 10 mm²			**LBOXXMINIK3014K**	
Scope of supply	Colour	Description	Quantity	Page
K3014K		Crimping tool for cable end-sleeves and twin cable end-sleeves 0.14 - 10 mm²	1	218
K118		Hand-operated cutting tool for Cu and Al cables to 12 mm dia.	1	364
4728		Insl. cable end-sleeve, 1.5 mm², 14 mm	100	141
47312		Insl. cable end-sleeve, 2.5 mm², 18 mm	100	141
47412		Insl. cable end-sleeve, 4 mm², 20 mm	50	141
47512		Insl. cable end-sleeve, 6 mm², 20 mm	50	141
47612		Insl. cable end-sleeve, 10 mm², 22 mm	30	141
LBOXXMINIL		L-BOXX “Mini“	1	

L-BOXXes with the new battery powered tools of the NEXT GENERATION

NEXT GENERATION



NEW

This is just a small extract of our range. If you need a different combination, contact us.

Bosch battery

Tool	Crimping	Cutting	Punching	Part No.
EK 35/4	6 - 150 mm²			**LBOXXEK354CFB**
EK 50/5	6 - 240 mm²			**LBOXXEK505CFB**
EK 50/18	6 - 185 mm²			**LBOXXEK5018CFB**
EKM 60/22	6 - 300 mm²			**LBOXXEKM6022CFB**
EKM 60 ID	10 - 240 mm²			**LBOXXEKM60IDCFB**
ES 20		max. 20 mm dia.		**LBOXXES20CFB**
ES 32 F		max. 32 mm dia.		**LBOXXES32FCFB**
ES 32		max. 32 mm dia.		**LBOXXES32CFB**
EKM 60 UNV	6 - 300 mm²	max. 25 mm dia.	round/shape	**LBOXXEKM60UNVCFB**
LS 50 FLEX			round/shape	**LBOXXLS50FLEXCFB**

Makita battery

Tool	Crimping	Cutting	Punching	Part No.
EK 35/4	6 - 150 mm²			**LBOXXEK354CFM**
EK 50/5	6 - 240 mm²			**LBOXXEK505CFM**
EK 50/18	6 - 185 mm²			**LBOXXEK5018CFM**
EKM 60/22	6 - 300 mm²			**LBOXXEKM6022CFM**
EKM 60 ID	10 - 240 mm²			**LBOXXEKM60IDCFM**
ES 20		max. 20 mm dia.		**LBOXXES20CFM**
ES 32 F		max. 32 mm dia.		**LBOXXES32FCFM**
ES 32		max. 32 mm dia.		**LBOXXES32CFM**
EKM 60 UNV	6 - 300 mm²	max. 25 mm dia.	round/shape	**LBOXXEKM60UNVCFM**
LS 50 FLEX			round/shape	**LBOXXLS50FLEXCFM**

Crimping & cutting

(shown is the scope of supply with Bosch battery)



Part No.	Scope of supply	LBOXX- EK354	EK505	EK5018	EKM6022	EKM60ID	ES20	ES32	ES32F	EKM60UNV
RALB1EU	Bosch battery 18 V / 2.0 Ah, Li-Ion	●	●	●	●	●	●	●	●	●
LGLB1EU	Bosch charger for 18 V Li-Ion batteries	●	●	●	●	●	●	●	●	●
UA22	Adapter for crimping dies									●
LBOXX136LFG	L-BOXX (W/D/H: 442 x 357 x 151 mm)	●	●	●	●	●	●	●	●	●

Punching

(shown is the scope of supply with Bosch battery)



	LBOXXLS50LFLEX							
Part No.	RALB2EU	LGLB1EU	50318721	50032488	52049371	51300430	50339672	LBOXX136GL
Scope of supply	Bosch battery 18 V / 5.0 Ah, Li-Ion	Bosch charger for 18 V Li-Ion batteries	Draw stud for hydraulic operation 19 x 105 mm	Spacer, short	HSS Co5 step bit	Draw stud for punch with hydraulic operation 9.5 x 71 mm	Adapter 19 x 48 mm with internal thread 9.5 mm	L-BOXX (W/D/H: 442 x 357 x 151 mm)

PERFECT CRIMPED CONNECTIONS FOR SURE.

Klauke crimping tools give you peace of mind for optimum processing. The right crimping tool achieves connections that satisfy even the toughest requirements.





Crimping

Mechanical crimping tools **208**
Mechanical crimping tools 210
Mechanical crimping tools with interchangeable dies 240

Electromechanical crimping tool **253**

Battery powered crimping tool **257**
10.8 V - base 257
18 V - base 264
Battery powered universal tools 288

Hand-operated hydraulic crimping tools **291**

Hydraulic crimping heads and crimping systems **305**
Hydraulic crimping heads 306
Hydraulic crimping systems 320

Crimping dies **324**
Series 50 326
Series 4 328
Series 5 333
Series 18 337
Series 22 341
Series 13 347
Series 15 352
Series 25 353
Series 45 358
Series 100 359

FULL FORCE TRANSMISSION - MECHANICAL CRIMPING TOOLS

Less force is more. Klauke crimping tools were developed specifically to make your work faster, more precise and simpler. Ergonomic handles ensure the right grip, improved lever effects provide a manual actuation that transmits your force exactly where it's needed: With 33 % less effort.



In brief

- Effortless operation due to a third less force
- Exact crimping with precise actuation
- Reliable assignment through clear marking of the crimping profiles
- Durable material
- Individually selectable crimping profiles from 0.08 mm^2 to 400 mm^2

Developed for a broad range of applications

To ensure efficient crimps, a good tool needs optimum force transmission and high-quality materials. So we developed our mechanical series to make your work easier. These function make the difference especially with frequent use.

- Crimping profiles with nominal cross-sections from 0.08 mm^2 to 400 mm^2
- High-quality steel for long service life
- Best possible force transmission: Up to 33 % less effort
- Optimum crimp results with integrated ratchet
- Ergonomic design for fast and effortless operations



K 4 Crimping tool for cable end-sleeves 0.5 - 2.5 mm²



- Indent crimping for round clamp opening
- Simple and quick due to spring-actuated tool opening

Characteristics

- One crimp profile per cross-section
- Lateral insertion (side crimping)
- Simple and safe: Exact cross-section assignment thanks to permanent marking on the crimping tool
- Optimum handling due to ergonomically-shaped handle

Technical data	
Crimping range	0.5 - 2.5 mm²
Length	150 mm
Weight	0.16 kg

Item	Part No.
Crimping tool for cable end-sleeves 0.5 - 2.5 mm²	**K4**

Accessories	Part No.	Page
Steel carrying case	SK30L	193

K 46 Crimping tool for cable end-sleeves 1.5 - 6 mm²



- Indent crimping for round clamp opening
- Simple and quick due to spring-actuated tool opening

Characteristics

- One crimp profile per cross-section
- Lateral insertion (side crimping)
- Simple and safe: Exact cross-section assignment thanks to permanent marking on the crimping tool
- Optimum handling due to ergonomically-shaped handle


Technical data	
Crimping range	1.5 - 6 mm²
Length	150 mm
Weight	0.16 kg

Item	Part No.
Crimping tool for cable end-sleeves 1.5 - 6 mm²	**K46**

Accessories	Part No.	Page
Steel carrying case	SK30L	193

K 3 Crimping tool for cable end-sleeves 0.5 - 16 mm²





- Indent crimping for round clamp opening
- With wire cutter

Characteristics

- Optimum handling due to ergonomically-shaped handle
- Optimised crimp range (up to 3-times wider than before)
- Lateral insertion (side crimping)
- Simple and safe: Exact cross-section assignment thanks to permanent marking on the crimping tool
- Integrated cable stripper

Technical data	
Crimping range	0.5 - 16 mm²
Length	230 mm
Weight	0.35 kg


Item	Part No.
Crimping tool for cable end-sleeves 0.5 - 16 mm²	**K3**

Accessories	Part No.	Page
Steel carrying case	SK32L	193

Variants	Part No.	Page
L-BOXX from plastic with crimping tool and cable end-sleeves 0.5 - 16 mm²	LBOXXMINIK3	203

K 35 Crimping tool for cable end-sleeves 10 - 35 mm²





- Indent crimping for round clamp opening
- For large cross-sections to 35 mm²

Characteristics

- One crimp profile per cross-section
- Lateral insertion (side crimping)
- Simple and safe: Exact cross-section assignment thanks to permanent marking on the crimping tool
- Optimum handling due to ergonomically-shaped handle


Technical data	
Crimping range	10 - 35 mm²
Length	230 mm
Weight	0.24 kg

Item	Part No.
Crimping tool for cable end-sleeves 10 - 35 mm²	**K35**

Accessories	Part No.	Page
Steel carrying case	SK32L	193

K 1 Crimping tool for cable end-sleeves 0.14 - 2.5 mm²





- Trapezoid crimping suitable for box terminals
- Quick repetition of work steps due to spring-actuated tool opening
- With wire stripping and cutting tool

Characteristics

- One crimp profile per cross-section
- Lateral insertion (side crimping)
- Simple and safe: Exact cross-section assignment thanks to permanent marking on the crimping tool
- Optimum handling due to ergonomically-shaped handle
- Interchangeable stripping blades


Technical data	
Crimping range	0.14 - 2.5 mm²
Length	175 mm
Weight	0.19 kg

Item	Part No.
Crimping tool for cable end-sleeves 0.14 - 2.5 mm²	**K1**

Accessories	Part No.	Page
Steel carrying case	SK30L	193

K 48 Crimping tool for cable end-sleeves 0.14 - 2.5 mm²





- Trapezoid crimping suitable for box terminals
- Quick repetition of work steps due to spring-actuated tool opening

Characteristics

- One crimp profile per cross-section
- Lateral insertion (side crimping)
- Simple and safe: Exact cross-section assignment thanks to permanent marking on the crimping tool
- Optimum handling due to ergonomically-shaped handle


Technical data	
Crimping range	0.14 - 2.5 mm²
Length	150 mm
Weight	0.16 kg

Item	Part No.
Crimping tool for cable end-sleeves 0.14 - 2.5 mm²	**K48**

Accessories	Part No.	Page
Steel carrying case	SK30L	193

K 36 Crimping tool for cable end-sleeves and twin cable end-sleeves 0.5 - 6 mm²





- Two crimping profiles with the cross-section areas 0.5 - 2.5 mm² and 4 - 6 mm²
- Quick repetition of work steps due to spring-actuated tool opening

Characteristics

- Front sleeve insertion (front crimping)
- Ergonomically-designed handle with slip guard


Technical data	
Crimping range	0.5 - 6 mm²
Cable end-sleeves	0.5 - 2.5 and 4 - 6 mm²
Twin cable end-sleeves	2 x 0.25 - 2 x 1.5 and 2 x 2.5 - 2x4 mm²
Length	200 mm
Weight	0.22 kg

Item	Part No.
Crimping tool for cable end-sleeves 0.5 - 6 mm² and twin cable end-sleeves 2 x 0.25 - 2 x 1.5 and 2 x 2.5 - 2 x 4 mm²	**K36**

Accessories	Part No.	Page
Steel carrying case	SK32L	193

K 32 Crimping tool for cable end-sleeves and twin cable end-sleeves 0.14 - 6 mm²





- Trapezoid crimping suitable for box terminals
- One crimping profile for cross-sections from 0.14 - 6 mm² due to automatic cross-section adjustment
- Quick repetition of work steps due to spring-actuated tool opening

Characteristics

- With ratchet for consistently-controlled crimp results
- Front sleeve insertion (front crimping)
- Optimum handling due to ergonomically-shaped handle
- Handle with slip guard and inscription panel


Technical data	
Crimping range	0.14 - 6 mm²
Cable end-sleeves	0.14 - 6 mm²
Twin cable end-sleeves	2 x 0.25 - 2 x 2.5 mm²
Length	210 mm
Weight	0.35 kg

Item	Part No.
Crimping tool for cable end-sleeves 0.14 - 6 mm² and twin cable end-sleeves 2 x 0.5 - 2 x 2.5 mm²	**K32**

Accessories	Part No.	Page
Steel carrying case	SK43L	193

K 34 Crimping tool for cable end-sleeves and twin cable end-sleeves 6 - 16 mm²





- Trapezoid crimping suitable for box terminals
- Quick repetition of work steps due to spring-actuated tool opening
- One crimping profile for cross-sections from 6 - 16 mm² due to automatic cross-section adjustment

Characteristics

- With ratchet for consistently-controlled crimp results
- Front sleeve insertion (front crimping)
- Handle with slip guard and inscription panel


Technical data	
Crimping range	6 - 16 mm²
Cable end-sleeves	6 - 16 mm²
Twin cable end-sleeves	2 x 4 - 2 x 6 mm²
Length	210 mm
Weight	0.5 kg

Item	Part No.
Crimping tool for cable end-sleeves 6 - 16 mm² and twin cable end-sleeves 2 x 4 - 2 x 6 mm²	**K34**

Accessories	Part No.	Page
Steel carrying case	SK43L	193

K 37 Crimping tool for cable end-sleeves 0.14 - 6 mm²





- Trapezoid crimping suitable for box terminals
- Tool pre-tensioning adjustable

Characteristics

- Adjusting disc for compensating for the natural tool wear
- One crimp profile per cross-section
- With ratchet for consistently-controlled crimp results
- Lateral insertion (side crimping)
- Simple and safe: Exact cross-section assignment thanks to permanent marking on the crimping tool


Technical data	
Crimping range	0.14 - 6 mm²
Length	200 mm
Weight	0.36 kg

Item	Part No.
Crimping tool for cable end-sleeves 0.14 - 6 mm²	**K37**

Accessories	Part No.	Page
Steel carrying case	SK43L	193

K 39 Crimping tool for cable end-sleeves 10 - 25 mm²





- Trapezoid crimping suitable for box terminals
- Sustainable crimps due to adjustable tool pre-tensioning

Characteristics

- Adjusting disc for compensating for the natural tool wear
- One crimp profile per cross-section
- With ratchet for consistently-controlled crimp results
- Lateral insertion (side crimping)
- Simple and safe: Exact cross-section assignment thanks to permanent marking on the crimping tool


Technical data	
Crimping range	10 - 25 mm²
Length	200 mm
Weight	0.36 kg

Item	Part No.
Crimping tool for cable end-sleeves 10 - 25 mm²	**K39**

Accessories	Part No.	Page
Steel carrying case	SK43L	193

K 38/2 Crimping tool for cable end-sleeves and twin cable end-sleeves 0.5 - 6 mm²





- Square crimping suitable for box terminals and spring clamp technology
- Adjusting disc to compensate for the natural tool wear
- One crimping profile for cross-sections from 0.5 - 6 mm² due to automatic cross-section adjustment

Characteristics

- Accurate drive
- With ratchet for consistently-controlled crimp results
- Front sleeve insertion (front crimping)

Technical data	
Crimping range	0.5 - 6 mm²
Cable end-sleeves	0.5 - 6 mm²
Twin cable end-sleeves	2 x 0.25 - 2 x 2.5 mm²
Length	190 mm
Weight	0.3 kg

Item	Part No.
Crimping tool for cable end-sleeves and twin cable end-sleeves 0.5 - 6 mm²	**K382**

Accessories	Part No.	Page
Steel carrying case	SK43L	193

K 38 ERGO Crimping tool for cable end-sleeves and twin cable end-sleeves 0.25 - 6 mm²



- Square crimping suitable for box terminals and spring clamp technology
- Ergonomic design
- Low manual crimping force

Characteristics

- Precise drive with ratchet for consistently-controlled crimp results
- Front sleeve insertion (front crimping)
- Reduced space requirement for processing
- Automatic cross-section range adjustment from 0.25 - 6 mm²
- Max. length of cable end-sleeves to be crimped 18 mm, from 12 mm in two stages

Technical data	
Crimping range	0.25 - 6 mm²
Cable end-sleeves	0.25 - 6 mm²
Twin cable end-sleeves	2 x 0.25 - 2 x 2.5 mm²
Length	160 mm
Weight	0.4 kg

Item	Part No.
Crimping tool for cable end-sleeves and twin cable end-sleeves 0.25 - 6 mm²	**K38ERGO**

Variants	Part No.	Page
Plastic case with cable end-sleeves, twin cable end-sleeves and crimping tool	K38ERGOSET	

K 38 ERGO SET Plastic case with cable end-sleeves, twin cable end-sleeves and crimping tool



- Square crimping suitable for box terminals and spring clamp technology
- Ergonomic design
- Low manual crimping force
- Plastic tool case

Characteristics

- Precise drive with ratchet for consistently-controlled crimp results
- Front sleeve insertion (front crimping)
- Reduced space requirement for processing
- Automatic cross-section range adjustment from 0.25 - 6 mm²
- Max. length of cable end-sleeves to be crimped 18 mm, from 12 mm in two stages


Technical data	
Crimping range	0.25 - 6 mm²
Cable end-sleeves	0.25 - 6 mm²
Twin cable end-sleeves	2 x 0.25 – 2 x 2.5 mm²
Dimensions	235 x 180 x 50 mm
Length	160 mm
Weight	0.74 kg

Item	Part No.
Plastic case with cable end-sleeves, twin cable end-sleeves and crimping tool	**K38ERGOSET**

Scope of supply	Colour	Part No.	Quantity	Page
Crimping tool for cable end-sleeves and twin cable end-sleeves 0.25 - 6 mm²		K38ERGO	1	216
Insl. cable end-sleeve, 0.5 mm²		4698	100	141
Insl. cable end-sleeve, 0.75 mm²		4708	100	141
Insl. cable end-sleeve, 1 mm²		4718	100	141
Insl. cable end-sleeve, 1.5 mm²		4728	100	141

K 30/3 Crimping tool for cable end-sleeves and twin cable end-sleeves 0.08 - 10 mm²





▸ **Square crimping suitable for box terminals and spring clamp technology**

Characteristics

- One crimping profile for cross-sections from 0.08-16 mm² due to automatic cross-section adjustment
- With ratchet for consistently-controlled crimp results
- Lateral insertion (side crimping)
- Handle with slip guard and inscription panel

Technical data	
Crimping range	0.08 - 10 mm²
Cable end-sleeves	0.08 - 10 mm²
Twin cable end-sleeves	2 x 0.25 - 2 x 4 mm²
Length	190 mm
Weight	0.3 kg


Item	Part No.
Crimping tool for cable end-sleeves and twin cable end-sleeves 0.08 - 10 mm²	**K303**

Accessories	Part No.	Page
Steel carrying case	SK30L	193

Crimping tools for cable end-sleeves and twin cable end-sleeves 0.08 - 16 mm²

NEW





▸ **Square crimping K 30/4 K**
▸ **Hexagonal crimping K 30/6 K**

Characteristics

- One crimping profile for cross-sections from 0.08-16 mm² due to automatic cross-section adjustment
- With ratchet for consistently-controlled crimp results
- Lateral insertion (side crimping)
- Positioner for small cable end-sleeves
- Handle with slip guard and inscription panel

Technical data	
Crimping range	0.08 - 16 mm²
Cable end-sleeves	0.08 - 16 mm²
Twin cable end-sleeves	K30/4 K: 2 x 0.5 - 2 x 6 mm², K30/6 K: 2 x 0.5 - 2 x 10 mm²
Length	215 mm
Weight	0.5 kg


Item	Part No.
Crimping tool for cable end-sleeves and twin cable end-sleeves 0.08 - 16 mm², square crimping	**K304K**
Crimping tool for cable end-sleeves and twin cable end-sleeves 0.08 - 16 mm², hexagonal crimping	**K306K**

Accessories	Part No.	Page
Steel carrying case	SK30L	193

Variants	Part No.	Page
L-BOXX from plastic with crimping tool and insl. cable end-sleeves 1.5 - 10 mm²	LBOXXMINIK304K	204
L-BOXX from plastic with crimping tool and insl. cable end-sleeves 1.5 - 10 mm²	LBOXXMINIK306K	204

K 301/4 K Crimping tool for cable end-sleeves and twin cable end-sleeves 0.14 - 10 mm² NEW





- Square crimping
- Very light and ergonomic

Characteristics

- One crimping profile for all cross-sections due to automatic cross-section adjustment
- With ratchet for consistently-controlled crimp results
- Lateral insertion (side crimping)
- Handle with slip guard and inscription panel
- Safety pad in handle for slip-free working


Technical data	
Crimping range	0.14 - 10 mm²
Cable end-sleeves	0.14 - 10 mm²
Twin cable end-sleeves	2 x 0.25 - 2 x 4 mm²
Length	175 mm
Weight	0.35 kg

Item	Part No.
Crimping tool for cable end-sleeves and twin cable end-sleeves 0.14 - 10 mm²	**K3014K**

Variants	Part No.	Page
L-BOXX from plastic with crimping tool and insl. cable end-sleeves 1.5 - 10 mm²	LBOXXMI-NIK304K	204

K 27/1 Crimping tool for cable end-sleeves and twin cable end-sleeves 4 - 50 mm²





- Special trapezoid crimping suitable for box terminals
- Special type, especially suitable for fine-stranded conductors

Characteristics

- One crimp profile per cross-section
- With ratchet for consistently-controlled crimp results
- Lateral insertion (side crimping)
- Simple and safe: Exact cross-section assignment thanks to permanent marking on the crimping tool
- Handle with slip guard and inscription panel


Technical data	
Crimping range	2 x 4 - 50 mm²
Cable end-sleeves	10 - 50 mm²
Twin cable end-sleeves	2 x 4 - 2 x 16 mm²
Length	335 mm
Weight	0.8 kg

Item	Part No.
Crimping tool for cable end-sleeves and twin cable end-sleeves 4 - 50 mm²	**K271**

Accessories	Part No.	Page
Steel carrying case	SK4L	193

K 27/2 Crimping tool for cable end-sleeves 50 - 95 mm²





- Special trapezoid crimping suitable for box terminals
- Special type, especially suitable for fine-stranded conductors
- For large cross-sections to 95 mm²

Characteristics

- One crimp profile per cross-section
- With ratchet for consistently-controlled crimp results
- Lateral insertion (side crimping)
- Simple and safe: Exact cross-section assignment thanks to permanent marking on the crimping tool
- Handle with slip guard and inscription panel


Technical data	
Crimping range	50 - 95 mm²
Length	335 mm
Weight	0.8 kg

Item	Part No.
Crimping tool for cable end-sleeves 50 - 95 mm²	**K272**

Accessories	Part No.	Page
Steel carrying case	SK4L	193

K 28 Crimping tool for cable end-sleeves and twin cable end-sleeves 4 - 50 mm²





- Trapezoid crimping suitable for box terminals

Characteristics

- One crimp profile per cross-section
- With ratchet for consistently-controlled crimp results
- Lateral insertion (side crimping)
- Simple and safe: Exact cross-section assignment thanks to permanent marking on the crimping tool
- Handle with slip guard and inscription panel


Technical data	
Crimping range	4 - 50 mm²
Cable end-sleeves	10 - 50 mm²
Twin cable end-sleeves	2 x 4 - 2 x 16 mm²
Length	335 mm
Weight	0.8 kg

Item	Part No.
Crimping tool for cable end-sleeves and twin cable end-sleeves 4 - 50 mm²	**K28**

Accessories	Part No.	Page
Steel carrying case	SK4L	193

K 29 Crimping tool for cable end-sleeves 50 - 95 mm²





- Trapezoid crimping suitable for box terminals
- For large cross-sections to 95 mm²

Characteristics

- One crimp profile per cross-section
- With ratchet for consistently-controlled crimp results
- Lateral insertion (side crimping)
- Handle with slip guard and inscription panel


Technical data	
Crimping range	50 - 95 mm²
Length	335 mm
Weight	0.8 kg

Item	Part No.
Crimping tool for cable end-sleeves 50 - 95 mm²	**K29**

Accessories	Part No.	Page
Steel carrying case	SK4L	193

K 80 Crimping tool for insulated cable connections 0.1 - 1 mm²





- Crimping of conductor and insulation in one step
- Adjusting disc to compensate for the natural tool wear

Characteristics

- Accurate drive
- With ratchet for consistently-controlled crimp results
- Colour-coded cross-section assignment
- Handle with slip guard and inscription panel

Technical data	
Crimping range	0.1 - 1 mm²
Red insulation sleeve	0.5 - 1.0 mm²
Yellow insulation sleeve	0.1 - 0.4 mm²
Length	195 mm
Weight	0.38 kg

Item	Part No.
Crimping tool for insulated cable connections 0.1 - 1 mm²	**K80**

Accessories	Part No.	Page
Steel carrying case	SK43L	193

K 81 Crimping tool for insulated cable connections 0.5 - 2.5 mm²



- Double crimping, oval shape
- Crimping of conductor and insulation in one step
- Adjusting disc to compensate for the natural tool wear

Characteristics

- Accurate drive
- With ratchet for consistently-controlled crimp results
- Colour-coded cross-section assignment

Technical data	
Crimping range	0.5 - 2.5 mm²
Red insulation sleeve	0.5 - 1.0 mm²
Blue insulation sleeve	1.5 - 2.5 mm²
Length	195 mm
Weight	0.38 kg

Item	Part No.
Crimping tool for insulated cable connections 0.5 - 2.5 mm²	**K81**

Accessories	Part No.	Page
Steel carrying case	SK43L	193

K 82 Crimping tool for insulated cable connections 0.5 - 6 mm²



- 33 % less effort
- 3-Component handle grip
- Optimised material quality for a long service life
- Precise pre-tension setting maintains constant crimp performance

Characteristics

- Less effort required due to new mechanical lever system
- 3C handle: YELLOW: hard core for force transmission, BLUE: soft ergonomic grip area, GREY: soft slip protection
- Easy handling thanks to reduced tool opening width, optimum ergonomics due to the position of the palms and fingers, which is gentle on the joints
- Crimping of conductor and insulation in one step


Technical data	
Crimping range	0.5 - 6.0 mm²
Red insulation sleeve	0.5 - 1.0 mm²
Blue insulation sleeve	1.5 - 2.5 mm²
Yellow insulation sleeve	4.0 - 6.0 mm²
Length	225 mm
Weight	0.53 kg

Item	Part No.
Crimping tool for insulated cable connections 0.5 - 6 mm²	**K82A**

Accessories	Part No.	Page
Steel carrying case	MK230L	194

K 16 Crimping tool for insulated solderless terminals 10 + 16 mm²





- Oval crimping
- Crimping tool also for meter connections

Characteristics

- With ratchet for consistently-controlled crimp results
- Colour-coded cross-section assignment


Technical data	
Crimping range	10 + 16 mm²
Red insulation sleeve	10 mm²
Blue insulation sleeve	16 mm²
Length	305 mm
Weight	0.61 kg

Item	Part No.
Crimping tool for insulated solderless terminals 10 + 16 mm²	**K16**

Accessories	Part No.	Page
Steel carrying case	SK4L	193

K 60 crimping tool for non-insulated tabs and receptacles 0.5 - 6 mm²





- Roll crimping
- To shorten screws M2.5 - M6

Characteristics

- Crimping of conductor and insulation in two steps
- With wire stripping and cutting tool for cross-sections 0.75 – 6 mm²

Suitable for

- Tabs with 2.8 / 4.8 and 6.3 mm tab width

Technical data	
Crimping range	0.5 - 6 mm²
Length	225 mm
Weight	0.2 kg

Item	Part No.
Crimping tool for non-insulated tabs and receptacles 0.5 - 6 mm²	**K60**

Accessories	Part No.	Page
Steel carrying case	MK210L	194

K 57/2 Crimping tool for non-insulated tabs and receptacles 2.8 mm; 0.1 - 1 mm²



- Roll crimping
- Crimping of conductor and insulation in one step
- Spring-actuated tool opening
- Tool pre-tensioning adjustable

Characteristics

- With ratchet for consistently-controlled crimp results
- Simple and safe: Exact cross-section assignment thanks to permanent marking on the crimping tool
- Adjusting disc for compensating for the natural tool wear

Suitable for

- Tabs with 2.8 mm tab width

Technical data	
Crimping range	0.1-1 mm²
Length	220 mm
Weight	0.55 kg

Item	Part No.
Crimping tool for non-insulated tabs and receptacles 2.8 mm; 0.1-1 mm²	**K572**

K 58/2 Crimping tool for non-insulated tabs and receptacles 4.8 mm; 0.5 - 2.5 mm²



- Roll crimping
- Crimping of conductor and insulation in one step
- Tool pre-tensioning adjustable

Characteristics

- Simple and quick due to spring-actuated tool opening
- With ratchet for consistently-controlled crimp results
- Simple and safe: Exact cross-section assignment thanks to permanent marking on the crimping tool
- Adjusting disc for compensating for the natural tool wear

Suitable for

- Tabs with 4.8 mm tab width

Technical data	
Crimping range	0.5 - 2.5 mm²
Length	220 mm
Weight	0.55 kg

Item	Part No.
Crimping tool for non-insulated tabs and receptacles 4.8 mm; 0.5 - 2.5 mm²	**K582**

K 59/2 Crimping tool for non-insulated tabs and receptacles 6.3 mm; 0.5 - 6 mm²



- Roll crimping
- Crimping of conductor and insulation in one step
- Tool pre-tensioning adjustable

Characteristics

- With ratchet for consistently-controlled crimp results
- Simple and safe: Exact cross-section assignment thanks to permanent marking on the crimping tool
- Simple and quick due to spring-actuated tool opening
- Adjusting disc for compensating for the natural tool wear

Suitable for

- Tabs with 6.3 mm tab width

Technical data	
Crimping range	0.5 - 6 mm²
Length	220 mm
Weight	0.51 kg

Item	Part No.
Crimping tool for non-insulated tabs and receptacles 6.3 mm; 0.5 - 6 mm²	**K592**

K 67 Crimping tool for non-insulated tabs and receptacles 2.8 mm; 0.1 - 1 mm²



- Roll crimping
- Crimping of conductor and insulation in one step
- Spring-actuated tool opening

Characteristics

- With ratchet for consistently-controlled crimp results
- Parallel guided crimping jaws

Suitable for

- Tabs with 2.8 mm tab width

Technical data	
Crimping range	0.1 - 1 mm²
Length	210 mm
Weight	0.5 kg

Item	Part No.
Crimping tool for non-insulated tabs and receptacles 2.8 mm; 0.1 - 1 mm²	**K67**

Accessories	Part No.	Page
Steel carrying case	MK210L	194

K 65 Crimping tool for non-insulated tabs and receptacles 4.8 mm; 0.5 - 2.5 mm²



- Roll crimping
- Crimping of conductor and insulation in one step
- Spring-actuated tool opening

Characteristics

- With ratchet for consistently-controlled crimp results
- Parallel guided crimping jaws

Suitable for

- Tabs with 4.8 mm tab width

Technical data	
Crimping range	0.5 - 2.5 mm²
Length	265 mm
Weight	0.6 kg

Item	Part No.
Crimping tool for non-insulated tabs and receptacles 4.8 mm; 0.5 - 2.5 mm²	**K65**

Accessories	Part No.	Page
Steel carrying case	MK210L	194

K 63 Crimping tool for non-insulated tabs and receptacles 6.3 mm; 0.5 - 2.5 mm² with lateral conductor connector



- Roll crimping
- Crimping of conductor and insulation in one step

Characteristics

- With ratchet for consistently-controlled crimp results
- Optimised force transmission
- Parallel guided crimping jaws

Suitable for

- Tabs 6.3 mm tab width

Technical data	
Crimping range	0.5 - 2.5 mm²
Length	265 mm
Weight	0.6 kg

Item	Part No.
Crimping tool for non-insulated tabs and receptacles 6.3 mm; 0.5 - 2.5 mm² with lateral conductor connector	**K63**

K 64 Crimping tool for non-insulated tabs and receptacles 6.3 mm; 0.5 - 1.5 mm² with lateral conductor connector



- Roll crimping
- Crimping of conductor and insulation in one step

Characteristics

- With ratchet for consistently-controlled crimp results
- Optimised force transmission
- Parallel guided crimping jaws

Suitable for

- Tabs with 6.3 mm tab width

Technical data	
Crimping range	0.5 - 1.5 mm²
Length	265 mm
Weight	0.6 kg

Item	Part No.
Crimping tool for non-insulated tabs and receptacles 6.3 mm; 0.5 - 1.5 mm² with lateral conductor connector	**K64**

K 93 Crimping tool for connectors for solid conductors 1.5 - 4 mm²



- Hexagonal crimping
- Tool pre-tensioning adjustable

Characteristics

- Accurate drive
- With ratchet for consistently-controlled crimp results
- Simple and safe: Exact cross-section assignment thanks to permanent marking on the crimping tool
- Handle with slip guard and inscription panel
- Adjusting disc for compensating for the natural tool wear

Technical data	
Crimping range	1.5 - 4 mm²
Length	220 mm
Weight	0.56 kg

Item	Part No.
Crimping tool for connectors for solid conductors 1.5 - 4 mm²	**K93**

K 94 Crimping tool for tubular cable lugs and connectors for solid conductors 6 - 10 mm²



- Hexagonal crimping
- Tool pre-tensioning adjustable

Characteristics


- Accurate drive
- With ratchet for consistently-controlled crimp results
- Simple and safe: Exact cross-section assignment thanks to permanent marking on the crimping tool
- Handle with slip guard and inscription panel
- Adjusting disc for compensating for the natural tool wear

Technical data	
Crimping range	6 - 10 mm²
Length	220 mm
Weight	0.56 kg

Item	Part No.
Crimping tool for tubular cable lugs and connectors for solid conductors 6 - 10 mm²	**K94**

K 2 Crimping tool for tubular cable lugs and connectors, standard type 0.75 - 16 mm²





- Indent crimping
- Ideal crimping tool with spring-actuated tool opening

Characteristics

- With ratchet for consistently-controlled crimp results
- Simple and safe: Exact cross-section assignment thanks to permanent marking on the crimping tool


Technical data	
Crimping range	0.75 - 16 mm²
Length	325 mm
Weight	0.6 kg

Item	Part No.
Crimping tool for tubular cable lugs and connectors, standard type 0.75 - 16 mm²	**K2**

Accessories	Part No.	Page
Steel carrying case	SK4L	193

K 02 Crimping tool for tubular cable lugs and connectors for solid conductors 0.75 - 16 mm²





- Indent crimping
- Ideal crimping tool with spring-actuated tool opening
- For tubular cable lugs and connectors for solid conductors

Characteristics

- With ratchet for consistently-controlled crimp results
- Simple and safe: Exact cross-section assignment thanks to permanent marking on the crimping tool


Technical data	
Crimping range	0.75 - 16 mm²
Length	325 mm
Weight	0.6 kg

Item	Part No.
Crimping tool for tubular cable lugs and connectors for solid conductors 0.75 - 16 mm²	**K02**

Accessories	Part No.	Page
Steel carrying case	SK4L	193

K 25 Crimping tool 0.5 - 16 mm²





- Indent crimping
- Ideal crimping tool with spring-actuated tool opening
- For solderless terminals to DIN 46234, pin terminals to DIN 46230
- For nickel and stainless steel tubular cable lugs and connector to 6 mm²

Characteristics

- With ratchet for consistently-controlled crimp results
- Simple and safe: Exact cross-section assignment thanks to permanent marking on the crimping tool


Technical data	
Crimping range	0.5 - 16 mm²
Length	325 mm
Weight	0.6 kg

Item	Part No.
Crimping tool 0.5 - 16 mm²	**K25**

Accessories	Part No.	Page
Steel carrying case	SK4L	193

K 95 Crimping tool 16 - 95 mm²





- Indent crimping

Characteristics

- For smaller copper conductors
- Optimised force transmission

Suitable for


- Tubular cable-lugs and connectors, standard type
- Tubular cable lugs and connectors for fine-stranded conductors
- Solderless terminals DIN 46234, pin terminals DIN 46230

Technical data	
Crimping range	16 - 95 mm²
Length	630 mm
Weight	3.6 kg

Item	Part No.
Crimping tool 16 - 95 mm²	**K95**

TK 95 Crimping tool 16 - 95 mm² for workbench mounting





- Indent crimping
- Ideal tool for workbench assembly

Characteristics

- For smaller copper conductors
- Optimised force transmission

Suitable for


- Tubular cable-lugs and connectors, standard type
- Tubular cable lugs and connectors for fine-stranded conductors
- Solderless terminals DIN 46234, pin terminals DIN 46230

Technical data	
Crimping range	16 - 95 mm²
Length	700 mm
Weight	3.9 kg

Item	Part No.
Crimping tool 16 - 95 mm² for workbench mounting	**TK95**

K 5 / K 5 SP Crimping tools 6 - 50 mm²





- Indent crimping
- Version with ratchet for consistent checking of crimp results
- Low-maintenance mechanical drive

Characteristics

- For smaller copper conductors
- Simple and safe: Exact cross-section assignment thanks to permanent marking on the dies

Suitable for


- Tubular cable-lugs and connectors, standard type
- Tubular cable lugs and connectors for fine-stranded conductors

Technical data	
Crimping range	6 - 50 mm²
Length	600 mm
Weight	2.4 kg

Item	Part No.
Crimping tool 6 - 50 mm²	**K5**
Crimping tool with ratchet, 6 - 50 mm²	**K5SP**

K 6 / K 6 SP Crimping tools 50 - 120 mm²





- Indent crimping
- Version with ratchet for consistent checking of crimp results
- Low-maintenance mechanical drive

Characteristics

- For smaller copper conductors
- Simple and safe: Exact cross-section assignment thanks to permanent marking on the dies
- Telescopic handles

Suitable for


- Tubular cable-lugs and connectors, standard type
- Tubular cable lugs and connectors for fine-stranded conductors

Technical data	
Crimping range	50 - 120 mm²
Length	970 mm
Weight	4.4 kg

Item	Part No.
Crimping tool 50 - 120 mm²	**K6**
Crimping tool with ratchet 50 - 120 mm²	**K6SP**

K 07 / K 07 SP Crimping tools 185 - 400 mm²





- Indent crimping
- Extremely wide cross section range up to 400 mm²
- Version with ratchet for consistent checking of crimp results
- Low-maintenance mechanical drive

Characteristics

- Simple and safe: Exact cross-section assignment thanks to permanent marking on the dies
- Telescopic handles

Suitable for

- Tubular cable-lugs and connectors, standard type
- Tubular cable lugs and connectors for fine-stranded conductors

Technical data	
Crimping range	185 - 400 mm²
Length	975 mm
Weight	4.7 kg

Item	Part No.
Crimping tool 185 - 400 mm²	**K07**
Crimping tool with ratchet 185 - 400 mm²	**K07SP**

K 7 / K 7 SP Crimping tools 120 - 240 mm²



- Indent crimping
- Large cross section range up to 240 mm²
- Version with ratchet for consistent checking of crimp results
- Low-maintenance mechanical drive

Characteristics

- Simple and safe: Exact cross-section assignment thanks to permanent marking on the dies
- Telescopic handles

Suitable for

- Tubular cable-lugs and connectors, standard type
- Tubular cable lugs and connectors for fine-stranded conductors

Technical data	
Crimping range	120 - 240 mm²
Length	975 mm
Weight	4.6 kg

Item	Part No.
Crimping tool 120 - 240 mm²	**K7**
Crimping tool 120 - 240 mm² with ratchet	**K7SP**

K 8 / K 8 SP Crimping tools 35 - 95 mm²



- Indent crimping
- Version with ratchet for consistent checking of crimp results
- Low-maintenance mechanical drive

Characteristics

- For smaller copper conductors
- Simple and safe: Exact cross-section assignment thanks to permanent marking on the dies
- Telescopic handles

Suitable for

- Tubular cable-lugs and connectors, standard type
- Tubular cable lugs and connectors for fine-stranded conductors

Technical data	
Crimping range	35 - 95 mm²
Length	970 mm
Weight	4.4 kg

Item	Part No.
Crimping tool 35 - 95 mm²	**K8**
Crimping tool with ratchet 35 - 95 mm²	**K8SP**

K 04 Crimping tool for tubular cable lugs and connectors, standard type 10-25 mm²



- Hexagonal crimping
- Tool pre-tensioning adjustable
- Large cross section range up to 25 mm²

Characteristics

- Energy-efficient ergonomic drive
- With ratchet for consistently-controlled crimp results
- Simple and safe: Exact cross-section assignment thanks to permanent marking on the crimping tool
- Adjusting disc for compensating for the natural tool wear

Technical data	
Crimping range	10 - 25 mm²
Length	260 mm
Weight	0.56 kg

Item	Part No.
Crimping tools for tubular cable lugs and connectors, standard type 10 - 25 mm²	**K04**

K 05 BC Crimping tools for tubular cable lugs and connectors blue connection® 6-50 mm²



- Hexagonal crimping
- Synchronised die selection when in the open position
- Cross-section display on marked adjusting wheel
- For compacted conductors to DIN EN 60228
- Accurate assignment of crimping tool/crimping die through colour-coding system

Characteristics

- Precisely synchronised head plate position for optimum and consistent crimp results
- Modern, rigid and lightweight elliptical handle tubes
- Service-friendly design for simple die change

Technical data	
Crimping range	6 - 50 mm²
Length	390 mm
Weight	1.1 kg

Item	Part No.
Crimping tool for tubular cable lugs and connectors, blue connection® 6 - 50 mm²	**K05BC**

K 05 / K 05 SP Crimping tools for tubular cable lugs and connectors, standard type 6-50 mm²



- Synchronised die selection when in the open position
- Cross-section display on marked adjusting wheel
- Version with ratchet for consistent crimp results

Characteristics

- Hexagonal crimping
- Precisely synchronised head plate position for optimum and consistent crimp results
- Modern, rigid and lightweight elliptical handle tubes
- Ergonomic 2-component handle with two-sided slip guard
- Smooth-running, durable and effortless tool mechanism
- Service-friendly design for simple die change

Technical data	
Crimping range	6 - 50 mm²
Length	390 mm
Weight	1.1 kg

Item	Part No.
Crimping tool for tubular cable lugs and connectors, standard type 6 - 50 mm²	**K05**
Crimping tool with ratchet for tubular cable lugs and connectors, standard type 6 - 50 mm²	**K05SP**

K 05 D / K 05 D SP Crimping tools for DIN compression cable lugs and connectors 6-50 mm²



- Synchronised die selection when in the open position
- Cross-section display on marked adjusting wheel
- Version with ratchet for consistent crimp results

Characteristics

- Hexagonal crimping
- Precisely synchronised head plate position for optimum and consistent crimp results
- Modern, rigid and lightweight elliptical handle tubes
- Ergonomic 2-component handle with two-sided slip guard
- Smooth-running, durable and effortless tool mechanism
- Service-friendly design for simple die change

Technical data	
Crimping range	6 - 50 mm²
Length	390 mm
Weight	1.1 kg

Item	Part No.
Crimping tool for compression cable lugs and connectors (DIN 46235 / DIN 46267, Part 1) 6 - 50 mm²	**K05D**
Crimping tool with ratchet for compression cable lugs and connectors (DIN 46235 / DIN 46267 part 1) 6 - 50 mm²	**K05DSP**

K 06 BC Crimping tools
for tubular cable lugs and connectors blue connection® 10 - 120 mm²







- Accurate assignment of crimping tool/crimping die through colour-coding system
- For compacted conductors to DIN EN 60228
- Effort-saving and low maintenance mechanical drive

Characteristics

- Hexagonal crimping
- Simple and safe: Exact cross-section assignment thanks to permanent marking on the dies

Technical data	
Crimping range	10 - 120 mm²
Length	650 mm
Weight	2.9 kg

Item	Part No.
Crimping tool for tubular cable lugs and connectors, blue connection® 10 - 120 mm²	**K06BC**

K 06 / K 06 SP Crimping tools
for tubular cable lugs and connectors, standard type 10 - 120 mm²







- Hexagonal crimping
- Effort-saving and low maintenance mechanical drive
- Version with ratchet for consistent crimp results

Characteristics

- With revolving dies
- Simple and safe: Exact cross-section assignment thanks to permanent marking on the dies

Technical data	
Crimping range	10 - 120 mm²
Length	650 mm
Weight	2.9 kg

Item	Part No.
Crimping tools with ratchet for tubular cable lugs and connectors, standard type 10 - 120 mm²	**K06SP**
Crimping tools for tubular cable lugs and connectors, standard type 10 - 120 mm²	**K06**

K 06 D / K 06 D SP Crimping tools for DIN compr. cable lugs and connectors 10 - 120 mm²



- Hexagonal crimping
- Effort-saving and low maintenance mechanical drive
- Version with ratchet for consistent crimp results

Characteristics

- With revolving dies
- Simple and safe: Exact cross-section assignment thanks to permanent marking on the dies

Technical data	
Crimping range	10 - 120 mm²
Length	650 mm
Weight	2.9 kg

Item	Part No.
Crimping tool for compression cable lugs and connectors (DIN 46235 / DIN 46267, Part 1) 10 - 120 mm²	**K06D**
Crimping tool with ratchet for compression cable lugs and connectors (DIN 46235 / DIN 46267, Part 1) 10 - 120 mm²	**K06DSP**

K 09 BC Crimping tools for tubular cable lugs and connectors blue connection® 25 - 150 mm²



- Accurate assignment of crimping tool/crimping die through colour-coding system
- Large cross section range up to 150 mm²
- For compacted conductors to DIN EN 60228
- Effort-saving and low maintenance mechanical force

Characteristics

- Hexagonal crimping
- Simple and safe: Exact cross-section assignment thanks to permanent marking on the dies

Technical data	
Crimping range	25 - 150 mm²
Length	650 mm
Weight	2.9 kg

Item	Part No.
Crimping tool for tubular cable lugs and connectors, blue connection® 25 - 150 mm²	**K09BC**

K 09 / K 09 SP Crimping tools for tubular cable lugs and connectors, standard type 25 - 150 mm²



- Hexagonal crimping
- Large cross section range up to 150 mm²
- Effort-saving and low maintenance mechanical drive
- Version with ratchet for consistent crimp results

Characteristics

- With revolving dies
- Simple and safe: Exact cross-section assignment thanks to permanent marking on the dies

Technical data	
Crimping range	25 - 150 mm²
Length	650 mm
Weight	2.9 kg

Item	Part No.
Crimping tools for tubular cable lugs and connectors, standard type 25 - 150 mm²	**K09**
Crimping tools with ratchet for tubular cable lugs and connectors, standard type 25 - 150 mm²	**K09SP**

K 09 D / K 09 D SP Crimping tools for DIN compression cable lugs and connectors, 25 - 150 mm²



- Hexagonal crimping
- Large cross section range up to 150 mm
- Effort-saving and low maintenance mechanical drive
- Version with ratchet for consistent crimp results

Characteristics

- With revolving dies
- Simple and safe: Exact cross-section assignment thanks to permanent marking on the dies

Technical data	
Crimping range	25 - 150 mm²
Length	650 mm
Weight	2.9 kg

Item	Part No.
Crimping tool with ratchet for compression cable lugs and connectors (DIN 46235 / DIN 46267, Part 1) 25 - 150 mm²	**K09DSP**
Crimping tool for compression cable lugs and connectors (DIN 46235 / DIN 46267, Part 1) 25 - 150 mm²	**K09D**

K 511 / K 512 Crimping tools for gas-tight connections



- Parallel guided crimping jaws
- Suitable for gas-tight crimps in environments extremely harmful to crimps (e.g. ammonia gas)

Characteristics

- Optimised force transmission
- With ratchet for consistently-controlled crimp results
- Handle with slip guard and inscription panel

Suitable for

- Non-insulated tubular cable lugs, ring and fork type
- Parallel and butt connectors

Technical data		
Length	270 mm	
Weight	0.7 kg	
Item	Crimping range mm²	Part No.
Mechanical crimping tool 1 - 4 mm²	1-4	**K511**
Mechanical crimping tool 6 + 10 mm²	6+10	**K512**

DN-K 74/2 Crimping tool for BNC connectors and coax cable



- Hexagonal crimping
- Tool pre-tensioning adjustable

Characteristics

- With ratchet for consistently-controlled crimp results
- Adjusting disc for compensating for the natural tool wear

Suitable for

- Coax cable RG 58, RG 59, RG 62 and RG 71

Technical data		
Length	220 mm	
Weight	0.560 kg	
Item		Part No.
Mechanical crimping tool for BNC connector, coax cable RG 58, RG 59, RG 62 and RG 71		**DNK742**

KP 1 / KP 1 L basic tool from the Klauke Pro series



- Compatible with all crimping heads of the Klauke Pro range
- Easy change of crimping head without tools

Characteristics

- Standardised mounting of crimping heads
- With ratchet for consistently-controlled crimp results

Item	Weight kg	Part No.
Basic tool from the Klauke Pro range, length 151 mm	0.2	**KP1**
Basic tool from the Klauke Pro range, length 207 mm	0.3	**KP1L**

Accessories	Part No.	Page
Plastic case	MKKP1	196

	Suitable for	Crimping range mm²	Crimp profile	Part No.
Crimping heads for cable end-sleeves				
	Cable end-sleeves, square crimping	0,08 -10		**KP303**
	Cable end-sleeves, square crimping	10 - 16		**KP304**
	Cable end-sleeves, round crimping for narrow chamber sizes	0,14 - 2,5		**KP350**
	Cable end-sleeves, round crimping for narrow chamber sizes	1,5 - 6		**KP351**
	Cable end-sleeves, round crimping for narrow chamber sizes	10 - 16		**KP352**
	Cable end-sleeves DIN 46228, part 2, roll-crimping	0,5 - 2,5		**KP66**
Crimping heads for insulated cable connections				
	Insulated cable connections (yellow and red)	0,1 - 1		**KP80**
	Insulated cable connections (red and blue)	0,5 - 2,5		**KP81**
	Insulated cable connections (red, yellow, blue)	0,5 - 6		**KP82**
	Insulated cable connections (yellow)	4 - 6		**KP83**
Crimping heads for tubular cable lugs and solderless terminals				
	Tubular cable lugs and solderless terminals	0,5 - 6		**KP232**
	Tubular cable lugs and solderless terminals	4 - 10		**KP242**
Crimping heads for photovoltaic				
	Connector for photovoltaics 3 mm dia.	2,5 - 4		**KP90MC31**
Crimping heads for receptacles				
	Part No. 3720, receptacles 6.3 x 0.8 mm with lateral conductor connector	0,5 - 1		**KP631**
	Part No. 3725, receptacles 6.3 x 0.8 mm with lateral conductor connector	0,5 - 1,5		**KP64**
	Part No. 3735, receptacles 6.3 x 0.8 mm with lateral conductor connector	1,5 - 2,5		**KP632**
	For receptacles 2.8 mm tab width	0,1 - 1		**KP67**
	For receptacles 4.8 mm tab width	0,5 - 2,5		**KP65**
	For receptacles 6.3 mm tab width	0,5 - 2,5		**KP68**

SKP 1 Crimping head assortment from the Klauke Pro series



- Easy change of crimping head without tools
- Crimping of conductor and insulation in one step
- Spring-actuated tool opening

Characteristics

- Parallel guided crimping heads
- With ratchet for consistently-controlled crimp results

Technical data	
Dimension	250 x 115 x 40 mm
Weight	0.8 kg

Item	Part No.
Crimping head set of the Klauke Pro range	**SKP1**

Scope of supply	Part No.	Page
Basic tool from the Klauke Pro range, length 151 mm	KP1	240
Crimping head for insulated cable connections 0.5 - 2.5 mm² (red, blue)	KP81	
Crimping head for cable end-sleeves, square crimping, 0.08 - 10 mm²	KP303	
Crimping head for non-insulated tubular cable lugs and solderless terminals 0.5 - 6 mm²	KP232	

SKP 6 Crimping head assortment from the Klauke Pro series



- Easy change of crimping head without tools
- Crimping of conductor and insulation in one step
- Parallel guided crimping heads
- Spring-actuated tool opening

Characteristics

- Roll crimping
- For crimping of non-insulated receptacles with lateral conductor connector
- With ratchet for consistently-controlled crimp results

Technical data	
Dimension	250 x 115 x 40 mm
Weight	0.8 kg

Item	Part No.
Crimping head set of the Klauke Pro range	**SKP6**

Scope of supply	Part No.	Page
Basic tool from the Klauke Pro range, length 151 mm	KP1	240
Crimping head for receptacles 6.3 x 0.8 mm with lateral conductor connector, 0.5 - 1 mm², for Item 3720	KP631	
Crimping head for receptacles 6.3 x 0.8 mm with lateral conductor connector, 1.5 - 2.5 mm², for Item 3735	KP632	
Crimping head for receptacles 6.3 x 0.8 mm with lateral conductor connector, 0.5 - 1.5 mm², for Item 3725	KP64	

K 507 Crimping tool with interchangeable dies





- Fast change of crimping die, no tools required, without readjustment by special fixing system
- Additional crimping dies integrated in the handle

Characteristics

- With ratchet for consistently-controlled crimp results
- Adjusting disc for compensating for the natural tool wear

Technical data	
Length	220 mm
Weight	0.635 kg

Item	Part No.
Crimping tool with interchangeable dies	**K507**

Scope of supply	Part No.	Page
Crimping die for insulated connectors, 0.5 - 6 mm²	IS5071	
Crimping dies AE 50, 0.14 - 10 mm²	AE501	326
Crimping die for insulated connectors 0.5 - 6 mm²	Q5071	

K 50 Crimping tool for interchangeable dies



- Parallel guided crimping jaws
- Fast change of crimping die without readjustment by special fixing system
- Exact positioning of the crimping dies due to die locating pins

Characteristics

- Optimised force transmission
- With ratchet for consistently-controlled crimp results
- Handle with slip guard and inscription panel

Technical data	
Length	220 mm
Weight	0.6 kg

Item	Part No.
Crimping tool for interchangeable dies 0.1 - 50 mm²	**K50**

Accessories	Part No.	Page
Steel carrying case	MK55	194

K50 SERIE

Available dies for Series 50 for K 50

Suitable for	Connection material	Crimping range mm²	Crimp profile	Page
Tubular cable lugs and connectors, Cu				
Tubular cable lugs and connectors, Cu, standard type		0.75 - 10		326
Tubular cable lugs and connectors, Cu, standard type		16 - 25		326
Tubular cable lugs and connectors for solid conductors, Cu		1.5 - 10		326
Compression cable lugs and connectors acc. to DIN - Cu				
Copper compression cable lugs (DIN 46235) and connectors (DIN 46267, part 1)		6 - 25		326
Terminals, connectors and pin terminals acc. to DIN - Cu				
Terminals (DIN 46234) and pin terminals (DIN 46230) Cu, solderless connectors (DIN 46341) Cu		0.5 - 10		326
Cable end-sleeves				
Cable end-sleeves		0.14 - 50		326
Cable connections, insulated and non-insulated				
Non insulated receptacles		0.25 - 6		327
for pin and shielded receptacles, BNC connectors for coax cables RG 58, 59, 60 and 71				327
Turned pin connectors, pin receptacles		0.1 - 4		327
Insulated cable connections, double crimping		0.1 - 6		327
Insulated cable connections, single crimping		0.5 - 16		327

K 35/4 Crimping tool for interchangeable dies 6 - 150 mm²



- Very comfortable: Tool-less crimping die change
- Optimised for cable glands and control cabinet construction
- Energy-efficient and low-maintenance mechanical drive

Characteristics

- Narrow crimping
- Less effort due to extendible telescopic handle
- Flexible use: Head rotates 360°
- Fast, change of crimping die without readjustment by special fixing system

Technical data	
Length	Stepless 420-590 mm
Weight	1.9 kg

Item	Part No.
Crimping tool for interchangeable dies 6 - 150 mm²	**K354**

Accessories	Part No.	Page
Steel carrying case	SK65L	195

K4 SERIE

Available dies for Series 4 for K 35/4

Suitable for	Connection material	Crimping range mm²	Crimp profile	Page
Copper tubular cable lugs and connectors				
Tubular cable lugs and connectors blue connection for compacted conductors acc. to DIN EN 60228		6 - 150		329
Tubular cable lugs and connectors, standard type, tubular cable lugs for switchgear connections		6 - 150		328
Insulated cable lugs and compression joints, standard type, insulated pin terminals		10 - 70		328
Tubular cable lugs and connectors for fine stranded conductors		10 - 35		329
Tubular cable lugs and connectors for solid conductors		1.5 - 16		329
Tubular cable lugs and connectors, Ni, VA				
Stainless steel tubular cable lugs and connectors		0.5 - 16		329
Nickel tubular cable lugs and connectors		0.5 - 16		329
Copper compression cable lugs and connectors to DIN				
Copper compression cable lugs (DIN 46235) and connectors (DIN 46267, part 1) acc. to DIN		6 - 120		330
Terminals, connectors and pin terminals acc. to DIN, copper				
Solderless terminals (DIN 46234), connectors and pin terminals (DIN 46230) acc. to DIN		10 - 35		330
Insulated solderless terminals and connectors		10 - 16		330
Sleeves for compacted conductors and sector-shaped conductors, copper				
Pre-rounding dies for sector-shaped Al and Cu conductors		10sm - 150se / 120sm		331
Aluminium compression cable lugs and connectors acc. to DIN				
Aluminium compression cable lugs and connectors to DIN		10 - 70		331
Compression joints for full-tension connections of Aldrey-conductors DIN EN 50182		25 - 50		331
Aluminium/copper compression cable lugs and connectorsl				
Aluminum side of aluminum/copper compression cable lugs and connectors: crimping dies HA4, copper side of aluminum/copper compression cable lugs and connectors: crimping dies HD4		10 - 70		331
Clamps				
Clamps, C-type		4 - 35		331
Cable end-sleeves				
Cable end-sleeves		10 - 50		332
Twin cable end-sleeves		2 x 4 - 2 x 16		332
Twin cable end-sleeves for fine stranded conductors		2 x 4 - 2 x 16		332
Cable end-sleeves for fine stranded conductors		10 - 50		332

K 18 Crimping tool for interchangeable dies to DIN 48083, Part 1, 6 - 185 mm²



- Change of crimping dies without tools
- Optimised for cable glands and control cabinet construction
- Energy-efficient and low-maintenance mechanical drive

Characteristics

- Narrow crimping
- Less effort due to extendible telescopic handle
- Flexible use: Head rotates 360°
- Fast, change of crimping die without readjustment by special fixing system

Technical data	
Length	Stepless 580-830 mm
Weight	2.5 kg

Item	Part No.
Crimping tool for interchangeable dies acc. to DIN 48083, sheet 1, 6 - 185 mm²	**K18**

Accessories	Part No.	Page
Steel carrying case	MK18	195

K18 SERIE

Available dies for Series 18 for K 18

Refer to the limitations when crimping connectors in the technical appendix.

Suitable for	Connection material	Crimping range mm²	Crimp profile	Page
Copper tubular cable lugs and connectors				
Tubular cable lugs and connectors, standard type, tubular cable lugs for switchgear connections		6 - 185		337
Connectors, standard type		6 - 95		337
Insulated tubular cable lugs and connectors, standard type, insulated pin terminals		10 - 95		337
Tubular cable lugs and connectors for fine stranded conductors		10 - 50		337
Tubular cable lugs and connectors for solid conductors		1.5 - 16		338
Copper compression cable lugs and connectors to DIN				
Compression cable lugs (DIN 46235)		6 - 185		338
Connectors DIN 46267		6 - 70		338
Terminals, connectors and pin terminals acc. to DIN, copper				
Solderless terminals (DIN 46234), connectors and pin terminals (DIN 46230) acc. to DIN		10 - 70		338
Insulated solderless terminals and connectors		10 - 50		338
Sleeves for compacted conductors and sector-shaped conductors, copper				
Pre-rounding dies for sector-shaped Al and Cu conductors		10 sm - 240 se / 185 sm		339
Aluminium compression cable lugs and connectors to DIN				
Aluminium compression cable lugs and connectors to DIN		10 - 185		339
Aluminium connectors		10 - 70		339
Compression joints for full-tension connections of Aldrey-conductors DIN EN 50182		25 - 95		339
Aluminium/copper compression cable lugs and connectors				
Aluminum side of aluminum/copper compression cable lugs and connectors: crimping dies A, copper side of aluminum/copper compression cable lugs and connectors: crimping dies D		10 - 185		339
Clamps				
Clamps, C-type		4 - 50		339
Cable end-sleeves				
Cable end-sleeves		10 - 95		340
Twin cable end-sleeves		2 x 4 - 2 x 16		340
Cable end-sleeves, trapezodial, for fine stranded conductors		10 - 95		340
Twin cable end-sleeves, trapezodial, for fine stranded conductors		2 x 4 - 2 x 16		340
Cutting die				
for cutting area		18 mm dia.		412

K 22 Crimping tool for interchangeable dies 6 - 300 mm²



- Change of crimping dies without tools
- Optimised for cable glands and control cabinet construction
- Energy-efficient and low-maintenance mechanical drive

Characteristics

- Narrow crimping
- Large cross section by half shell dies
- Less effort due to extendible telescopic handle
- Flip top style head rotates 360°
- Fast, change of crimping die without readjustment by special fixing system

Technical data	
Length	Stepless 560-860 mm
Weight	2.5 kg

Item	Part No.
Crimping tool for interchangeable dies 6 - 300 mm²	**K22**

Accessories	Part No.	Page
Steel carrying case	MK22	195

K22 SERIE

Available dies for Series 22 for K 22

Refer to the limitations when crimping connectors in the technical appendix.

Suitable for	Connection material	Crimping range mm²	Crimp profile	Page
Copper tubular cable lugs and connectors				
Tubular cable lugs and connectors blue connection for compacted conductors acc. to DIN EN 60228		6 - 300		341
Tubular cable lugs and connectors, standard type, tubular cable lugs for switchgear connections		6 - 300		341
Insulated cable lugs and compression joints, standard type, insulated pin terminals		10 - 150		341
Tubular cable lugs and connectors for fine stranded conductors		10 - 70		342
Tubular cable lugs and connectors for solid conductors		1.5 - 16		342
Tubular cable lugs and connectors, Ni, VA				
Stainless steel tubular cable lugs and connectors		10 - 50		342
Nickel tubular cable lugs and connectors		10 - 50		329
Copper compression cable lugs and connectors to DIN				
Copper compression cable lugs (DIN 46235) and connectors (DIN 46267, part 1) acc. to DIN		6 - 300		343
Double compression cable lugs		2 x 50 - 2 x 70		343
Terminals, connectors and pin terminals acc. to DIN, copper				
Solderless terminals (DIN 46234), connectors and pin terminals (DIN 46230) acc. to DIN		10 - 70		343
Insulated solderless terminals and connectors		10 - 70		343
Sleeves for compacted conductors and sector-shaped conductors, copper				
Pre-rounding dies for sector-shaped Al and Cu conductors		10 sm - 300 se / 240 sm		344
Aluminium compression cable lugs and connectors to DIN				
Aluminium compression cable lugs and connectors to DIN		10 - 300		344
Compression joints connections for Aldrey-conductors DIN EN 50182, Al-conductors DIN EN 50182, 120 - 185 mm²		25 - 185		344
Compression joints DIN 48085, part 3 for aluminium/steel conductors DIN EN 50182, aluminium crimping		25 / 4 - 120 / 20		345
Compression joints DIN 48085, part 3 for aluminium/steel conductors DIN EN 50182, steel crimping		25/4 - 120/20		345
Aluminium/copper compression cable lugs and connectors				
Aluminum side of aluminum/copper compression cable lugs and connectors: crimping dies A22, copper side of aluminum/copper compression cable lugs and connectors: crimping dies D22		10 - 300		331
Clamps				
Clamps, C-type		4 - 50		345
Clamps, H-type		70		345

see next page

Suitable for	Connection material	Crimping range mm²	Crimp profile	Page
Cable end-sleeves				
Cable end-sleeves		10 - 240		346
Twin cable end-sleeves		2 x 4 - 2 x 16		346
Cable end-sleeves, trapezodial, for fine stranded conductors		10 - 240		346
Twin cable end-sleeves for fine stranded conductors		2 x 4 - 2 x 16		346

SO FAST IN SERIES PRODUCTION - THE KLAUKE MICRO

The Klauke Micro is as convenient and quick as a mechanical tool, and just as powerful and easy to handle as a battery-powered hydraulic tool. Compact and portable in one device! Thanks to the innovative PowerSense technology. This tool simplifies your work like never before.



KLAUKE® micro

Manual pre-clamping - motorized crimping

- Flexible to use with interchangeable crimping dies
- Broad application range of up to 50 mm²
- With LED illumination of the crimp position and the work area
- Low weight (< 1 kg)
- Intuitive operation thanks to PowerSense function
- Electronic control with ratchet function and motor stall protection
- Automatic retraction
- Long service life with servicing intervals of 35,000 cycles
- 3 year warranty on tool registration

Link to tool registration:
werkzeugregistrierung.klauke.com/en/login-tool-registration

EK 50 ML Electromechanical crimping tool 0.14 - 50 mm²



- **The Klauke micro with intuitive PowerSense function combines the benefits of manual crimping tools with the convenience of battery powered hydraulic crimping tools**
- **Excellent crimps with minimum effort**

Characteristics

- Simple and safe: One-button operating concept for controlling all tool functions
- Electronic control with locking function monitors full closing of the dies
- Simple and safe: Automatic retraction when operation is complete
- Manual retract as required
- Motor stall protection
- Ergonomic 2C housing in the Klauke "In-line Design"
- Tool fixing point for use with balancer aid or lanyard
- Very low weight and high speed for maximum efficiency
- Powerful drive technology for effortless operations
- Powerful 10.8 V Li-Ion battery with charge status display
- LED for work area illumination
- Maintenance display via LED
- Project-based reporting with Klauke i-press software package

Suitable for

- 50-series interchangeable dies

Technical data	
Crimping force	max. 15 kN
Crimping range	0.14 - 50 mm²
Number of crimps	approx. 300 at 10 mm² Cu DIN 46234 / per battery charge
Battery voltage	10.8 V
Battery capacity	1.5 Ah, Li-Ion
Charging time	approx. 40 min.
Weight incl. battery	0.96 kg
Ambient temperature	-10 °C up to +40 °C

Item	Part No.
Electromechanical crimping tool 0.14 - 50 mm²	**EK50ML**

Scope of supply	Part No.	Page
Battery 10.8 V / 1.5 Ah, Li-Ion (16.2 Wh)	RAML1	493
Charger for 10.8 V Li-Ion batteries, 230V	LGML1	495
Crimping dies IS 50, double crimping, 0.5 - 6 mm²	IS501	
Plastic case 450 x 370 x 105 mm	KKEKP1B	

Variants	Part No.	Page
Battery powered hydraulic crimping tool 6 - 150 mm²	EK50ML-L	
L-BOXX with electro-mechanical crimping tool EK 50 ML 0.14 to 50 mm² and extensive additional equipment	LBOXXEK50ML	



Available dies of series 50 for EK 50 ML

Suitable for	Connection material	Crimping range mm²	Crimp profile	Page
Copper tubular cable lugs and connectors				
Tubular cable lugs and connectors, standard type		0.75 - 10		326
Tubular cable lugs and connectors, standard type		16 - 25		326
Tubular cable lugs and connectors for solid conductors		1.5 - 10		326
Copper compression cable lugs and connectors acc. to DIN				
Copper compression cable lugs (DIN 46235) and connectors (DIN 46267, part 1)		6 - 25		326
Terminals, connectors and pin terminals acc. to DIN, copper				
Solderless terminals (DIN 46234), connectors (DIN 46341) and pin terminals (DIN 46230)		0.5 - 10		326
Cable end-sleeves				
Cable end-sleeves		0.14 - 50		326
Cable connections, insulated and non-insulated				
Insulated cable connections, double crimping		0.1 - 6		327
Insulated cable connections, single crimping		0.5 - 16		327
Non-insulated receptacles		0.25 - 6		327
BNC connectors for coax cables RG 58,59,60 and 71				327
Turned pin connectors and receptacles		0.1 - 4		327

THE LITTLE CRIMPING EXPERT - BATTERY-POWERED HYDRAULIC CRIMPING TOOL (10.8 V)

We have made performance easy: The Klauke mini is lightweight yet powerful. The Klauke mini's practical dimensions make it the ideal solution for confined areas, in panel building for instance. A convenient expert for crimp to 150 mm² nominal cross-section.



Klauke® mini

Pure performance without frills

The Klauke mini concentrates on its core task: reliable crimping. Even without pressure sensor and display, the little expert does its job well - no fuss or quibble.

Usage time at a glance

Read the charge level at any time from the powerful 10.8 V battery.

All-round crimping

How can confined areas be easily reached? With crimping heads rotating through 360°.

EK 15/50 ML Battery powered hydraulic crimping tool 0.14 - 50 mm²



- Long service life thanks to robust head
- Optimum crimping due to parallel guided crimping dies
- Effortless operations thanks to low weight
- Powerful 10.8 V Li-Ion battery technology with battery charge indicator

Characteristics

- Open head, rotatable
- Simple and safe: One-button operating concept for controlling all tool functions
- Comfortable and secure one-hand operation thanks to 2-component plastic housing with soft lining
- Simple and safe: Automatic retraction when operation is complete
- Maintenance display via LED

Suitable for

- 50-series interchangeable dies

Technical data	
Crimping force	13 kN
Stroke / opening width	9 mm
Crimping range	0.14 - 50 mm²
Crimping cycle	approx. 2 s
Number of crimps	approx. 230 at 10 mm² Cu
Battery voltage	10.8 V
Battery capacity	1.5 Ah, Li-Ion
Charging time	approx. 40 min.
Weight incl. battery	1.5 kg
Ambient temperature	-10 °C up to +40 °C

Item	Part No.
Battery powered hydraulic crimping tool 0.14 - 50 mm²	**EK1550ML**

Scope of supply	Part No.	Page
Battery 10.8 V / 1.5 Ah, Li-Ion (16.2 Wh)	RAML1	493
Charger for 10.8 V Li-Ion batteries, 230V	LGML1	495
Plastic case	KKML	

Available dies for Series 50 for EK 15/50 ML

Suitable for	Connection material	Crimping range mm²	Crimp profile	Page
Copper tubular cable lugs and connectors				
Copper tubular cable lugs and connectors, standard type		0.75 - 10		326
Copper tubular cable lugs and connectors, standard type		16 - 25		326
Copper tubular cable lugs and connectors for solid conductors		1.5 - 10		326
Copper compression cable lugs and connectors acc. to DIN				
Copper compression cable lugs (DIN 46235) and connectors (DIN 46267, part 1)		6 - 25		326
Terminals, connectors and pin terminals acc. to DIN - Cu				
Solderless terminals (DIN 46234) and pin terminals (DIN 46230) Cu, connectors (DIN 46341)		0.5 - 10		326
Cable end-sleeves				
Cable end-sleeves		0.14 - 50		326
Cable connections, insulated and non-insulated				
Insulated cable connections, single crimping		0.5 - 16		327
Insulated cable connections, double crimping		0.5 - 16		327
Non-insulated receptacles		0.25 - 6		327
For pin and shielded receptacles, BNC connectors for coax-cables RG 58, 59, 60 and 71				327
Turned pin connectors, pin receptacles		0.1 - 4		327

EKP 1 ML Battery powered hydraulic crimping tool 0.14 - 16 mm²



- **Basic tool from the Klauke Pro series**
- **Simplified handling due to tool-free replacement of crimping heads**
- **Powerful 10.8 V Li-Ion battery technology with battery charge indicator**

Characteristics

- Crimping heads rotatable
- Simple and safe: One-button operating concept for controlling all tool functions
- Comfortable and secure one-hand operation thanks to 2-component plastic housing with soft grips
- Effortless working thanks to low weight
- Simple and safe: Automatic retraction when operation is complete
- Maintenance display via LED

Suitable for

- Compatible with all crimping heads of the Klauke Pro series

Technical data	
Crimping force	10 kN
Stroke / opening width	9 mm
Crimping range	0.14 - 16 mm²
Crimping cycle	approx. 2 s
Number of crimps	approx. 230 at 10 mm² Cu
Battery voltage	10.8 V
Battery capacity	1.5 Ah, Li-Ion
Charging time	approx. 40 min.
Weight incl. battery	1.2 kg
Ambient temperature	-10 °C up to +40 °C

Item	Part No.
Battery powered hydraulic crimping tool 0.14 - 16 mm²	**EKP1ML**

Scope of supply	Part No.	Page
Battery 10.8 V / 1.5 Ah, Li-Ion (16.2 Wh)	RAML1	493
Charger for 10.8 V Li-Ion batteries, 230V	LGML1	495
Plastic case	KKML	

	Suitable for	Crimping range mm²	Crimp profile	Part No.
Crimping heads for cable-end sleeves				
	Cable end-sleeves, square crimping	0.14 -10		**KP303**
	Cable end-sleeves, square crimping	10 - 16		**KP304**
	Cable end-sleeves, round crimping for narrow chamber sizes	0.14 - 2.5		**KP350**
	Cable end-sleeves, round crimping for narrow chamber sizes	1.5 - 6		**KP351**
	Cable end-sleeves, round crimping for narrow chamber sizes	10 - 16		**KP352**
	Cable end-sleeves DIN 46228, part 2, roll-crimping	0.5 - 2.5		**KP66**
Crimping heads for insulated cable connections				
	Insulated cable connections (yellow and red)	0.1 - 1		**KP80**
	Insulated cable connections (red and blue)	0.5 - 2.5		**KP81**
	Insulated cable connections (red, yellow, blue)	0.5 - 6		**KP82**
	Insulated cable connections (yellow)	4 - 6		**KP83**
Crimping heads for cable lugs and solderless terminals				
	Tubular cable lugs and solderless terminals	0.5 - 6		**KP232**
	Tubular cable lugs and solderless terminals	4 - 10		**KP242**
Crimping heads for photovoltaic				
	Connector for photovoltaics 3 mm dia.	2.5 - 4		**KP90MC31**
Crimping heads for receptacles				
	Part No. 3720, receptacles 6.3 x 0.8 mm with lateral conductor connector	0.5 - 1		**KP631**
	Part No. 3725, receptacles 6.3 x 0.8 mm with lateral conductor connector	0.5 - 1.5		**KP64**
	Part No. 3735, receptacles 6.3 x 0.8 mm with lateral conductor connector	1.5 - 2.5		**KP632**
	For receptacles 2.8 mm tab width	0.1 - 1		**KP67**
	For receptacles 4.8 mm tab width	0.5 - 2.5		**KP65**
	For receptacles 6.3 mm tab width	0.5 - 2.5		**KP68**

EK 35/4 ML Battery powered hydraulic crimping tool 6 - 150 mm²



- Large cross section range up to 150 mm²
- Slim crimping head - ideal when space is critical
- Powerful 10.8 V Li-Ion battery technology with battery charge indicator

Characteristics

- Closed head, flip top style, rotatable
- Simple and safe: One-button operating concept for controlling all tool functions
- Comfortable and secure one-hand operation thanks to 2-component plastic housing with soft grips
- Effortless working thanks to low weight
- Simple and safe: Automatic retraction when operation is complete
- Maintenance display via LED

Suitable for

- 4-series interchangeable dies, narrow crimping

Technical data	
Crimping force	35 kN
Stroke / opening width	9 mm
Crimping range	6 - 150 mm²
Crimping cycle	3 s to 4 s (depending on crimp cross-section)
Number of crimps	approx. 145 at 120 mm² Cu
Battery voltage	10.8 V
Battery capacity	1.5 Ah, Li-Ion
Charging time	approx. 40 min.
Weight incl. battery	1.6 kg
Ambient temperature	-10 °C up to +40 °C

Item	Part No.
Battery powered hydraulic crimping tool 6 - 150 mm²	**EK354ML**

Scope of supply	Part No.	Page
Battery 10.8 V / 1.5 Ah, Li-Ion (16.2 Wh)	RAML1	493
Charger for 10.8 V Li-Ion batteries, 230 V	LGML1	495
Plastic case	KKML	

Variants	Part No.	Page
EK 35/4 ML with crimping die set HR 4 from 6 - 150 mm²	EK354MLSETHR	
EK 35/4 ML with crimping die set HD 4 from 6 - 120 mm²	EK354MLSETHD	

Available dies for Series 4 for EK 35/4 ML

Suitable for	Connection material	Crimping range mm²	Crimp profile	Page
Copper tubular cable lugs and connectors				
Tubular cable lugs and connectors blue connection for compacted conductors acc. to DIN EN 60228		6 - 150		329
Tubular cable lugs and connectors, standard type, tubular cable lugs for switchgear connections		6 - 150		328
Insulated cable lugs and compression joints, standard type, Insulated pin terminals		10 - 70		328
Tubular cable lugs and connectors for fine stranded conductors		10 - 35		329
Tubular cable lugs and compression joints for solid conductors		1.5 - 16		329
Tubular cable lugs and connectors, Ni, VA				
Stainless steel tubular cable lugs and connectors		0.5 - 16		329
Nickel tubular cable lugs and connectors		0.5 - 16		329
Copper compression cable lugs and connectors to DIN				
Copper compression cable lugs (DIN 46235) and connectors (DIN 46267, part 1) acc. to DIN		6 - 120		330
Terminals, connectors and pin terminals acc. to DIN, copper				
Solderless terminals (DIN 46234), connectors (DIN 46341) and pin terminals (DIN 46230)		10 - 35		330
Insulated solderless terminals and connectors		10 - 16		330
Sleeves for compacted conductors and sector-shaped conductors, copper				
Pre-rounding dies for sector-shaped Al and Cu conductors		10 sm - 150 se /120 sm		331
Aluminium compression cable lugs and connectors to DIN				
Aluminium compression cable lugs and connectors to DIN		10 - 70		331
Compression joints for full-tension connections of Aldrey-conductors DIN EN 50182		25 - 50		331
Aluminium/copper compression cable lugs and connectors				
Aluminium/copper compression cable lugs and connectors		10 - 70		331
Clamps				
Clamps, C-type		4 - 35		331
Cable end-sleeves				
Cable end-sleeves		10 - 50		332
Twin cable end-sleeves		2 x 4 - 2 x 16		332
Cable end-sleeves, trapezodial, for fine stranded conductors		10 - 50		332
Twin cable end-sleeves, trapezodial, for fine stranded conductors		2 x 4 - 2 x 16		332

THE NEW STANDARD - KLAUKE NEXT GENERATION CRIMPING TOOLS

To guarantee the quality, you can check the tool data from the display or via ipress app at any time. You can easily make this information available to your customers as project documentation at the touch of a button. The balanced design ensures effortless and continuously high-quality operations up to the end of each working day.

NEXT GENERATION



In brief

- Freely-selectable battery platform: with Bosch or Makita
- Proof of quality can be created via Bluetooth
- Ensure tool availability: Read the tool properties from the display or via the app
- Effortless operations thanks to modern, ergonomic design

Interested in Klauke Next Generation tools? Then take a look at our Multi universal tool on Page 472 >>

Making work easier

Klauke tools guarantee effortless operations: The “mini” impresses through its low weight and the pistol shape thanks to the balanced centre of gravity

- Our compact “mini” is just perfect for confined areas
- The 2-stage hydraulic system ensures fast operations with fast feed and power stroke (pistol shape)
- Especially impressive and reliable: The one-button control concept for all tools with automatic retraction
- The ARS function (Automatic Retraction Stop) stops the automatic retraction when a crimp is complete through a fully-automated process

Guarantees quality

- All relevant tool data immediately in view on the integrated display
- In case of a fault, you are warned by a visual and audible signal from the tool
- Provide written proof of the quality of your work with i-press - now simply and conveniently connect the tool to the computer via Bluetooth.



i-press software

Show your customers how well you work. Klauke Next Generation records your operations, and these can then be transmitted by Bluetooth. The free i-press software uses these data to create for you, if you want, a project report - the proof of quality for your correct operations. You have control over your quality.

The i-press software can be found at:
www.klauke.com/en/support/download/connectivity-werkzeugdaten-auslesen/

i-press app

Use the i-press app to check and control your tool data on the go. Individual tool settings, such as the number of warning tones for an incorrect crimp or the double-click function for increased user safety, help make your day-to-day work simpler and more reliable - just as you need it.

The i-press app can be found at:
www.klauke.com/en/support/download/connectivity-werkzeugdaten-auslesen/



EK 35/4 Battery powered hydraulic crimping tool 6 - 150 mm²

NEXT GENERATION



- Large cross section range up to 150 mm²
- Slim crimping head - ideal when space is critical
- All tool data in view thanks to display and ipress app

Characteristics

- Choose your battery system: Bosch or Makita
- All data can be easily read via Bluetooth
- Closed head, flip top style, rotatable
- Quality assurance via visual and audible signals in case of error
- Simple and safe: One-button operating concept for controlling all tool functions
- Simple and safe: Automatic retraction when operation is complete
- Effortless working thanks to low weight
- LED for work area illumination
- Always ready-to-use thanks to battery charge and service display

Suitable for

- 4-series interchangeable dies, narrow crimping

Technical data	
Crimping force	35 kN
Stroke / opening width	9 mm
Crimping range	6 - 150 mm²
Crimping cycle	3 s to 4 s (depending on crimp cross-section)
Charging time	15 min.
Weight incl. battery	2.4 kg
Ambient temperature	-10 °C up to +40 °C

Item	Part No. **Bosch**	Part No. **Makita**	
Battery powered hydraulic crimping tool 6 - 150 mm²	**EK354CFB**	**EK354CFM**	
Scope of supply			**Page**
Bosch battery 18 V / 2.0 Ah, Li-Ion	RALB1EU		492
Bosch quick-charger for 18 V Li-Ion battery	LGLB1EU		494
Makita battery 18 V / 1.5 Ah, Li-Ion		RAL1	491
Makita quick-charger for 18 V Li-Ion battery		LGL1	494
Plastic case	KK50NG	KK50NG	
Variants			**Page**
Bosch battery 18 V / 5.0 Ah, Li-Ion	RALB2EU		493
Makita battery 18 V / 3.0 Ah, Li-Ion (54 Wh)		RAL2	491

Available dies for Series 4 for EK 35/4

Suitable for	Connection material	Crimping range mm²	Crimp profile	Page
Copper tubular cable lugs and connectors				
Tubular cable lugs and connectors blue connection® for compacted conductors acc. to DIN EN 60228		6 - 150		329
Tubular cable lugs and connectors, standard type, tubular cable lugs for switchgear connections		6 - 150		328
Insulated tubular cable lugs and compression joints, standard type, insulated pin terminals		10 - 70		328
Tubular cable lugs and connectors for fine stranded conductors		10 - 35		329
Tubular cable lugs and compression joints for solid conductors		1.5 - 16		329
Tubular cable lugs and connectors, Ni, stainless steel				
Tubular cable lugs and connectors, stainless steel		0.5 - 16		329
Tubular cable lugs and connectors, Ni		0.5 - 16		329
Copper compression cable lugs and connectors acc. to DIN				
Copper compression cable lugs (DIN 46235) and connectors (DIN 46267, part 1)		6 - 120		330
Terminals, connectors and pin terminals acc. to DIN - Cu				
Solderless terminals (DIN 46234) and pin terminals (DIN 46230) Cu, connectors (DIN 46341)		10 - 35		330
Insulated solderless terminals and pin terminals		10 - 16		330
Sleeves for compacted conductors and sector shaped conductors, Cu				
Pre-rounding crimping dies for Al and Cu sector shaped conductors		10 sm - 150 se / 120 sm		331
Aluminum compression cable lugs and connectors acc. to DIN				
Aluminum compression cable lugs and connectors acc. to DIN		10 - 70		331
Compression joints for full tension connections of Aldrey cables acc. to DIN EN 50182		25 - 50		331
Aluminium/copper compression cable lugs and connectors				
Aluminum side of aluminum/copper compression cable lugs and connectors: crimping dies HA4, copper side of aluminum/copper compression cable lugs and connectors: crimping dies HD4		10 - 70		331
Clamps				
Clamps, C-type		4 - 35		331
Cable end-sleeves				
Cable end-sleeve		10 - 50		332
Twin cable end-sleeves		2 x 4 - 2 x 16		332
Cable end-sleeves, trapezodial, for fine stranded conductors		10 - 50		332
Twin cable end-sleeves, trapezodial, for fine stranded conductors		2 x 4 - 2 x 16		332

EK 50/5 Battery powered hydraulic crimping tool 6 - 240 mm²

NEXT GENERATION



- Very large crimping range to 240 mm² (tubular cable lugs only)
- All tool data in view thanks to display and ipress app

Characteristics

- Choose your battery system: Bosch or Makita
- All data can be easily read via Bluetooth
- Closed head, flip top style, rotatable
- Quality assurance via visual and audible signals in case of error
- Simple and safe: One-button operating concept for controlling all tool functions
- Effortless working thanks to low weight
- LED for work area illumination
- Simple and safe: Automatic retraction when operation is complete
- Always ready-to-use thanks to battery charge and service display

Suitable for

- 5-series interchangeable dies, narrow crimping

IEC

K5 SERIE

Technical data	
Crimping force	50 kN
Stroke / opening width	12 mm
Crimping range	6 - 240 mm²
Crimping cycle	4 s to 5 s (depending on crimp cross-section)
Charging time	15 min.
Weight incl. battery	2.4 kg
Ambient temperature	-10 °C up to +40 °C

Item	Part No. **Bosch**	Part No. **Makita**	
Battery powered hydraulic crimping tool 6 - 240 mm²	**EK505CFB**	**EK505CFM**	
Scope of supply			**Page**
Bosch battery 18 V / 2.0 Ah, Li-Ion	RALB1EU		492
Bosch quick-charger for 18 V Li-Ion battery	LGLB1EU		494
Makita battery 18 V / 1.5 Ah, Li-Ion		RAL1	491
Makita quick-charger for 18 V Li-Ion battery		LGL1	494
Plastic case	KK50NG	KK50NG	
Accessories			**Page**
Bosch battery 18 V / 5.0 Ah, Li-Ion	RALB2EU		493
Makita battery 18 V / 3.0 Ah, Li-Ion (54 Wh)		RAL2	491

Available dies for Series 5 for EK 50/5

Suitable for	Connection material	Crimping range mm²	Crimp profile	Page
Tubular cable lugs and connectors, Cu				
Tubular cable lugs and connectors blue connection for compacted conductors acc. to DIN EN 60228		6 - 185		333
Tubular cable lugs and connectors, Cu, standard type		6 - 240		333
Insulated tubular cable lugs and connectors, insulated pin terminals		10 - 95		333
Tubular cable lugs and connectors for fine stranded conductors		10 - 50		334
Compression cable lugs and connectors acc. to DIN - Cu				
Cooper compression cable lugs (DIN 46235) and connectors (DIN 46267), part 1) Cu		6 - 185		334
Terminals, connectors and pin terminals acc. to DIN - Cu				
Solderless terminals (DIN 46234) and pin terminals (DIN 46230)		10 - 50		334
Sleeves for compacted conductors and sector shaped conductors, Cu				
Pre-rounding crimping dies for Al and Cu sector shaped conductors		10 sm - 300 se / 240 sm		335
Aluminum compression cable lugs and connectors acc. to DIN				
Aluminum compression cable lugs and connectors acc. to DIN		10 - 150		335
Compression joints for full tension connections of Aldrey cables acc. to DIN EN 50182		25 - 95		335
Aluminum/copper compression cable lugs and connectors				
Aluminum/copper compression cable lugs and connectors		10 - 150		335
Clamps				
Clamps, C-type		16 - 35		335
Cable end-sleeves				
Cable end-sleeves		10 - 95		336
Twin cable end-sleeves		2 x 4 - 2 x 16		336
Cable end-sleeves, trapezoidal, for fine stranded conductors		10 - 95		336
Twin cable end-sleeves, trapezoidal, for fine stranded conductors		2 x 4 - 2 x 16		336

EK 50/18 Battery powered hydraulic crimping tool 6 - 185 mm²

NEXT GENERATION



- For dies acc. to DIN 48083, sheet 1
- Fast crimp cycles due to Automatic Retraction Stop (ARS)
- All tool data in view thanks to display and ipress app

Characteristics

- All data can be easily read via Bluetooth
- Choose your battery system: Bosch or Makita
- Open head, rotatable
- Quality assurance via visual and audible signals in case of error
- Simple and safe: One-button operating concept for controlling all tool functions
- Effortless working thanks to low weight
- LED for work area illumination
- Simple and safe: Automatic retraction when operation is complete
- Automatic retract stop (ARS) for positioning control in case of multiple crimps
- Always ready-to-use thanks to battery charge and service display

Suitable for

- 18-series interchangeable dies, narrow crimping

Technical data	
Crimping force	50 kN
Stroke / opening width	17 mm
Crimping range	6 - 185 mm²
Crimping cycle	5 s to 6 s (depending on cross-section)
Charging time	15 min.
Weight incl. battery	2.8 kg
Ambient temperature	-10 °C up to +40 °C

Item	Part No. **Bosch**	Part No. **Makita**	
Battery powered hydraulic crimping tool 6 - 185 mm²	**EK5018CFB**	**EK5018CFM**	
Scope of supply			**Page**
Bosch battery 18 V / 2.0 Ah, Li-Ion	RALB1EU		492
Bosch quick-charger for 18 V Li-Ion battery	LGLB1EU		494
Makita battery 18 V / 1.5 Ah, Li-Ion		RAL1	491
Makita battery 18 V / 3.0 Ah, Li-Ion (54 Wh)		LGL1	494
Plastic case	KK50NG	KK50NG	
Accessories			**Page**
Bosch battery 18 V / 5.0 Ah, Li-Ion	RALB2EU		493
Makita battery 18 V / 3.0 Ah, Li-Ion (54 Wh)		RAL2	491

Available dies for Series 18 for EK 50/18

Refer to the limitations when crimping connectors in the technical appendix.

Suitable for	Connection material	Crimping range mm²	Crimp profile	Page
Tubular cable lugs and connectors, Cu				
Tubular cable lugs and connectors, Cu, standard type, tubular cable lugs for switchgear connections		6 - 185		337
Insulated tubular cable lugs and compression joints, insulated pin terminals		10 - 95		337
Tubular cable lugs and connectors for fine stranded conductors		10 - 50		337
Tubular cable lugs and connectors for solid conductors		1.5 - 16		338
Compression cable lugs and connectors acc. to DIN - Cu				
Copper compression cable lugs (DIN46235) and compression joints (DIN 46267, part 1)		6 - 185		338
Terminals, connectors and pin terminals acc. to DIN - Cu				
Solderless terminals (DIN 46234) an pin terminals (DIN 46230), solderless connectors (DIN 46341) Cu		10 - 70		338
Insulated solderless terminals and pin terminals		10 - 50		338
Sleeves for compacted conductors and sector shaped conductors, Cu				
Pre-rounding crimping dies for Al and Cu sector shaped conductors		10 sm - 240 se / 185 sm		339
Aluminum compression cable lugs and connectors acc. to DIN - Al				
Aluminum compression cable lugs and connectors acc. to DIN - Al		10 - 185		339
Aluminum compression cable lugs and connectors acc. to DIN				
Compression joints for full tension connections of Aldrey cables acc. to DIN EN 50182		25 - 95		339
Clamps				
Clamps, C-type		4 - 50		339
Cable end-sleeves				
Cable end-sleeves		10 - 95		340
Twin cable end-sleeves		2 x 4 - 2 x 16		340
Cable end-sleeves, trapezoidal, for fine stranded conductors		10 - 95		340
Twin cable end-sleeves, trapezoidal, for fine stranded conductors		2 x 4 - 2 x 16		340

EKM 60/22 Battery powered hydraulic crimping tool 6 - 300 mm²

NEXT GENERATION



- Large crimping range up to 300 mm²
- All tool data in view thanks to display and ipress app

Characteristics

- Choose your battery system: Bosch or Makita
- All data can be easily read via Bluetooth
- Closed head, flip top style, rotatable
- Quality assurance via visual and audible signals in case of error
- Effortless working due to balanced centre of gravity
- LED for work area illumination
- Simple and safe: Automatic retraction when operation is complete
- Automatic retract stop (ARS) for positioning control in case of multiple crimps
- Always ready-to-use thanks to battery charge and service display

Suitable for

- 22-series interchangeable dies, narrow crimping

Technical data	
Crimping force	60 kN
Hub	17.5 mm
Crimping range	6 - 300 mm²
Crimping cycle	2 s (bei ARS) und 5 s (depending on crimp cross-section)
Charging time	15 min.
Weight incl. battery	3.0 kg
Ambient temperature	-10 °C up to +40 °C

Item	Part No. **Bosch**	Part No. **Makita**	
Battery powered hydraulic crimping tool 6 - 300 mm²	**EKM6022CFB**	**EKM6022CFM**	
Scope of supply			**Page**
Bosch battery 18 V / 2.0 Ah, Li-Ion	RALB1EU		492
Bosch quick-charger for 18 V Li-Ion battery	LGLB1EU		494
Plastic case	KK50NG		
Makita battery 18 V / 1.5 Ah, Li-Ion		RAL1	491
Makita battery 18 V / 3.0 Ah, Li-Ion (54 Wh)		LGL1	494
Plastic case		KK50L	
Accessories			**Page**
Bosch battery 18 V / 5.0 Ah, Li-Ion	RALB2EU		493
Makita battery 18 V / 4.0 Ah, Li-Ion		RAL40	492

Available dies for Series 22 for EKM 60/22

Refer to the limitations when crimping connectors in the technical appendix.

Suitable for	Connection material	Crimping range mm²	Crimp profile	Page
Copper tubular cable lugs and connectors				
Tubular cable lugs and connectors blue connection for compacted conductors acc. to DIN EN 60228		6 - 300		342
Tubular cable lugs and connectors, standard type, tubular cable lugs for switchgear connections		6 - 300		341
Insulated cable lugs and compression joints, standard type, Insulated pin terminals		10 - 150		341
Tubular cable lugs and connectors for fine stranded conductors		10 - 70		342
Tubular cable lugs and connectors for solid conductors		10 - 50		342
Tubular cable lugs and connectors, Ni, VA				
Stainless steel tubular cable lugs and connectors		10 - 50		342
Nickel tubular cable lugs and connectors		10 - 50		342
Copper compression cable lugs and connectors to DIN				
Copper compression cable lugs (DIN 46235) and connectors (DIN 46267, part 1) acc. to DIN		6 - 300		343
Double compression cable lugs		2 x 50 - 2 x 70		343
Terminals, connectors and pin terminals acc. to DIN, copper				
Solderless terminals (DIN 46234), connectors and pin terminals (DIN 46230) acc. to DIN		10 - 70		343
Insulated solderless terminals		10 - 70		343
Sleeves for compacted conductors and sector-shaped conductors, copper				
Pre-rounding dies for sector-shaped Al and Cu conductors		10 sm - 300 se / 240 sm		344
Aluminium compression cable lugs and connectors to DIN				
Aluminium compression cable lugs and connectors to DIN		10 - 300		344
Compression joints connections for Aldrey-conductors DIN EN 50182, Al-conductors DIN EN 50182, 120 - 185 mm²		25 - 185		344
Compression joints DIN 48085, part 3 for aluminium/steel conductors DIN EN 50182, aluminium crimping		25/4 - 120/20		345
Compression joints DIN 48085, part 3 for aluminium/steel conductors DIN EN 50182, steel crimping		25/4 - 120/20		345
Aluminium/copper compression cable lugs and connectors				
Aluminum side of aluminum/copper compression cable lugs and connectors: crimping dies A22, copper side of aluminum/copper compression cable lugs and connectors: crimping dies D22		10 - 300		344
Clamps				
Clamps, C-type		4 - 50		345
Clamps, H-type		70		345
Cable end-sleeves				
Cable end-sleeves		10 - 240		346
Twin cable end-sleeves		2 x 4 - 2 x 16		346
Cable end-sleeves, trapezodial, for fine stranded conductors		10 - 240		346
Twin cable end-sleeves, trapezodial, for fine stranded conductors		2 x 4 - 2 x 16		346

EK 60/22 Battery powered hydraulic crimping tool 6 - 300 mm²

NEXT GENERATION



- Large crimping range up to 300 mm²
- Fast crimp cycles due to Automatic Retraction Stop (ARS)
- All tool data in view thanks to display and ipress app

Characteristics

- Choose your battery system: Bosch or Makita
- All data can be easily read via Bluetooth
- Closed head, flip top style, rotatable
- Quality assurance via visual and audible signals in case of error
- Simple and safe: One-button operating concept for controlling all tool functions
- Effortless working due to balanced centre of gravity
- LED for work area illumination
- Simple and safe: Automatic retraction when operation is complete
- Automatic retract stop (ARS) for positioning control in case of multiple crimps
- Always ready-to-use thanks to battery charge and service display

Suitable for

- 22-series interchangeable dies, narrow crimping

Technical data	
Crimping force	60 kN
Hub	17 mm
Crimping range	6 - 300 mm²
Crimping cycle	3 s to 5 s (depending on crimp cross-section)
Charging time	45 min.
Weight incl. battery	4.4 kg
Ambient temperature	-10 °C up to +40 °C

Item	Part No. **Bosch**	Part No. **Makita**	
Battery powered hydraulic crimping tool 6 - 300 mm²	**EK6022CFB**	**EK6022CFM**	
Scope of supply			Page
Bosch battery 18 V / 5.0 Ah, Li-Ion	RALB2EU		493
Bosch quick-charger for 18 V Li-Ion battery	LGLB1EU		494
Makita battery 18 V / 4.0 Ah, Li-Ion		RAL40	492
Makita battery 18 V / 3.0 Ah, Li-Ion (54 Wh)		LGL1	494
Plastic case	KK120NG	KK120NG	
Accessories			Page
Bosch battery 18 V / 5.0 Ah, Li-Ion	RALB2EU		493
Makita battery 18 V / 4.0 Ah, Li-Ion		RAL40	492

Available dies for Series 22 for EK 60/22

Refer to the limitations when crimping connectors in the technical appendix.

Suitable for	Connection material	Crimping range mm²	Crimp profile	Page
Copper tubular cable lugs and connectors				
Tubular cable lugs and connectors blue connection for compacted conductors acc. to DIN EN 60228		6 - 300		342
Tubular cable lugs and connectors, standard type, tubular cable lugs for switchgear connections		6 - 300		341
Insulated cable lugs and compression joints, standard type, Insulated pin terminals		10 - 150		341
Tubular cable lugs and connectors for fine stranded conductors		10 - 70		342
Tubular cable lugs and connectors for solid conductors		1.5 - 16		342
Tubular cable lugs and connectors, Ni, VA				
Stainless steel tubular cable lugs and connectors		10 - 50		342
Nickel tubular cable lugs and connectors		10 - 50		342
Copper compression cable lugs and connectors to DIN				
Copper compression cable lugs (DIN 46235) and connectors (DIN 46267, part 1) acc. to DIN		6 - 300		343
Double compression cable lugs		2 x 50 - 2 x 70		343
Terminals, connectors and pin terminals acc. to DIN, copper				
Solderless terminals (DIN 46234), connectors and pin terminals (DIN 46230) acc. to DIN		10 - 70		343
Insulated solderless terminals		10 - 70		343
Sleeves for compacted conductors and sector-shaped conductors, copper				
Pre-rounding dies for sector-shaped Al and Cu conductors		10 sm - 300 se / 240 sm		344
Aluminium compression cable lugs and connectors to DIN				
Aluminium compression cable lugs and connectors to DIN		10 - 300		344
Compression joints connections for Aldrey-conductors DIN EN 50182, Al-conductors DIN EN 50182, 120 - 185 mm²		25 - 185		344
Compression joints DIN 48085, part 3 for aluminium/steel conductors DIN EN 50182, aluminium crimping		25/4 - 120/20		345
Compression joints DIN 48085, part 3 for aluminium/steel conductors DIN EN 50182, steel crimping		25/4 - 120/20		345
Aluminium/copper compression cable lugs and connectors				
Aluminum side of aluminum/copper compression cable lugs and connectors: crimping dies A22, copper side of aluminum/copper compression cable lugs and connectors: crimping dies D22		10 - 300		344
Clamps				
Clamps, C-type		4 - 50		345
Clamps, H-type		70		345
Cable end-sleeves				
Cable end-sleeves		10 - 240		346
Twin cable end-sleeves		2 x 4 - 2 x 16		346
Cable end-sleeves, trapezodial, for fine stranded conductors		10 - 240		346
Twin cable end-sleeves, trapezodial, for fine stranded conductors		2 x 4 - 2 x 16		346

EK 60 VP Battery powered hydraulic crimping tool 10 - 240 mm²

NEXT GENERATION



- Crimps optimised at all times due to the patented centring system
- Fast crimp cycles due to Automatic Retraction Stop (ARS)
- All tool data in view thanks to display and ipress app

Characteristics

- Choose your battery system: Bosch or Makita
- All data can be easily read via Bluetooth
- Quad-point indent crimping feature with patented centring system, no dies required
- Open head, rotatable
- Quality assurance via visual and audible signals in case of error
- Simple and safe: One-button operating concept for controlling all tool functions
- Effortless working due to balanced centre of gravity
- LED for work area illumination
- 2-stage hydraulic system with fast feed and power stroke
- Simple and safe: Automatic retraction when operation is complete
- Always ready-to-use thanks to battery charge and service display

Technical data	
Crimping force	55 kN
Crimping range	10 - 240 mm²
Crimping cycle	3 s to 6 s (depending on crimp cross-section)
Charging time	45 min.
Weight incl. battery	5.0 kg
Ambient temperature	-10 °C up to +40 °C

Item	Part No. **Bosch**	Part No. **Makita**	
Battery powered hydraulic crimping tool 10 - 240 mm²	**EK60VPCFB**	**EK60VPCFM**	
Scope of supply			Page
Bosch battery 18 V / 5.0 Ah, Li-Ion	RALB2EU		493
Bosch quick-charger for 18 V Li-Ion battery	LGLB1EU		494
Makita battery 18 V / 4.0 Ah, Li-Ion		RAL40	492
Makita battery 18 V / 3.0 Ah, Li-Ion (54 Wh)		LGL1	494
Plastic case	KK120NG	KK120NG	
Accessories			Page
Gauge and 10 Test cylinder	TS10B	TS10B	

Suitable for	Connection material	Crimping range mm²	Crimp profile
Copper tubular cable lugs and connectors			
Tubular cable lugs, standard type, tubular cable lugs for switchgear connections		10-240	
Connectors, standard type		10-120	
Tubular cable lugs for fine stranded conductors		10-240	
Connectors for fine stranded conductors		10-95	

EK 60 VP/FT Battery powered hydraulic crimping tool 16 - 300 mm²

NEXT GENERATION



- Suitable for crimping tubular cable lugs and connectors „standard type“ and fine and superfine stranded conductors to 300 mm²
- Fast crimp cycles due to Automatic Retraction Stop (ARS)
- All tool data in view thanks to display and ipress app

Characteristics

- Choose your battery system: Bosch or Makita
- All data can be easily read via Bluetooth
- Quad-point indent crimping feature with patented centring system, no dies required
- Closed head with bolt interlock, rotatable, flip top style
- Quality assurance via visual and audible signals in case of error
- Simple and safe: One-button operating concept for controlling all tool functions
- Effortless working due to balanced centre of gravity
- LED for work area illumination
- 2-stage hydraulic system with fast feed and power stroke
- Simple and safe: Automatic retraction when operation is complete
- Automatic retract stop (ARS) for positioning control in case of multiple crimps
- Always ready-to-use thanks to battery charge and service display

Technical data	
Crimping force	55 kN
Crimping range	16 - 300 mm²
Crimping cycle	3 s to 6 s (depending on crimp cross-section)
Charging time	45 min.
Weight incl. battery	5.1 kg
Ambient temperature	-10 °C up to +40 °C

Item	Part No. **Bosch**	Part No. **Makita**	
Battery powered hydraulic crimping tool 16 - 300 mm²	**EK60VPFTCFB**	**EK60VPFTCFM**	
Scope of supply			**Page**
Bosch battery 18 V / 5.0 Ah, Li-Ion	RALB2EU		493
Bosch quick-charger for 18 V Li-Ion battery	LGLB1EU		494
Makita battery 18 V / 4.0 Ah, Li-Ion		RAL40	492
Makita battery 18 V / 3.0 Ah, Li-Ion (54 Wh)		LGL1	494
Plastic case	KK120NG	KK120NG	
Accessories			**Page**
Bosch battery 18 V / 5.0 Ah, Li-Ion	RALB2EU		493
Makita battery 18 V / 4.0 Ah, Li-Ion		RAL40	492

Suitable for	Connection material	Crimping range mm²	Crimp profile
Tubular cable lugs and connectors - Cu			
Tubular cable lugs and connectors, standard type, tubular cable lugs for switchgear connections		16-300	
Tubular cable lugs and connectors for fine stranded conductors		16-300	

EKM 60 ID Battery powered hydraulic crimping tool 10 - 240 mm²

NEXT GENERATION



- Extra large crimping area due to innovative 2-stage telescopic cylinder
- Indent crimping - no changing of dies required
- All tool data in view thanks to display and ipress app

Characteristics

- Choose your battery system: Bosch or Makita
- All data can be easily read via Bluetooth
- With innovative 2-stage telescopic cylinder
- Closed head, flip top style, rotatable
- Quality assurance via visual and audible signals in case of error
- Simple and safe: One-button operating concept for controlling all tool functions
- Effortless working due to balanced centre of gravity
- LED for work area illumination
- Always ready-to-use thanks to battery charge and service display

Suitable for

- Very well suited for compacted conductors
- Especially for fine strand conductors to DIN VDE 60228

Technical data	
Crimping force	30 - 60 kN
Stroke / opening width	35.5 mm
Crimping range	Cu: 10 - 240 mm², Al: 50 - 240 mm²
Crimping cycle	2 s (for ARS) to 7 s (depending on cross-section)
Charging time	15 min.
Weight incl. battery	2.5 kg
Ambient temperature	-10 °C up to +40 °C

Item	Part No. **Bosch**	Part No. **Makita**	
Battery powered hydraulic crimping tool 10 - 240 mm²	**EKM60IDCFB**	**EKM60IDCFM**	
Scope of supply			Page
Bosch battery 18 V / 2.0 Ah, Li-Ion	RALB1EU		492
Bosch quick-charger for 18 V Li-Ion battery	LGLB1EU		494
Makita battery 18 V / 1.5 Ah, Li-Ion		RAL1	491
Makita battery 18 V / 3.0 Ah, Li-Ion (54 Wh)		LGL1	494
Plastic case	KK50NG	KK50NG	
Accessories			Page
Bosch battery 18 V / 5.0 Ah, Li-Ion	RALB2EU		493
Makita battery 18 V / 4.0 Ah, Li-Ion		RAL40	492

Suitable for	Connection material	Crimping range mm²	Crimp profile
Copper tubular cable lugs and connectors			
Tubular cable lugs and connectors, standard type, Tubular cable lugs for switch gear connections		10 - 240	
Tubular cable lugs and connectors for fine stranded conductors		10 - 240	
Terminals, connectors and pin terminals acc. to DIN			
Solderless terminals (DIN 46234) connectors and pin terminals (DIN 46230, DIN 46341)		10 - 240	
Aluminum compression cable lugs and connectors			
Aluminum compression cable lugs and connectors acc. to DIN		50 - 240	
Compression joints for full tension connections of Aldrey conductors acc. to DIN EN 50182, Al-conductor acc. to DIN EN 50182, 120 - 185 mm²		50 - 185	
Compression joints acc. to DIN 48085, part 3 for Al/St-cable acc. to DIN EN 50182		50 - 240	
Aluminum/copper compression cable lugs and connectors			
Aluminum/copper compression cable lugs and connectors		50 - 240	

EK 120 ID Battery powered hydraulic crimping tool 35 - 500 mm²

NEXT GENERATION



- For superfine-stranded conductors to 500 mm²
- Indent crimping, no dies required
- All tool data in view thanks to display and ipress app

Characteristics

- Choose your battery system: Bosch or Makita
- All data can be easily read via Bluetooth
- Closed head, flip top style, rotatable
- Quality assurance via visual and audible signals in case of error
- Simple and safe: One-button operating concept for controlling all tool functions
- Effortless working due to balanced centre of gravity
- LED for work area illumination
- 2-stage hydraulic system with fast feed and power stroke
- Simple and safe: Automatic retraction when operation is complete
- Automatic retract stop (ARS) for positioning control in case of multiple crimps
- Always ready-to-use thanks to battery charge and service display

Technical data	
Crimping force	108 kN
Stroke / opening width	52 mm
Crimping range	35 - 500 mm²
Crimping cycle	10 s to 11 s (depending on crimp cross-section)
Charging time	45 min.
Weight incl. battery	7.0 kg
Ambient temperature	-10 °C up to +40 °C

Item	Part No. **Bosch**	Part No. **Makita**	
Battery powered hydraulic crimping tool 35 - 500 mm²	**EK120IDCFB**	**EK120IDCFM**	
Scope of supply			Page
Bosch battery 18 V / 5.0 Ah, Li-Ion	RALB2EU		493
Bosch quick-charger for 18 V Li-Ion battery	LGLB1EU		494
Makita battery 18 V / 4.0 Ah, Li-Ion		RAL40	492
Makita battery 18 V / 3.0 Ah, Li-Ion (54 Wh)		LGL1	494
Plastic case	KK120NG	KK120NG	
Accessories			Page
Bosch battery 18 V / 5.0 Ah, Li-Ion	RALB2EU		493
Makita battery 18 V / 4.0 Ah, Li-Ion		RAL40	492

EK 120/32 Battery powered hydraulic crimping tool 16 - 400 mm²

NEXT GENERATION



- Very large crimping range up to 400 mm²
- Up to 60% fewer crimps thanks to wide crimping in comparison to 6 t tools
- All tool data in view thanks to display and ipress app

Characteristics

- Choose your battery system: Bosch or Makita
- All data can be easily read via Bluetooth
- Open head, rotatable
- Quality assurance via visual and audible signals in case of error
- Simple and safe: One-button operating concept for controlling all tool functions
- Effortless working due to balanced centre of gravity
- LED for work area illumination
- 2-stage hydraulic system with fast feed and power stroke
- Simple and safe: Automatic retraction when operation is complete
- Automatic retract stop (ARS) for positioning control in case of multiple crimps
- Always ready-to-use thanks to battery charge and service display

Suitable for

- 13-series interchangeable dies, wide crimping

Technical data	
Crimping force	120 kN
Stroke / opening width	32 mm
Crimping range	16 - 400 mm²
Crimping cycle	7 s to 8 s (depending on crimp cross-section)
Charging time	45 min.
Weight incl. battery	6.8 kg
Ambient temperature	-10° C up to +40 °C

Item	Part No. **Bosch**	Part No. **Makita**	
Battery powered hydraulic crimping tool 16 - 400 mm²	**EK12032CFB**	**EK12032CFM**	
Scope of supply			**Page**
Bosch battery 18 V / 5.0 Ah, Li-Ion	RALB2EU		493
Bosch quick-charger for 18 V Li-Ion battery	LGLB1EU		494
Makita battery 18 V / 4.0 Ah, Li-Ion		RAL40	492
Makita battery 18 V / 3.0 Ah, Li-Ion (54 Wh)		LGL1	494
Plastic case	KK120NG	KK120NG	
Accessories			**Page**
Bosch battery 18 V / 5.0 Ah, Li-Ion	RALB2EU		493
Makita battery 18 V / 4.0 Ah, Li-Ion		RAL40	492

Available dies for Series 13 for EK 120/32

Refer to the limitations when crimping connectors in the technical appendix.

Suitable for	Connection material	Crimping range mm²	Crimp profile	Page
Tubular cable lugs and connectors, Cu				
Tubular cable lugs and connectors, Cu, standard type, tubular cable lugs for switchgear connections		16 - 400		347
Butt connectors, standard type		16 - 185		347
Insulated tubular cable lugs and connectors, insulated pin terminals		10 - 150		347
Tubular cable lugs and connectors for fine stranded conductors		16 - 150		348
Compression cable lugs and connectors acc. to DIN - Cu				
Compression cable lugs (DIN46230) and connectors (DIN 46267, part 1) Cu		16 - 300		348
Compression joints DIN 46267 part 1		16 - 150		348
Double compression cable lugs		2 x 50 - 2 x 95		348
Terminals, connectors and pin terminals acc. to DIN - Cu				
Terminals (DIN 46234) and pin terminals (DIN 46230) Cu, solderless connectors (DIN 46341) Cu		16 - 150		349
Insulated terminals and pin terminals		10 - 95		349
Sleeves for compacted conductors and sector shaped conductors, Cu				
Pre-rounding crimping dies for Al and Cu sector shaped conductors		10 sm - 300 se / 300 sm		349
Aluminum compression cable lugs and connectors acc. to DIN				
Aluminum compression cable lugs and connectors acc. to DIN		10 - 240		350
Compression joints for full tension connections of Aldrey cables acc. to DIN EN 50182, Al conductors DIN EN 50182, 120 - 185 mm²		25 - 185		350
Compression joints acc. to DIN 45085, part 3 for Al-steel cable acc. to DIN EN 50182, aluminum crimping		24/4 - 120/20		350
Compression joints acc. to DIN 48085, part 3 for Al-steel cables acc. to DIN EN 50182, steel crimping		25/4 - 120/20		350
Aluminum/copper compression cable lugs and connectors				
Aluminum/copper compression cable lugs and connectors		10 - 240		350
Clamps				
Clamps, C-type		10 - 70		351
Clamps, H-type		70 - 120		351
Cable end-sleeves				
Cable end-sleeves		25 - 240		351
Cable end-sleeves, trapezoidal, for fine stranded conductors		25 - 240		351

EK 120/42 Battery powered hydraulic crimping tool 16 - 400 mm²

NEXT GENERATION



- C-head with very wide crimping range to 400 mm²
- Up to 60% fewer crimps thanks to wide crimping in comparison to 6 t tools
- Easy handling by optimum weight distribution
- All tool data in view thanks to display and ipress app

Characteristics

- Choose your battery system: Bosch or Makita
- All data can be easily read via Bluetooth
- Open head, rotatable
- Quality assurance via visual and audible signals in case of error
- Simple and safe: One-button operating concept for controlling all tool functions
- Effortless working due to balanced centre of gravity
- LED for work area illumination
- 2-stage hydraulic system with fast feed and power stroke
- Simple and safe: Automatic retraction when operation is complete
- Automatic retract stop (ARS) for positioning control in case of multiple crimps
- Always ready-to-use thanks to battery charge and service display

Suitable for

- 13-series interchangeable dies, wide crimping

Technical data	
Crimping force	120 kN
Stroke / opening width	42 mm
Crimping range	16 - 400 mm²
Crimping cycle	8 s to 9 s (depending on crimp cross-section)
Charging time	45 min.
Weight incl. battery	7.1 kg
Ambient temperature	-10 °C up to +40 °C

Item	Part No. **Bosch**	Part No. **Makita**	
Battery powered hydraulic crimping tool 16 - 400 mm²	**EK12042CFB**	**EK12042CFM**	
Scope of supply			**Page**
Bosch battery 18 V / 5.0 Ah, Li-Ion	RALB2EU		493
Bosch quick-charger for 18 V Li-Ion battery	LGLB1EU		494
Makita battery 18 V / 4.0 Ah, Li-Ion		RAL40	492
Makita battery 18 V / 3.0 Ah, Li-Ion (54 Wh)		LGL1	494
Plastic case	KK120NG	KK120NG	
Accessories			**Page**
Bosch battery 18 V / 5.0 Ah, Li-Ion	RALB2EU		493
Makita battery 18 V / 4.0 Ah, Li-Ion		RAL40	492

Available dies for Series 13 for EK 120/42

Suitable for	Connection material	Crimping range mm²	Crimp profile	Page
Tubular cable lugs and connectors, Cu				
Tubular cable lugs and connectors, Cu, standard type, tubular cable lugs for switchgear connections		16 - 400		347
Insulated tubular cable lugs and connectors, insulated pin terminals		10 - 150		347
Tubular cable lugs and connectors for fine stranded conductors		16 - 150		348
Compression cable lugs and connectors acc. to DIN - Cu				
Compression cable lugs (DIN 46235) and connectors (DIN 46267, part 1) Cu		16 - 300		348
Double compression cable lugs		2 x 50 - 2 x 95		348
Terminals, connectors and pin terminals acc. to DIN - Cu				
Terminals (DIN 46234) and pin terminals (DIN 46230) Cu, solderless connectors (DIN 46341) Cu		16 - 150		349
Insulated terminals and pin terminals		10 - 95		349
Sleeves for compacted conductors and sector shaped conductors, Cu				
Pre-rounding crimping dies for Al and Cu sector shaped conductors		10 sm - 300 se / 300 sm		349
Aluminum compression cable lugs and connectors acc. to DIN				
Aluminum compression cable lugs and connectors acc. to DIN		10 - 240		350
Compression points for full tension connections of Aldrey cables acc. to DIN EN 50182, Al conductors DIN EN 50182, 120 - 185 mm²		25 - 185		350
Compression joints acc. to DIN 48085, part 3 for Al-steel cables acc. to DIN EN 50182, aluminum crimping		25/4 - 120/20		350
Compression joints acc. to DIN 45085, part 3 for Al-steel cables acc. to DIN EN 50182, steel crimping		25/4 - 120/20		350
Aluminum/copper compression cable lugs and connectors				
Aluminum/copper compression cable lugs and connectors		10 - 240		350
Clamps				
Clamps, C-type		10 - 70		351
Clamps, H-type		70 - 120		351
Cable end-sleeves				
Cable end-sleeves		25 - 240		351
Cable end-sleeves, trapezoidal, for fine stranded conductors		25 - 240		351

EK 120 U Battery powered hydraulic crimping tool 16 - 400 mm²

NEXT GENERATION



- H-head for deep groove crimps
- Up to 60% fewer crimps thanks to wide crimping in comparison to 6 t tools
- All tool data in view thanks to display and ipress app

Characteristics

- Choose your battery system: Bosch or Makita
- All data can be easily read via Bluetooth
- Closed head, rotatable
- Quality assurance via visual and audible signals in case of error
- Simple and safe: One-button operating concept for controlling all tool functions
- Effortless working due to balanced centre of gravity
- LED for work area illumination
- 2-stage hydraulic system with fast feed and power stroke
- Simple and safe: Automatic retraction when operation is complete
- Automatic retract stop (ARS) for positioning control in case of multiple crimps
- Always ready-to-use thanks to battery charge and service display

Suitable for

- 13-series interchangeable dies, wide crimping

K13 SERIE

IEC

Technical data	
Crimping force	120 kN
Stroke / opening width	20 mm
Crimping range	16 - 400 mm²
Crimping cycle	7 s to 8 s (depending on crimp cross-section)
Charging time	45 min.
Weight incl. battery	6.2 kg
Ambient temperature	-10° C up to +40 °C

Item	Part No. **Bosch**	Part No. **Makita**	
Battery powered hydraulic crimping tool 16 - 400 mm²	**EK120UCFB**	**EK120UCFM**	
Scope of supply			Page
Bosch battery 18 V / 5.0 Ah, Li-Ion	RALB2EU		493
Bosch quick-charger for 18 V Li-Ion battery	LGLB1EU		494
Makita battery 18 V / 4.0 Ah, Li-Ion		RAL40	492
Makita battery 18 V / 3.0 Ah, Li-Ion (54 Wh)		LGL1	494
Plastic case	KK120NG	KK120NG	
Accessories			Page
Bosch battery 18 V / 5.0 Ah, Li-Ion	RALB2EU		493
Makita battery 18 V / 4.0 Ah, Li-Ion		RAL40	492

Available dies for Series 13 for EK 120 U

Suitable for	Connection material	Crimping range mm²	Crimp profile	Page
Tubular cable lugs and connectors, Cu				
Tubular cable lugs and connectors, Cu, standard type, tubular cable lugs for switchgear connectors		16 - 400		347
Insulated tubular cable lug and compression joints		10 - 150		347
Tubular cable lugs and connection for fine stranded conductors		16 - 150		348
Compression cable lugs and connectors acc. to DIN - Cu				
Copper compression cable lugs (DIN 46235) and connectors (DIN 46267, part 1) Cu		16 - 300		348
Double compression cable lugs		2 x 50 - 2 x 95		348
Terminals, connectors and pin terminals acc. to DIN - Cu				
Terminals (DIN 46234) and pin terminals (DIN 46230) Cu, solderless connectors (DIN 46341) Cu		16 - 150		349
Insulated terminals and pin terminals		10 - 95		349
Sleeves for compacted conductors and sector shaped conductors, Cu				
Pre-rounding crimping dies for Al and Cu sector shaped conductors, 3 and 4 core sector shaped conductors		10 sm - 300 se / 300 sm		349
Compression cable lugs and connectors acc. To DIN-Al				
Compression cable lugs and connectors acc. To DIN-Al		10 - 240		350
Compression joints for full tension connections of Aldrey cables acc. to DIN EN 50182, Al conductors DIN EN 50182, 120 - 185 mm²		25 - 185		350
Compression joints acc. to DIN 48085, part 3 for Al-steel cables acc. to DIN EN 50182, aluminum crimping		25/4 - 120/20		350
Compression joints acc. to DIN 48085, part 3 for Al-Steel cables acc. to DIN EN 50182, steel crimping		25/4 - 120/20		350
Aluminum/copper compression cable lugs and connectors				
Aluminum/copper compression cable lugs and connectors		10 - 240		350
Clamps and screw connectors				
C-clamps		10 - 70		351
H-clamps		70 - 120		351
Cable end-sleeves				
Cable end-sleeves		25 - 240		351
Cable end-sleeves, trapezoidal, for fine stranded conductors		25 - 240		351

EK 135 FT Battery powered hydraulic crimping tool 10 - 630 mm²

NEXT GENERATION



- Very large crimping range to 630 mm²
- Very powerful with a crimping force of 13.5 t
- All tool data in view thanks to display and ipress app

Characteristics

- Choose your battery system: Bosch or Makita
- All data can be easily read via Bluetooth
- Closed head, rotatable
- Quality assurance via visual and audible signals in case of error
- Simple and safe: One-button operating concept for controlling all tool functions
- Effortless working due to balanced centre of gravity
- LED for work area illumination
- 2-stage hydraulic system with fast feed and power stroke
- Simple and safe: Automatic retraction when operation is complete
- Automatic retract stop (ARS) for positioning control in case of multiple crimps
- Always ready-to-use thanks to battery charge and service display

Suitable for

- 13-series interchangeable dies, wide crimping
- 15-series interchangeable dies, wide crimping

Technical data	
Crimping force	135 kN
Stroke / opening width	50.8 mm
Crimping range	10 - 630 mm²
Crimping cycle	ca. 10 s to 11 s (depending on cross-section)
Charging time	45 min.
Weight incl. battery	10.2 kg
Ambient temperature	-10 °C up to +40 °C

Item	Part No. **Bosch**	Part No. **Makita**	
Battery powered hydraulic crimping tool 10 - 630 mm²	**EK135FTCFB**	**EK135FTCFM**	
Scope of supply			Page
Bosch battery 18 V / 5.0 Ah, Li-Ion	RALB2EU		493
Bosch quick-charger for 18 V Li-Ion battery	LGLB1EU		494
Adapter for crimping dies series 13	UA15T	UA15T	478
Makita battery 18 V / 4.0 Ah, Li-Ion		RAL40	492
Makita battery 18 V / 3.0 Ah, Li-Ion (54 Wh)		LGL1	494
Plastic case	KK135FTNG	KK135FTNG	
Accessories			Page
Bosch battery 18 V / 5.0 Ah, Li-Ion	RALB2EU		493
Makita battery 18 V / 4.0 Ah, Li-Ion		RAL40	492

Available dies for Series 13 and 15 for EK 135 FT

Suitable for	Connection material	Crimping range mm²	Crimp profile	Page
Copper tubular cable lugs and connectors				
Tubular cable lugs and connectors, standard type, tubular cable lugs for switchgear connections		16 - 400		347
Insulated terminals and connectors, Insulated pin terminals		10 - 150		347
Tubular cable lugs and connectors for fine stranded conductors		16 - 150		348
Copper compression cable lugs and connectors to DIN				
Copper compression cable lugs (DIN 46235) and connectors (DIN 46267, part 1) acc. to DIN		16 - 300		348
Copper compression cable lugs (DIN 46235) and connectors (DIN 46267, part 1) acc. to DIN		400 - 625		352
Double compression cable lugs		2 x 50 - 2 x 95		348
Terminals, connectors and pin terminals to DIN - Cu				
Copper Copper solderless bterminals (DIN 46234) and pin terminals (DIN 46230)acc. to DIN, copper solderless connectors (DIN 46341) acc. to DIN		16 - 150		349
Insulated solderless terminals and pin terminals		10 - 95		349
Sleeves for compacted conductors and sector-shaped conductors, copper				
Pre-rounding dies for sector-shaped Al and Cu conductors, 3- and 4-core sector-shaped conductors		10 sm - 300 se / 300 sm		349
Aluminum compression cable lugs and connectors to DIN				
Aluminum compression cable lugs and connectors to DIN		10 - 240		350
Aluminum compression cable lugs and connectors to DIN		400 - 500		352
Compression joints for full tension connections of Aldrey conductors acc. to DIN EN 50182, Al-conductor acc. to DIN EN 50182, 120 - 185 mm²		25 - 185		350
Compression joints acc. to DIN 48085, part 3 for Al/St-cable acc. to DIN EN 50182, Aluminum crimping		25 - 185		350
Compression joints acc. to DIN 48085, part 3 for Al/St-cables acc. to DIN EN 50182, stell crimping		25/4 - 120/20		350
Aluminum/copper compression cable lugs and connectors				
Aluminum/copper compression cable lugs and connectors acc. to DIN		10 - 300		350
Aluminum/copper compression cable lugs and connectors acc. to DIN		400 - 500		352
Clamps				
Clamps, C-type		10 - 70		351
Clamps, H-type		70 - 120		351
Cable end-sleeves				
Cable end-sleeves		25 - 240		351
Cable end-sleeves, special trapezoid crimp for fine stranded conductors		25 - 240		351

EKM 60 UNV Battery-powered hydraulic universal tool 6 - 300 mm²

NEXT GENERATION



- One head for crimping, cutting and punching - one tool for all
- Ideal in the assembly field where all common jobs can be carried out using one tool
- All tool data on view thanks to display and ipress app
- Small and slim, perfect for cramped conditions

Characteristics

- Choose your battery system: Bosch or Makita
- All data can be easily read via Bluetooth
- Universal head flip top style, rotatable
- Simple and safe: One-button operating concept for controlling all tool functions
- Effortless working due to balanced centre of gravity
- LED for work area illumination
- Simple and safe: Automatic retraction when operation is complete
- Always ready-to-use thanks to battery charge and service display

Technical instructions

- Interchangeable adapters and dies for crimping, cutting and punching you will find on page 478

IEC

K22 SERIE K18 SERIE K5 SERIE

Technical data	
Crimping force	60 kN
Stroke	42 mm
Crimping range	6 - 300 mm²
Crimping cycle	7 s up to 9 s (depending on cross-section)
Cutting range	max. 40 mm dia.
Punching capacity	up to 64 mm dia. round, up to 92 x 92 mm square
Charging time	15 min.
Weight	3.0 kg
Ambient temperature	-10 °C up to +40 °C

Item	Part No. **Bosch**	Part No. **Makita**	
Battery-powered hydraulic universal tool 6 - 300 mm²	**EKM60UNVCFB**	**EKM60UNVCFM**	
Scope of supply			Page
Bosch battery 18 V / 2.0 Ah, Li-Ion	RALB1EU		492
Bosch quick-charger for 18 V Li-Ion battery	LGLB1EU		494
Makita battery 18 V / 1.5 Ah, Li-Ion		RAL1	491
Makita quick-charger for 18 V Li-Ion battery		LGL1	494
Adapter for crimping dies of Series 22	UA22	UA22	478
Plastic case 450 x 370 x 105 mm	KKMUNVNG	KKMUNVNG	
Accessories			Page
Bosch battery 18 V / 5.0 Ah, Li-Ion	RALB2EU		493
Makita battery 18 V / 3.0 Ah, Li-Ion (54 Wh)		RAL2	491

EK 60 UNV Battery-powered hydraulic universal tool 6 - 300 mm²

NEXT GENERATION



- One head for crimping, cutting and punching - one tool for all
- Ideal in the assembly field where all common jobs can be carried out using one tool
- Fast working due to 2-stage hydraulics
- All tool data on view thanks to display and ipress app

Characteristics

- Choose your battery system: Bosch or Makita
- All data can be easily read via Bluetooth
- Universal head flip top style, rotatable
- Simple and safe: One-button operating concept for controlling all tool functions
- Effortless working due to balanced centre of gravity
- LED for work area illumination
- Simple and safe: Automatic retraction when operation is complete
- Always ready-to-use thanks to battery charge and service display

Technical instructions

- Interchangeable adapters and dies for crimping, cutting and punching you will find on page 478

Technical data	
Crimping force	60 kN
Stroke	42 mm
Crimping range	6 - 300 mm²
Crimping cycle	3 s to 5 s (depending on cross-section)
Cutting range	max. 40 mm dia.
Punching capacity	up to 64 mm dia. round
Charging time	45 min.
Weight	4.8 kg
Ambient temperature	-10 °C up to +40 °C

Item	Part No. **Bosch**	Part No. **Makita**	
Battery-powered hydraulic universal tool 6 - 300 mm²	**EK60UNVCFB**	**EK60UNVCFM**	
Scope of supply			**Page**
Bosch battery 18 V / 5.0 Ah, Li-Ion	RALB2EU		493
Bosch quick-charger for 18 V Li-Ion battery	LGLB1EU		494
Makita battery 18 V / 4.0 Ah, Li-Ion		RAL40	492
Makita quick-charger for 18 V Li-Ion battery		LGL1	494
Plastic case 450 x 370 x 105 mm	UA22	UA22	478
Adapter for crimping dies of Series 22	KK120UNVNG	KK120UNVNG	

EK 120 UNV Battery-powered hydraulic universal tool 10 - 400 mm²

NEXT GENERATION



- One head for crimping, cutting and punching - one tool for all
- Ideal in the assembly field where all common jobs can be carried out using one tool
- All tool data on view thanks to display and ipress app

Characteristics

- Choose your battery system: Bosch or Makita
- All data can be easily read via Bluetooth
- Universal head flip top style, rotatable
- Simple and safe: One-button operating concept for controlling all tool functions
- Effortless working due to balanced centre of gravity
- LED for work area illumination
- Simple and safe: Automatic retraction when operation is complete
- Always ready-to-use thanks to battery charge and service display

Technical instructions

- Interchangeable adapters and dies for crimping, cutting and punching you will find on page 478

Technical data	
Crimping force	108 kN
Stroke	42 mm
Crimping range	10 - 400 mm²
Crimping cycle	Depending on cable type
Cutting range	max. 40 mm dia.
Punching capacity	up to 144 mm dia. round, up to 138 x 138 mm square
Charging time	45 min.
Weight	6.5 kg
Ambient temperature	-10 °C up to +40 °C

Item	Part No. **Bosch**	Part No. **Makita**	
Battery-powered hydraulic universal tool 10 - 400 mm²	**EK120UNVCFB**	**EK120UNVCFM**	
Scope of supply			**Page**
Bosch battery 18 V / 5.0 Ah, Li-Ion	RALB2EU		493
Bosch quick-charger for 18 V Li-Ion battery	LGLB1EU		494
Plastic case 450 x 370 x 105 mm	KK120UNVNG	KK120UNVNG	
Adapter for crimping dies	UA12TKL	UA12TKL	478

EASY TO HANDLE - HAND-OPERATED HYDRAULIC CRIMPING TOOLS

Klauke tools work for you. The 2-stage hydraulic system ensures automatic retraction after crimping. Rotating heads come into their own even in confined areas and support you up to a cross-sectional range of 400 mm². Aluminium makes the tool lighter and the work easier. The bolt interlock makes the device safe when not in use. You save energy and time. All you need to do yourself is crimp.



Convenient to use

Several crimps in succession are tiring. And so for our hand-operated hydraulic tools, we produced the housing and pump lever from aluminium to achieve a low weight. The pump lever is in exactly the correct position, and so the pump movement requires only a small space. Work better with the convenience of Klauke.

- Large crimping range up to 400 mm²
- Ergonomic design for effortless operations
- 2-stage hydraulic system with fast feed and power stroke
- Simple and reliable due to automatic retraction after every crimping operation
- Low weight thanks to the aluminium pump lever and housing

Adapts

All hand-operated hydraulic crimping tools have crimping heads that rotate through 360°. You can work even in confined areas with flexible settings.

- 360° rotating crimping heads for safe operations in confined spaces
- Well suited for installing cable joints underground or in panel building

Save yourself the return stroke

Your effort goes only into the crimping process. When the crimping process is complete, the crimping jaws retract into the home position via the automatic retraction function.

HK 60/18 Hand-operated hydraulic crimping tool 6 - 185 mm²



K18 SERIE

- For standardised crimping dies to DIN 48083
- Effortless operations thanks to low weight

Characteristics

- Closed head, flip top style, rotatable
- Light weight due to high quality aluminium housing
- 2-stage hydraulic system with fast feed and power stroke
- Simple and safe: Automatic retraction when operation is complete

Suitable for

- 18-series interchangeable dies, narrow crimping

Technical data	
Crimping force	60 kN
Stroke	14 mm
Crimping range	6 -185 mm²
Length	470 mm
Weight	3.0 kg
Ambient temperature	-20 up to +40 °C

Item	Part No.
Hand-operated hydraulic crimping tool 6 - 185 mm²	**HK6018**

Scope of supply	Part No.
Steel carrying case	MK6018

Available dies for Series 18 for HK 60/18

Refer to the limitations when crimping connectors in the technical appendix.

Suitable for	Connection material	Crimping range mm²	Crimp profile	Page
Copper tubular cable lugs and connectors				
Tubular cable lugs and connectors, standard type, tubular cable lugs for switchgear connections		6 - 185		337
Insulated cable lugs and compression joints, standard type, insulated pin terminals		10 - 95		337
Tubular cable lugs and connectors for fine stranded conductors		10 - 50		337
Tubular cable lugs and connectors for solid conductors		1.5 - 16		338
Copper compression cable lugs and connectors to DIN				
Copper compression cable lugs (DIN 46235) and compression joints acc. to DIN		6 - 185		338
Terminals, connectors and pin terminals acc. to DIN - copper				
Solderless terminals (DIN 46234) and pin terminals (DIN 46230), solderless connectors (DIN 46341)		10 - 70		338
Insulated solderless terminals		10 - 50		338
Sleeves for compacted conductors and sector shaped conductors, copper				
Pre-rounding dies for sector shaped Al and Cu conductors		10 sm - 240 se / 185 sm		339
Aluminium compression cable lugs and connectors acc. to DIN				
Aluminium compression cable lugs and connectors		10 - 185		339
Compression joints for full tension connections of Aldrey cables acc. to DIN EN 50182		25 - 95		339
Aluminium/copper compression cable lugs and connectors				
Aluminum side of aluminum/copper compression cable lugs and connectors: crimping dies A, copper side of aluminum/copper compression cable lugs and connectors: crimping dies D		10 - 185		339
Clamps				
Clamps, C-type		4 - 50		339
Cable end-sleeves				
Cable end-sleeves		10 - 95		340
Twin cable end-sleeves		2 x 4 - 2 x 16		340
Cable end-sleeves, trapezodial, for fine stranded conductors		10 - 95		340
Twin cable end-sleeves, trapezodial, for fine stranded conductors		2 x 4 - 2 x 16		340
Cutting die				
Cutting die		18 mm dia.		412

HK 60/22 Hand-operated hydraulic crimping tool 6 - 300 mm²



K22 SERIE

- Large crimping range up to 300 mm²
- Slim crimping head - ideal when space is critical

Characteristics

- Closed head, flip top style, rotatable
- Light weight due to high quality aluminium housing
- 2-stage hydraulic system with fast feed and power stroke
- Simple and safe: Automatic retraction when operation is complete

Suitable for

- 22-series interchangeable dies, narrow crimping

Additional information

- Part Number appendix for W crimping dies (UL-tested) “W“

Technical data	
Crimping force	60 kN
Stroke	17 mm
Crimping range	6 - 300 mm²
Length	460 mm
Weight	3.3 kg
Ambient temperature	-20 °C up to +40 °C

Item	Part No.
Hand-operated hydraulic crimping tool 6 - 300 mm²	**HK6022**

Scope of supply	Part No.
Steel carrying case	MK6022

Variants	Part No.
HK 60/22 with crimping die set R 22 from 16 - 240 mm²	HK6022SETR
HK 60/22 with crimping die set D 22 from 16 - 240 mm²	HK6022SETD

Available dies for Series 22 for HK 60/22

Refer to the limitations when crimping connectors in the technical appendix.

Suitable for	Connection material	Crimping range mm²	Crimp profile	Page
Tubular cable lugs and connectors, Cu				
Tubular cable lugs and connectors blue connection for compacted conductors acc. to DIN EN 60228		6 - 300		342
Tubular cable lugs and connectors, Cu, standard type, tubular cable lugs for switchgear connections		6 - 300		341
Insulated tubular cable lugs and connectors, insulated pin terminals		10 - 150		341
Tubular cable lugs and connectors for fine stranded conductors		10 - 70		342
Tubular cable lugs and connectors for solid conductors		1.5 - 16		342
Tubular cable lugs and connectors, Ni, VA				
Stainless steel tubular cable lugs and connectors		10 - 50		342
Nickel tubular cable lugs and connectors		10 - 50		342
Copper compression cable lugs and connectors acc. to DIN - Cu				
Compression cable lugs (DIN 46235) and connectors (DIN 46267, part 1) Cu		6 - 300		343
Double crimping compression cable lugs		2 x 50 - 2 x 70		343
Terminals, connectors and pin terminals acc. to DIN, copper				
Terminals (DIN 46234) and pin terminals (DIN 46230) Cu, solderless connectors (DIN 46341) Cu		10 - 70		343
Insulated terminals and pin terminals		10 - 70		343
Sleeves for compacted conductors and sector-shaped conductors, copper				
Pre-rounding dies for sector-shaped Al and Cu conductors		10 sm - 300 se / 240 sm		344
Aluminium compression cable lugs and connectors to DIN				
Aluminium compression cable lugs and connectors to DIN		10 - 300		344
Compression joints connections for Aldrey-conductors DIN EN 50182, Al-conductors DIN EN 50182, 120 - 185 mm²		25 - 185		344
Compression joints DIN 48085, part 3 for aluminium/steel conductors DIN EN 50182, aluminium crimping		25 / 4 - 120 / 20		345
Compression joints DIN 48085, part 3 for aluminium/steel conductors DIN EN 50182, steel crimping		25 / 4 - 120 / 20		345
Aluminium/copper compression cable lugs and connectors				
Aluminum side of aluminum/copper compression cable lugs and connectors: crimping dies A22, copper side of aluminum/copper compression cable lugs and connectors: crimping dies D22		10 - 300		334
Clamps				
Clamps, H-type		70		345
Clamps, C-type		4 - 50		345
Cable end-sleeves				
Cable end-sleeves		10 - 240		346
Twin cable end-sleeves		2 x 4 - 2 x 16		346
Cable end-sleeves, trapezodial, for fine stranded conductors		10 - 240		346
Twin cable end-sleeves, trapezodial, for fine stranded conductors		2 x 4 - 2 x 16		346

HK 60 VP Hand-operated hydraulic crimping head 10 - 240 mm²



- **Suitable for crimping tubular cable lugs and connectors "standard type" and fine and superfine stranded conductors up to 240 mm²**
- **The patented centring system guarantees optimum crimps every time**

Characteristics

- Quad-point indent crimping feature with patented centring system, no dies required
- Open head, rotatable
- Light weight due to high quality aluminium housing
- 2-stage hydraulic system with fast feed and power stroke
- Simple and safe: Automatic retraction when operation is complete

Technical data	
Crimping force	55 kN
Crimping range	10 - 240 mm²
Length	525 mm
Weight	4.1 kg
Ambient temperature	-20 °C up to +40 °C

Item	Part No.
Hand-operated hydraulic crimping tool 10 - 240 mm²	**HK60VP**

Scope of supply	Part No.
Steel carrying case	MK60VP
Gauge and 10 test cylinder	TS10B

Accessories	Part No.
Gauge and 10 test cylinder	TS10B

Suitable for	Connection material	Crimping range mm²	Crimp profile
Copper tubular cable lugs and connectors			
Tubular cable lugs, standard type, tubular cable lugs for switchgear connections		10 - 240	
Tubular cable lugs for fine stranded conductors		10 - 240	
Connectors for fine stranded conductors		10 - 95	
Connectors, standard type		10 - 120	

HK 60 VP/FT Hand-operated hydraulic crimping head 16 - 300 mm²



- Suitable for crimping tubular cable lugs and connectors “standard type" and fine and superfine stranded conductors to 300 mm²
- The patented centring system guarantees optimum crimps every time
- Closed crimping head - ideal for utility lines construction

Characteristics

- Quad-point indent crimping feature with patented centring system, no dies required
- Closed head with bolt interlock, rotatable, flip top style
- Light weight due to high quality aluminium housing
- 2-stage hydraulic system with fast feed and power stroke
- Simple and safe: Automatic retraction when operation is complete

Technical data	
Crimping force	55 kN
Crimping range	16 - 300 mm²
Length	535 mm
Weight	4.1 kg
Ambient temperature	-20 °C up to +40 °C

Item	Part-No.
Hand-operated hydraulic crimping tool 16 - 300 mm²	**HK60VPFT**

Scope of supply	Part-Nr.
Steel carrying case	MK60VP
Gauge and 10 test cylinder	TS10B

Accessories	Part.-Nr.
Gauge and 10 test cylinder	TS10B

Suitable for	Connection material	Crimping range mm²	Crimp profile
Copper tubular cable lugs and connectors			
Tubular cable lugs and connectors, standard type, tubular cable lugs for switchgear connections		16 - 300	
Tubular cable lugs and compression joints for fine stranded conductors		16 - 300	

HK 120/30 Hand-operated hydraulic crimping tool 16 - 400 mm²



- Very large crimping range to 400 mm²
- Up to 60% fewer crimps thanks to wide crimping in comparison to 6 t tools

Characteristics

- Open head, rotatable
- Light weight due to high quality aluminium housing
- 2-stage hydraulic system with fast feed and power stroke
- Simple and safe: Automatic retraction when operation is complete

Suitable for

- 13-series interchangeable dies, wide crimping

Technical data	
Crimping force	120 kN
Stroke	30 mm
Crimping range	16 - 400 mm²
Length	510 mm
Weight	5.4 kg
Ambient temperature	-20 °C up to +40 °C

Item	Part No.
Hand-operated hydraulic crimping tool 10 - 400 mm²	**HK12030**

Scope of supply	Part No.
Steel carrying case	MK12042

Available dies for Series 13 for HK 120/30

Refer to the limitations when crimping connectors in the technical appendix.

Suitable for	Connection material	Crimping range mm²	Crimp profile	Page
Copper tubular cable lugs and connectors				
Tubular cable lugs and connectors, Cu, standard type, tubular cable lugs for switchgear connections		16 - 400		347
Butt connectors, standard type		16 - 185		347
Insulated cable lugs and compression joints, standard type, Insulated pin terminals		10 - 150		347
Tubular cable lugs and connectors for fine stranded conductors		16 - 150		348
Copper compression cable lugs and connectors to DIN				
Copper compression cable lugs and connectors to DIN		16 - 300		348
Compression joints DIN 46267, part 1		16 - 150		348
Double compression cable lugs		2 x 50 - 2 x 95		348
Terminals, connectors and pin terminals acc. to DIN, copper				
Solderless terminals (DIN 46234), connectors and pin terminals (DIN 46230) acc. to DIN		16 - 150		349
Insulated solderless terminals		10 - 95		349
Sleeves for compacted conductors and sector-shaped conductors, copper				
Pre-rounding dies for sector-shaped Al and Cu conductors		10 sm - 300 se / 300 sm		349
Aluminium compression cable lugs and connectors to DIN				
Aluminium connectors		10 - 120		350
Compression joints connections for Aldrey-conductors DIN EN 50182, Al-conductors DIN EN 50182, 120 - 185 mm²		25 - 185		350
Compression joints DIN 48085, part 3 for aluminium/steel conductors DIN EN 50182, aluminium crimping		25/4 - 120/20		350
Compression joints DIN 48085, part 3 for aluminium/steel conductors DIN EN 50182, steel crimping		25/4 - 120/20		350
Aluminium/copper compression cable lugs and connectors				
Aluminum side of aluminum/copper compression cable lugs and connectors: crimping dies A13, copper side of aluminum/copper compression cable lugs and connectors: crimping dies D13		10 - 240		350
Clamps				
Clamps, C-type		10 - 70		351
Clamps, H-type		70 - 120		351
Cable end-sleeves				
Cable end-sleeves		25 - 240		351
Cable end-sleeves, trapezodial, for fine stranded conductors		25 - 240		351

HK 120/42 Hand-operated hydraulic crimping tool 16 - 400 mm²



- Very large crimping range up to 400 mm²
- Up to 60% fewer crimps thanks to wide crimping in comparison to 6 t tools
- C-head with larger 42 mm jaw opening

Characteristics

- Open head, rotatable
- Light weight due to high quality aluminium housing
- 2-stage hydraulic system with fast feed and power stroke
- Simple and safe: Automatic retraction when operation is complete

Suitable for

- 13-series interchangeable dies, wide crimping

Technical data	
Crimping force	120 kN
Stroke	42 mm
Crimping range	16 - 400 mm²
Length	560 mm
Weight	5.9 kg
Ambient temperature	-20 °C up to +40 °C

Item	Part No.
Hand-operated hydraulic crimping tool 16 - 400 mm²	**HK12042**

Scope of supply	Part No.
Steel carrying case	MK12042

Available dies for Series 13 for HK 120/42

Refer to the limitations when crimping connectors in the technical appendix.

Suitable for	Connection material	Crimping range mm²	Crimp profile	Page
Tubular cable lugs and connectors, Cu				
Tubular cable lugs and connectors, Cu, standard type, tubular cable lugs for switchgear connections		16 - 400		347
Insulated tubular cable lugs and connectors, insulated pin terminals		10 - 150		347
Tubular cable lugs and connectors for fine stranded conductors		16 - 150		348
Compression cable lugs and connectors acc. to DIN - Cu				
Compression cable lugs (DIN 46235) and connectors (DIN 46267, part 1) Cu		16 - 300		348
Double crimping compression cable lugs		2 x 50 - 2 x 95		348
Terminals, connectors and pin terminals acc. to DIN - Cu				
Terminals (DIN 46234) and pin terminals (DIN 46230) Cu, solderless connectors (DIN 46341) Cu		16 - 150		349
Insulated terminals and pin terminals		10 - 95		349
Pre-rounding crimping dies				
Pre-rounding crimping dies for Al and Cu sector shaped conductors, 3 and 4 core sector shaped conductors		10 sm - 300se / 300 sm		349
Compression cable lugs and connectors acc. to DIN - Al				
Compression joints for full tension connections of Aldrey cables acc. to DIN EN 50182, Al conductors DIN EN 50182, 120 - 185 mm²		25 - 185		350
Compression joints acc. to DIN 48085, part 3 for Al-steel cables acc. to DIN EN 50182, aluminium crimping		25/4 - 120/20		350
Compression joints acc. to DIN 48085, part 3 for Al-steel cables acc. to DIN EN 50182, steel crimping		25/4 - 120/20		350
Aluminum/copper compression cable lugs and connectors				
Aluminum side of aluminum/copper compression cable lugs and connectors: crimping dies HA13, copper side of aluminum/copper compression cable lugs and connectors: crimping dies HD13		10 - 240		350
Clamps and screw connectors				
C-clamps		10 - 70		351
H-clamps		70 - 120		351
Cable end-sleeves				
Cable end-sleeves		25 - 240		351
Cable end-sleeves, trapezodial, for fine stranded conductors		25 - 240		351

HK 120 U Hand-operated hydraulic crimping tool 16 - 400 mm²



K13 SERIE

- H-head for deep groove crimps
- Up to 60% fewer crimps thanks to wide crimping in comparison to 6 t tools

Characteristics

- Closed head, rotatable
- Light weight due to high quality aluminium housing
- 2-stage hydraulic system with fast feed and power stroke
- Simple and safe: Automatic retraction when operation is complete

Suitable for

- 13-series interchangeable dies, wide crimping

Technical data	
Crimping force	120 kN
Stroke	20 mm
Crimping range	16 - 400 mm²
Length	540 mm
Weight	5.2 kg
Ambient temperature	-20 °C up to +40 °C

Item	Part No.
Hand-operated hydraulic crimping tool 16 - 400 mm²	**HK120U**

Scope of supply	Part No.
Steel carrying case	MK120U

Available dies for Series 13 for HK 120 U

Refer to the limitations when crimping connectors in the technical appendix.				
Suitable for	Connection material	Crimping range mm²	Crimp profile	Page
Copper tubular cable lugs and connectors				
Tubular cable lugs and connectors, standard type, tubular cable lugs for switchgear connections		16 - 400		347
Insulated cable lugs and compression joints, standard type		10 - 150		347
Tubular cable lugs and compression joints for fine stranded conductors		16 - 150		348
Copper compression cable lugs and connectors to DIN				
Copper compression cable lugs and connectors to DIN		16 - 300		348
Double compression cable lugs		2 x 50 - 2 x 95		348
Terminals, connectors and pin terminals acc. to DIN, copper				
Solderless terminals (DIN 46234), connectors and pin terminals (DIN 46230) acc. to DIN		16 - 150		349
Insulated solderless terminals		10 - 95		349
Sleeves for compacted conductors and sector-shaped conductors, copper				
Pre-rounding dies for sector-shaped Al and Cu conductors		10 sm - 300 se / 300 sm		349
Aluminium compression cable lugs and connectors to DIN				
Compression joints connections for Aldrey-conductors DIN EN 50182, Al-conductors DIN EN 50182, 120 - 185 mm²		25 - 185		350
Compression joints DIN 48085, part 3 for aluminium/steel conductors DIN EN 50182, aluminium crimping		25/4 - 120/20		350
Compression joints DIN 48085, part 3 for aluminium/steel conductors DIN EN 50182, steel crimping		25/4 - 120/20		350
Aluminium/copper compression cable lugs and connectors				
Aluminum side of aluminum/copper compression cable lugs and connectors: crimping dies HA13, copper side of aluminum/copper compression cable lugs and connectors: crimping dies HD13		10 - 240		350
Clamps				
Clamps, C-type		10 - 70		351
Clamps, H-type		70 - 120		351
Cable end-sleeves				
Cable end-sleeves		25 - 240		351
Cable end-sleeves, trapezodial, for fine stranded conductors		25 - 240		351

FLEXIBLE HEADS - HYDRAULIC CRIMPING HEADS AND CRIMPING TOOL SYSTEMS

No matter whether continuous operation in the workshop or portable use in the field - Klauke crimping heads and systems provide the right solution each and every time.



The Klauke system

Full flexibility with the Klauke system - all hydraulic heads and pumps are mutually compatible and your 13, 18 and 22 series crimping dies can also be used in the hydraulic crimping heads.

- Crimping heads for the 13, 18 and 22 series, also for workbench mounting
- Crimping heads with a crimping force of 55 kN to 1000 kN
- Workbench tools BG-tested

High crimping force for greater width

The crimping heads achieve a crimping force of 55 kN to 1000 kN. Allowing you to process cable lugs of up to 1600 mm^2.

- Compact design
- Easy handling
- Versatile
- Broadest range of applications

PK 18 Hydraulic crimping head 6 - 185 mm²



- For connecting to hydraulic pumps with 700 bar operating pressure for optimum crimping results
- Crimping dies are spring-secured

Characteristics

- Open head with quick coupling, 360° rotation when not pressurised

Suitable for

- 18-series interchangeable dies, narrow crimping
- Standardised dies to DIN 48083, sheet 1

Technical data	
Crimping force	60 kN
Crimping range	6 - 185 mm²
Operating pressure	max. 700 bar
Length	310 mm
Weight	3.2 kg

Item	Part No.
Hydraulic crimping head 6 - 185 mm²	**PK18**

Scope of supply	Part No.	Page
Carrying bag	TT2	196

THK 18 Hydraulic crimping tool for workbench mounting 6 - 185 mm²



- BG-compliant version
- For connecting to hydraulic pumps with 700 bar operating pressure for optimum crimping results

Characteristics

- Quick coupling
- For workbench mounting

Suitable for

- 18-series interchangeable dies, narrow crimping
- Standardised dies to DIN 48083, sheet 1

Technical data	
Crimping force	60 kN
Crimping range	6 - 185 mm²
Operating pressure	max. 700 bar
Weight	8.6 kg
Dimensions	H x W x D: 220 x 160 x 120 mm

Item	Part No.
Hydraulic crimping tool for workbench mounting 6 - 185 mm²	**THK18**

Available dies for Series 18 for PK 18

Refer to the limitations when crimping connectors in the technical appendix.

Suitable for	Connection material	Crimping range mm²	Crimp profile	Page
Copper tubular cable lugs and connectors				
Tubular cable lugs and connectors, standard type, tubular cable lugs for switchgear connections		6 - 185		337
Insulated cable lugs and compression joints, standard type, Insulated pin terminals		10 - 95		337
Tubular cable lugs and connectors for fine stranded conductors		10 - 50		337
Tubular cable lugs and connectors for solid conductors		1.5 - 16		338
Copper compression cable lugs and connectors to DIN				
Copper compression cable lugs (DIN 46235) and connectors (DIN 46267, part 1) acc. to DIN		6 - 185		338
Terminals, connectors and pin terminals acc. to DIN, copper				
Solderless terminals (DIN 46234), connectors (DIN 46341) and pin terminals (DIN 46230)		10 - 70		338
Insulated solderless terminals and connectors		10 - 50		338
Sleeves for compacted conductors and sector-shaped conductors, copper				
Pre-rounding dies for sector-shaped Al and Cu conductors		10 sm - 240 se / 185 sm		339
Aluminium compression cable lugs and connectors to DIN				
Aluminium compression cable lugs and connectors to DIN		10 - 185		339
Compression joints for full-tension connections of Aldrey-conductors DIN EN 50182		25 - 95		339
Aluminium/copper compression cable lugs and connectors				
Aluminum side of aluminum/copper compression cable lugs and connectors: crimping dies A, copper side of aluminum/copper compression cable lugs and connectors: crimping dies D		10 - 185		339
Clamps				
Clamps, C-type		4 - 50		339
Cable end-sleeves				
Cable end-sleeves		10 - 95		340
Twin cable end-sleeves		2 x 4 - 2 x 16		340
Cable end-sleeves, trapezodial, for fine stranded conductors		10 - 95		340
Twin cable end-sleeves, trapezodial, for fine stranded conductors		2 x 4 - 2 x 16		340
Cutting die				
Cutting die		18 mm dia.		412

PK 22 Hydraulic crimping heads 6 - 300 mm²



K22 SERIE

- Large crimping range up to 300 mm²
- Slim crimping head - ideal when space is critical

Characteristics

- Closed head, flip top style, 360° rotation when not pressurised
- For connecting to hydraulic pumps with 700 bar operating pressure for best possible results

Suitable for

- 22-series interchangeable dies, narrow crimping

Additional information

- Part Number appendix for W crimping dies (UL-tested) "W"

Technical data	
Crimping force	60 kN
Stroke / opening width	17 mm
Crimping range	6 - 300 mm²
Operating pressure	max. 700 bar
Length	305 mm
Weight	3.0 kg

Item	Part No.
Hydraulic crimping head 6 - 300 mm²	**PK22**

Scope of supply	Part No.	Page
Carrying bag	TT2	196

THK 22 Hydraulic crimping tool for workbench mounting 6 - 300 mm²



K22 SERIE

- Large crimping range up to 300 mm²
- For connecting to hydraulic pumps with 700 bar operating pressure for optimum crimping results

Characteristics

- Quick coupling
- For workbench mounting
- BG-conformity version

Suitable for

- 22-series interchangeable dies, narrow crimping

Technical data	
Crimping force	60 kN
Crimping range	6 - 300 mm²
Operating pressure	max. 700 bar
Weight	8.8 kg
Dimensions	H x W x D: 220 x 160 x 120 mm

Item	Part No.
Hydraulic crimping tool for workbench mounting 6 - 300 mm²	**THK22**

Available dies for Series 22 for PK 22 and THK 22

Refer to the limitations when crimping connectors in the technical appendix.

Suitable for	Connection material	Crimping range mm²	Crimp profile	Page
Copper tubular cable lugs and connectors				
Tubular cable lugs and connectors blue connection for compacted conductors acc. to Tubular cable lugs and connectors blue connection for compacted conductors acc. to DIN EN 60228		6 - 300		342
Tubular cable lugs and connectors, standard type, tubular cable lugs for switchgear connections		6 - 300		341
Insulated cable lugs and compression joints, standard type, Insulated pin terminals		10 - 150		341
Tubular cable lugs and connectors for fine stranded conductors		10 - 70		342
Tubular cable lugs and connectors for solid conductors		1.5 - 16		342
Tubular cable lugs and connectors, Ni, VA				
Stainless steel tubular cable lugs and connectors		10 - 50		342
Nickel tubular cable lugs and connectors		10 - 50		342
Copper compression cable lugs and connectors to DIN				
Copper compression cable lugs (DIN 46235) and connectors (DIN 46267, part 1) acc. to DIN		6 - 300		343
Double compression cable lugs		2 x 50 - 2 x 70		343
Terminals, connectors and pin terminals acc. to DIN, copper				
Solderless terminals (DIN 46234), connectors (DIN 46341) and pin terminals (DIN 46230)		10 - 70		343
Insulated solderless terminals and connectors		10 - 70		343
Sleeves for compacted conductors and sector-shaped conductors, copper				
Pre-rounding dies for sector-shaped Al and Cu conductors		10 sm - 300 se/ 240 sm		344
Aluminium compression cable lugs and connectors to DIN				
Aluminium compression cable lugs and connectors to DIN		10 - 300		344
Compression joints connections for Aldrey-conductors DIN EN 50182, Al-conductors DIN EN 50182, 120 - 185 mm²		25 - 185		344
Compression joints DIN 48085, part 3 for aluminium/steel conductors DIN EN 50182, aluminium crimping		25/4 - 120/20		345
Compression joints DIN 48085, part 3 for aluminium/steel conductors DIN EN 50182, steel crimping		25/4 - 120/20		345
Aluminium/copper compression cable lugs and connectors				
Aluminum side of aluminum/copper compression cable lugs and connectors: crimping dies A22, copper side of aluminum/copper compression cable lugs and connectors: crimping dies D22		10 - 300		344
Clamps				
Clamps, C-type		4 - 50		345
Clamps, H-type		70		345
Cable end-sleeves				
Cable end-sleeves		10 - 240		346
Twin cable end-sleeves		2 x 4 - 2 x 16		346
Cable end-sleeves, trapezodial, for fine stranded conductors		10 - 240		346
Twin cable end-sleeves, trapezodial, for fine stranded conductors		2 x 4 - 2 x 16		346

PK 60 VP Hydraulic crimping head 10 - 240 mm²



- Suitable for crimping tubular cable lugs and connectors “standard type“ and fine and superfine stranded conductors up to 240 mm²
- The patented centring system guarantees optimum crimps every time
- No additional dies required

Characteristics

- Quad-point indent crimping and wide crimping
- Open head with quick coupling, 360° rotation when not pressurised
- For connecting to hydraulic pumps with 700 bar operating pressure for best possible results

Technical data	
Crimping force	55 kN
Crimping range	10 - 240 mm²
Operating pressure	max. 700 bar
Length	305 mm
Weight	2.8 kg

Item	Part No.
Hydraulic crimping head 10 - 240 mm²	**PK60VP**

Scope of supply	Part No.	Page
Carrying bag	TT2	196

Suitable for	Connection material	Crimping range mm²	Crimp profile
Copper tubular cable lugs and connectors			
Tubular cable lugs, standard type, tubular cable lugs for switchgear connections		10 - 240	
Connectors, standard type		10 - 120	
Tubular cable lugs for fine stranded conductors		10 - 240	
Connectors for fine stranded conductors		10 - 95	

PK 60 VP/FT Hydraulic crimping head 16 - 300 mm²



- Suitable for crimping tubular cable lugs and connectors “standard type“ and fine and superfine stranded conductors to 300 mm²
- The patented centring system guarantees optimum crimps every time
- Closed crimping head - ideal for utility lines construction, for example

Characteristics

- Quad-point indent crimping and wide crimping
- Closed head, flip top style, 360° rotation when not pressurised
- For connecting to hydraulic pumps with 700 bar operating pressure for best possible results

Technical data	
Crimping force	55 kN
Crimping range	16 - 300 mm²
Operating pressure	max. 700 bar
Length	315 mm
Weight	2.8 kg

Item	Part No.
Hydraulic crimping head 16 - 300 mm²	**PK60VPFT**

Scope of supply	Part No.	Page
Carrying bag	TT2	196

Suitable for	Connection material	Crimping range mm²	Crimp profile
Copper tubular cable lugs and connectors			
Tubular cable lugs and connectors, standard type, tubular cable lugs for switchgear connections		16 - 300	
Tubular cable lugs and connectors for fine stranded conductors		16 - 300	

PK 60 ID Hydraulic crimping head 10 - 240 mm²

NEW



- **Extra large crimping area due to innovative 2-stage telescopic cylinders (patent pending)**
- **Indent crimping - no changing of dies required**

Characteristics

- Closed head, flip top style, rotatable
- For connecting to hydraulic pumps with 700 bar operating pressure for best possible results

Technical data	
Crimping force	30 - 60 kN
Stroke / opening width	35.5 mm
Crimping range	Copper: 10 - 240 mm² / Aluminum: 50 - 240 mm² mm²
Operating pressure	max. 700 bar
Length	249.5 mm
Weight	approx. 2.5 kg

Item	Part No.
Hydraulic crimping head 10 - 240 mm²	**PK60VP**

Scope of supply	Part No.	Page
Carrying bag	TT2	196

Suitable for	Connection material	Crimping range mm²	Crimp profile
Copper tubular cable lugs and connectors			
Tubular cable lugs and connectors, standard type, Tubular cable lugs for switch gear connections		10 - 240	
Tubular cable lugs and connectors for fine stranded conductors		10 - 240	
Terminals, connectors and pin terminals acc. to DIN			
Solderless terminals (DIN 46234) connectors and pin terminals (DIN 46230, DIN 46341)		10 - 240	
Aluminum compression cable lugs and connectors			
Aluminum compression cable lugs and connectors acc. to DIN		50 - 240	
Compression joints acc. to DIN 48085, part 3 for Al/St-cable acc. to DIN EN 50182		50 - 240	
Compression joints for full tension connections of Aldrey conductors acc. to DIN EN 50182, Al-conductor acc. to DIN EN 50182, 120 - 185 mm²		50 - 185	
Aluminum/copper compression cable lugs and connectors			
Aluminum/copper compression cable lugs and connectors		50 - 240	

PK 120/42 Hydraulic crimping head 10 - 400 mm²



- Large crimping range up to 400 mm²
- C-head with larger 42 mm jaw opening
- Up to 60% fewer crimps thanks to wide crimping in comparison to narrow crimping

Characteristics

- Head with quick coupling, 360° rotation when not pressurised
- For connecting to hydraulic pumps with 700 bar operating pressure for best possible results

Suitable for

- 13-series interchangeable dies, wide crimping

Technical data	
Crimping force	120 kN
Stroke / opening width	42 mm
Crimping range	10 - 400 mm²
Operating pressure	max. 700 bar
Length	335 mm
Weight	4.5 kg

Item	Part No.
Hydraulic crimping head 10 - 400 mm²	**PK12042**

Scope of supply	Part No.	Page
Carrying bag	TT2	196

THK 120 Hydraulic crimping tool for workbench mounting 10 - 400 mm²



- Large crimping range up to 400 mm²
- For workbench mounting
- BG-compliant version
- Up to 60% fewer crimps thanks to wide crimping in comparison to narrow crimping

Characteristics

- Quick coupling
- For connecting to hydraulic pumps with 700 bar operating pressure for best possible results

Suitable for

- 13-series interchangeable dies, wide crimping

Technical data	
Crimping force	120 kN
Crimping range	10 - 400 mm²
Operating pressure	max. 700 bar
Weight	12 kg
Dimensions	H x W x D: 285 x 160 x 110 mm

Item	Part No.
Hydraulic crimping tool for workbench mounting 10 - 400 mm²	**THK120**

Available dies for Series 13 for PK 120/42 and THK 120

Refer to the limitations when crimping connectors in the technical appendix.

Suitable for	Connection material	Crimping range mm²	Crimp profile	Page
Copper tubular cable lugs and connectors				
Tubular cable lugs and connectors, standard type, tubular cable lugs for switchgear connections		16 - 400		347
Insulated cable lugs and compression joints, standard type, Insulated pin terminals		10 - 150		347
Tubular cable lugs and connectors for fine stranded conductors		16 - 150		348
Copper compression cable lugs and connectors to DIN				
Copper compression cable lugs (DIN 46235) and connectors (DIN 46267, part 1) acc. to DIN		16 - 300		348
Double compression cable lugs		2 x 50 - 2 x 95		348
Terminals, connectors and pin terminals acc. to DIN, copper				
Terminals, connectors andSolderless terminals (DIN 46234), connectors (DIN 46341) and pin terminals (DIN 46230)		16 - 150		349
Insulated solderless terminals and connectorsinals		10 - 95		349
Sleeves for compacted conductors and sector-shaped conductors, copper				
Pre-rounding dies for sector-shaped Al and Cu conductors		10 sm - 300 se / 300 sm		349
Aluminium compression cable lugs and connectors to DIN				
Compression joints connections for Aldrey-conductors DIN EN 50182, Al-conductors DIN EN 50182, 120 - 185 mm²		25 - 185		350
Compression joints DIN 48085, part 3 for aluminium/steel conductors DIN EN 50182, aluminium crimping		25/4 - 120/20		350
Compression joints DIN 48085, part 3 for aluminium/steel conductors DIN EN 50182, steel crimping		25/4 - 120/20		350
Aluminium/copper compression cable lugs and connectors				
Aluminium/copper compression cable lugs and connectors		10 - 240		350
Clamps				
Clamps, C-type		10 - 70		351
Clamps, H-type		70 - 120		351
Cable end-sleeves				
Cable end-sleeves		25 - 240		351
Cable end-sleeves, trapezodial, for fine stranded conductors		25 - 240		351

PK 120 U Hydraulic crimping head 10 - 400 mm²



K13 SERIE

- **H-head for deep groove crimps**
- **Up to 60% fewer crimps thanks to wide crimping in comparison to narrow crimping**

Characteristics

- Head with quick coupling, 360° rotation when not pressurised
- For connecting to hydraulic pumps with 700 bar operating pressure for best possible results

Suitable for

- 13-series interchangeable dies, wide crimping

Technical data	
Crimping force	120 kN
Stroke / opening width	20 mm
Crimping range	10 - 400 mm²
Operating pressure	max. 700 bar
Length	320 mm
Weight	3.7 kg

Item	Part No.
Hydraulic crimping head 10 - 400 mm²	**PK120U**

Scope of supply	Part No.	Page
Carrying bag	TT2	196

Available dies for Series 13 for PK 120 U

Refer to the limitations when crimping connectors in the technical appendix.				
Suitable for	Connection material	Crimping range mm²	Crimp profile	Page
Copper tubular cable lugs and connectors				
Tubular cable lugs and connectors, standard type, tubular cable lugs for switchgear connections		16 - 400		347
Insulated cable lugs and compression joints, standard type, Insulated pin terminals		10 - 150		347
Tubular cable lugs and connectors for fine stranded conductors		16 - 150		348
Copper compression cable lugs and connectors to DIN				
Copper compression cable lugs and connectors to DIN		16 - 300		348
Double compression cable lugs		2 x 50 - 2 x 95		348
Terminals, connectors and pin terminals acc. to DIN, copper				
Solderless terminals (DIN 46234), connectors (DIN 46341) and pin terminals (DIN 46230)		16 - 150		349
Insulated solderless terminals and connectors		10 - 95		349
Sleeves for compacted conductors and sector-shaped conductors, copper				
Pre-rounding dies for sector-shaped Al and Cu conductors		10 sm - 300 se / 300 sm		349
Aluminium compression cable lugs and connectors to DIN				
Compression joints connections for Aldrey-conductors DIN EN 50182, Al-conductors DIN EN 50182, 120 - 185 mm²		25 - 185		350
Compression joints DIN 48085, part 3 for aluminium/steel conductors DIN EN 50182, aluminium crimping		25/4 - 120/20		350
Aluminium compression cable lugs and connectors to DIN DIN - Al				
Compression joints DIN 48085, part 3 for aluminium/steel conductors DIN EN 50182, steel crimping		25/4 - 120/20		350
Aluminium/copper compression cable lugs and connectors				
Aluminum side of aluminum/copper compression cable lugs and connectors: crimping dies HA13, copper side of aluminum/ copper compression cable lugs and connectors: crimping dies HD13		10 - 240		350
Clamps				
Clamps, C-type		10 - 70		351
Clamps, H-type		70 - 120		351
Cable end-sleeves				
Cable end-sleeves		25 - 240		351
Cable end-sleeves, trapezodial, for fine stranded conductors		25 - 240		351

PK 25/2 Hydraulic crimping head 16 - 625 mm²



- For dies acc. to DIN 48083, sheet 3
- Very large crimping range up to 625 mm²
- For connecting to hydraulic pumps with 700 bar operating pressure for optimum crimping results

Characteristics

- Head with quick coupling, 360° rotation when not pressurised

Suitable for

- 25-series interchangeable dies, wide crimping

Technical data	
Crimping force	250 kN
Stroke / opening width	20 mm
Crimping range	16 - 625 mm²
Operating pressure	max. 700 bar
Length	335 mm
Weight	5.3 kg

Item	Part No.
Hydraulic crimping head 16 - 625 mm²	**PK252**

Scope of supply	Part No.	Page
Carrying bag	TT2	196

Available dies for Series 25 for PK 25/2

Refer to the limitations when crimping connectors in the technical appendix.

Suitable for	Connection material	Crimping range mm²	Crimp profile	Page
Tubular cable lugs and connectors, Cu				
Tubular cable lugs and connectors, Cu, standard type, tubular cable lugs for switchgear connections		16 - 400		353
Insulated tubular cable lugs and connectors, insulated pin terminals		10 - 150		353
Tubular cable lugs and connectors for fine stranded conductors		16 - 300		354
Compression cable lugs and connectors acc. to DIN - Cu				
Compression cable lugs (DIN 46235) and connectors (DIN 46267, part 1) Cu		16 - 625		354
Double crimping compression cable lugs		2 x 50 - 2 x 120		354
Terminals, connectors and pin terminals acc. to DIN - Cu				
Terminals (DIN 46234) and pin terminals (DIN 46230) Cu, solderless connectors (DIN 46341) Cu		16 - 240		354
Insulated terminals and pin terminals		10 - 150		355
Sleeves for compacted conductors and sector shaped conductors, Cu				
Pre-rounding crimping dies for Al and Cu sector shaped conductors, 3 and 4 core sector shaped conductors		10 sm - 300 se / 300 sm		355
Compression cable lugs and connectors acc. to DIN - Al				
Compression cable lugs and connectors acc. to DIN - Al		10 - 500		355
Compression joints for full tension connections of Aldrey cables acc. to DIN EN 50182, Al conductors DIN EN 50182, 120 - 300 mmÂ²		25 - 300		355
Compression joints acc. to DIN 48085, part 3 for Al-steel cables acc. to DIN EN 50182, aluminium crimping		25/4 - 120/20		356
Compression joints acc. to DIN 48085, part 3 for Al-steel cables acc. to DIN EN 50182, steel crimping		25/4 - 120/20		356
Aluminium/copper compression cable lugs and connectors				
Aluminum side of aluminium/copper compression cable lugs and connectors: crimping dies HA13, copper side of aluminium/copper compression cable lugs and connectors: crimping dies HD13		10 - 500		355
Clamps and screw connectors				
C-clamps		10 - 185		356
H-clamps		70 - 120		356
Cable end-sleeves				
Cable end-sleeves		25 - 240		357
Cable end-sleeves, trapezodial, for fine stranded conductors		25 - 240		357

PK 45 Hydraulic crimping head 120 - 1000 mm²



K45 SERIE

- Very large crimping range to 1000 mm²
- Good sturdy construction for safe operations
- For connecting to hydraulic pumps with 700 bar operating pressure for optimum crimping results

Characteristics

- Head with quick coupling, 360° rotation when not pressurised

Suitable for

- 45-series interchangeable dies, wide crimping

Technical data	
Crimping force	450 kN
Crimping range	120 - 1000 mm²
Operating pressure	max. 700 bar
Weight	10.3 kg
Height	265 mm

Item	Part No.
Hydraulic crimping head 120 - 1000 mm²	**PK45**

Scope of supply	Part No.	Page
Carrying bag	TT2	196

Available dies for Series 45 for PK 45

Suitable for	Connection material	Crimping range mm²	Crimp profile	Page
Compression cable lugs and connectors acc. to DIN - Cu				
Compression cable lugs (DIN 46235) and connectors (DIN 46267, part 1) Cu	DIN	120 - 1000	⬡	358
Compression cable lugs and connectors acc. to DIN - Al				
Compression cable lugs and connectors acc. to DIN - Al	Al	150 - 500	⬡	358
Compression joints for full tension connections of Aldrey cables acc. to DIN EN 50182, Al conductors DIN EN 50182, 150 - 300 mm²	Aldrey	150 - 300	⬡	358
Aluminium/copper compression cable lugs and connectors				
Aluminium side of aluminium/copper compression cable lugs and connectors: crimping dies HA45, copper side of aluminium/copper compression cable lugs and connectors: crimping dies HD45	Al/Cu	150 - 500	⬡	358

PK 1000 Hydraulic 100 t crimping heads up to 1600 mm²



- **Single-acting crimping head for connecting to hydraulic pumps with 700 bar operating pressure**
- **Compact, simple design**
- **Extremely high crimping force**

Characteristics

- Nickel-plated version
- Quick coupling

Suitable for

- Interchangeable dies (outer: to IZUMI standard EP-100W, inside: DIN standard or customer request)

Additional information

- Also available in country-specific variants, Part Number appendix “C“

K100 SERIE


Technical data	
Crimping force	1000 kN
Stroke	25 mm
Crimping range	up to 1600 mm²
Operating pressure	max. 700 bar
Weight	Without dies: 27 kg
Height	Incl. handles: 365 mm
Dimensions	External diameter: 195 mm

Item	Part No.
Hydraulic 100 t crimping head with Cejn coupling	**PK1000**

Available dies for Series 100 for PK 1000

Suitable for	Connection material	Crimping range mm²	Crimp profile	Page
Copper compression cable lugs and connectors acc. to DIN				
Compression cable lugs (DIN 46235) and connectors (DIN 46267, part 1)	DIN	625 - 1000	⬡	358

HK 25/2 Hydraulic crimping tool with foot pump 16 - 625 mm²

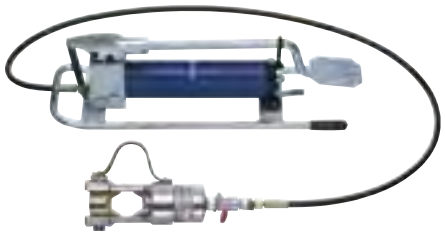

- Extremely wide cross section range up to 625 mm²
- Hydraulic system with 250 kN crimping force
- Foot pump with two-stage hydraulics

Characteristics

- Head with quick coupling, 360° rotation when not pressurised
- Manual retract as required

Suitable for

- 25-series interchangeable dies, wide crimping

Additional information

- The wide choice of available crimping dies can be found in chapter “Crimping dies“ under Series 25.


Technical data	
Crimping force	250 kN
Crimping range	16 - 625 mm²
Operating pressure	max. 700 bar
Weight	17.6 kg

Item	Part No.
Hydraulic crimping tool with foot pump 16 - 625 mm²	**HK252**

Scope of supply	Part No.	Page
Hydraulic hose, 2 m	HS22	497
Steel carrying case	MKU	196

Accessories	Part No.	Page
Hydraulic hose, 3 m	HS23	497
Hydraulic hose, 4 m	HS24	497
Hydraulic hose, 5 m	HS25	497
Hydraulic hose, 6 m	HS26	497
Hydraulic hose, 8 m	HS28	497
Hydraulic hose, 10 m	HS210	497

HK 45 Hydraulic crimping tool with foot pump 120 - 1000 mm²

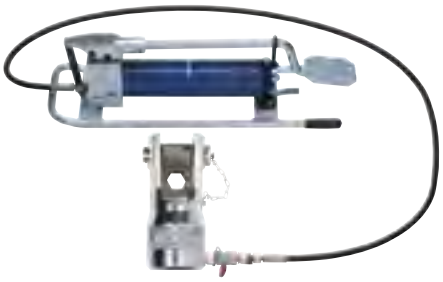

K45 SERIE

- Extremely large cross section range up to 1000 mm²
- Hydraulic system with 450 kN crimping force
- Foot pump with two-stage hydraulics

Characteristics

- Head with quick coupling
- Manual retract as required
- Hydraulic hose, 2 m

Suitable for

- 45-series interchangeable dies, wide crimping

Additional information

- The wide choice of available crimping dies can be found in chapter “Crimping dies“ under Series 45.

Technical data	
Crimping force	450 kN
Crimping range	120 - 1.000 mm²
Operating pressure	max. 700 bar
Weight	23 kg

Item	Part No.
Hydraulic crimping tool with foot pump 120 - 1000 mm²	**HK45**

Scope of supply	Part No.	Page
Hydraulic hose, 2 m	HS22	497
Steel carrying case	MKU	196

Accessories	Part No.	Page
Hydraulic hose, 3 m	HS23	497
Hydraulic hose, 4 m	HS24	497
Hydraulic hose, 5 m	HS25	497
Hydraulic hose, 6 m	HS26	497
Hydraulic hose, 8 m	HS28	497
Hydraulic hose, 10 m	HS210	497

HK 12/2 EL/380 Hydraulic crimping tool with pump, 16 - 400 mm², 400 V



K13 SERIE

- Large cross section range up to 400 mm²
- C-head with 42 mm jaw opening
- Suitable for portable use thanks to transport trolley and extremely long cable

Characteristics

- Head with quick coupling, 360° rotation when not pressurised
- Electronic control with AC motor

Suitable for

- 13-series interchangeable dies, wide crimping

Additional information

- The wide choice of available crimping dies can be found in chapter “Crimping dies“ under Series 13.

Technical data	
Crimping force	120 kN
Crimping range	16 - 400 mm²
Version	Three-phase motor 400 V
Rated output	0.55 kW
Motor voltage	360 V - 440 V / 50 Hz
Capacity	0.82 l / min.
Operating pressure	max. 700 bar
Weight	44.5 kg

Item	Part No.
Crimping tool with pump, 16 - 400 mm², 400 V	**HK122EL380**

Scope of supply	Part No.	Page
Hydraulic hose, 2 m	HS22	497
Foot switch for electro-hydraulic pumps EHP 4 and HK 12/2 EL	FTA1	496
Transport trolley for electro-hydraulic pump EHP 2	TW50	

Accessories	Part No.	Page
Hydraulic hose, 3 m	HS23	497
Hydraulic hose, 4 m	HS24	497
Hydraulic hose, 5 m	HS25	497
Hydraulic hose, 6 m	HS26	497
Hydraulic hose, 8 m	HS28	497
Hydraulic hose, 10 m	HS210	497
Two-hand safety controller for pumps EHP 2 to EHP 4	ZST3	496

HK 25/2 EL/380 Hydraulic crimping tool with pump, 16 - 625 mm², 400 V



K25 SERIE

- Extremely wide cross section range up to 625 mm²
- Crimping head, H-shape
- Suitable for portable use thanks to transport trolley and extremely long cable

Characteristics

- Head with quick coupling, 360° rotation when not pressurised
- Electronic control with AC motor

Suitable for

- 25-series interchangeable dies, wide crimping

Additional information

- The wide choice of available crimping dies can be found in chapter “Crimping dies“ under Series 25.

Technical data	
Crimping force	250 kN
Crimping range	16 - 625 mm²
Version	Three-phase motor 400 V
Rated output	0.55 kW
Motor voltage	360 V - 440 V / 50 Hz
Capacity	0.82 l / min.
Operating pressure	max. 700 bar
Weight	45.9 kg

Item	Part No.
Crimping tool with pump, 16 - 625 mm², 400 V	**HK252EL380**

Scope of supply	Part No.	Page
Hydraulic hose, 2 m	HS22	497
Foot switch for electro-hydraulic pumps EHP 4 and HK 12/2 EL	FTA1	496
Transport trolley for electro-hydraulic pump EHP 2	TW50	

Accessories	Part No.	Page
Hydraulic hose, 3 m	HS23	497
Hydraulic hose, 4 m	HS24	497
Hydraulic hose, 5 m	HS25	497
Hydraulic hose, 6 m	HS26	497
Hydraulic hose, 8 m	HS28	497
Hydraulic hose, 10 m	HS210	497
Two-hand safety controller for pumps EHP 2 to EHP 4	ZST3	496


















TEN SERIES IN USE - CRIMPING DIES

The Klauke range of crimping dies is unbeatable. We have developed a total of 10 series to suit your requirements. All are set apart by their high durability and highest precision. For optimum crimping results, the crimping surface of the dies are polished. You can count on that: Tools, crimping dies and connection materials from Klauke deliver the perfect electrical connection every time.



In brief

- Broad range with 10 different crimping dies series
- Solutions for every material
- Polished crimping surfaces for optimum crimping results
- Quickly find the correct die through coloured coatings

Connection material	K50 SERIE 	K4 SERIE 	K5 SERIE 	K18 SERIE 	K22 SERIE 	K13 SERIE 	K15 SERIE 	K25 SERIE 	K45 SERIE 	K100 SERIE 
 blue connection	–	6-150 mm²	6-185 mm²	–	6-300 mm²	16-300 mm²	–	–	–	–
	0.75-25 mm²	6-150 mm²	6-240 mm²	6-185 mm²	6-300 mm²	16-400 mm²	500-630 mm²	16-400 mm²	–	–
	–	10-70 mm²	10-95 mm²	10-95 mm²	10-150 mm²	10-150 mm²	–	10-150 mm²	–	–
	–	10-50 mm²	10-50 mm²	10-50 mm²	10-70 mm²	16-150 mm²	–	16-300 mm²	–	–
	1.5-10 mm²	1.5-16 mm²	–	1.5-16 mm²	1.5-16 mm²	–	–	–	–	–
 VA	–	0.5-16 mm²	–	–	10-50 mm²	10-95 mm²	–	–	–	–
 Ni	–	0.5-16 mm²	–	–	10-50 mm²	10-95 mm²	–	–	–	–
 DIN	6-25 mm²	6-120 mm²	6-185 mm²	6-185 mm²	6-300 mm²	16-300 mm²	300-625 mm²	16-625 mm²	120-1000 mm²	625-1000 mm²
	0.5-10 mm²	10-35 mm²	10-50 mm²	10-70 mm²	10-70 mm²	16-150 mm²	–	16-240 mm²	–	–
	10-16 mm²	10-16 mm²	–	10-50 mm²	10-70 mm²	10-95 mm²	–	10-150 mm²	–	–
	–	10 sm*-150 se**/120 sm*	10 sm*-300 se**/240 sm*	10 sm*-240 se**/185 sm*	10 sm*-300 se**/240 sm*	10 sm*-300 sm*	–	10 sm*-300 sm*	–	–
 Al	–	10-70 mm²	10-150 mm²	10-185 mm²	10-300 mm²	10-300 mm²	400-500 mm²	10-500 mm²	150-500 mm²	Upon request
 Aldrey	–	25-50 mm²	25-95 mm²	25-95 mm²	25-185 mm²	25-185 mm²	–	25-300 mm²	100-300 mm²	Upon request
 Al/St	–	–	–	–	4-20 (St) 25-120 (Al)	4 (St)-120 (Al)	–	4 (St)-120 (Al)	–	Upon request
 Al/Cu	–	10-70 mm²	–	10-185 mm²	10-300 mm²	10-300 mm²	400-500 mm²	10-500 mm²	150-500 mm²	Upon request
	–	4-35 mm²	16-35 mm²	4-50 mm²	4-50 mm²	10-70 mm²	–	10-185 mm²	–	–
	–	–	–	70 mm²	70-120 mm²	70-120 mm²	–	–	–	–
	0.14-50 mm²	10-50 mm²	10-95 mm²	10-95 mm²	10-240 mm²	25-240 mm²	–	25-240 mm²	–	–
	–	2x4-2x16 mm²	2x4-2x16 mm²	2x4-2x16 mm²	2x4-2x16 mm²	–	–	–	–	–
	0.1-16 mm²	–	–	–	–	–	–	–	–	–
	0.25-6 mm²	–	–	–	–	–	–	–	–	–
BNC plug	RG 58, RG 59, RG 62, RG 71	–	–	–	–	–	–	–	–	–
Turned pin receptacle and pin connectors	0.1-4 mm²	–	–	–	–	–	–	–	–	–

* Sector multi-stranded ** Sector single-stranded

K50 SERIE


K 50


EK 50 ML


EK 15 / 50 ML

Crimping dies R 50



Suitable for

- Tubular cable lugs and connectors - Cu, standard type

Cross section mm²	Part No.
0.75 - 2.5	**R501**
4 - 10	**R502**

Crimping dies R 505

NEW



Suitable for

- Tubular cable lugs and connectors - Cu, standard type

Cross section mm²	Part No.
16 - 25	**R505**

Crimping dies M 50



Suitable for

- Tubular cable lugs and connectors for solid conductors

Cross section mm²	Part No.
1.5 - 4	**M50154**
6 - 10	**M50610**

Crimping dies D 50

NEW



Suitable for

- Compression cable lugs to DIN 46235 and connectors to DIN 46267, part 1 - Cu

Cross section mm²	Part No.
6 - 16	**D504**
16 - 25	**D505**

Crimping dies Q 50



Suitable for

- Solderless terminals to DIN 46234 and pin terminals to DIN 46230 - Cu
- Solderless connectors to DIN 46341 - Cu

Cross section mm²	Part No.
0.5 - 10	**Q501**

Crimping dies AE 50



Suitable for

- Cable end-sleeves

Cross section mm²	Part No.
0.14 - 10	**AE501**
10 - 25	**AE502**
35 - 50	**AE503**

Crimping dies IS 50, single crimping




Suitable for

- Insulated cable connections, single crimping

Cross section mm²	Part No.	for item
10 - 16	**IS5072**	ST1716IS, ST1717IS, 652C5, 652C6, 653C6
0.5 - 2.5	**IS504**	670 WS, 680 WS
4 - 6	**IS505**	700 WS

Crimping dies IS 50, double crimping



Suitable for

- Insulated cable connections, double crimping

Cross section mm²	Part No.	for item
0.5 - 6	**IS501**	
0.1 - 1	**IS503**	8201-8201B

Crimping dies CR 50



Suitable for

- Non-insulated receptacles

Cross section mm²	Part No.	for item	Tab Width
0.25 - 6	**CR501**		2.8 / 6.3
0.5 - 2.5	**CR502**		4.8
0.5 - 1	**CR503**	38201, 38201A	2.8
0.5 - 2.5	**CR504**	3720, 3735	6.3
0.5 - 1.5	**CR505**	3725	6.3

Crimping dies BNC 50



Suitable for

- Stud and shielded sleeves
- BNC plugs for coax cable RG 58, 59, 62 and 71

Part No.
BNC501

Crimping dies SB 50



Suitable for

- Turned pin receptacles
- Pin connectors

Cross section mm²	Part No.
0.1 - 1; 1.5 - 2.5; 4	**SB501**

K4 SERIE


K 35/4


EK 35/4 ML


EK 35/4

Crimping dies HR 4



Suitable for

- Tubular cable lugs and connectors - Cu, standard type
- Tubular cable lugs for switchgear connections

Cross section mm²	Part No.	Crimp width mm
6	**HR46**	5
10	**HR410**	5
16	**HR416**	5
25	**HR425**	5
35	**HR435**	5
50	**HR450**	5
70	**HR470**	5
95	**HR495**	5
120	**HR4120**	5
150	**HR4150**	5

Crimping dies HIS 4



Suitable for

- Insulated tubular cable lugs and connectors
- Insulated pin terminals

Cross section mm²	Part No.	Crimp width mm
10	**HIS410**	5
16	**HIS416**	5
25	**HIS425**	5
35	**HIS435**	5
50	**HIS450**	5
70	**HIS470**	5

Crimping die set, 6 - 150 mm² HR 4 in plastic case, 11-pce.




Suitable for

- Tubular cable lugs and connectors - Cu, standard type
- Tubular cable lugs for switchgear connections

Part No.
HR4SET

Crimping dies blue connection® HB 4





▸ **Accurate assignment of crimping tool/crimping die through colour-coding system**


Suitable for

- Tubular cable lugs and connectors, blue connection® for compacted conductors acc. to DIN EN 60228 Class 2

Cross section mm²	Part No.	Crimp width mm	Number of crimps
6	**HB46**	9	1
10	**hb410**	9	1
16	**hb416**	9	1
25	**hb425**	9	1
35	**HB435**	9	1
50	**HB450**	9	1
70	**hb470**	5	2
95	**hb495**	5	2
120	**hb4120**	5	2
150	**hb4150**	5	2

Crimping die set 6 - 150 mm² blue connection® HB 4 in plastic case, 11-pce.






Suitable for

- Tubular cable lugs and connectors, blue connection® for compacted conductors acc. to DIN EN 60228 Class 2

Part No.
HB4SET

Crimping dies HF 4






Suitable for

- Tubular cable lugs and connectors for fine stranded conductors

Cross section mm²	Part No.
10	**HF410**
16	**HF416**
25	**HF425**
35	**HF435**

Crimping dies HM 4





Suitable for

- Tubular cable lugs and connectors for solid conductors

Cross section mm²	Part No.	Crimp width mm
1.5 - 2.5; 4	**HM4154**	5
6 - 10	**HM4610**	5
16	**HM416**	5

Crimping dies HN 4





Suitable for

- Tubular cable lugs and connectors - Ni
- Tubular cable lugs and connectors - stainless steel

Cross section mm²	Part No.
0.5 - 1.0	**HN4051**
1.5 - 2.5	**HN41525**
4 - 6	**HN446**
10	**HN410**
16	**HN416**

Crimping dies HD 4



Suitable for

- Compression cable lugs to DIN 46235 and connectors to DIN 46267, part 1 - Cu

Cross section mm²	Part No.	Code	Crimp width mm
6	**HD46**	5	5
10	**HD410**	6	5
16	**HD416**	8	5
25	**HD425**	10	5
35	**HD435**	12	5
50	**HD450**	14	5
70	**HD470**	16	5
95	**HD495**	18	5
120	**HD4120**	20	5

Crimping die set, 6 - 120 mm² HD 4 in plastic case, 10-pce.



Suitable for

- Compression cable lugs to DIN 46235 and connectors to DIN 46267, part 1 - Cu

Part No.
HD4SET

Crimping dies HQ 4



Suitable for

- Solderless terminals to DIN 46234 and pin terminals to DIN 46230 - Cu
- Solderless connectors to DIN 46341 - Cu

Cross section mm²	Part No.
10	**HQ410**
16	**HQ416**
25	**HQ425**
35	**HQ435**

Crimping dies HISQ 4




Suitable for

- Insulated solderless terminals and pin terminals

Cross section mm²	Part No.
10	**HISQ410**
16	**HISQ416**

Crimping dies HRU 4





Suitable for

- Pre-rounding dies for sector-shaped Al and Cu conductors
- 3- and 4-core sector-shaped conductors

Nominal cross section mm² se	Nominal cross section mm² sm	Part No.	Conductor dia. mm	Pre-rounding width mm
	10	**HRU410**	4.1	9
	16	**HRU416**	5.1	9
35	25	**HRU43525**	6.3	9
50	35	**HRU45035**	7.5	9
70	50	**HRU47050**	9.0	9
95	70	**HRU49570**	10.5	9
120	95	**HRU412095**	12.5	9
150	120	**HRU4150120**	14.0	9

Crimping dies HA 4






Suitable for

- Compression cable lugs and connectors to DIN - Al
- Compression cable lugs and connectors Al/Cu (aluminium side)

Cross section mm²	Part No.	Code	Crimp width mm
10	**HA410**	10	7
16 - 25	**HA41625**	12	7
35	**HA435**	14	7
50	**HA450**	16	7
70	**HA470**	18	7

Crimping dies HAD 4






Suitable for

- Compression joints for full tension connections of Aldrey conductors according to DIN EN 50182

Cross section mm²	Part No.	Code	Crimp width mm
25	**HAD425**	12	7
35	**HAD435**	14	7
50	**HAD450**	16	7

Crimping dies HC 4 / HMC 4






Suitable for

- C-clamps

Cross section mm²	Part No.	Crimp width mm
16	**HC416**	5
25	**HC425**	5
4 - 4	**HMC44**	5
10 - 10	**HMC410**	5
10 - 16 10 - 25 35 - 35	**HMC435**	5

Crimping dies HAE 4






Suitable for

- Cable end-sleeves

Cross section mm²	Part No.	Crimp width mm
10	**HAE410**	10
16	**HAE416**	10
25	**HAE425**	10
35	**HAE435**	10
50	**HAE450**	10

Crimping dies HAES 4






Suitable for

- Cable end-sleeves
- Special trapezoid crimp for fine stranded conductors

Cross section mm²	Part No.	Crimp width mm
10	**HAES410**	10
16	**HAES416**	10
25	**HAES425**	10
35	**HAES435**	10
50	**HAES450**	10

Crimping dies HZAE 4






Suitable for

- Twin-cable end-sleeves

Cross section mm²	Part No.	Crimp width mm
2 x 4	**HZAE44**	10
2 x 6	**HZAE46**	10
2 x 10	**HZAE410**	10
2 x 16	**HZAE416**	10

Crimping dies HZAES 4





Suitable for

- Twin-cable end-sleeves
- Special trapezoid crimp for fine stranded conductors

Cross section mm²	Part No.	Crimp width mm
2 x 4	**HZAES44**	10
2 x 6	**HZAES46**	10
2 x 10	**HZAES410**	10
2 x 16	**HZAES416**	10


HK 60 UNV + UA5


EK 50/5


EKM 60 UNV + UA5


EK 60 UNV + UA5


PK 60 UNV + UA5

K5 SERIE

Crimping dies HR 5



Suitable for

- Tubular cable lugs and connectors - Cu, standard type

Cross section mm²	Part No.	Crimp width mm
6 + 35	**HR5635**	5
10 + 50	**HR51050**	5
16 + 70	**HR51670**	5
25 + 95	**HR52595**	5
120	**HR5120**	5
150	**HR5150**	5
185	**HR5185**	5
240	**HR5240**	5

Crimping die set, 6 - 240 mm² HR 5 in plastic case, 9-pce.



Suitable for

- Tubular cable lugs and connectors - Cu, standard type

Part No.
HR5SET

Crimping dies HIS 5



Suitable for

- Insulated tubular cable lugs and connectors
- Insulated pin terminals

Cross section mm²	Part No.	Crimp width mm
10	**HIS510**	5
16	**HIS516**	5
25	**HIS525**	5
35	**HIS535**	5
50	**HIS550**	5
70	**HIS570**	5
95	**HIS595**	5

Crimping dies blue connection® HB 5



Accurate assignment of crimping tool/crimping die through colour-coding system

Suitable for

- Tubular cable lugs and connectors, blue connection® for compacted conductors acc. to DIN EN 60228 Class 2

Cross section mm²	Part No.	Crimp width mm	Number of crimps
6 + 35	**hb5635**	9	1
10 + 50	**HB51050**	9	1
16 + 70	**hb51670**	9	1
25 + 95	**hb52595**	9	1
120	**hb5120**	5	2
150	**hb5150**	5	2
185	**hb5185**	5	2

Crimping die set, 6 - 185 mm² blue connection® HB 5 in plastic case, 8-pce.



Suitable for

- Tubular cable lugs and connectors, blue connection® for compacted conductors acc. to DIN EN 60228 Class 2

Part No.
HB5SET

Crimping dies HF 5



Suitable for

- Tubular cable lugs and connectors for fine stranded conductors

Cross section mm²	Part No.
10	**HF510**
16	**HF516**
25	**HF525**
35	**HF535**
50	**HF550**

Crimping dies HD 5



Suitable for

- Compression cable lugs to DIN 46235 and connectors to DIN 46267, part 1 - Cu

Cross section mm²	Part No.	Code	Crimp width mm
6 + 35	**HD5635**	5 + 12	5
10 + 50	**HD51050**	6 + 14	5
16 + 70	**HD51670**	8 + 16	5
25 + 95	**HD52595**	10 + 18	5
120	**HD5120**	20	5
150	**HD5150**	22	5
185	**HD5185**	25	5

Crimping die set, 6 - 185 mm² HD 5 in plastic case, 8-pce.



Suitable for

- Compression cable lugs to DIN 46235 and connectors to DIN 46267, part 1 - Cu

Part No.
HD5SET

Crimping dies HQ 5




Suitable for

- Solderless terminals to DIN 46234 and pin terminals to DIN 46230 - Cu

Cross section mm²	Part No.
10	**HQ510**
16	**HQ516**
25	**HQ525**
35	**HQ535**
50	**HQ550**

Crimping dies HRU 5





Suitable for

- Pre-rounding dies for sector-shaped Al and Cu conductors
- 3- and 4-core sector-shaped conductors

Nominal cross section mm² se	Nominal cross section mm² sm	Part No.	Conductor dia. mm	Pre-rounding width mm
	10	**HRU510**	4.1	12
	16	**HRU516**	5.1	12
35	25	**HRU53525**	6.3	12
50	35	**HRU55035**	7.5	12
70	50	**HRU57050**	9	12
95	70	**HRU59570**	10.5	12
120	95	**HRU512095**	12.5	12
150	120	**HRU5150120**	14	12
185	150	**HRU5185150**	15.7	12
240	185	**HRU5240185**	17.5	12
300	240	**HRU5300240**	20.3	12

Crimping dies HA 5






Suitable for

- Compression cable lugs and connectors to DIN - Al
- Compression cable lugs and connectors Al/Cu (aluminium side)

Cross section mm²	Part No.	Code	Crimp width mm
10	**HA510**	10	7
16 - 25	**HA51625**	12	7
35	**HA535**	14	7
50	**HA550**	16	7
70	**HA570**	18	7
95 - 120	**HA595120**	22	7
150	**HA5150**	25	7

Crimping dies HAD 5






Suitable for

- Compression joints for full tension connections of Aldrey conductors according to DIN EN 50182

Cross section mm²	Part No.	Code	Crimp width mm
25	**HAD525**	12	7
35	**HAD535**	14	7
50	**HAD550**	16	7
70	**HAD570**	18	7
95	**HAD595**	20	7

Crimping dies HC 5





Suitable for

- C-clamps

Cross section mm²	Part No.	Crimp width mm
16	**HC516**	5
25	**HC525**	5
35	**HC535**	5

Crimping dies HAE 5



Suitable for

- Cable end-sleeves

Cross section mm²	Part No.	Crimp width mm
10	**HAE510**	20
16	**HAE516**	20
25	**HAE525**	20
35	**HAE535**	20
50	**HAE550**	20
70	**HAE570**	20
95	**HAE595**	20

Crimping dies HAES 5



Suitable for

- Cable end-sleeves
- Special trapezoid crimp for fine stranded conductors

Cross section mm²	Part No.	Crimp width mm
10	**HAES510**	20
16	**HAES516**	20
25	**HAES525**	20
35	**HAES535**	20
50	**HAES550**	20
70	**HAES570**	20
95	**HAES595**	20

Crimping dies HZAE 5



Suitable for

- Twin-cable end-sleeves

Cross section mm²	Part No.	Crimp width mm
2 x 4	**HZAE54**	20
2 x 6	**HZAE56**	20
2 x 10	**HZAE510**	20
2 x 16	**HZAE516**	20


Crimping dies HZAES 5



Suitable for

- Twin-cable end-sleeves
- Special trapezoid crimp for fine stranded conductors

Cross section mm²	Part No.	Crimp width mm
2 x 4	**HZAES54**	20
2 x 6	**HZAES56**	20
2 x 10	**HZAES510**	20
2 x 16	**HZAES516**	20


K 18


HK 60/18


HK 60 UNV + UA 18


EK 50/18


EKM 60 UNV + UA18


EK 60 UNV + UA18


THK 18


PK 18



PK 60 UNV + UA18

K18 SERIE

2

Crimping dies R





Suitable for


- Tubular cable lugs and connectors - Cu, standard type
- Tubular cable lugs for switchgear connections


Technical instructions

- For connectors, refer to the installation instructions in the technical appendix, page i-8

Cross section mm²	Part No.	Crimp width mm
6	**R6**	5
10	**R10**	5
16	**R16**	5
25	**R25**	5
35	**R35**	5
50	**R50**	5
70	**R70**	5
95	**R95**	5
120	**R120**	5
150	**R150**	5
185	**R185**	5

Crimping dies IS






Suitable for

- Insulated tubular cable lugs and connectors
- Insulated pin terminals

Cross section mm²	Part No.	Crimp width mm
10	**IS10**	5
16	**IS16**	5
25	**IS25**	5
35	**IS35**	5
50	**IS50**	5
70	**IS70**	5
95	**IS95**	5

Crimping dies F






Suitable for

- Tubular cable lugs and connectors for fine stranded conductors

Cross section mm²	Part No.
10	**F10**
16	**F16**
25	**F25**
35	**F35**
50	**F50**

Crimping dies M



Suitable for

- Tubular cable lugs and connectors for solid conductors

Cross section mm²	Part No.	Crimp width mm
1.5 - 4	**M154**	5
6 - 10	**M610**	5
16	**M16**	5

Crimping dies D



Suitable for

- Compression cable lugs to DIN 46235 and connectors to DIN 46267, part 1 - Cu

Technical instructions

- For connectors, refer to the installation instructions in the technical appendix, page i-8

Cross section mm²	Part No.	Code	Crimp width mm
6	**D6**	5	5
10	**D10**	6	5
16	**D16**	8	5
25	**D25**	10	5
35	**D35**	12	5
50	**D50**	14	5
70	**D70**	16	5
95	**D95**	18	5
120	**D120**	20	5
150	**D150**	22	5
185	**D185**	25	5

Crimping dies Q



Suitable for

- Solderless terminals to DIN 46234 and pin terminals to DIN 46230 - Cu
- Solderless connectors to DIN 46341 - Cu

Cross section mm²	Part No.
10	**Q10**
16	**Q16**
25	**Q25**
35	**Q35**
50	**Q50**
70	**Q70**

Crimping dies ISQ




Suitable for

- Insulated solderless terminals and pin terminals

Cross section mm²	Part No.
10	**ISQ10**
16	**ISQ16**
25	**ISQ25**
35	**ISQ35**
50	**ISQ50**

Crimping dies RU






Suitable for

- Pre-rounding dies for sector-shaped Al and Cu conductors
- 3- and 4-core sector-shaped conductors

Nominal cross section mm² se	Nominal cross section mm² sm	Part No.	Conductor dia. mm	Pre-rounding width mm
	10	**RU10**	4.1	19.5
	16	**RU16**	5.1	19.5
35	25	**RU3525**	6.3	19.5
50	35	**RU5035**	7.5	19.5
70	50	**RU7050**	9.0	19.5
95	70	**RU9570**	10.5	19.5
120	95	**RU12095**	12.5	19.5
150	120	**RU150120**	14.0	19.5
185	150	**RU185150**	15.8	19.5
240	185	**RU240185**	17.5	19.5

Crimping dies A





Suitable for

- Compression cable lugs and connectors to DIN - Al
- Compression cable lugs and connectors Al/Cu (aluminium side)


Technical instructions

- For connectors, refer to the installation instructions in the technical appendix, page i-8

Cross section mm²	Part No.	Code	Crimp width mm
10	**A10**	10	7
16 - 25	**A1625**	12	7
35	**A35**	14	7
50	**A50**	16	7
70	**A70**	18	7
95 - 120	**A95120**	22	7
150	**A150**	25	7
185	**A185**	28	7

Crimping dies AD





Suitable for

- Compression joints for full tension connections of Aldrey conductors according to DIN EN 50182


Technical instructions

- For connectors, refer to the installation instructions in the technical appendix, page i-8

Cross section mm²	Part No.	Code	Crimp width mm
25	**AD25**	12	7
35	**AD35**	14	7
50	**AD50**	16	7
70	**AD70**	18	7
95	**AD95**	20	7

Crimping dies C / MC






Suitable for

- C-clamps

Cross section mm²	Part No.	Crimp width mm
16	**C16**	5
25	**C25**	5
35	**C35**	5
50	**C50**	5
4 - 4	**MC4**	5
10 - 10	**MC10**	5
10 - 16 10 - 25 10 - 35	**MC35**	5

Crimping dies AE




Suitable for

- Cable end-sleeves

Cross section mm²	Part No.	Crimp width mm
10	**AE10**	20
16	**AE16**	20
25	**AE25**	20
35	**AE35**	20
50	**AE50**	20
70	**AE70**	20
95	**AE95**	20

Crimping dies AES




Suitable for

- Cable end-sleeves
- Special trapezoid crimp for fine stranded conductors

Cross section mm²	Part No.	Crimp width mm
10	**AES10**	20
16	**AES16**	20
25	**AES25**	20
35	**AES35**	20
50	**AES50**	20
70	**AES70**	20
95	**AES95**	20

Crimping dies ZAE




Suitable for

- Twin-cable end-sleeves

Cross section mm²	Part No.	Crimp width mm
2 x 4	**ZAE4**	20
2 x 6	**ZAE6**	20
2 x 10	**ZAE10**	20
2 x 16	**ZAE16**	20

Crimping dies ZAES



Suitable for

- Twin-cable end-sleeves
- Special trapezoid crimp for fine stranded conductors

Cross section mm²	Part No.	Crimp width mm
4	**ZAES4**	20
6	**ZAES6**	20
10	**ZAES10**	20
16	**ZAES16**	20

K22 SERIE


K 22


HK 60/22


HK 60 UNV + UA22


EK 60/22


EKM 60/22


EKM 60 UNV + UA22


EK 60 UNV + UA22


THK 22


PK 22


PK 60 UNV + UA22

Crimping dies R 22



Suitable for

- Tubular cable lugs and connectors - Cu, standard type
- Tubular cable lugs for switchgear connections

Cross section mm²	Part No.	Crimp width mm
6	**R226**	5
10	**R2210**	5
16	**R2216**	5
25	**R2225**	5
35	**R2235**	5
50	**R2250**	5
70	**R2270**	5
95	**R2295**	5
120	**R22120**	5
150	**R22150**	5
185	**R22185**	5
240	**R22240**	5
300	**R22300**	5

Crimping die set, 6-300 mm² R 22 in plastic case, 14-pce.



Suitable for

- Tubular cable lugs and connectors - Cu, standard type
- Tubular cable lugs for switchgear connections

Part No.
R22SET

Crimping dies IS 22



Suitable for

- Insulated tubular cable lugs and connectors
- Insulated pin terminals

Cross section mm²	Part No.	Crimp width mm
10	**IS2210**	5
16	**IS2216**	5
25	**IS2225**	5
35	**IS2235**	5
50	**IS2250**	5
70	**IS2270**	5
95	**IS2295**	5
120	**IS22120**	5
150	**IS22150**	5

Crimping dies, blue connection® B 22



Accurate assignment of crimping tool/crimping die through colour-coding system

Suitable for

- Tubular cable lugs and connectors, blue connection® for compacted conductors acc. to DIN EN 60228 Class 2

Cross section mm²	Part No.	Crimp width mm	Number of crimps
6	**b226**	9	1
10	**b2210**	9	1
16	**b2216**	9	1
25	**b2225**	9	1
35	**b2235**	9	1
50	**b2250**	9	1
70	**b2270**	9	1
95	**b2295**	9	1
120	**b22120**	9	1
150	**b22150**	9	1
185	**b22185**	5	2
240	**b22240**	5	2
300	**b22300**	5	3

Presseinsatzset 6-300 mm² blue connection® B22 im Kunststoffkoffer, 14-teilig



Suitable for

- Tubular cable lugs and connectors, blue connection® for compacted conductors acc. to DIN EN 60228 Class 2

Part No.
B22SET

Crimping dies F 22



Suitable for

- Tubular cable lugs and connectors for fine stranded conductors

Cross section mm²	Part No.
10	**F2210**
16	**F2216**
25	**F2225**
35	**F2235**
50	**F2250**
70	**F2270**

Crimping dies M 22



Suitable for

- Tubular cable lugs and connectors for solid conductors

Cross section mm²	Part No.	Crimp width mm
1.5 - 4	**M22154**	5
6 - 10	**M22610**	5
16	**M2216**	5

Presseinsätze N 22



Suitable for

- Tubular cable lugs and connectors - Ni
- Tubular cable lugs and connectors - stainless steel

Cross section mm²	Part No.
10	**N2210**
16	**N2216**
25	**N2225**
35	**N2235**
50	**N2250**

Crimping dies D 22



Suitable for

- Compression cable lugs to DIN 46235 and connectors to DIN 46267, part 1 - Cu

Cross section mm²	Part No.	Code	Crimp width mm
6	**D226**	5	5
10	**D2210**	6	5
16	**D2216**	8	5
25	**D2225**	10	5
35	**D2235**	12	5
50	**D2250**	14	5
70	**D2270**	16	5
95	**D2295**	18	5
120	**D22120**	20	5
150	**D22150**	22	5
185	**D22185**	25	5
240	**D22240**	28	5
300	**D22300**	32	5

Crimping die set, 6-300 mm² D 22 in plastic case, 14-pce.



Suitable for

- Compression cable lugs to DIN 46235 and connectors to DIN 46267, part 1 - Cu

Part No.
D22SET

Crimping dies DP 22



Suitable for

- Double compression cable lugs

Cross section mm²	Part No.	Code
2 x 50	**DP2250**	22 DP
2 x 70	**DP2270**	24 DP

Crimping dies Q 22



Suitable for

- Solderless terminals to DIN 46234 and pin terminals to DIN 46230 - Cu
- Solderless connectors to DIN 46341 - Cu

Cross section mm²	Part No.
10	**Q2210**
16	**Q2216**
25	**Q2225**
35	**Q2235**
50	**Q2250**
70	**Q2270**

Crimping dies ISQ 22



Suitable for

- Insulated solderless terminals and pin terminals

Cross section mm²	Part No.
10	**ISQ2210**
16	**ISQ2216**
25	**ISQ2225**
35	**ISQ2235**
50	**ISQ2250**
70	**ISQ2270**

Crimping dies RU 22



Suitable for

- Pre-rounding of sector-shaped Al- and Cu-conductors
- 3- and 4-core sector-shaped conductors

Nominal cross section mm² se	Nominal cross section mm² sm	Part No.	Conductor dia. mm	Pre-rounding width mm
	10	**RU2210**	4.1	19.5
	16	**RU2216**	5.1	19.5
35	25	**RU223525**	6.3	19.5
50	35	**RU225035**	7.5	19.5
70	50	**RU227050**	9.0	19.5
95	70	**RU229570**	10.5	19.5
120	95	**RU2212095**	12.5	19.5
150	120	**RU22150120**	14.0	19.5
185	150	**RU22185150**	15.8	19.5
240	185	**RU22240185**	17.5	19.5
300	240	**RU22300240**	20.3	19.5

Crimping dies A 22



Suitable for

- Compression cable lugs and connectors to DIN - Al
- Compression cable lugs and connectors Al/Cu (aluminium side)

Cross section mm²	Part No.	Code	Crimp width mm
10	**A2210**	10	7
16 - 25	**A221625**	12	7
35	**A2235**	14	7
50	**A2250**	16	7
70	**A2270**	18	7
95 - 120	**A2295120**	22	7
150	**A22150**	25	7
185	**A22185**	28	7
240	**A22240**	32	5
300	**A22300**	34	5

Crimping die set, 10-300 mm² A 22 in plastic case, 11-pce.



Suitable for

- Compression cable lugs and connectors to DIN - Al
- Compression cable lugs and connectors Al/Cu (aluminium side)

Part No.
A22SET

Crimping dies AD 22




Suitable for

- Compression joints for full tension connections of Aldrey conductors according to DIN EN 50182
- Al-conductor acc. to DIN EN 50182, 120 - 185 mm²

Cross section mm²	Part No.	Code	Crimp width mm
25	**AD2225**	12	7
35	**AD2235**	14	7
50	**AD2250**	16	7
70	**AD2270**	18	7
95	**AD2295**	20	7
120	**AD22120**	25	7
150 - 185	**AD22150185**	28	7

Crimping dies AST 22






Suitable for

- Compression joints acc. to DIN 48085, part 3 for Al-/St-cable acc. to DIN EN 50182
- Aluminium crimping

Cross section mm²	Part No.	Code	Crimp width mm
25 - 4	**AST2225**	12	7
35 - 6	**AST2235**	14	7
50 - 8	**AST2250**	16	7
70 - 12	**AST2270**	18	7
95 - 15	**AST2295**	22	7
120 - 20	**AST22120**	25	7

Crimping dies ST 22






Suitable for

- Compression joints acc. to DIN 48085, part 3 for Al-/St-cable acc. to DIN EN 50182
- Steel crimping

Cross section mm²	Part No.	Code	Crimp width mm
25 - 4 35 - 6	**ST2246**	6	5
50 - 8	**ST228**	7	5
70 - 12 95 - 15	**ST221215**	9	5
120 - 20	**ST2220**	13	5

Crimping dies C 22 / MC 22






Suitable for

- C-clamps

Cross section mm²	Part No.	Crimp width mm
16	**C2216**	5
25	**C2225**	5
35	**C2235**	5
50	**C2250**	5
4 - 4	**MC224**	5
10 - 10	**MC2210**	5
10 - 1 10 - 25 35 - 35	**MC2235**	5

Crimping dies H 22






Suitable for

- H-clamps

Cross section mm²	Part No.	Crimp width mm
70	**H2270**	5

Crimping dies AE 22





Suitable for

- Cable end-sleeves


Additional information

- * = Not suitable for THK 22 due to opening width

Cross section mm²	Part No.	Crimp width mm
10	**AE2210**	21
16	**AE2216**	21
25	**AE2225**	21
35	**AE2235**	21
50	**AE2250**	21
70	**AE2270**	21
95	**AE2295**	21
120	**AE22120**	21
150	**AE22150**	21
185 *	**AE22185**	21
240 *	**AE22240**	21

Crimping dies AES 22





Suitable for

- Cable end-sleeves
- Special trapezoid crimp for fine stranded conductors

Technical instructions


Additional information

- * = Not suitable for THK 22 due to opening width

Cross section mm²	Part No.	Crimp width mm
10	**AES2210**	21
16	**AES2216**	21
25	**AES2225**	21
35	**AES2235**	21
50	**AES2250**	21
70	**AES2270**	21
95	**AES2295**	21
120	**AES22120**	21
150	**AES22150**	21
185 *	**AES22185**	21
240 *	**AES22240**	21

Crimping dies ZAE 22






Suitable for

- Twin-cable end-sleeves

Cross section mm²	Part No.	Crimp width mm
2 x 4	**ZAE224**	21
2 x 6	**ZAE226**	21
2 x 10	**ZAE2210**	21
2 x 16	**ZAE2216**	21

Crimping dies ZAES 22





Suitable for

- Twin-cable end-sleeves
- Special trapezoid crimp for fine stranded conductors

Cross section mm²	Part No.	Crimp width mm
2 x 4	**ZAES224**	21
2 x 6	**ZAES226**	21
2 x 10	**ZAES2210**	21
2 x 16	**ZAES2216**	21


HK 120/30


HK 120/42


HK 120 U


EK 120/32


EK 120/42


EK 120 UNV


EK 120 U


EK 135 FT


THK 120


HK 12/2 EL/380


PK 120/42


PK 120 U

K13 SERIE

2

Crimping dies HR 13



Suitable for

- Tubular cable lugs and connectors - Cu, standard type
- Tubular cable lugs for switchgear connections

Technical instructions

- For connectors, refer to the installation instructions in the technical appendix, page i-8

Additional information

- * = Narrow crimping (crimp 5 x)

Cross section mm²	Part No.	Crimp width mm
16	**HR1316**	10
25	**HR1325**	10
35	**HR1335**	10
50	**HR1350**	13
70	**HR1370**	13
95	**HR1395**	14
120	**HR13120**	14
150	**HR13150**	14
185	**HR13185**	11
240	**HR13240**	11
300	**HR13300**	11
400 *	**HR13400**	5

Crimping dies HIS 13



Suitable for

- Insulated tubular cable lugs and connectors
- Insulated pin terminals

Cross section mm²	Part No.	Crimp width mm
10	**HIS1310**	5
16	**HIS1316**	5
25	**HIS1325**	5
35	**HIS1335**	5
50	**HIS1350**	5
70	**HIS1370**	5
95	**HIS1395**	5
120	**HIS13120**	5
150	**HIS13150**	5

Crimping dies HF 13



Suitable for

- Tubular cable lugs and connectors for fine stranded conductors

Cross section mm²	Part No.
16	**HF1316**
25	**HF1325**
35	**HF1335**
50	**HF1350**
70	**HF1370**
95	**HF1395**
120	**HF13120**
150	**HF13150**

Crimping dies HN 13



Suitable for

- Tubular cable lugs and connectors - Ni
- Tubular cable lugs and connectors - stainless steel

Cross section mm²	Part No.
70	**HN1370**
95	**HN1395**

Crmping dies HD 13



Suitable for

- Compression cable lugs to DIN 46235 - Cu
- Compression joints to DIN 46267, part 1 - Cu

Technical instructions

- For connectors, refer to the installation instructions in the technical appendix, page i-8

Additional information

- * = Narrow crimping (crimp 5 x)

Cross section mm²	Part No.	Code	Crimp width mm
16	**HD1316**	8	10
25	**HD1325**	10	10
35	**HD1335**	12	10
50	**HD1350**	14	13
70	**HD1370**	16	13
95	**HD1395**	18	14
120	**HD13120**	20	14
150	**HD13150**	22	10
185	**HD13185**	25	10
240	**HD13240**	28	10
300 *	**HD13300**	32	7

Crimping dies HDP 13




Suitable for

- Double compression cable lugs

Cross section mm²	Part No.	Code	Crimp width mm
2 x 50	**HDP1350**	22 DP	12
2 x 70	**HDP1370**	24 DP	12
2 x 95	**HDP1395**	29 DP	12

Crimping dies HQ 13






Suitable for

- Solderless terminals to DIN 46234 and pin terminals to DIN 46230 - Cu
- Solderless connectors to DIN 46341 - Cu

Cross section mm²	Part No.
16	**HQ1316**
25	**HQ1325**
35	**HQ1335**
50	**HQ1350**
70	**HQ1370**
95	**HQ1395**
120	**HQ13120**
150	**HQ13150**

Crimping dies HISQ 13






Suitable for

- Insulated solderless terminals and pin terminals

Cross section mm²	Part No.
10	**HISQ1310**
16	**HISQ1316**
25	**HISQ1325**
35	**HISQ1335**
50	**HISQ1350**
70	**HISQ1370**
95	**HISQ1395**

Crimping dies HRU 13





Suitable for

- Pre-rounding dies for sector-shaped Al and Cu conductors
- 3- and 4-core sector-shaped conductors

Nominal cross section mm² se	Nominal cross section mm² sm	Part No.	Conductor dia. mm	Pre-rounding width mm
	10	**HRU1310**	4.1	35
	16	**HRU1316**	5.1	35
35	25	**HRU133525**	6.3	35
50	35	**HRU135035**	7.5	35
70	50	**HRU137050**	9.0	35
95	70	**HRU139570**	10.5	35
120	95	**HRU1312095**	12.5	35
150	120	**HRU13150120**	14.0	35
185	150	**HRU13185150**	15.8	35
240	185	**HRU13240185**	17.5	35
300	240	**HRU13300240**	20.3	35
	300	**HRU13300SM**	22.5	35

Crimping dies HA 13





Suitable for

- Compression cable lugs and connectors to DIN - Al
- Compression cable lugs and connectors Al/Cu (aluminium side)


Technical instructions

- For connectors, refer to the installation instructions in the technical appendix, page i-8

Cross section mm²	Part No.	Code	Crimp width mm
10	**HA1310**	10	12
16 - 25	**HA131625**	12	12
35	**HA1335**	14	12
50	**HA1350**	16	12
70	**HA1370**	18	12
95 - 120	**HA1395120**	22	14
150	**HA13150**	25	14
185	**HA13185**	28	14
240	**HA13240**	32	17
300	**HA13300**	34	17

Crimping dies HAD 13





Suitable for


- Compression joints for full tension connections of Aldrey conductors according to DIN EN 50182
- Al-conductor acc. to DIN EN 50182, 120 - 185 mm²


Technical instructions

- For connectors, refer to the installation instructions in the technical appendix, page i-8

Cross section mm²	Part No.	Code	Crimp width mm
25	**HAD1325**	12	12
35	**HAD1335**	14	12
50	**HAD1350**	16	12
70	**HAD1370**	18	12
95	**HAD1395**	20	14
120	**HAD13120**	25	14
150 - 185	**HAD13150185**	28	14

Crimping dies HAST 13





Suitable for


- Compression joints acc. to DIN 48085, part 3 for Al-/St-cable acc. to DIN EN 50182
- Aluminium crimping


Technical instructions

- For connectors, refer to the installation instructions in the technical appendix, page i-8

Cross section mm²	Part No.	Code	Crimp width mm
25 - 4	**HAST1325**	12	12
35 - 6	**HAST1335**	14	12
50 - 8	**HAST1350**	16	12
70 - 12	**HAST1370**	18	12
95 - 15	**HAST1395**	22	14
120 - 20	**HAST13120**	25	14

Crimping dies HST 13





Suitable for

- Compression joints acc. to DIN 48085, part 3 for Al-/St-cable acc. to DIN EN 50182
- Steel crimping


Technical instructions

- For connectors, refer to the installation instructions in the technical appendix, page i-8

Cross section mm²	Part No.	Code	Crimp width mm
25 - 4 35 - 6	**HST1346**	6	12
50 - 8	**HST138**	7	12
70 - 12 95 - 15	**HST131215**	9	12
120 - 20	**HST1320**	13	12

Crimping dies HC 13 / HMC 13






Suitable for

- C-clamps

Cross section mm²	Part No.	Crimp width mm
16	**HC1316**	16
25	**HC1325**	17
35	**HC1335**	20
50	**HC1350**	20
70	**HC1370**	20
10 - 10	**HMC1310**	13
10 - 16 10 - 25 35 - 35	**HMC1335**	18
25 - 50 50 - 50	**HMC1350**	20
35 - 70	**HMC1370**	20

Crimping dies HAH 13






Suitable for

- H-clamps

Cross section mm²	Part No.	Crimp width mm
70	**HAH1370**	30
95	**HAH1395**	30
120	**HAH13120**	20

Crimping dies HAE 13






Suitable for

- Cable end-sleeves

Cross section mm²	Part No.	Crimp width mm
25	**HAE1325**	20
35	**HAE1335**	20
50	**HAE1350**	26
70	**HAE1370**	26
95	**HAE1395**	26
120	**HAE13120**	26
150	**HAE13150**	26
185	**HAE13185**	26
240	**HAE13240**	26

Crimping dies HAES 13





Suitable for

- Cable end-sleeves
- Special trapezoid crimp for fine stranded conductors

Cross section mm²	Part No.	Crimp width mm
25	**HAES1325**	20
35	**HAES1335**	20
50	**HAES1350**	26
70	**HAES1370**	26
95	**HAES1395**	26
120	**HAES13120**	26
150	**HAES13150**	26
185	**HAES13185**	26
240	**HAES13240**	26

K15 SERIE



EK 135 FT

Crimping dies HR 15

NEW



Suitable for

- Tubular cable lugs and connectors - Cu, standard type
- Tubular cable lugs for switchgear connections

Additional information

- * = Narrow crimping (crimp 5 x)
  ** = Narrow crimping (crimp 6 x)

Cross section mm²	Part No.	Crimp width mm
500 *	**HL15500**	10
630 **	**HL15630**	8

Crimping dies HD 15

NEW



Suitable for

- Compression cable lugs to DIN 46235 and connectors to DIN 46267, part 1 - Cu

Additional information

- * = Narrow crimping (crimp 7 x)

Cross section mm²	Part No.	Code	Crimp width mm
400 *	**HD15400**	38	7
500 *	**HD15500**	42	7
625 *	**HD15625**	44	7

Crimping dies HA 15

NEW



Suitable for

- Compression cable lugs and connectors to DIN - Al
- Compression cable lugs and connectors Al/Cu (aluminium side)

Cross section mm²	Part No.	Code	Crimp width mm
400	**HA15400**	38	15
500	**HA15500**	38	15



HK 25/2



HK 25/2 EL/380




PK 25/2

K25 SERIE

Crimping dies HR 25






Suitable for

- Tubular cable lugs and connectors - Cu, standard type
- Tubular cable lugs for switchgear connections

Cross section mm²	Part No.	Crimp width mm
16	**HR2516**	10
25	**HR2525**	10
35	**HR2535**	10
50	**HR2550**	13
70	**HR2570**	13
95	**HR2595**	15
120	**HR25120**	15
150	**HR25150**	20
185	**HR25185**	20
240	**HR25240**	20
300	**HR25300**	20
400	**HR25400**	20

Crimping dies HIS 25





Suitable for

- Insulated tubular cable lugs and connectors
- Insulated pin terminals

Cross section mm²	Part No.	Crimp width mm
10	**HIS2510**	7
16	**HIS2516**	7
25	**HIS2525**	8
35	**HIS2535**	8
50	**HIS2550**	10
70	**HIS2570**	12
95	**HIS2595**	14
120	**HIS25120**	14
150	**HIS25150**	16

Crimping dies HF 25



Suitable for

- Tubular cable lugs and connectors for fine stranded conductors

Cross section mm²	Part No.
16	**HF2516**
25	**HF2525**
35	**HF2535**
50	**HF2550**
70	**HF2570**
95	**HF2595**
120	**HF25120**
150	**HF25150**
185	**HF25185**
240	**HF25240**
300	**HF25300**

Crimping dies HD 25



Suitable for

- Compression cable lugs to DIN 46235 - Cu
- Compression joints to DIN 46267, part 1 - Cu

Cross section mm²	Part No.	Code	Crimp width mm
16	**HD2516**	8	10
25	**HD2525**	10	10
35	**HD2535**	12	10
50	**HD2550**	14	13
70	**HD2570**	16	13
95	**HD2595**	18	14
120	**HD25120**	20	14
150	**HD25150**	22	15
185	**HD25185**	25	15
240	**HD25240**	28	15
300	**HD25300**	32	17
400	**HD25400**	38	17
500	**HD25500**	42	17
625	**HD25625**	44	15

Crimping dies HDP 25



Suitable for

- Double compression cable lugs

Cross section mm²	Part No.	Code	Crimp width mm
2 x 50	**HDP2550**	22 DP	15
2 x 70	**HDP2570**	24 DP	15
2 x 95	**HDP2595**	29 DP	15
2 x 120	**HDP25120**	32 DP	15

Crimping dies HQ 25




Suitable for

- Solderless terminals to DIN 46234 and pin terminals to DIN 46230 - Cu
- Solderless connectors to DIN 46341 - Cu

Cross section mm²	Part No.
16	**HQ2516**
25	**HQ2525**
35	**HQ2535**
50	**HQ2550**
70	**HQ2570**
95	**HQ2595**
120	**HQ25120**
150	**HQ25150**
185	**HQ25185**
240	**HQ25240**

Crimping dies HISQ 25






Suitable for

- Insulated solderless terminals and pin terminals

Cross section mm²	Part No.
10	**HISQ2510**
16	**HISQ2516**
25	**HISQ2525**
35	**HISQ2535**
50	**HISQ2550**
70	**HISQ2570**
95	**HISQ2595**
120	**HISQ25120**
150	**HISQ25150**

Crimping dies HRU 25





Suitable for

- Pre-rounding dies for sector-shaped Al and Cu conductors
- 3- and 4-core sector-shaped conductors

Nominal cross section mm² se	Nominal cross section mm² sm	Part No.	Conductor dia. mm	Pre-rounding width mm
	10	**HRU2510**	4.1	40
	16	**HRU2516**	5.1	40
35	25	**HRU253525**	6.3	40
50	35	**HRU255035**	7.5	40
70	50	**HRU257050**	9.0	40
95	70	**HRU259570**	10.5	40
120	95	**HRU2512095**	12.5	40
150	120	**HRU25150120**	14.0	40
185	150	**HRU25185150**	15.8	40
240	185	**HRU25240185**	17.5	40
300	240	**HRU25300240**	20.3	40
	300	**HRU25300SM**	22.5	40

Crimping dies HA 25






Suitable for

- Compression cable lugs and connectors to DIN - Al
- Compression cable lugs and connectors Al/Cu (aluminium side)

Cross section mm²	Part No.	Code	Crimp width mm
10	**HA2510**	10	12
16 - 25	**HA251625**	12	12
35	**HA2535**	14	12
50	**HA2550**	16	12
70	**HA2570**	18	12
95 - 120	**HA2595120**	22	14
150	**HA25150**	25	14
185	**HA25185**	28	14
240	**HA25240**	32	17
300	**HA25300**	34	17
400	**HA25400**	38	17
500	**HA25500**	44	15

Crimping dies HAD 25





Suitable for

- Compression joints for full tension connections of Aldrey conductors according to DIN EN 50182
- Al-conductor acc. to DIN EN 50182, 120 - 300 mm²

Cross section mm²	Part No.	Code	Crimp width mm
25	**HAD2525**	12	12
35	**HAD2535**	14	12
50	**HAD2550**	16	12
70	**HAD2570**	18	12
95	**HAD2595**	20	14
120	**HAD25120**	25	14
150 - 185	**HAD25150185**	28	14
240	**HAD25240**	34	17
300	**HAD25300**	38	17

Crimping dies HAST 25



Suitable for

- Compression joints acc. to DIN 48085, part 3 for Al-/St-cable acc. to DIN EN 50182
- Aluminium crimping

Cross section mm²	Part No.	Code	Crimp width mm
25 - 4	**HAST2525**	12	12
35 - 6	**HAST2535**	14	12
50 - 8	**HAST2550**	16	12
70 - 12	**HAST2570**	18	12
95 - 15	**HAST2595**	22	14
120 - 20	**HAST25120**	25	14

Crimping dies HST 25



Suitable for

- Compression joints acc. to DIN 48085, part 3 for Al-/St-cable acc. to DIN EN 50182
- Steel crimping

Cross section mm²	Part No.	Code	Crimp width mm
25 - 4; 35 - 6	**HST2546**	6	14
50 - 8	**HST258**	7	14
70 - 12; 95 - 15	**HST251215**	9	14
120 - 20	**HST2520**	13	14

Crimping dies HC 25 / HMC 25



Suitable for

- C-clamps

Cross section mm²	Part No.	Crimp width mm
16	**HC2516**	16
25	**HC2525**	17
35	**HC2535**	20
50	**HC2550**	20
70	**HC2570**	20
95	**HC2595**	20
10 - 16; 10 - 25; 35 - 35	**HMC2535**	18
25 - 50; 50 - 50	**HMC2550**	20
35 - 70	**HMC2570**	20
35 - 95; 70 - 95	**HMC2595**	20
120 - 120	**HMC25120**	20
150 - 150	**HMC25150**	20
185 - 185	**HMC25185**	20

Crimping dies HAH 25




Suitable for

- H-clamps

Cross section mm²	Part No.	Crimp width mm
70	**HAH2570**	20
95	**HAH2595**	20
120	**HAH25120**	30

Crimping dies HAE 25






Suitable for

- Cable end-sleeves

Cross section mm²	Part No.	Crimp width mm
25	**HAE2525**	20
35	**HAE2535**	20
50	**HAE2550**	26
70	**HAE2570**	26
95	**HAE2595**	26
120	**HAE25120**	26
150	**HAE25150**	26
185	**HAE25185**	26
240	**HAE25240**	26

Crimping dies HAES 25






Suitable for

- Cable end-sleeves
- Special trapezoid crimp for fine stranded conductors


Cross section mm²	Part No.	Crimp width mm
25	**HAES2525**	20
35	**HAES2535**	20
50	**HAES2550**	26
70	**HAES2570**	26
95	**HAES2595**	26
120	**HAES25120**	26
150	**HAES25150**	26
185	**HAES25185**	26
240	**HAES25240**	26

K45 SERIE

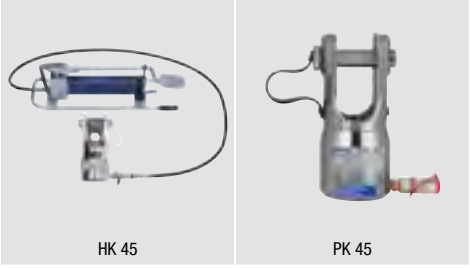

Crimping dies HD 45





Suitable for

- Compression cable lugs to DIN 46235 - Cu
- Compression joints to DIN 46267, part 1 - Cu

Cross section mm²	Part No.	Code	Crimp width mm
120	**HD45120**	20	15
150	**HD45150**	22	15
185	**HD45185**	25	15
240	**HD45240**	28	15
300	**HD45300**	32	17
400	**HD45400**	38	17
500	**HD45500**	42	17
625	**HD45625**	44	17
800	**HD45800**	52	20
1000	**HD451000**	58	20

Crimping dies HA 45






Suitable for

- Compression cable lugs and connectors to DIN - Al
- Compression cable lugs and connectors Al/Cu (aluminium side)

Cross section mm²	Part No.	Code	Crimp width mm
150	**HA45150**	25	15
185	**HA45185**	28	15
240	**HA45240**	32	17
300	**HA45300**	34	20
400	**HA45400**	38	20
500	**HA45500**	44	20

Crimping dies HAD 45





Suitable for

- Compression joints for full tension connections of Aldrey conductors according to DIN EN 50182
- Al-conductor acc. to DIN EN 50182, 150 - 300 mm²

Cross section mm²	Part No.	Code	Crimp width mm
150 - 185	**HAD45150185**	28	20
240	**HAD45240**	34	20
300	**HAD45300**	38	20



PK 1000

K100 SERIE

Crimping dies HD 100

NEW

DIN



Suitable for

- Compression cable lugs to DIN 46235 - Cu
- Compression joints to DIN 46267, part 1 - Cu

Cross section mm²	Part No.	Code	Crimp width mm
625	**HD100625**	44	60
800	**HD100800**	52	75
1000	**HD1001000**	58	40

THORNE & DERRICK INTERNATIONAL
Thorne & Derrick
+44 (0) 191 410 4292
www.powerandcables.com