



Version History:
Rev -- to A: CON2 and CON3 needed to be reversed by 180deg
Rev A-B: Add 1uf cap across 3.3V and GND on CON1
Removed connection of 3.3Vin to PIN 26-USB connection put 5V on board
Move LD2 - hit plastic battery carrier
Rev B1-C connect pin 28 on micro (+4.0V) to D3 cathode
Rev C->D R13-24 was 15M, IS; delete R24, R13=100M
Add 1uF C21,22,23 to T2-b and cellIV inputs
WAS: LED center leg com to GND, IS to +V
NEW: RED LED LD3 added and R18 changed to 330

R5 was 24 IS 16.2/2512

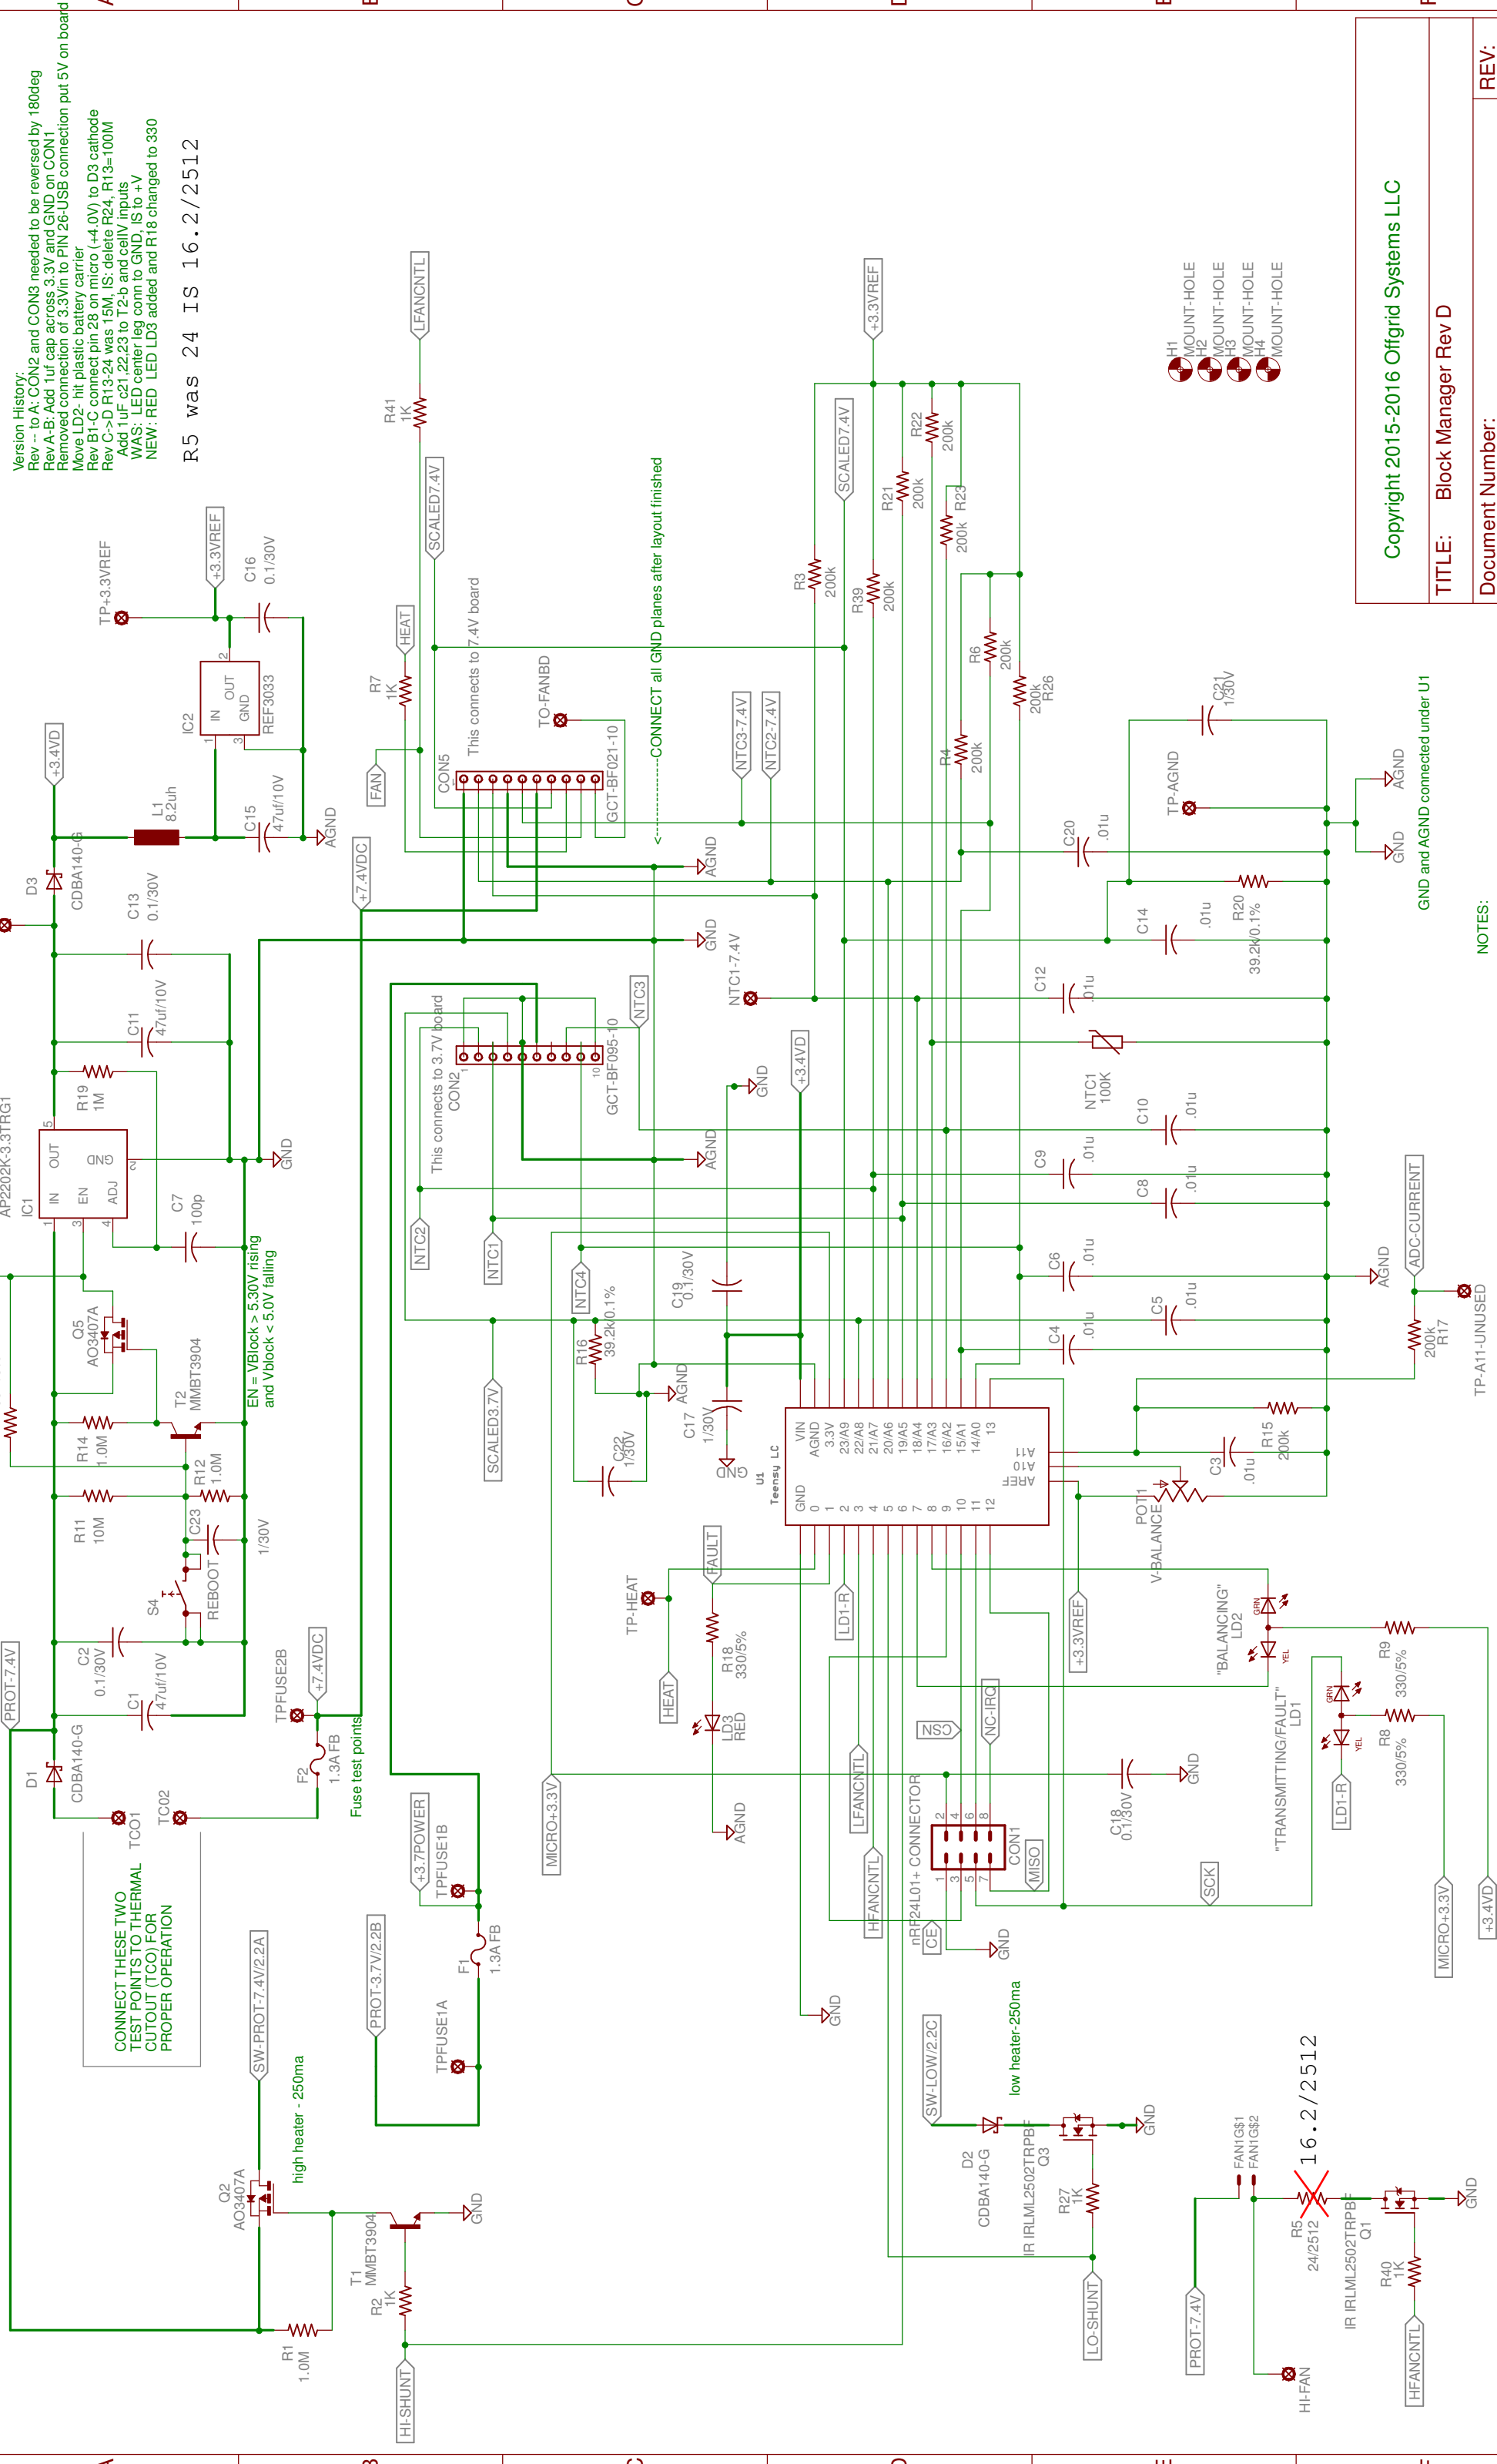

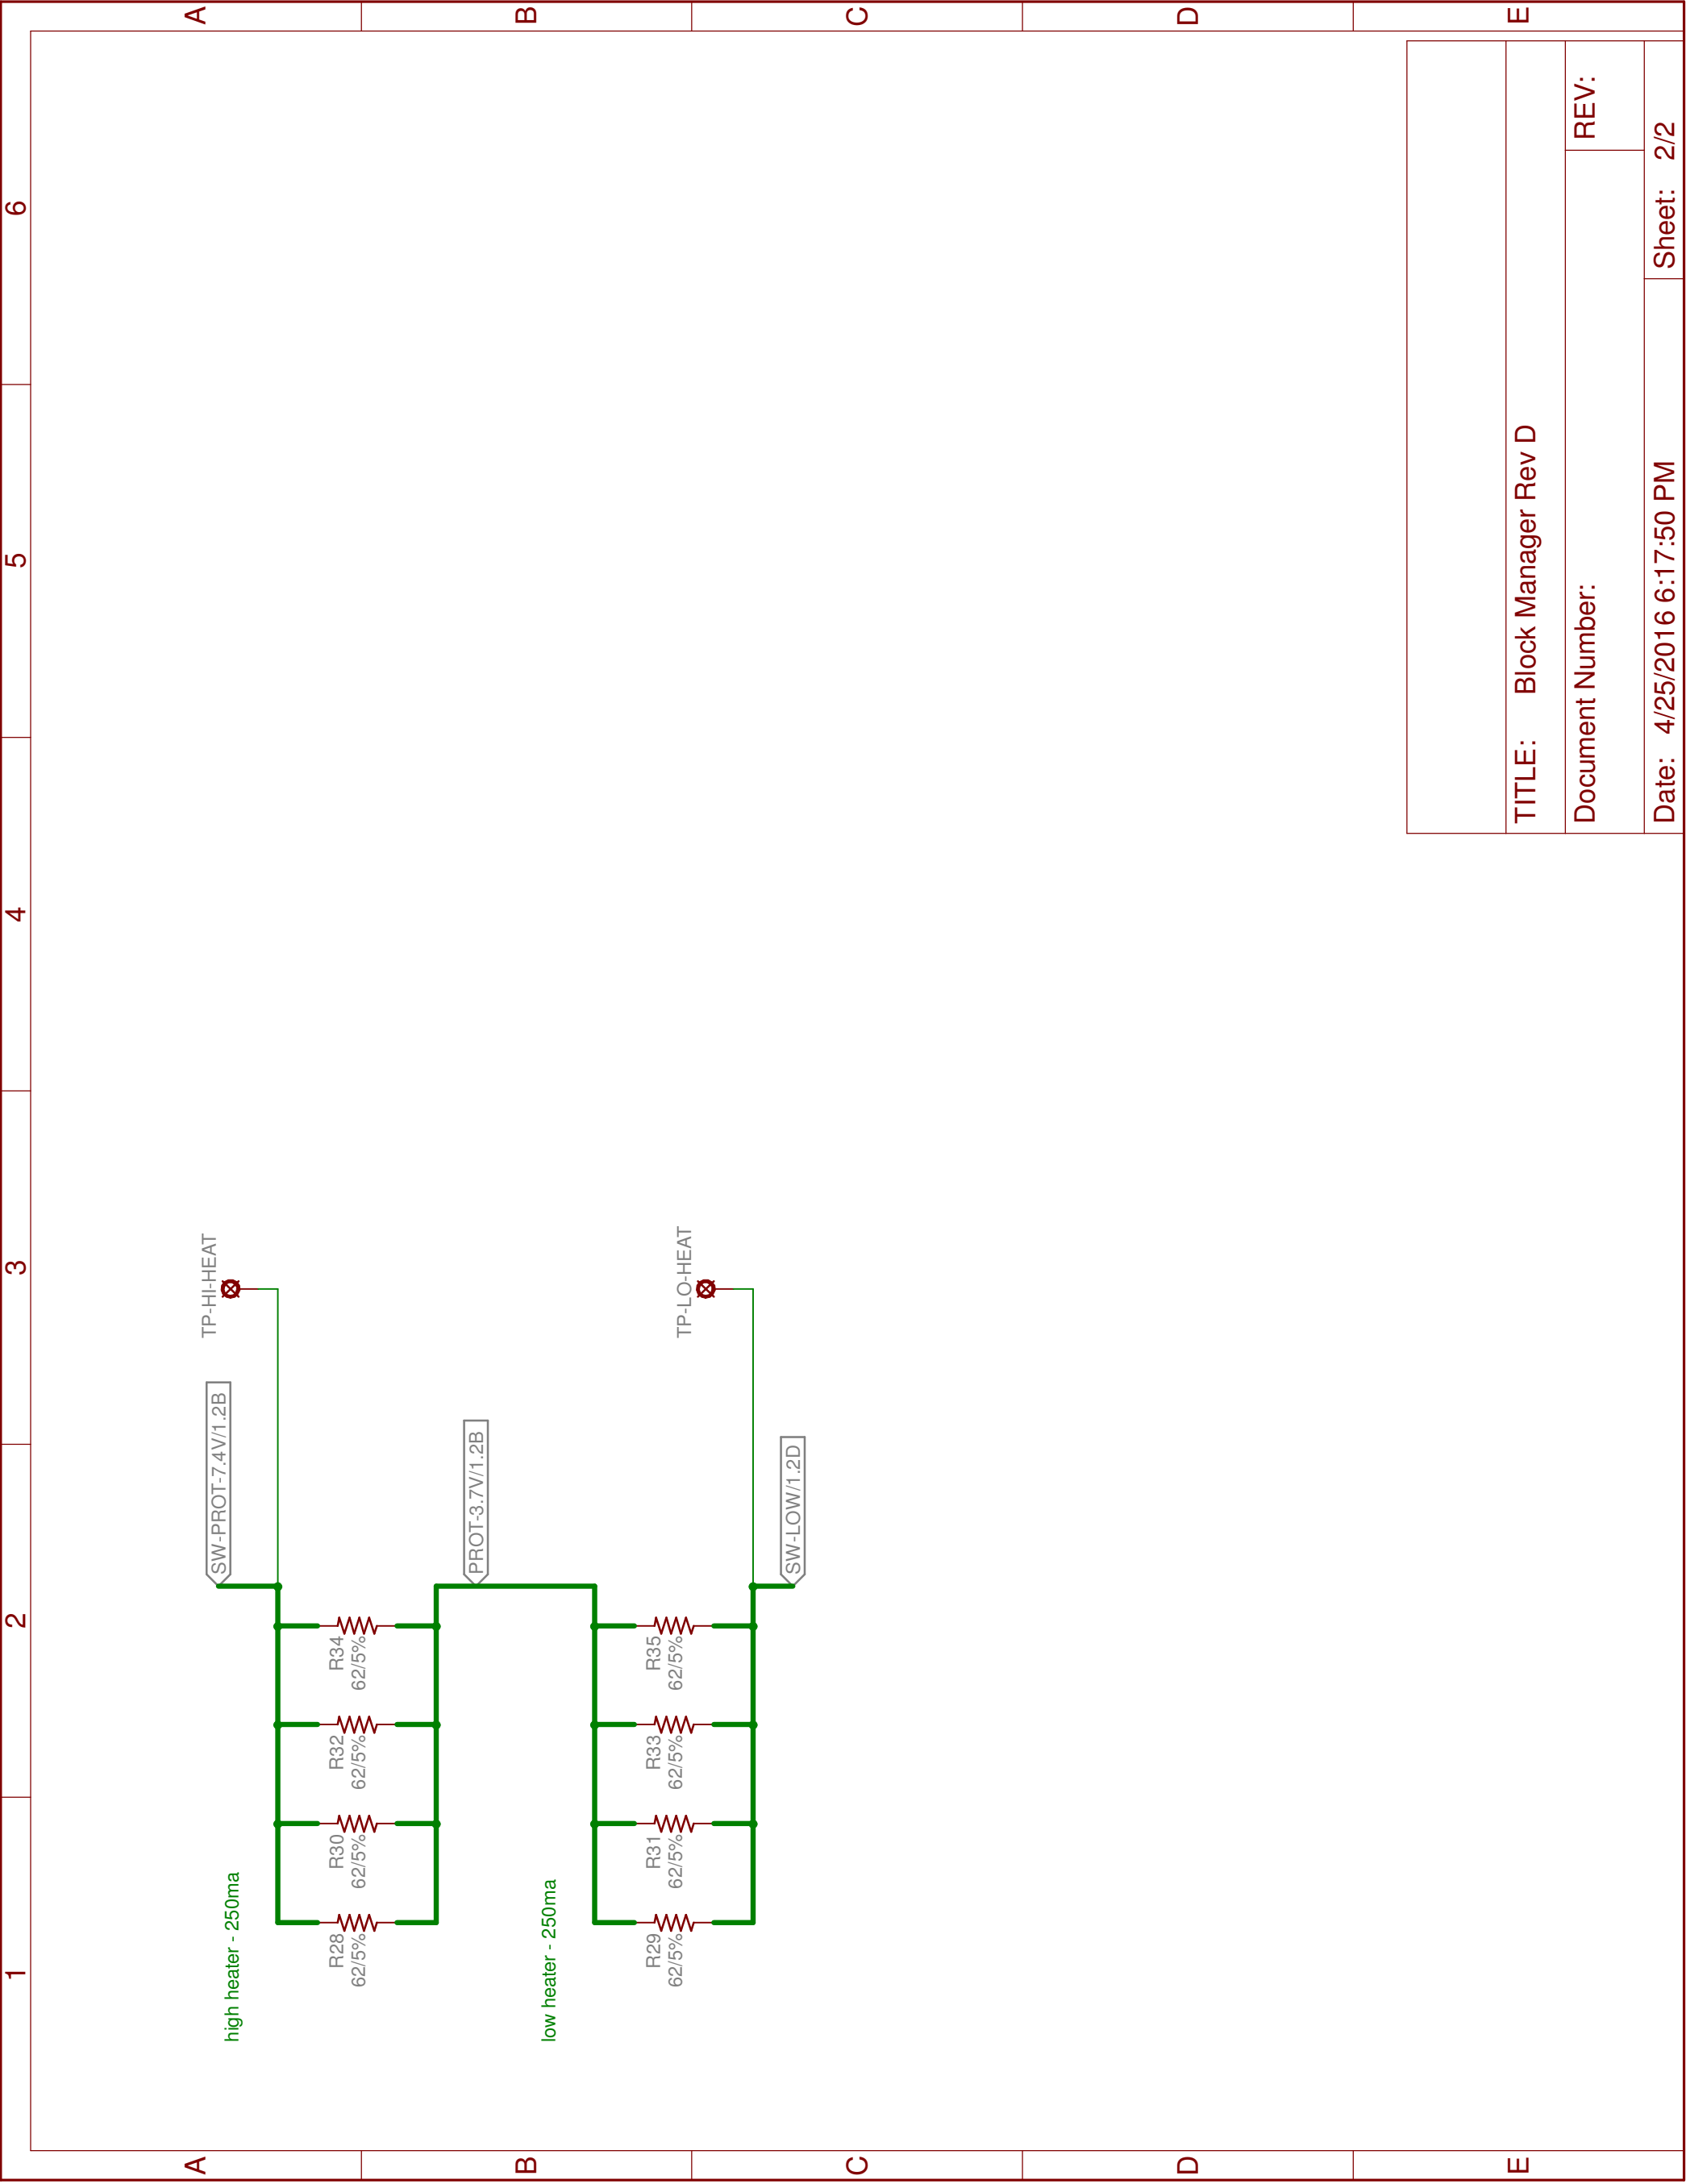

TITLE: Block Manager Rev D		
Document Number:	REV:	
	Sheet: 2/2	
Date: 4/25/2016 6:17:50 PM		