




This example circuit uses an I/O expander (MCP2317) connected via I2C interface with interrupt on change enabled. It could also be polled periodically for changes.

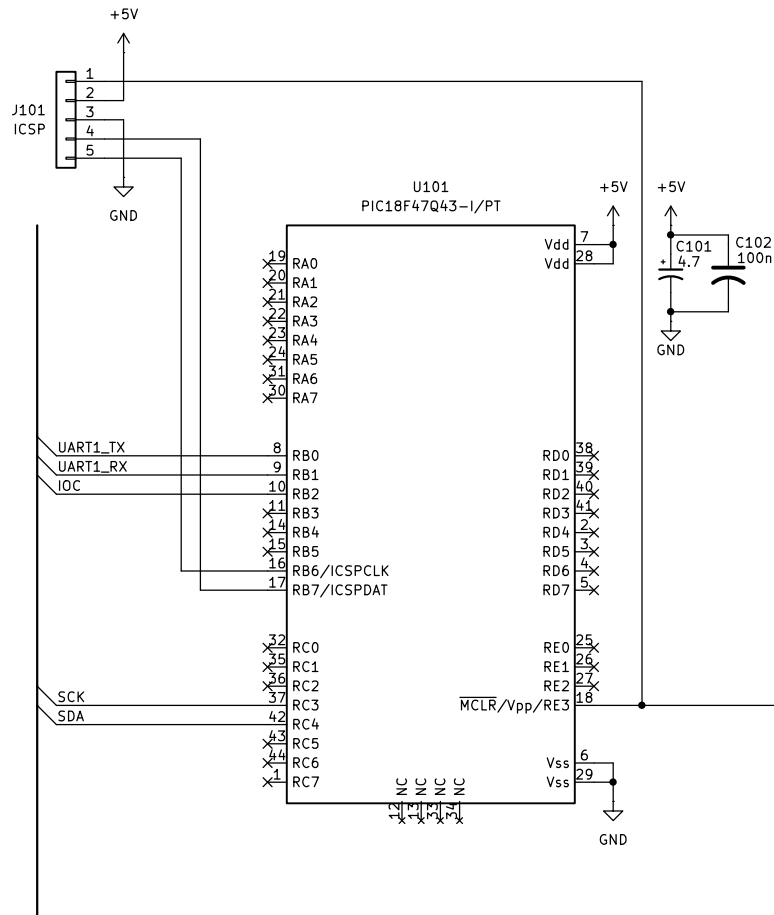