

# Unified State Feedback Control of a Hybrid Distribution Transformer using Particle Swarm Optimization Tuning

1<sup>st</sup> Dave Figueroa

*Institute of Control and Industrial Electronics*  
*Warsaw University of Technology*  
 Warsaw, Poland  
 email address or ORCID

2<sup>nd</sup> Jun Cheng

*Research Institute of Interdisciplinary Intelligent Science*  
*Ningbo University of Technology*  
 Ningbo, China  
 email address or ORCID

3<sup>rd</sup> Zhihong Zhao

*Research Institute of Interdisciplinary Intelligent Science*  
*Ningbo University of Technology*  
 Ningbo, China  
 email address or ORCID

4<sup>th</sup> Alvaro Carreno

*Institute of Control and Industrial Electronics*  
*Warsaw University of Technology*  
 Warsaw, Poland  
 email address or ORCID

5<sup>th</sup> Mariusz Malinowski

*Institute of Control and Industrial Electronics*  
*Warsaw University of Technology*  
 Warsaw, Poland  
 email address or ORCID

**Abstract**—Here will be the abstract of the paper.

**Index Terms**—hybrid distribution transformer, optimal control, particle swarm optimization

## I. INTRODUCTION

THE increasing penetration of renewable energy sources in the electrical grid has led to a significant rise in the use of power electronic converters. These converters are essential for integrating RES into the grid, as they facilitate the conversion of DC power generated by sources like solar panels and wind turbines into AC power compatible with the grid. However, the widespread use of power electronic converters has also introduced challenges related to power quality, such as the injection of harmonics and non-linear loads, which can lead to voltage distortions and other issues in the electrical grid.

One of the advantages of the HDT is its ability to compensate grid voltage disturbances, such as sags and swells, and to compensate the load current harmonics, in case of unbalanced loads. Moreover, since the HDT uses the DT, it provides galvanic isolation between primary and secondary sides and higher short-circuit current capability [1].

## II. MODEL OF THE HYBRID DISTRIBUTION TRANSFORMER

### A. Series Converter

The series converter dynamics are given by:

$$\begin{aligned} v_s^{abc} &= R_{fs} i_{fs}^{abc} + L_{fs} \frac{d i_{fs}^{abc}}{dt} + v_{cs}^{abc} \\ i_{fs}^{abc} &= C_{fs} \frac{d v_{cs}^{abc}}{dt} + i_g^{abc} \end{aligned} \quad (1)$$

where  $v_s^{abc}$  is the series converter output voltage,  $i_{fs}^{abc}$  is the series converter inductor current,  $v_{cs}^{abc}$  is the series converter output capacitor voltage, and  $i_g^{abc}$  is the grid current after the coupling transformer. The parameters  $R_{fs}$ ,  $L_{fs}$ , and  $C_{fs}$  are the series converter filter resistance, inductance, and capacitance respectively.

Leaving the states on the left side, and converting to  $\alpha\beta$  coordinates, the series converter model is given by:

$$\begin{aligned} \frac{d i_{fs}^{\alpha\beta}}{dt} &= -\frac{R_{fs}}{L_{fs}} i_{fs}^{\alpha\beta} - \frac{1}{L_{fs}} v_{cs}^{\alpha\beta} + \frac{1}{L_{fs}} v_s^{\alpha\beta} \\ \frac{d v_{cs}^{\alpha\beta}}{dt} &= -\frac{1}{C_{fs}} i_{fs}^{\alpha\beta} + \frac{1}{C_{fs}} i_g^{\alpha\beta} \end{aligned} \quad (2)$$

### B. Parallel Converter

The parallel converter dynamics are given by:

$$\begin{aligned} v_p^{abc} &= R_{fp} i_{fp}^{abc} + L_{fp} \frac{d i_{fp}^{abc}}{dt} + v_{cp}^{abc} \\ i_{fp}^{abc} &= C_{fp} \frac{d v_{cp}^{abc}}{dt} - i_Y^{abc} + i_L^{abc} \end{aligned} \quad (3)$$

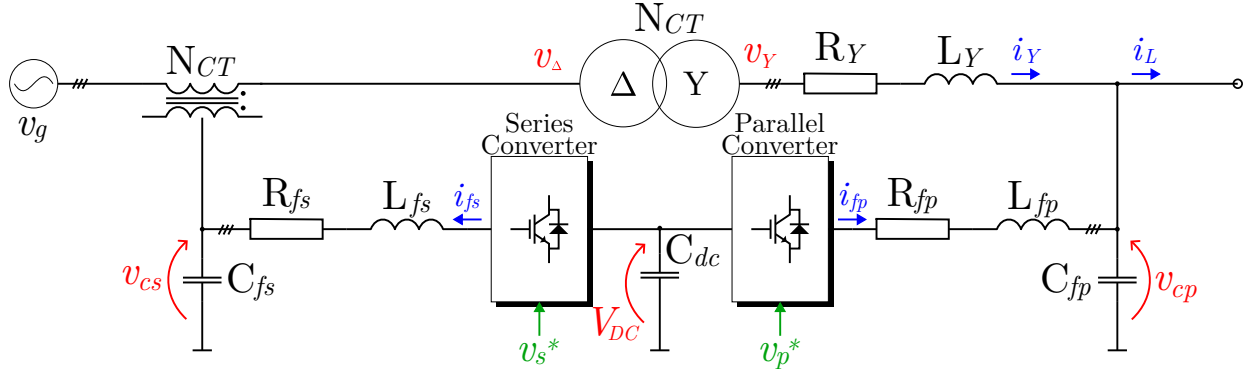


Fig. 1. Hybrid distribution transformer circuit diagram.

where  $v_p^{abc}$  is the parallel converter output voltage,  $i_{fp}^{abc}$  is the parallel converter inductor current,  $v_{cp}^{abc}$  is the parallel converter output capacitor voltage,  $i_Y^{abc}$  is the transformer Y side current, and  $i_L^{abc}$  is the load current. The parameters  $R_{fp}$ ,  $L_{fp}$ , and  $C_{fp}$  are the parallel converter filter resistance, inductance, and capacitance respectively.

Leaving the states on the left side, and converting to  $\alpha\beta$  coordinates, the series converter model is given by:

$$\begin{aligned} \frac{d i_{fp}^{\alpha\beta}}{dt} &= -\frac{R_{fp}}{L_{fp}} i_{fp}^{\alpha\beta} - \frac{1}{L_{fp}} v_{cp}^{\alpha\beta} + \frac{1}{L_{fp}} v_p^{\alpha\beta} \\ \frac{d v_{cp}^{\alpha\beta}}{dt} &= \frac{1}{C_{fp}} i_{fp}^{\alpha\beta} - \frac{1}{C_{fp}} i_Y^{\alpha\beta} + \frac{1}{C_{fp}} i_L^{\alpha\beta} \end{aligned} \quad (4)$$

### C. Distribution Transformer

The transformer is connected in  $\Delta - Y$  configuration, with the series converter (through the coupling transformer) connected to the  $\Delta$  side, and the parallel converter connected to the Y side. The Y side has its neutral point grounded. The transformer equations are given by:

$$\begin{aligned} v_{Ya} &= N_{LFT}(v_{\Delta a} - v_{\Delta b}) \\ v_{Yb} &= N_{LFT}(v_{\Delta b} - v_{\Delta c}) \\ v_{Yc} &= N_{LFT}(v_{\Delta c} - v_{\Delta a}) \end{aligned} \quad (5)$$

This can be expressed in matrix form as:

$$\begin{aligned} v_Y^{abc} &= N_{LFT} \underbrace{\begin{bmatrix} 1 & -1 & 0 \\ 0 & 1 & -1 \\ -1 & 0 & 1 \end{bmatrix}}_{K'_T} v_{\Delta}^{abc} \\ v_Y^{abc} &= N_{LFT} K'_T v_{\Delta}^{abc} \end{aligned} \quad (6)$$

In the other hand, the dynamics of the transformer are modeled as a series impedance referred to the Y side. These transformer equations are given by:

$$v_Y^{abc} = R_Y i_Y^{abc} + L_Y \frac{d i_Y^{abc}}{dt} + v_{cp}^{abc} \quad (7)$$

Assuming that there is no zero-sequence current, and using the expression given in (6), the transformer model can be expressed in  $\alpha\beta$  coordinates as:

$$\frac{d i_Y^{\alpha\beta}}{dt} = -\frac{R_Y}{L_Y} i_Y^{\alpha\beta} - \frac{1}{L_Y} v_{cp}^{\alpha\beta} + \frac{1}{L_Y} N_{LFT} K'_T v_{\Delta}^{\alpha\beta} \quad (8)$$

### D. Overall HDT Model

The overall HDT model can be expressed in state-space form as:

$$\begin{aligned} \frac{d}{dt} \begin{bmatrix} x_s \\ x_p \end{bmatrix} &= \underbrace{\begin{bmatrix} \mathbf{A}_s & \mathbf{P}_{ig} \mathbf{M}_p \\ \mathbf{P}_{vc} \mathbf{M}_s & \mathbf{A}_p \end{bmatrix}}_{\mathbf{A}} \underbrace{\begin{bmatrix} x_s \\ x_p \end{bmatrix}}_x + \underbrace{\begin{bmatrix} \mathbf{B}_s & \mathbf{0} \\ \mathbf{0} & \mathbf{B}_p \end{bmatrix}}_{\mathbf{B}} \underbrace{\begin{bmatrix} u_s \\ u_p \end{bmatrix}}_u \\ &+ \underbrace{\begin{bmatrix} \mathbf{0} \\ \mathbf{P}_{vg} \end{bmatrix}}_{\mathbf{P}_{vg}} v_g + \underbrace{\begin{bmatrix} \mathbf{0} \\ \mathbf{P}_{iL} \end{bmatrix}}_{\mathbf{P}_{iL}} i_L \end{aligned} \quad (9)$$

where the matrices  $\mathbf{M}_p = \begin{bmatrix} \mathbf{0} & \mathbf{I} & \mathbf{0} \end{bmatrix}$  and  $\mathbf{M}_s = \begin{bmatrix} \mathbf{0} & \mathbf{I} \end{bmatrix}$  are used to select the appropriate states from the parallel and series converter state vectors respectively.

The last can be expressed in a more compact form as:

$$\begin{aligned} \frac{d x(t)}{dt} &= \mathbf{A} x(t) + \mathbf{B} u(t) + \mathbf{P}_{vg} v_g(t) + \mathbf{P}_{iL} i_L(t) \\ y(t) &= \mathbf{C} x(t) \end{aligned} \quad (10)$$

with the states  $x(t) = \begin{bmatrix} i_{fs}^{\alpha\beta} & v_{cs}^{\alpha\beta} & i_{fp}^{\alpha\beta} & i_Y^{\alpha\beta} & v_{cp}^{\alpha\beta} \end{bmatrix}^T$ , input  $u(t) = \begin{bmatrix} v_s^{\alpha\beta} & v_p^{\alpha\beta} \end{bmatrix}^T$ , and output  $y(t) = \begin{bmatrix} i_{fs}^{\alpha\beta} & v_{cs}^{\alpha\beta} & i_{fp}^{\alpha\beta} & i_Y^{\alpha\beta} & v_{cp}^{\alpha\beta} \end{bmatrix}^T$ .

The HDT system is discretized using a zero-order hold with a sampling time of  $T_s = 5 \mu s$ . The discrete-time state-space model is given by:

$$\begin{aligned} x[k+1] &= \mathbf{A}_d x[k] + \mathbf{B}_d u[k] + \mathbf{P}_{vg,d} v_g[k] + \mathbf{P}_{iL,d} i_L[k] \\ y[k] &= \mathbf{C} x[k] \end{aligned} \quad (11)$$

where  $\mathbf{A}_d = e^{\mathbf{A} T_s}$ ,  $\mathbf{B}_d = \int_0^{T_s} e^{\mathbf{A} \tau} d\tau \mathbf{B}$ ,  $\mathbf{P}_{vg,d} = \int_0^{T_s} e^{\mathbf{A} \tau} d\tau \mathbf{P}_{vg}$ ,  $\mathbf{P}_{iL,d} = \int_0^{T_s} e^{\mathbf{A} \tau} d\tau \mathbf{P}_{iL}$ , and  $\mathbf{C} = \mathbb{I}$ .

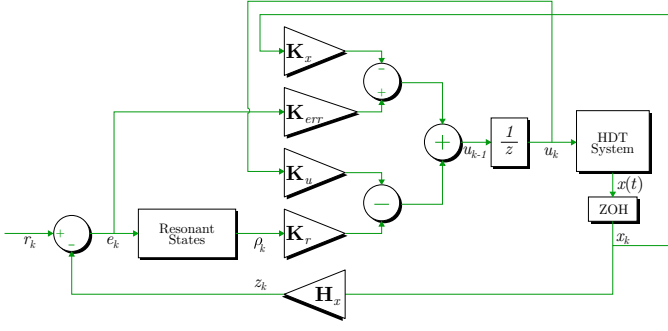


Fig. 2. Block diagram of the proposed control strategy for the HDT.

Since the HDT is designed to have a one-sampling period delay in the control loop, the discrete-time model can be expressed as:

$$x[k+1] = \begin{bmatrix} \mathbf{A}_d & \mathbf{B}_d \\ \mathbf{0} & \mathbf{0} \end{bmatrix} \begin{bmatrix} x[k] \\ u[k-1] \end{bmatrix} + \begin{bmatrix} \mathbf{0} \\ \mathbf{I} \end{bmatrix} u[k] \quad (12)$$

### III. CONTROL STRATEGY

Since we have access to all of the states of the system, we can implement a state feedback control strategy. The control law is given by:

$$u_k = -\mathbf{K}_x x_k + \mathbf{K}_r \rho_k + \mathbf{K}_u u_{k-1} \quad (13)$$

where  $\mathbf{K}_x$  is the state feedback gain matrix,  $\mathbf{K}_r$  is the resonant states gain matrix and  $\mathbf{K}_u$  is the previous control input gain matrix.

The resonant states are included to ensure zero steady-state error for sinusoidal references and disturbances. The resonant states dynamics are given by:

$$\frac{d\rho(t)}{dt} = \underbrace{\begin{bmatrix} -\xi\omega & \omega \\ -\omega & \xi\omega \end{bmatrix}}_{\mathbf{A}_r} \rho(t) + \underbrace{\begin{bmatrix} 1 \\ 0 \end{bmatrix}}_{\mathbf{B}_r} e(t) \quad (14)$$

where  $\omega$  is the nominal angular frequency,  $\xi$  is the damping factor, and  $e(t)$  is the error signal defined as the difference between the reference and the measured output. Each of the references signals has two resonant states associated with it, meaning that for the HDT control, there are eight resonant states in total (4 for the  $ev_{cs,\alpha\beta}$  and 4 for the  $i_{fp,\alpha\beta}$ ). This can be expressed as:

$$\frac{d\rho(t)}{dt} = \text{blkdiag}(\mathbf{A}_r, \mathbf{A}_r, \mathbf{A}_r, \mathbf{A}_r) \rho(t) \quad (15)$$

$$+ \text{blkdiag}(\mathbf{B}_r, \mathbf{B}_r, \mathbf{B}_r, \mathbf{B}_r) e(t) \quad (16)$$

The augmented state-space model of the HDT can be expressed as:

$$\begin{aligned} \frac{d}{dt} \begin{bmatrix} x \\ \rho \end{bmatrix} &= \begin{bmatrix} \mathbf{A} & \mathbf{0} \\ \mathbf{B}_r \mathbf{H} & \mathbf{A}_r \end{bmatrix} \begin{bmatrix} x \\ \rho \end{bmatrix} + \begin{bmatrix} \mathbf{B}_{d,\text{aug}} \\ \mathbf{0} \end{bmatrix} \begin{bmatrix} u \\ e \end{bmatrix} \\ y &= [\mathbf{C} \quad \mathbf{0}] \begin{bmatrix} x \\ \rho \end{bmatrix} \end{aligned} \quad (17)$$

### A. Particle Swarm Optimization

The PSO algorithm is a population-based optimization technique inspired by the social behavior of birds and fish. It consists of a swarm of particles, where each particle represents a potential solution to the optimization problem. The particles move through the search space, updating their positions based on their own experience and the experience of their neighbors. The velocity and position of each particle are updated using the following equations:

$$v_j(i+1) = K_{ap} (v_j(i) + c_1 r_1 (pbest_j - x_j(i)) + c_2 r_2 (gbest - x_j(i))) \quad (18)$$

$$x_j(i+1) = x_j(i) + v_j(i+1)$$

where  $v_j(i)$  is the velocity of particle  $j$  at iteration  $i$ ,  $x_j(i)$  is the position of particle  $j$  at iteration  $i$ ,  $pbest_j$  is the best position found by particle  $j$ ,  $gbest$  is the best position found by the entire swarm,  $c_1$  and  $c_2$  are cognitive and social acceleration coefficients,  $r_1$  and  $r_2$  are random numbers uniformly distributed in the range  $[0, 1]$ , and  $K_{ap}$  is the constriction factor given by:

$$K_{ap} = \frac{2}{\left| 2 - \phi - \sqrt{\phi^2 - 4\phi} \right|} \quad (19)$$

where  $\phi = c_1 + c_2 > 4$  is a constant that ensures convergence.

The PSO algorithm iteratively updates the positions and velocities of the particles until a stopping criterion is met, such as a maximum number of iterations or a satisfactory solution. The best position found by the swarm is considered the optimal solution to the optimization problem.

### IV. SIMULATION RESULTS

In this section, the simulation results of the proposed control strategy are presented. The simulations are performed using MATLAB/Simulink, and the system parameters are listed in Table I. The proposed control strategy is tested under various grid and load disturbances, including grid voltage unbalanced swell, load impact, and unbalanced load.

TABLE I  
SYSTEM PARAMETERS

Parameter	Variable	Value
Grid Voltage	$V_g$	10 kV
Grid Frequency	$f_e$	50 Hz
Transformers Power Rating	$S$	1 kVA
DC Link Voltage	$V_{DC}$	400 V
Series Converter Filter Inductance	$L_{fs}$	2 mH
Series Converter Filter Capacitance	$C_{fs}$	20 $\mu$ F
Parallel Converter Filter Inductance	$L_{fp}$	2 mH
Parallel Converter Filter Capacitance	$C_{fp}$	20 $\mu$ F
Transformer Dispersion Inductance	$L_Y$	0.1 mH
Transformer Series Resistance	$R_Y$	50 $\Omega$
Coupling Transformer Turns Ratio	$N_{ct}$	2.5
Distribution Transformer Turns Ratio	$N_{DT}$	$a$
Converters Switching Frequency	$f_{sw}$	20 kHz
Control Sampling Time	$T_s$	5 $\mu$ s

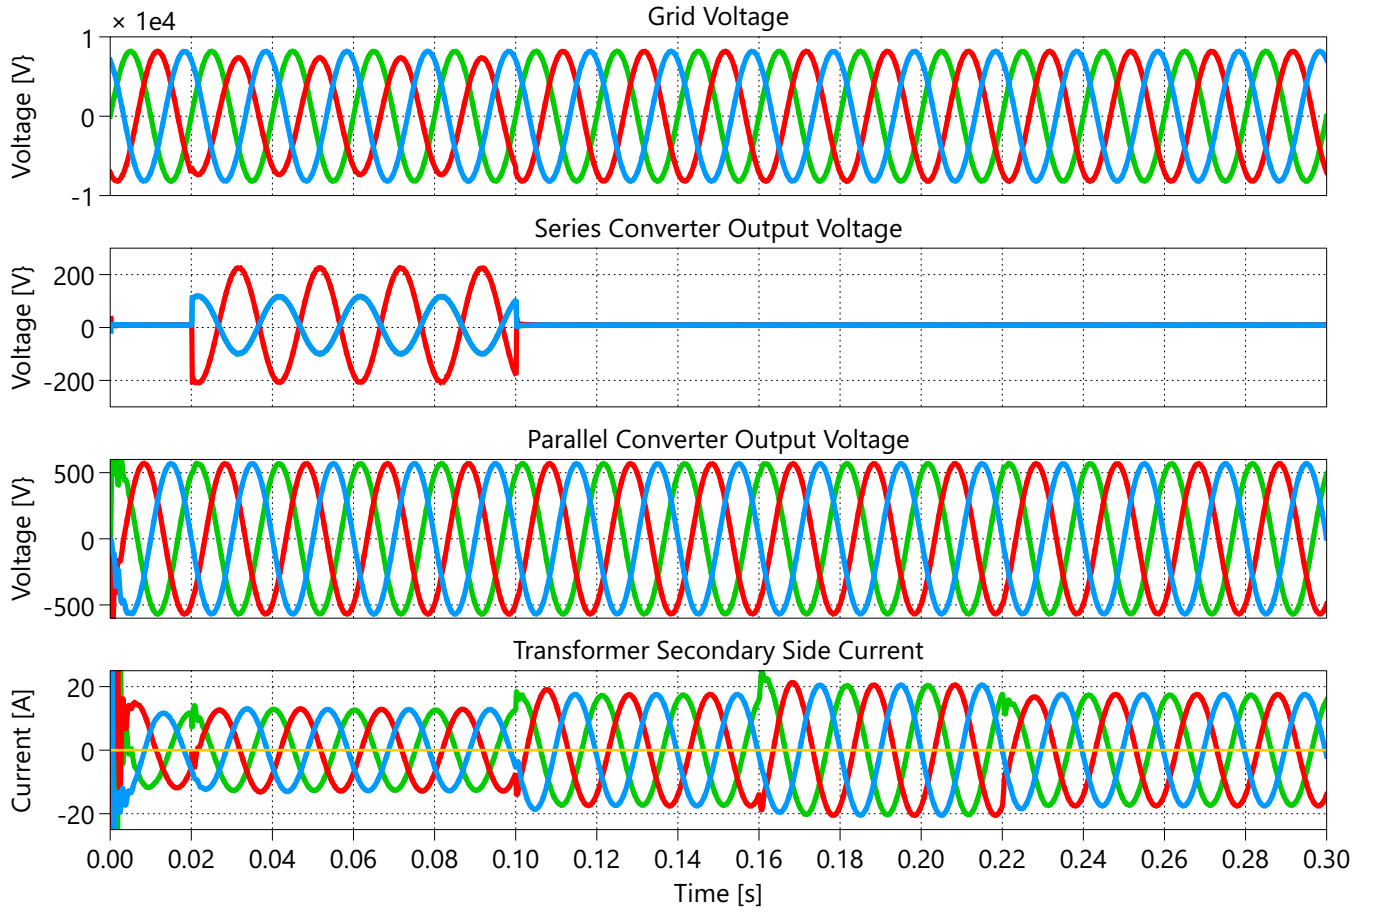


Fig. 3. Simulation results for the proposed control strategy under grid and load disturbances.

#### A. Grid Voltage Unbalanced Swell Compensation

The simulation results for the proposed control strategy under grid voltage unbalanced swell are shown in Fig. 3. The grid voltage swell occurs at  $t = 0.02$  s and lasts for 0.08 s. The proposed control strategy effectively compensates for the voltage swell, maintaining a balanced load current.

#### B. Load Impact and Unbalanced Load Compensation

In the other hand, a load unbalance is applied at  $t = 0.1$  s and lasts for 0.06 s. Then, an unbalanced load is applied at  $t = 0.16$  s and lasts for 0.06 s. The proposed control strategy effectively compensates for the load unbalance, meaning that the parallel inverter injects the necessary current to maintain a balanced load current, as shown in Fig. 4.

### V. CONCLUSIONS

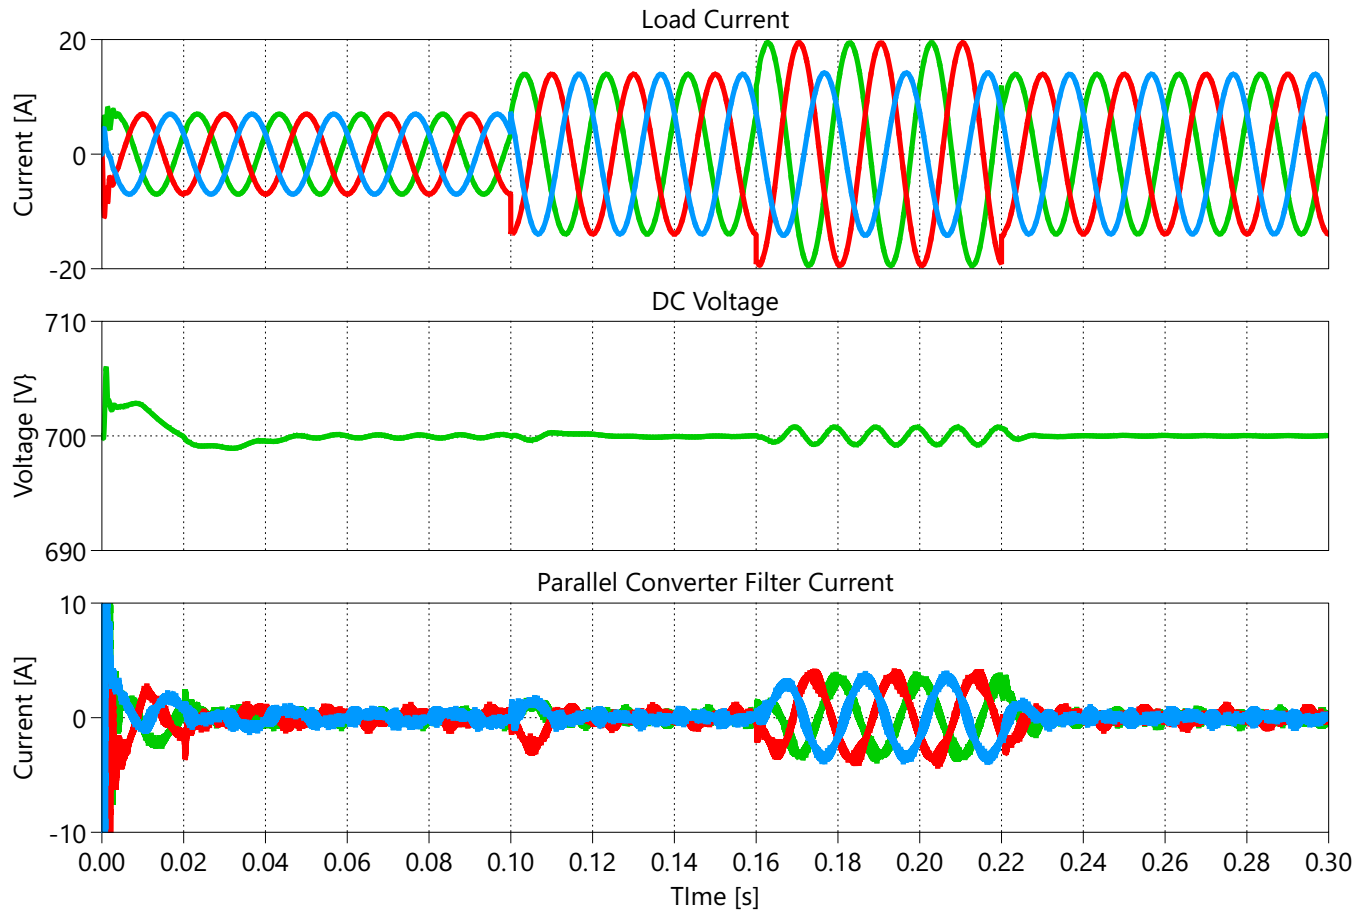


Fig. 4. Simulation results for the proposed control strategy under grid and load disturbances.

## REFERENCES

- [1] A. Carreno, M. Malinowski, and M. A. Perez, "Circulating Active Power Flow and DC-Link Voltage Ripple in Hybrid Transformers," in *IECON 2023- 49th Annual Conference of the IEEE Industrial Electronics Society*. Singapore, Singapore: IEEE, Oct. 2023, pp. 1–6.