

MujocoROS2Control: Seamless MuJoCo Integration with ROS 2 for Robot Simulation and Control

Adrian Danzglock^{1,2}, Vamsi Krishna Origanti¹, and Frank Kirchner^{1,2}

¹ Robotics Innovation Center, German Research Center for Artificial Intelligence (DFKI), Bremen, Germany ² Universität Bremen, Bremen, Germany

DOI:

Software

- [Review](#) ↗
- [Repository](#) ↗
- [Archive](#) ↗

Editor: ↗

Submitted:
Published:

License

Authors of papers retain copyright and release the work under a Creative Commons Attribution 4.0 International License ([CC BY 4.0](#)).

Summary

The `MujocoROS2Control` hardware interface enables seamless integration between MuJoCo (Todorov, Erez, and Tassa 2012), a high-performance physics engine, and ROS 2 (ROS-Controls Team 2024a), a widely adopted middleware for robotic systems. This interface provides an efficient solution for simulating and controlling robots using MuJoCo's physics capabilities within the ROS 2 ecosystem.

To support ROS-based workflows, we developed a dedicated URDF-to-MJCF conversion script. This tool translates URDF models into MJCF (MuJoCo XML format), preserving kinematic and dynamic properties and allowing custom MuJoCo-specific parameters such as sensors, actuators, and collision definitions to be specified directly in the URDF. This conversion ensures compatibility and adaptability for simulation.

`MujocoROS2Control` bridges the gap between ROS 2 and MuJoCo, offering a streamlined workflow for simulation, controller testing, and reinforcement learning.

Statement of Need

Developing and validating control algorithms for robotic systems often requires extensive testing, which on physical hardware can be expensive, time-consuming, and subject to wear. Accurate simulation environments are essential for safe and scalable development.

MuJoCo (Multi-Joint dynamics with Contact) is a fast and accurate physics engine designed for robotics, control, biomechanics, and reinforcement learning. It provides: - Precise multi-body dynamics with advanced numerical integration, - High-speed simulation for real-time control and machine learning, - Sophisticated contact modeling and soft constraint handling, - Flexible actuator models and comprehensive sensor support.

MuJoCo is ideal for reliable torque feedback due to its high-fidelity torque-controlled joints and smooth-contact soft constraint solver, which enables precise compliance behavior (Zhang et al. 2025).

Gazebo, on the other hand, typically relies on hard-constraint engines like ODE or Bullet, which struggle with compliant torque-based tasks unless carefully tuned. These engines often require smaller timesteps than MuJoCo to maintain stability (Team 2025).

Drake supports torque control, but due to its symbolic and rigid-body emphasis, tuning compliance can be computationally intensive (Tedrake and Drake Development Team 2019).

Table 1: Comparison of usability of different Simulators for usage with Compliant controllers

Controller Type	MuJoCo	Gazebo/Ignition	Drake
Torque-based impedance	High-fidelity, fast, stable	Accurate but tuning required	Accurate, symbolic, slower than mujoco
Admittance with wrench input	Stable, smooth compliant	Plugin-lag, tuning required	precise, heavier computationally
Time-step flexibility	Larger stable steps (e.g. 2-5ms)	Smaller steps required (1ms)	Variable but slower dynamics

Despite these capabilities, MuJoCo lacks native support for ROS 2, limiting its adoption in modern robotic development pipelines. MujocoROS2Control addresses this gap, enabling users to simulate ROS 2-compatible robots in MuJoCo with minimal overhead.

Implementation

MujocoROS2Control integrates MuJoCo with the ros2_control framework. A key component is the URDF-to-MJCF converter, which maintains fixed joints (which MuJoCo typically collapses), allows sensor and actuator tags within URDFs, and generates MJCF files compatible with MuJoCo’s expectations.

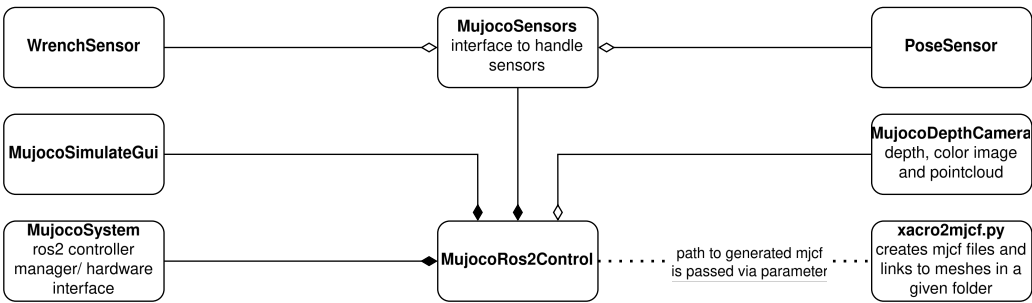


Figure 1: Overview of the MujocoRos2Control Structure

The interface supports: - Direct torque control, - PID-based position/velocity/acceleration control, - MuJoCo’s native actuator models.

Joint states and simulation time are published for synchronization with the ROS 2 system time (/clock). Sensors defined in the URDF (force-torque, IMU, pose, RGB-D camera) are exposed as individual ROS nodes using realtime_tools (ROS-Controls Team 2024b) to maintain real-time performance.

Use Cases

MujocoRos2Control was utilized for testing and validating various torque and admittance controllers within the scope of the HARTU project (“HARTU Project,” n.d.). The software also played a key role in conducting experiments for the publication “Look-Ahead Optimization for Managing Nullspace in Cartesian Impedance Control of Dual-Arm Robots” (Origanti, Danzglock, and Kirchner 2025).

Our framework has been successfully employed to test components such as force-torque sensor gravity compensation, torque-based Cartesian controllers, and Dynamic Movement Primitives (DMP)-based skill reproduction (Fabisch 2024).

Examples

Franka FR3 with IndustRealKit Gears

This example integrates the Franka FR3 robot (FRANKA ROBOTICS 2024) with high-resolution gear models from the IndustRealKit (Tang et al. 2023). MuJoCo actuators are used to generate joint torques, although the implemented PID control and torque control are also supported. For the high-resolution collision modeling, we use CoaCD (Wei et al. 2022) to create multiple convex hulls from complex mesh geometry. The URDF-to-MJCF converter automatically replaces original mesh files in the mjcf, when the converted files are in the same directory.

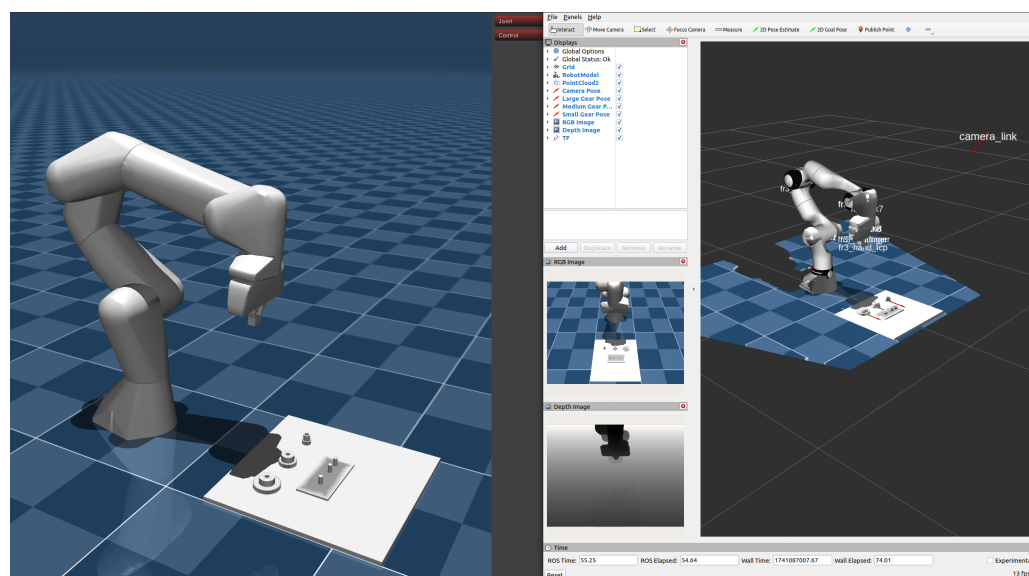


Figure 2: Franka FR3 controlled with ROS 2 Joint Trajectory Controller

IMRK System

In this example, we simulate the iMRK system developed at DFKI Bremen, consisting of two KUKA LBR iiwa 14 robots (Dennis Mronga 2025). A ROS2 Cartesian impedance controller (migrated version of (Mayr and Salt-Ducaju 2024)) is used for each arm. MuJoCo actuators manage the Robotiq 2F grippers, and force-torque sensors are simulated at both end-effectors.

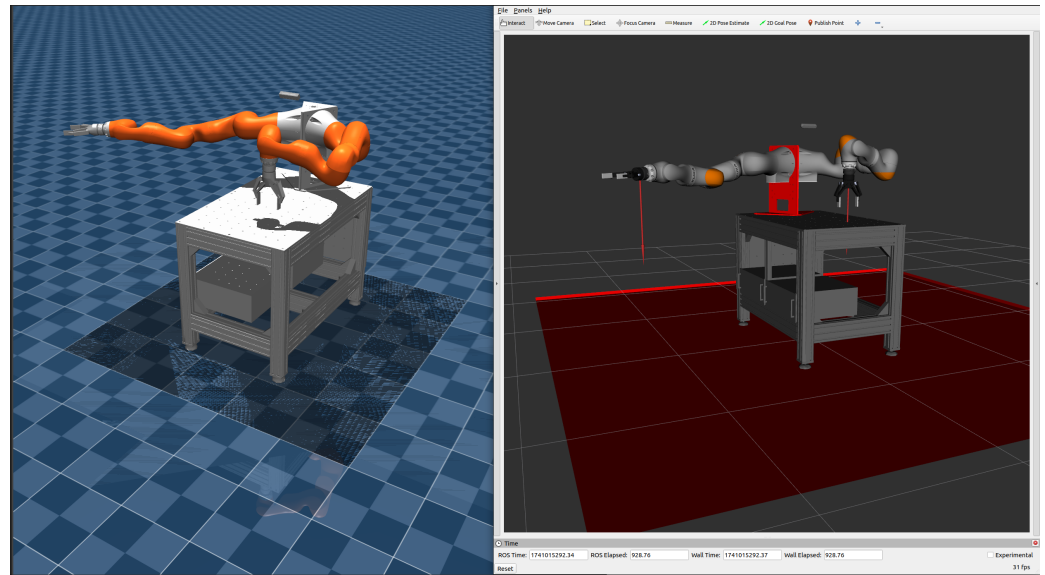


Figure 3: IMRK with Robotiq 2F Gripper and Robotiq FT300 Sensor

(Note: The IMRK robot description is internal and not included in the public examples.)

Conclusion

MujocoROS2Control enables high-fidelity robotic simulation by integrating MuJoCo with ROS 2. Through its robust conversion utilities, sensor bridging, and actuator support, it provides a reliable framework for control development, validation, and machine learning research.

Its lightweight design and fast simulation performance make it well-suited for force-based control, trajectory optimization, and reinforcement learning applications. Future enhancements may include support for additional sensor types, multi-robot coordination, and real-time closed-loop learning.

Acknowledgements

This library was initiated and developed at the Robotics Innovation Center, German Research Center for Artificial Intelligence (DFKI GmbH), Bremen, Germany, as part of the HARTU Project. This project received funding from the European Union's Horizon Europe research and innovation program under grant agreement No. 101092100.

References

- Dennis Mronga. 2025. "IMRK Dual-Arm Robot." <https://robotik.dfki-bremen.de/en/research/robot-systems/imrk/>.
- Fabisch, Alexander. 2024. *Journal of Open Source Software* 9 (97): 6695. <https://doi.org/10.21105/joss.06695>.
- FRANKA ROBOTICS. 2024. https://github.com/frankaemika/franka_description.
- "HARTU Project." n.d. <https://www.hartu-project.eu/>.

- Mayr, Matthias, and Julian M. Salt-Ducaju. 2024. "A C++ Implementation of a Cartesian Impedance Controller for Robotic Manipulators." *Journal of Open Source Software* 9 (93): 5194. <https://doi.org/10.21105/joss.05194>.
- Origanti, Vamsi Krishna, Adrian Danzglock, and Frank Kirchner. 2025. "Look Ahead Optimization for Managing Nullspace in Cartesian Impedance Control of Dual-Arm Robots." In *2025 IEEE/SICE International Symposium on System Integration (Sii)*, 990–97. <https://doi.org/10.1109/SII59315.2025.10871056>.
- ROS-Controls Team. 2024a. https://github.com/ros-controls/ros2_control.
- . 2024b. https://github.com/ros-controls/realtime_tools.
- Tang, Bingjie, Michael A Lin, Iretiayo Akinola, Ankur Handa, Gaurav S Sukhatme, Fabio Ramos, Dieter Fox, and Yashraj Narang. 2023. "IndustReal: Transferring Contact-Rich Assembly Tasks from Simulation to Reality." In *Robotics: Science and Systems*.
- Team, Gazebo Simulation. 2025. "Gazebo Physics Parameters." https://classic.gazebosim.org/tutorials?tut=physics_params&cat=physics.
- Tedrake, Russ, and the Drake Development Team. 2019. "Drake: Model-Based Design and Verification for Robotics." <https://drake.mit.edu>.
- Todorov, Emanuel, Tom Erez, and Yuval Tassa. 2012. "MuJoCo: A Physics Engine for Model-Based Control." In *2012 IEEE/Rsj International Conference on Intelligent Robots and Systems*, 5026–33. IEEE. <https://doi.org/10.1109/IROS.2012.6386109>.
- Wei, Xinyue, Minghua Liu, Zhan Ling, and Hao Su. 2022. "Approximate Convex Decomposition for 3d Meshes with Collision-Aware Concavity and Tree Search." *ACM Transactions on Graphics (TOG)* 41 (4): 1–18.
- Zhang, John Z., Taylor A. Howell, Zeji Yi, Chaoyi Pan, Guanya Shi, Guannan Qu, Tom Erez, Yuval Tassa, and Zachary Manchester. 2025. "Whole-Body Model-Predictive Control of Legged Robots with Mujoco." <https://arxiv.org/abs/2503.04613>.