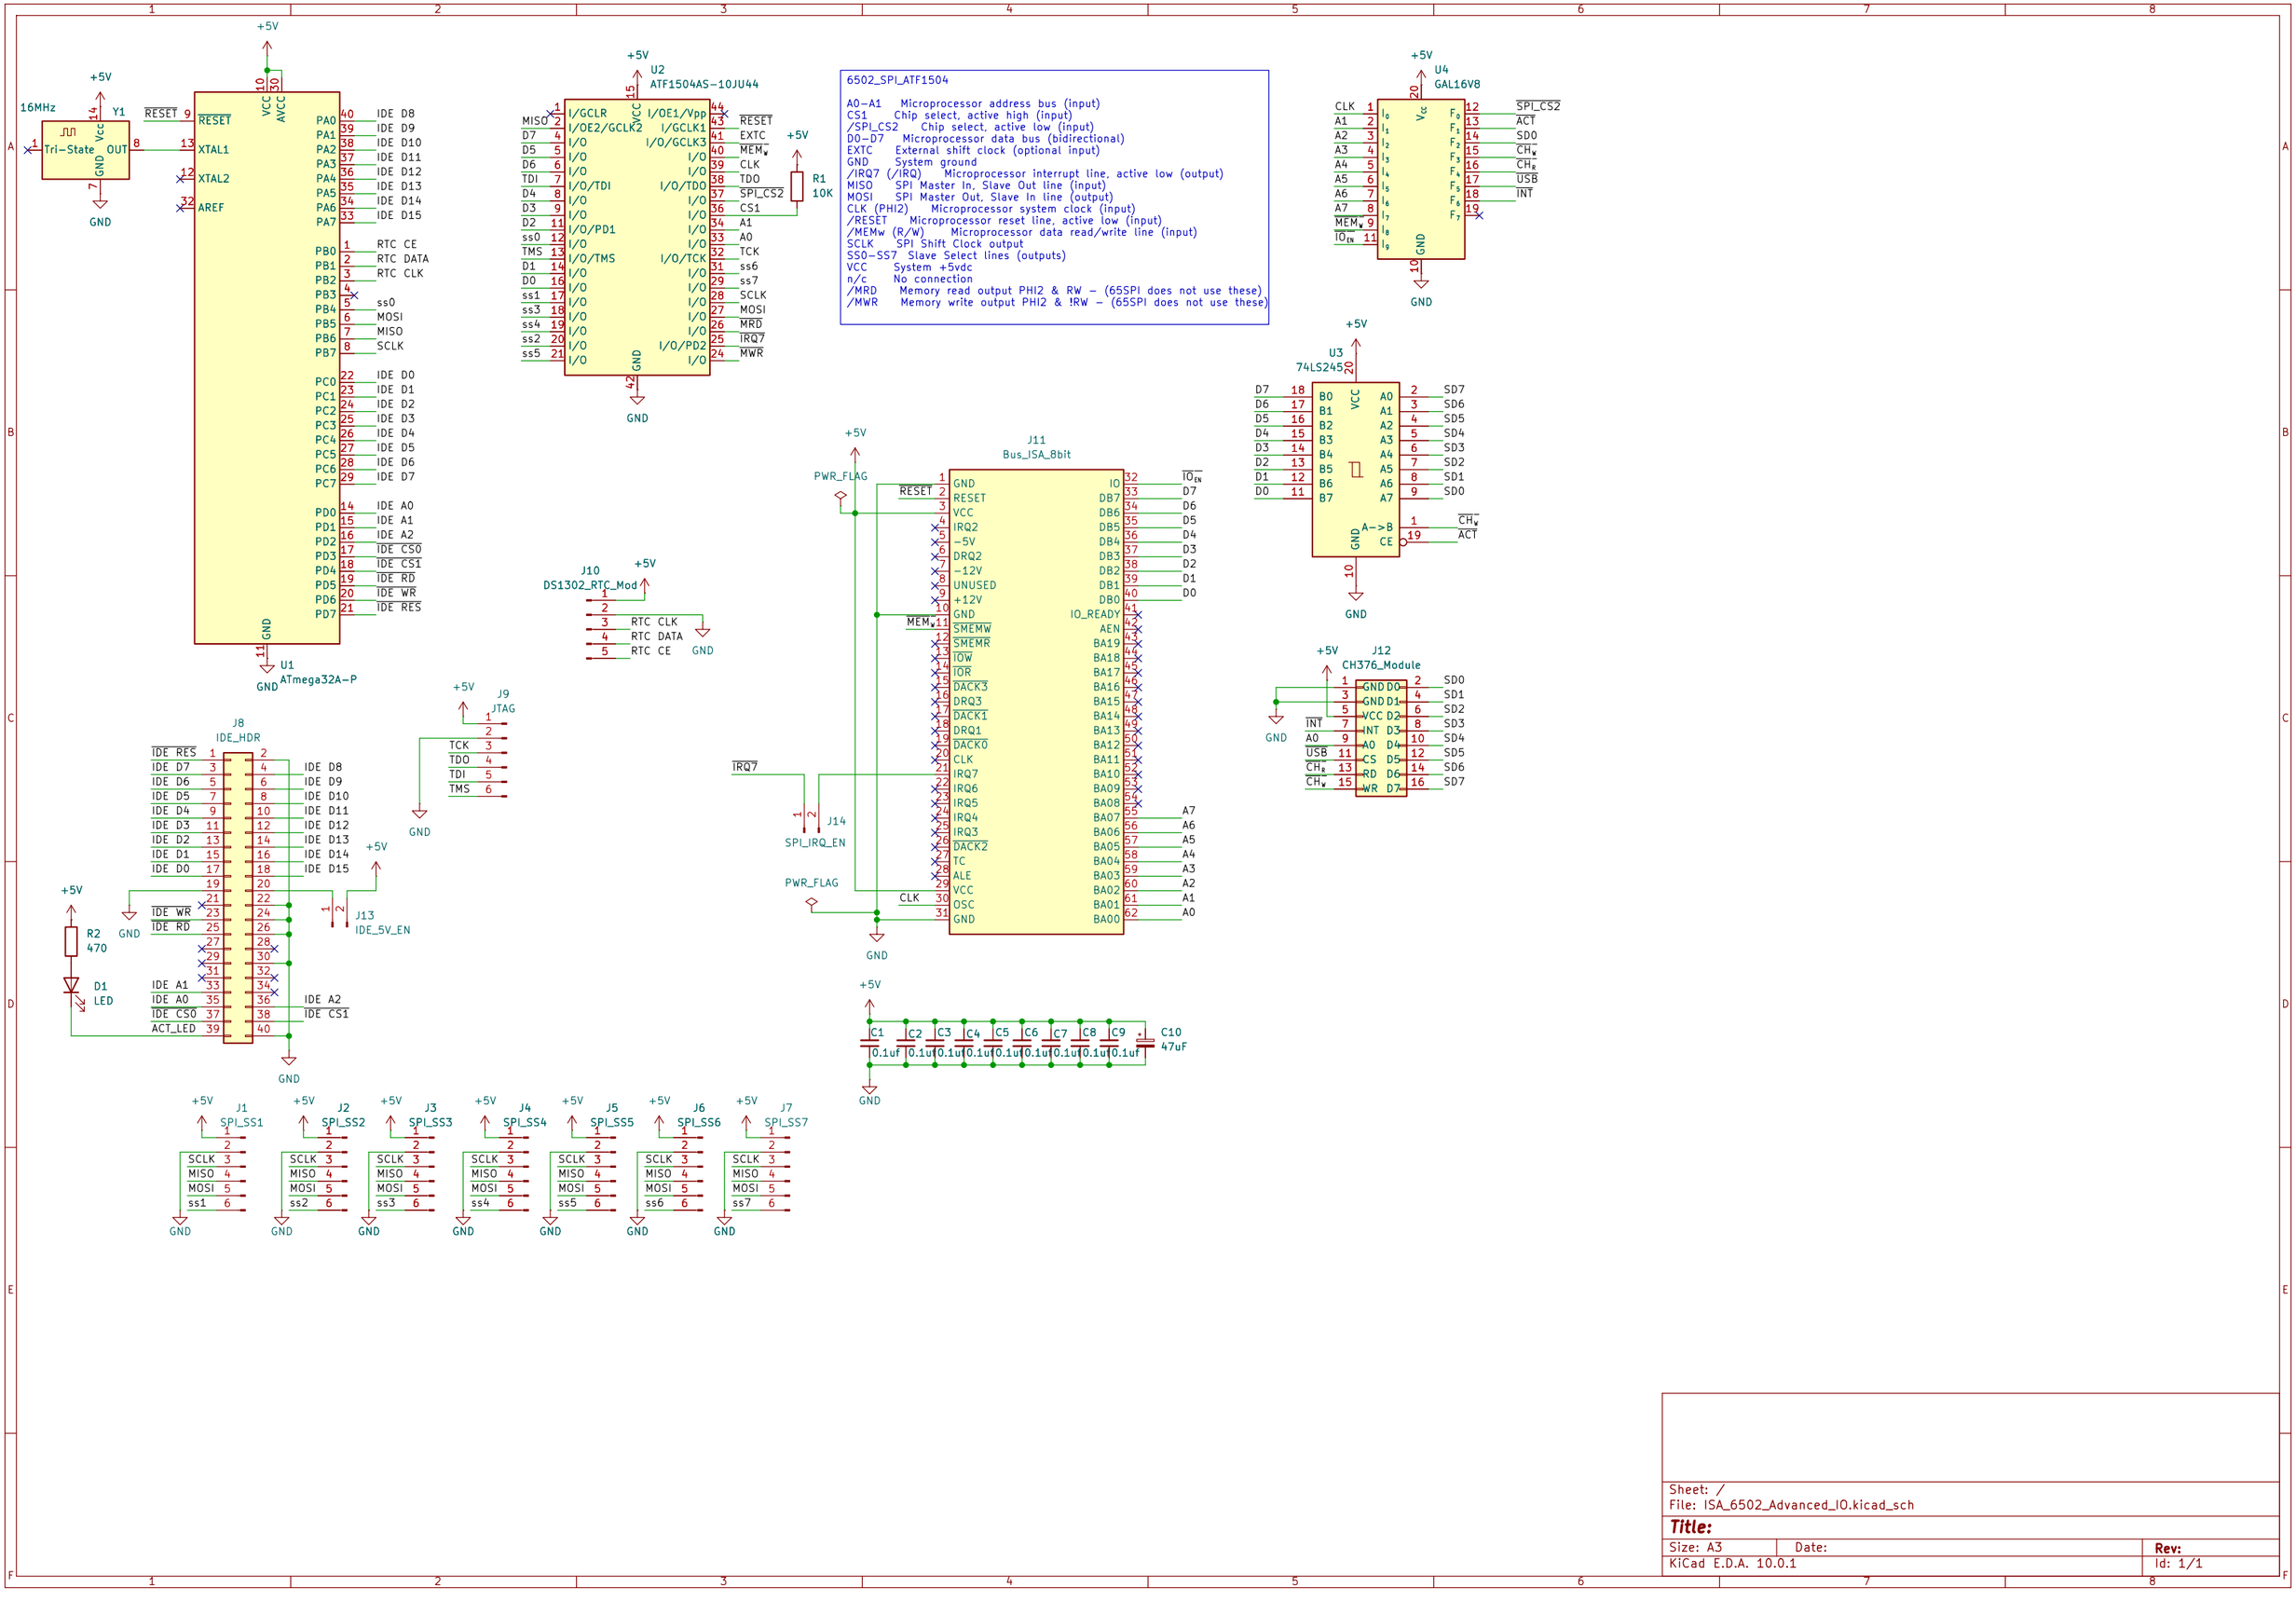

6502_SPI_ATF1504
A0–A1 Microprocessor address bus (input)
CS1 Chip select, active high (input)
/SPI_CS2 Chip select, active low (input)
D0–D7 Microprocessor data bus (bidirectional)
EXTC External shift clock (optional input)
GND System ground
/IRQ7 (/IRQ) Microprocessor interrupt line, active low (output)
MISO SPI Master In, Slave Out line (input)
MOSI SPI Master Out, Slave In line (output)
CLK (PHI2) Microprocessor system clock (input)
/RESET Microprocessor reset line, active low (input)
/MEMw (R/W) Microprocessor data read/write line (input)
SCLK SPI Shift Clock output
SS0–SS7 Slave Select lines (outputs)
VCC System +5vdc
n/c No connection
/MRD Memory read output PHI2 & RW – (65SPI does not use these)
/MWR Memory write output PHI2 & !RW – (65SPI does not use these)
U1 ATmega32A-P
U2 ATF1504AS-10JU44
U3 74LS245
U4 GAL16V8
U11 Bus_ISA_8bit
J8 IDE_HDR
J9 JTAG
J10 DS1302_RTC_Mod
J12 CH376_Module
J13 IDE_5V_EN
J14 SPI_IRQ_EN
J1 SPI_SS1
J2 SPI_SS2
J3 SPI_SS3
J4 SPI_SS4
J5 SPI_SS5
J6 SPI_SS6
J7 SPI_SS7
Y1 16MHz
R1 10K
R2 470
D1 LED
C1 C2 C3 C4 C5 C6 C7 C8 C9 0.1uF
C10 47uF
Sheet: /
File: ISA_6502_Advanced_IO.kicad_sch
Title:
Size: A3
Date:
Rev:
KiCad E.D.A. 10.0.1
Id: 1/1