

Silver Line

140100

Page 248

Coupling
Enlace Recto



141100

Page 249

Reducing Coupling



140200

Page 249

Male Adaptor
Enlace Mixto Rosca Macho



140300

Page 250

Female Adaptor
Enlace Mixto Rosca Hembra



141200

Page 250

End Plug
Tapón Final



140400

Page 251

90° Tee
Te de 90°



141400

Page 251

90° Tee with Threaded
Female Offtake
Te de 90° Compresión
Rosca Hembra



148400

Page 252

90° Tee with Threaded
Male Offtake
Te de 90° Compresión
Rosca Macho



143400

Page 252

90° Reducing Tee With
Irrifit Outlet
Te de 90° Reductor



140500

Page 253

90° Elbow
Codo de 90°



141500

Page 253

90° Elbow with Threaded
Female Offtake
Codo de 90° Compresión
Rosca Hembra



148500

Page 254

90° Elbow with Threaded
Male Offtake
Codo de 90° Compresión
Rosca Macho



146500

Page 254


Corner Elbow
Codo de Esquina



149300

Page 255

Reducing Set
Juego Reductor



1401M0

Page 255

Coupler Union Adaptor
Enlace Recto Con Racor



1498M0

Page 256

Union Adaptor
Adaptador A Rosca Macho



142500

Page 256

Threaded Adaptor
Adaptador Roscado



078901

Page 257

Threaded Male Adaptor
Adaptador Compresión
Rosca Macho



MECHANICAL FITTINGS

ELECTROFUSION FITTINGS

TOOLING

SERIES 1

SILVER LINE

148940

Page 257
Nut Threaded Adaptor
Tuerca para Adaptador de
Compresión



140040

Page 258
Nut
Racor



140030

Page 258
Split Ring - Polyacetal
Casquillo de Apriete (acetal)



070020

Page 259
O-Ring
Junta Tórica/Seiil



140050


Page 259
Insert
Inserto de PP



Coupling

140100

Enlace Recto

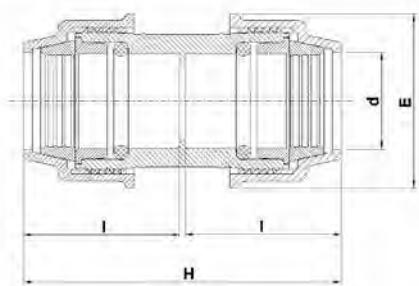


Product Code	Size d x d	E	H	I	UB	UC	W
140100016	16 x 16	39	105	50	10	400	50
140100020	20 x 20	42	90	44	10	500	40
140100025	25 x 25	50	98	48	10	300	60
140100032	32 x 32	61	114	56	10	160	100
140100040	40 x 40	73	127	62	—	100	150
140100050	50 x 50	92	146	71	—	60	250
140100063	63 x 63	106	167	82	—	40	400

Reducing Coupling

141100

Enlace Recto Reductor

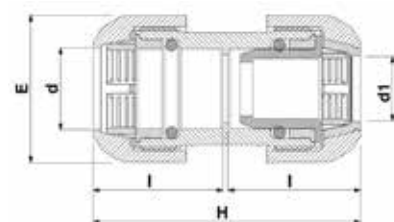


Product Code	Size d x d	E	H	I	UB	UC	W
141100025020	25x20	50	98	48	10	240	70
141100032020	32x20	61	114	56	10	160	120
141100032025	32x25	61	114	56	10	160	120
141100040025	40x25	73	127	62	—	120	200
141100040032	40x32	73	127	62	—	120	180
141100050025	50x25	92	146	71	—	60	340
141100050032	50x32	92	146	71	—	60	340
141100050040	50x40	92	146	71	—	60	330
141100063025	63x25	106	167	82	—	40	520
141100063032	63x32	106	167	82	—	40	510
141100063040	63x40	106	167	82	—	40	510
141100063050	63x50	106	167	82	—	40	420

Male Adaptor

140200

Enlace Mixto Rosca Macho




Product Code	Size d x R	E	H	I	I2	UB	UC	W
140200016003	16 x 3/8"	32	73	59	13	10	500	30
140200016005	16 x 1/2"	39	79	59	16	10	500	30
140200016007	16 x 3/4"	39	80	59	17	10	500	30
140200020005	20 x 1/2"	42	71	50	17	10	600	20
140200020007	20 x 3/4"	42	71	50	18	10	600	20
140200020010	20 x 1"	50	77	50	20	10	480	40
140200025005	25 x 1/2"	50	75	54	17	10	480	30
140200025007	25 x 3/4"	50	75	54	17	10	480	40
140200025010	25 x 1"	50	77	50	18	10	480	40
140200032007	32 x 3/4"	61	82	66	20	10	280	60
140200032010	32 x 1"	61	84	60	18	10	280	60
140200032013	32 x 1 1/4"	61	86	58	20	10	280	70
140200032015	32 x 1 1/2"	73	98	73	22	—	150	130
140200040010	40 x 1"	73	97	73	22	—	150	90
140200040013	40 x 1 1/4"	73	99	73	20	—	150	90
140200040015	40 x 1 1/2"	73	98	73	22	—	150	100
140200040020	40 x 2"	92	110	80	26	—	100	220
140200050015	50 x 1 1/2"	92	107	80	22	—	100	150
140200050020	50 x 2"	92	110	90	26	—	100	150
140200063020	63 x 2"	106	120	99	26	—	60	270

Female Adaptor

140300

Enlace Mixto Rosca Hembra

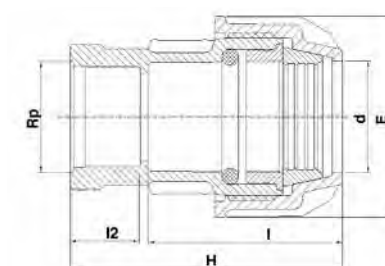


Product Code	Size d x Rp	E	H	I	I2	UB	UC	W
140300016005	16 x 1/2"	39	77	55	19	10	500	40
140300016007	16 x 3/4"	39	79	56	19	10	500	40
140300020005	20 x 1/2"	42	71	51	18	10	600	30
140300020007	20 x 3/4"	42	72	51	19	10	600	30
140300020010	20 x 1"	50	80	54	21	10	300	30
140300025007	25 x 3/4"	50	75	54	19	10	400	40
140300025010	25 x 1"	50	80	54	21	10	400	40
140300032007	32 x 3/4"	61	82	61	19	10	280	60
140300032010	32 x 1"	61	84	61	21	10	230	60
140300032013	32 x 1 1/4"	73	101	73	25	5	150	70
140300032015	32 x 1 1/2"	73	101	73	25	—	150	120
140300040010	40 x 1"	73	97	73	21	—	150	100
140300040013	40 x 1 1/4"	73	101	73	25	—	150	110
140300040015	40 x 1 1/2"	73	101	73	25	—	150	120
140300050015	50 x 1 1/2"	92	107	82	25	—	90	170
140300050020	50 x 2"	92	112	82	30	—	90	190
140300063020	63 x 2"	106	119	86	30	—	60	260

End Plug

141200

Tapón Final




Product Code	Size d	E	H	I	UB	UC	W
141200025	25	50	59	48	10	520	30
141200032	32	61	67	54	10	330	53
141200040	40	73	80	67	—	180	80
141200050	50	92	93	71	—	100	54
141200063	63	105	112	80	—	60	86

90° Tee

140400

Te de 90°




Product Code	Size d x d x d	E	H	I	A	UB	UC	W
140400016	16 x 16 x 16	39	126	50	63	10	200	79
140400020	20 x 20 x 20	42	113	43	57	10	250	77
140400025	25 x 25 x 25	50	124	47	60	10	170	85
140400032	32 x 32 x 32	61	150	56	75	5	100	148
140400040	40 x 40 x 40	73	173	62	86	—	60	244
140400050	50 x 50 x 50	92	207	74	104	—	32	394
140400063	63 x 63 x 63	106	239	82	119	—	20	643

90° Tee with Threaded Female Offtake

141400

Te de 90° Compresión Rosca Hembra

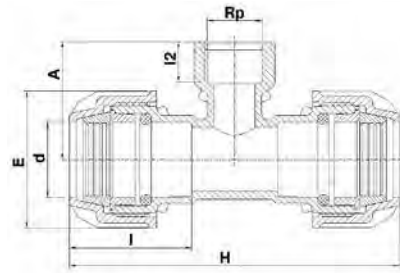


Product Code	Size d x Rp x d	E	H	I	I2	A	UB	UC	W
141400016005	16 x 1/2" x 16	39	124	51	19	30	10	240	66
141400016007	16 x 3/4" x 16	39	122	50	19	30	10	240	59
141400020005	20 x 1/2" x 20	42	113	44	18	43	10	320	48
141400020007	20 x 3/4" x 20	42	113	44	19	45	10	320	50
141400025005	25 x 1/2" x 25	50	123	48	18	45	10	200	71
141400025007	25 x 3/4" x 25	50	123	48	19	48	10	200	71
141400025010	25 x 1" x 25	50	123	48	21	50	10	200	75
141400025013	25 x 1 1/4" x 25	73	173	62	25	67	5	70	—
141400032005	32 x 1/2" x 32	61	150	56	18	49	5	120	120
141400032007	32 x 3/4" x 32	61	150	56	19	52	5	120	118
141400032010	32 x 1" x 32	61	150	56	21	55	5	120	123
141400032013	32 x 1 1/4" x 32	73	173	62	25	67	5	70	270
141400032015	32 x 1 1/2" x 32	73	173	62	25	68	5	60	280
141400040010	40 x 1" x 40	73	173	62	21	63	—	70	188
141400040013	40 x 1 1/4" x 40	73	173	62	25	67	—	70	207
141400040015	40 x 1 1/2" x 40	73	173	62	25	68	—	60	204
141400040020	40 x 2" x 40	92	200	72	30	79	—	40	490
141400050015	50 x 1 1/2" x 50	92	200	72	25	73	—	40	323
141400050020	50 x 2" x 50	92	200	72	30	79	—	40	348
141400063020	63 x 2" x 63	106	239	82	30	86	—	20	522

90° Tee with Threaded Male Offtake

148400

Te de 90° Compresión Rosca Macho

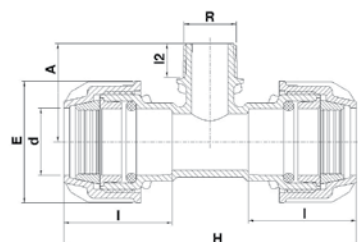


Product Code	Size d x R x d	E	H	I	I2	A	UB	UC	W
148400016005	16 x 1/2" x 16	42	113	44	17	44	10	300	33
148400016007	16 x 3/4" x 16	39	113	44	18	45	10	300	35
148400020005	20 x 1/2" x 20	42	113	44	17	44	10	300	44
148400020007	20 x 3/4" x 20	42	113	44	18	45	10	300	45
148400025005	25 x 1/2" x 25	50	124	48	17	45	10	220	63
148400025007	25 x 3/4" x 25	50	124	48	18	47	10	220	67
148400032007	32 x 3/4" x 32	61	150	56	18	49	5	120	112
148400032010	32 x 1" x 32	61	150	56	20	53	5	120	114
148400040010	40 x 1" x 40	73	173	62	20	65	—	70	182
148400040013	40 x 1 1/4" x 40	73	173	62	22	68	—	70	189
148400040015	40 x 1 1/2" x 40	73	173	62	22	69	—	70	192
148400050015	50 x 1 1/2" x 50	92	207	72	22	73	—	40	308
148400050020	50 x 2" x 50	92	207	72	26	77	—	40	316
148400063020	63 x 2" x 63	106	239	82	26	84	—	24	486

90° Reducing Tee with Irrifit Outlet

143400

Te de 90° Reductor




Product Code	Size d x d1 x d	E	H	I	A	UB	UC	W
143400020016	20 x 16 x 20	42	113	44	48	10	300	60
143400025016	25 x 16 x 25	50	124	48	50	10	200	70
143400032016	32 x 16 x 32	61	150	56	54	5	100	120
143400020020						10	180	70
143400025020	25 x 20 x 25	50	124	47	60	5	170	80
143400032020	32 x 20 x 32	61	150	56	75	5	100	170
143400032025	32 x 25 x 32	61	150	56	75	5	100	170
143400040025	40 x 25 x 40	73	173	62	86		60	290
143400040032	40 x 32 x 40	73	173	62	86		60	250
143400050025	50 x 25 x 50	92	207	74	104		32	500
143400050032	50 x 32 x 50	92	207	74	104		32	500
143400050040	50 x 40 x 50	92	207	74	104		32	500
143400063032	63 x 32 x 63	106	239	82	119		20	770
143400063040	63 x 40 x 63	106	239	82	119		20	770
143400063050	63 x 50 x 63	106	239	82	119		20	680

90° Elbow

140500

Codo de 90°




Product Code	Size d x d	E	I	A	UB	UC	W
140500016	16 x 16	39	51	64	10	350	50
140500020	20 x 20	42	43	57	10	440	38
140500025	25 x 25	50	47	62	10	250	59
140500032	32 x 32	61	56	75	10	150	102
140500040	40 x 40	73	62	86	—	90	164
140500050	50 x 50	92	74	104	—	50	276
140500063	63 x 63	106	82	119	—	32	442

90° Elbow with Threaded Female Offtake

141500

Codo de 90° Compresión Rosca Hembra




Product Code	Size d x Rp	E	I	I2	A	A1	UB	UC	W
141500016005	16 x 1/2"	39	50	19	66	39	10	500	39
141500016007	16 x 3/4"	39	33	19	57	45	—	—	—
141500020005	20 x 1/2"	42	44	17	56	42	10	600	29
141500020007	20 x 3/4"	42	44	18	56	42	10	500	30
141500025005	25 x 1/2"	50	48	18	68	45	10	380	44
141500025007	25 x 3/4"	50	48	18	68	45	10	380	43
141500025010	25 x 1"	50	48	21	68	50	10	340	48
141500032007	32 x 3/4"	61	56	18	75	47	10	220	64
141500032010	32 x 1"	61	56	21	75	60	10	200	70
141500032013	32 x 1 1/4"	61	56	25	75	66	10	160	91
141500040013	40 x 1 1/4"	73	62	25	86	70	—	120	130
141500040015	40 x 1 1/2"	73	62	25	86	70	—	110	141
141500040020	40 x 2"	92	72	30	102	79	70	1	300
141500050015	50 x 1 1/2"	92	74	25	102	79	—	70	203
141500050020	50 x 2"	92	74	30	102	79	—	70	226
141500063020	63 x 2"	106	82	30	115	86	—	44	327

90° Elbow with Threaded Male Offtake

148500

Codo de 90° Compresión Rosca Macho




Product Code	Size d x R	E	I	I2	A	A1	UB	UC	W
148500016005	16 x 1/2"	39	58	17	70	44	10	600	28
148500016007	16 x 3/4"	39	58	18	70	45	10	600	28
148500020005	20 x 1/2"	42	43	17	57	44	10	600	26
148500020007	20 x 3/4"	42	43	18	57	45	10	600	29
148500025005	25 x 1/2"	50	47	17	62	45	10	400	36
148500025007	25 x 3/4"	50	47	18	62	47	10	400	39
148500025010	25 x 1"	50	47	19	62	49	10	400	39
148500032005	32 x 1/2"	61	56	17	75	49	10	240	65
148500032007	32 x 3/4"	61	56	18	75	49	10	240	62
148500032010	32 x 1"	61	56	20	75	53	10	240	66
148500040010	40 x 1"	73	62	20	86	65	—	120	103
148500040013	40 x 1 1/4"	73	62	22	86	68	—	120	114
148500040015	40 x 1 1/2"	73	62	22	86	69	—	120	121
148500050015	50 x 1 1/2"	92	74	22	104	73	—	70	176
148500050020	50 x 2"	92	74	26	104	77	—	70	192
148500063020	63 x 2"	106	82	26	119	84	—	48	248

Corner Elbow

146500

Codo de Esquina





Product Code	Size d x Rp	E	I	I2	A	A1	UB	UC	W
146500020005	20 x 1/2"	42	39	17	58	30	10	350	50
146500025005	25 x 1/2"	50	44	17	62	30	10	250	70
146500025007	25 x 3/4"	50	44	17	62	30	10	250	60

Reducing Set

149300

Juego Reductor

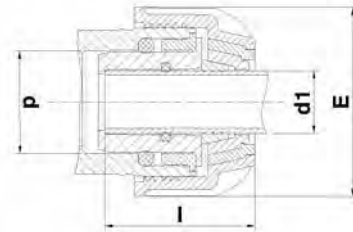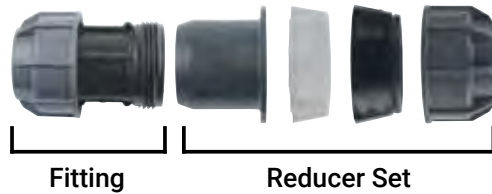


Product Code	Size d x d1	E	I	UB	UC	W
149300025020	25 x 20	50	42	10	450	28
149300032020	32 x 20	61	48	10	400	33
149300032025	32 x 25	61	46	10	360	29
149300040020	40 x 20	73	55	10	180	60
149300040025	40 x 32	73	55	10	180	70
149300040032	40 x 32	73	55	10	250	48
149300050025	50 x 25	92	59	5	200	83
149300050032	50 x 32	92	64	5	200	79
149300050040	50 x 40	92	62	5	200	75
149300063025	63 x 25	106	63	1	100	150
149300063032	63 x 32	106	68	1	100	144
149300063040	63 x 40	106	74	1	100	136
149300063050	63 x 50	106	72	1	100	128

Coupler Union Adaptor

1401M0

Enlace Recto Con Racor

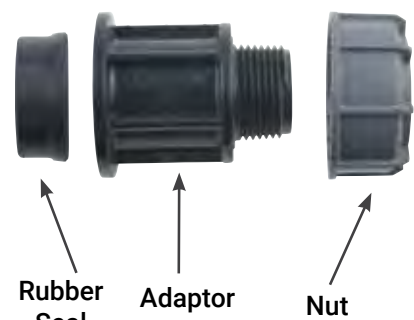


Product Code	Size d x d1	UB	UC	W
1401M0032007	32 x 3/4"	5	100	9
1401M0032010	32 x 1"	5	100	12
1401M0040010	40 x 1"	—	60	13
1401M0040015	40 x 1 1/2"	—	60	14
1401M0050015	50 x 1 1/2"	—	40	24
1401M0050020	50 x 2"	—	40	23
1401M0063015	63 x 1 1/2"	—	25	38
1401M0063020	63 x 2"	—	25	49

Union Adaptor

1498M0

Adaptador A Rosca Macho

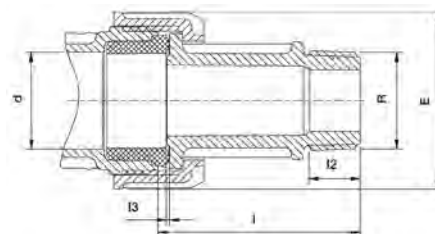


Product Code	Size d x R	E	I	I2	I3	UB	UC	W
1498M0032007	32 x 3/4"	61	68	18	1	1	180	77
1498M0032010	32 x 1"	61	69	20	1	1	180	55
1498M0040010	40 x 1"	73	70	20	1	1	130	142
1498M0040015	40 x 1 1/2"	73	71	22	1	1	130	89
1498M0050015	50 x 1 1/2"	92	73	24	1	1	80	126
1498M0050020	50 x 2"	92	79	27	1	1	80	133
1498M0063015	63 x 1 1/2"	106	75	22	1	1	60	—
1498M0063020	63 x 2"	106	77	26	1	1	60	306

Threaded Adaptor

142500

Adaptador Roscado




Product Code	Size d x R	E	H	I2	UB	UC	W
142500032005	32 x 1/2"	61	84	17	1	180	50
142500032007	32 x 3/4"	61	85	18	1	180	50
142500032010	32 x 1"	61	87	20	1	180	52
142500040010	40 x 1"	74	99	20	1	130	75
142500040013	40 x 1 1/4"	74	100	22	1	130	77
142500040015	40 x 1 1/2"	74	100	22	1	130	82
142500050010	50 x 1"	92	102	20	1	80	118
142500050013	50 x 1 1/4"	92	104	22	1	80	122
142500050015	50 x 1 1/2"	92	104	22	1	80	120
142500050020	50 x 2"	92	107	26	1	80	130
142500063010	63 x 1"	106	118	20	1	60	186
142500063013	63 x 1 1/4"	106	121	22	1	60	189
142500063015	63 x 1 1/2"	106	121	22	1	60	191
142500063020	63 x 2"	106	124	26	1	60	196
142500063025	63 x 2 1/2"	106	126	29	1	60	210

Threaded Male Adaptor

078901

Adaptador Compresión Rosca Macho



Product Code	Size d x R	L	I1	I2	UB	UC	W
078901025005P	25 x 1/2"	79	29	17	10	500	17
078901025007P	25 x 3/4"	80	29	18	10	500	20
078901032005P	32 x 1/2"	84	27	17	10	400	34
078901032007P	32 x 3/4"	85	27	18	10	400	35
078901032010P	32 x 1"	87	27	20	10	400	37
078901040010P	40 x 1"	99	33	20	—	220	54
078901040013P	40 x 1 1/4"	100	33	22	—	220	57
078901040015P	40 x 1 1/2"	100	33	22	—	220	61
078901050010P	50 x 1"	102	34	20	—	140	80
078901050013P	50 x 1 1/4"	104	34	22	—	140	40
078901050015P	50 x 1 1/2"	104	34	22	—	140	84
078901050020P	50 x 2"	107	34	26	—	140	91
078901063010P	63 x 1"	118	50	20	—	80	178
078901063013P	63 x 1 1/4"	121	50	22	—	80	140
078901063015P	63 x 1 1/2"	121	50	22	—	80	140
078901063020P	63 x 2"	124	50	26	—	80	146
078901063025P	63 x 2 1/2"	126	50	29	—	80	158

Nut for Threaded Adaptor

148940

Tuerca para Adaptador de Compresión




Product Code	Size d	UB	UC	W
148940032P	32	10	400	15
148940040P	40	—	200	20
148940050P	50	—	140	40
148940063P	63	5	120	70

Nut

140040

Racor



Product Code	Size d	UB	UC	W
140040016P	16	—	—	10
140040020P	20	10	1600	8
140040025P	25	10	1000	12
140040032P	32	10	500	21
140040040P	40	—	330	34
140040050P	50	—	180	68
140040063P	63	—	100	110

Split Ring - Polyacetal

140030

Casquillo de Apriete (acetal)



Product Code	Size d	UB	UC	W
070030016P	16	100	12000	1
140030020P	20	100	12000	2
140030025P	25	100	7000	3
140030032P	32	50	4200	4
140030040P	40	—	2000	8
140030050P	50	—	1200	12
140030063P	63	—	600	24

O-Ring

070020

Junta Tórica/Seil



Product Code	Size d	E1	e	UB	UC	W
070020016	16	15	3	100	30000	1
070020020	20	19	3	100	32000	1
070020025	25	24	4	100	12000	1
070020032	32	31	5	100	8000	2
070020040	40	39	6	50	4000	5
070020050	50	49	7	50	2500	8
070020063	63	62	7	50	2000	10

Insert

140050

Inserto de PP



Product Code	Size d	UB	UC	W
070050016P	16	100	8700	1
140050020P	20	100	10000	1
140050025P	25	—	5500	2
140050032P	32	50	3000	4
140050040P	40	—	2000	6
140050050P	50	—	1000	9
140050063P	63	—	500	15

Technical Specifications

Installation Instructions For Fittings

16mm - 63mm

- Cut the pipe square, chamfer the end of the pipe
- Undo the nut to the last thread. Leave the nut on the fitting while inserting the pipe.
- Twist the pipe into the fitting* through the split ring and rubber seal to the pipe stop Tighten the nut firmly. Use a PLASSON wrench (or similar tool) for final tightening of sizes 40 and above.
- The nut should be closed tightly, however there is no need for the nut to actually meet the body shoulder.

* Lubrication and chamfering of the pipe end will ease insertion of the pipe (use silicone lubricant).

Note

Before installation ensure that the end of the pipe to be inserted into the fitting is free of scratches and other imperfections and that both the pipe and the fitting itself are clean of sand, mud, stones etc.

Do not over tighten nut when closing. Never use wrenches or spanners with handle lengths longer than 46 cm - excessive torque during tightening can spread nut cone and result in pull outs.

If fittings are reused, ensure split ring is sharp and bites into pipe to avoid pull outs. Alternatively replace split ring.

We strongly recommend the use of PTFE tape in threaded connections.

Legend

UB	Units par bag
UC	Units per carton
W	Weight in grams

Technical Specifications

PLASSON Silver Line - These fittings have been specially designed for joining polyethylene pipes used with a working pressure up to 10 bar. They are designed and approved according to ISO 17885 (replaced ISO 14236) and are available in sizes 16 - 63mm.

Features

- Perfectly watertight
- Extremely simple to use
- Easy and fast to reuse
- Designed with a captive O-ring
- Frost proof
- Suitable for outdoor use in direct sunlight
- Highly impact resistant

Materials

Body: Polypropylene, high-grade copolymer

Nut: Polypropylene, high-grade copolymer

Split Ring: Polyacetal (POM)

Seal: Nitrile rubber (EPDM)

Operating Temperatures

The fittings are not to be used with hot water, although they withstand the same temperature as the polyethylene pipe itself. The fittings and valves will withstand sub-zero temperatures.

Threads

Threads marked "R", "Rp" and "Rc" are according to ISO 7-1. Threads marked "G" are according to ISO 228.

Especificaciones Técnicas

Installation Instructions Para accesorios de 16mm - 63mm

- Corte el tubo al tamaño requerido y realice el biselado al final del tubo
- Retire el racor hasta su última rosca dejándolo en el accesorio durante el próximo paso.
- Introduzca el tubo con un movimiento circular dentro del accesorio pasando el casquillo de apriete y el sello hasta llegar al tope interno del accesorio
- Gire firmemente el racor en dirección del cuerpo del accesorio, utilizando la llave PLASSON (o similar) en los tamaños 40mm y mayores.
- Cierre el racor firmemente, aunque no es necesario cerrarlo hasta el tope.

* A fin de facilitar la introducción es conveniente lubricar y biselar el tubo (con un lubricante que conforma las normas de aprobación de calidad del agua).

Nota

Antes de la instalación asegure que:
El extremo del tubo introducido no tenga imperfecciones o rayaduras. Tanto el tubo como el accesorio no tenga sobre los mismos arena, barro o piedras, etc. No cierre el racor con demasiada fuerza, nunca use llaves con manijas más largas de 46 cm.

Un excesivo momento de torsión durante el cierre puede dañar el cono del racor y como resultado del mismo no permitir su propio funcionamiento. Si los accesorios son usados nuevamente después de su desarmado, constate que los dientes del casquillo de apriete permanecen afilados y se hincan en el tubo impidiendo el escape del tubo. Si no es así, cambie el casquillo de apriete.

Recomendamos utilizar cinta de PTFE para sellar todas las conexiones roscadas.

Legend

UB	Unidades por bolsa
UC	Unidades por cartón
W	Peso en gramos

Especificaciones Técnicas

Los accesorios de la Línea Silver de **PLASSON** han sido diseñados para la unión de tuberías de polietileno de alta densidad usados con una presión de trabajo de hasta 10 bar. Están diseñados de acuerdo a las normas ISO y están disponibles en diámetros de 16 - 63mm.

Características

- Estanqueidad completa
- Fácil instalación
- Rápida reutilización
- Diseñada con una junta tórica cautiva
- Resistencia a bajas temperaturas
- Frost Proof
- Resistentes para instalación a la intemperie
- Alta resistencia a golpes o impactos

Materiales

Cuerpo: Polipropileno, block copolímero de alta calidad

Racor: Polipropileno, block copolímero de alta calidad

Casquillo de apriete: Polyacetal (POM)

Junta tórica: Nitrilo (EPDM)

Temperaturas de Trabajo

Los accesorios no son recomendados para usar con agua caliente, aunque soportan las mismas temperaturas que las propias tuberías de polietileno.
Sin embargo pueden resistir temperaturas inferiores a los cero grados centígrados.

Roscas

Roscas marcadas "R", "Rp" y "Rc" de conformidad con la normativa ISO 7-1.

Roscas "G" de conformidad con la normativa ISO 228.