POWERISE SOLUTIONS.







IOT Cold Storage Solution

We have 3 types/Models

One Time Use- offline- USB



4G/5GRealtime- One time Use



4G/5GRealtime- Multi- Use




USB- offline one time use

1. DF+CSV report version both support
2. Texas Instruments (TI) brand digital temperature sensor.
3. Digital sensor is NIST traceable
4. Every logger has calibration report.
5. Single-use(Max 100days)Support shock detection, protect the safety of your goods effectively
6. Temperature--30°C ~ 70°C (-22°F ~ 158°F)
7. Max 14400 readings
8. IP67
9. Battery life-12 Months / 3.0V Lithium Battery



Real-time Monitor (Multi use + Rechargeable)

Perishable foods, vaccines and pharmaceuticals, chemicals and electronics are typically sensitive to exposure of temperature variations as well as shock, tilt, vibrations and light. These types of goods require a steady and controlled temperature environment throughout the entire supply chain. Cold chain is the most commonly used name to describe such supply chains. Refrigerated trailers, intermodal containers, ULDs used for air freight cargo, rail freight wagons and other logistics units such as insulated cargo boxes and pallet shippers are used to maintain a steady cargo temperature during transportation. The global fleet of refrigerated trailers and intermodal containers amounts to more than 4.0 million units combined. The number of temperature-controlled ULDs and rail freight wagons in use globally are in the tens of thousands.

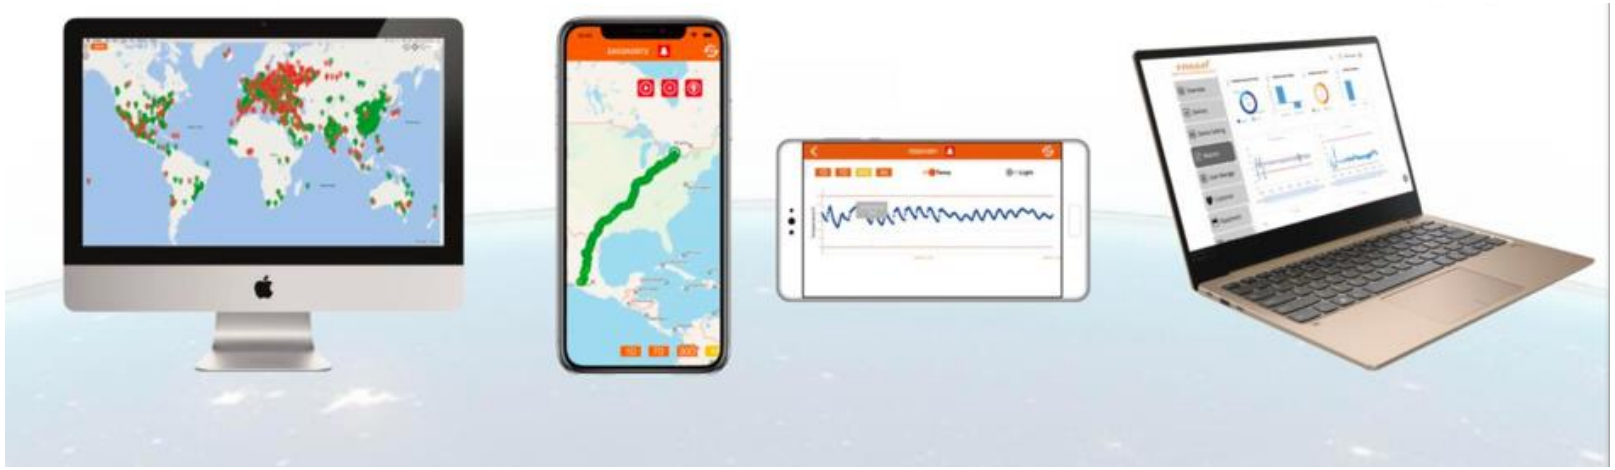

Single use Real-time logger

1. New generation of global real-time temperature monitor
2. Data is stored in the cloud for traceability; USB port for backup PDF data download
3. Full cold chain visibility(Location, Temperature, Humidity, Shock, Route) via Frigga cloud
4. Improve transportation efficiency and reduce products loss with real-time monitoring
5. 24/7 data control & analysis, manage quality and control of your products in-transit. Real time alert via SMS, Email and APP
6. Support shock detection, protect the safety of your goods effectively
7. Global SIM card Inside




Real time- Multi Use

1. New generation of global real-time temperature monitor
2. Data is stored in the cloud for traceability; USB port for backup PDF data download
3. Full cold chain visibility(Location, Temperature, Humidity, Shock, Route) via Frigga cloud
4. Improve transportation efficiency and reduce products loss with real-time monitoring
5. 24/7 data control & analysis, manage quality and control of your products in-transit. Real time alert via SMS, Email and APP
6. Support shock detection, protect the safety of your goods effectively
7. Global SIM card Inside



Display Instruction

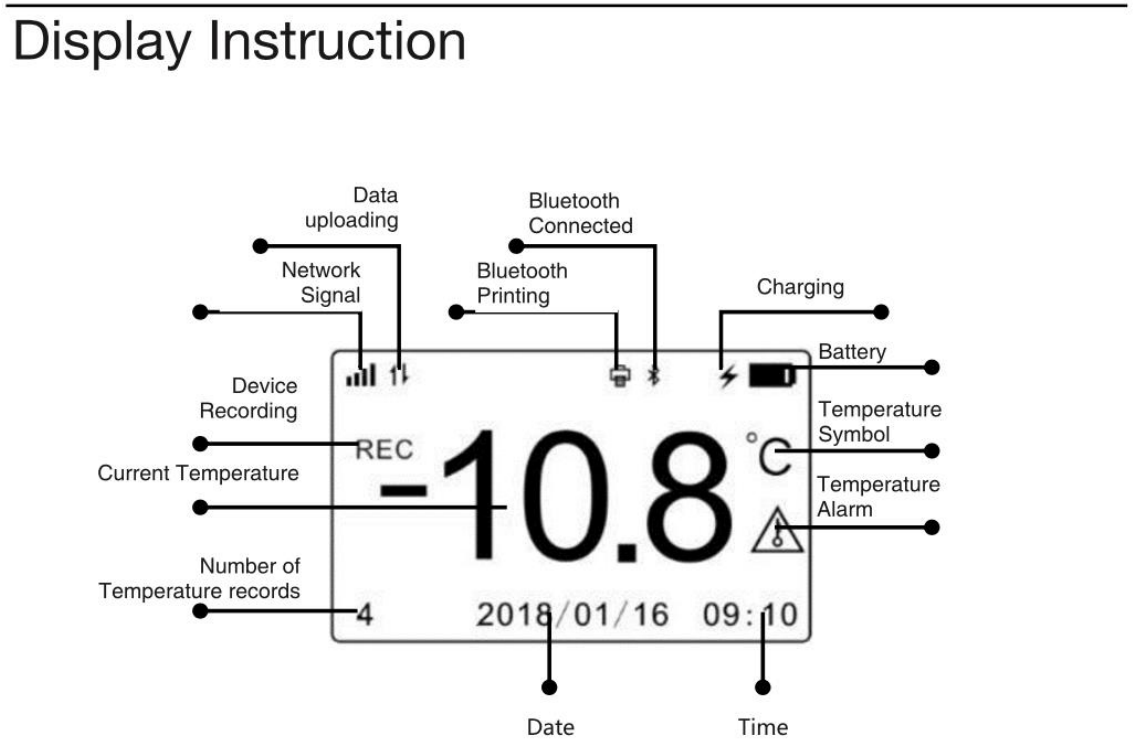

Appearance Instructions

Appearance Instruction




Note：The AC code（Activation code）is in the back of device.

Real-time Monitor (Reusable & Rechargeable)

1. Temperature
2. Humidity
3. Light
4. Shock
5. Location
6. Track routes

1. New generation of global real-time temperature monitor
2. Data is stored in the cloud for traceability or USB port for backup PDF data download
3. Full cold chain visibility(Location, Temperature, Route) via cloud
4. Improve transportation efficiency and reduce products loss with real-time monitoring
5. 24/7 data control & analysis, manage quality and control of your products in-transit. Real time alert via SMS, Email and APP.




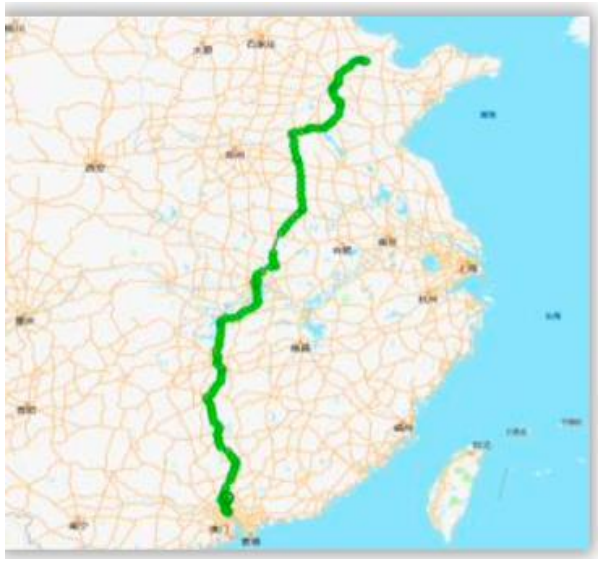




Intelligent Data Loggers

Cloud PlatForm- Login

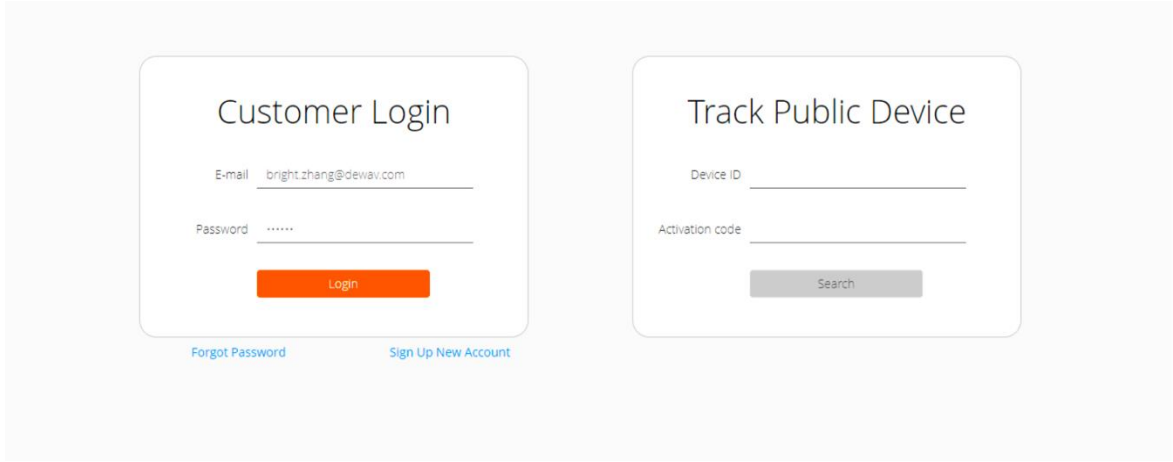


- Click " Sign Up New Account" button, and you will enter create new account process, and please according to the requirements input your information.
- Input your e-mail address and password, and you will login Frigga Cloud Platform.
- If you forgot password, please click "forgot Password" button. You will enter the password reset process, and please according to the requirements input your information.

Route Tracking visualization

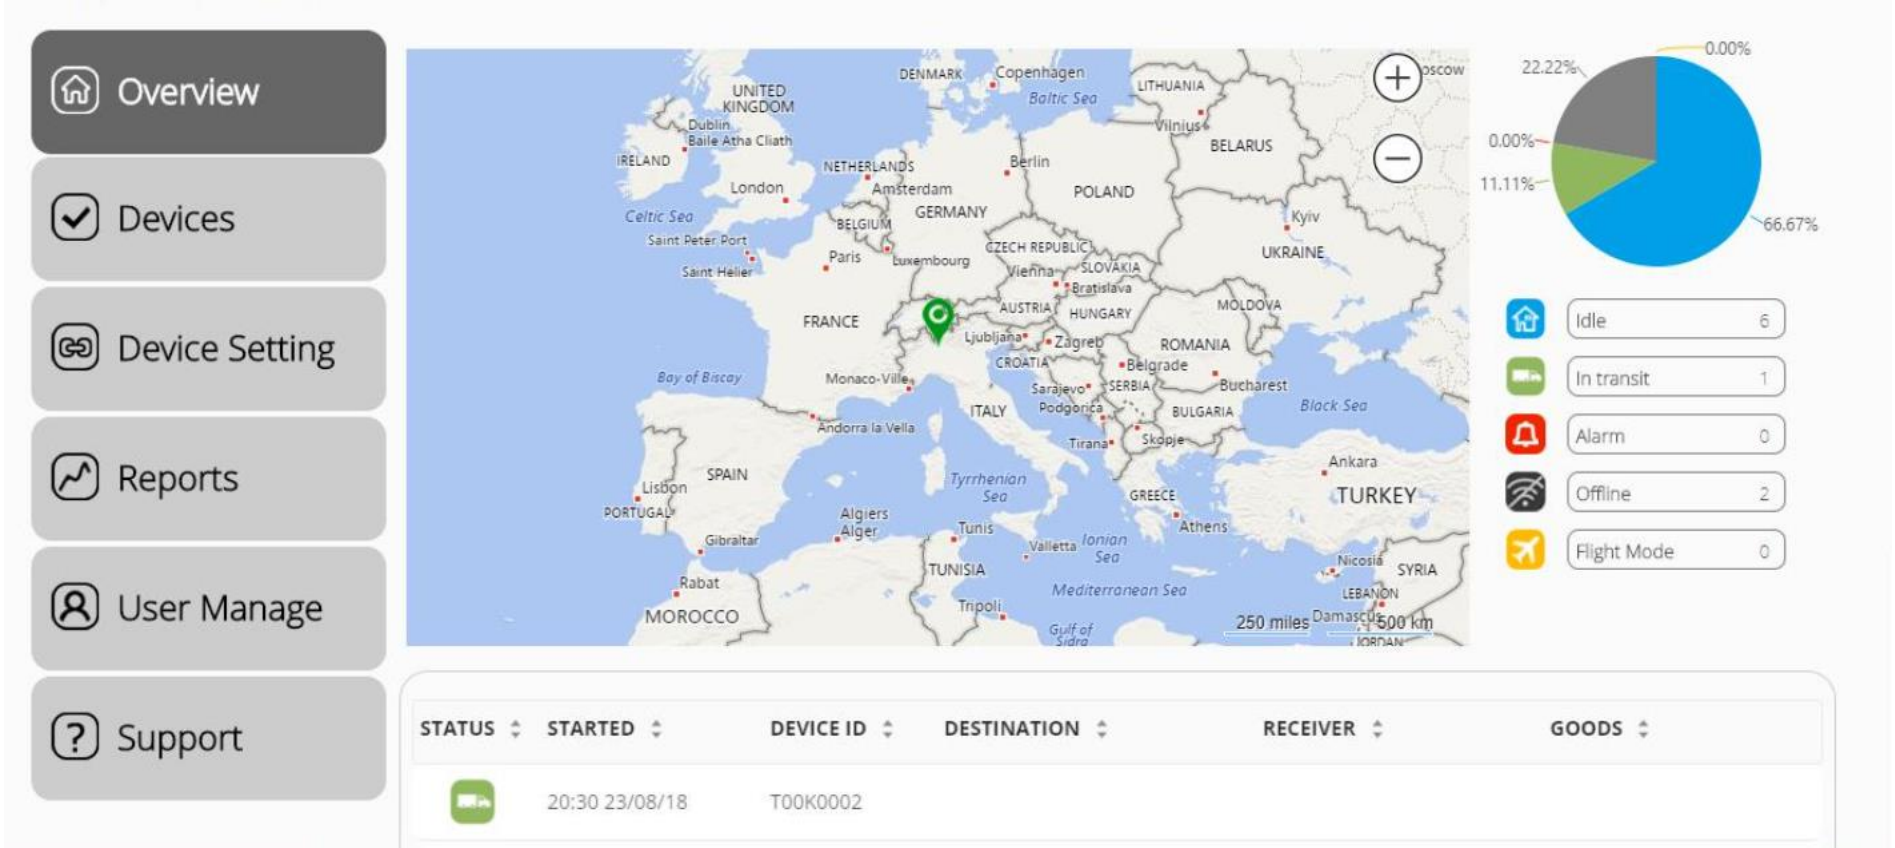

Reports


Visualization of the reports

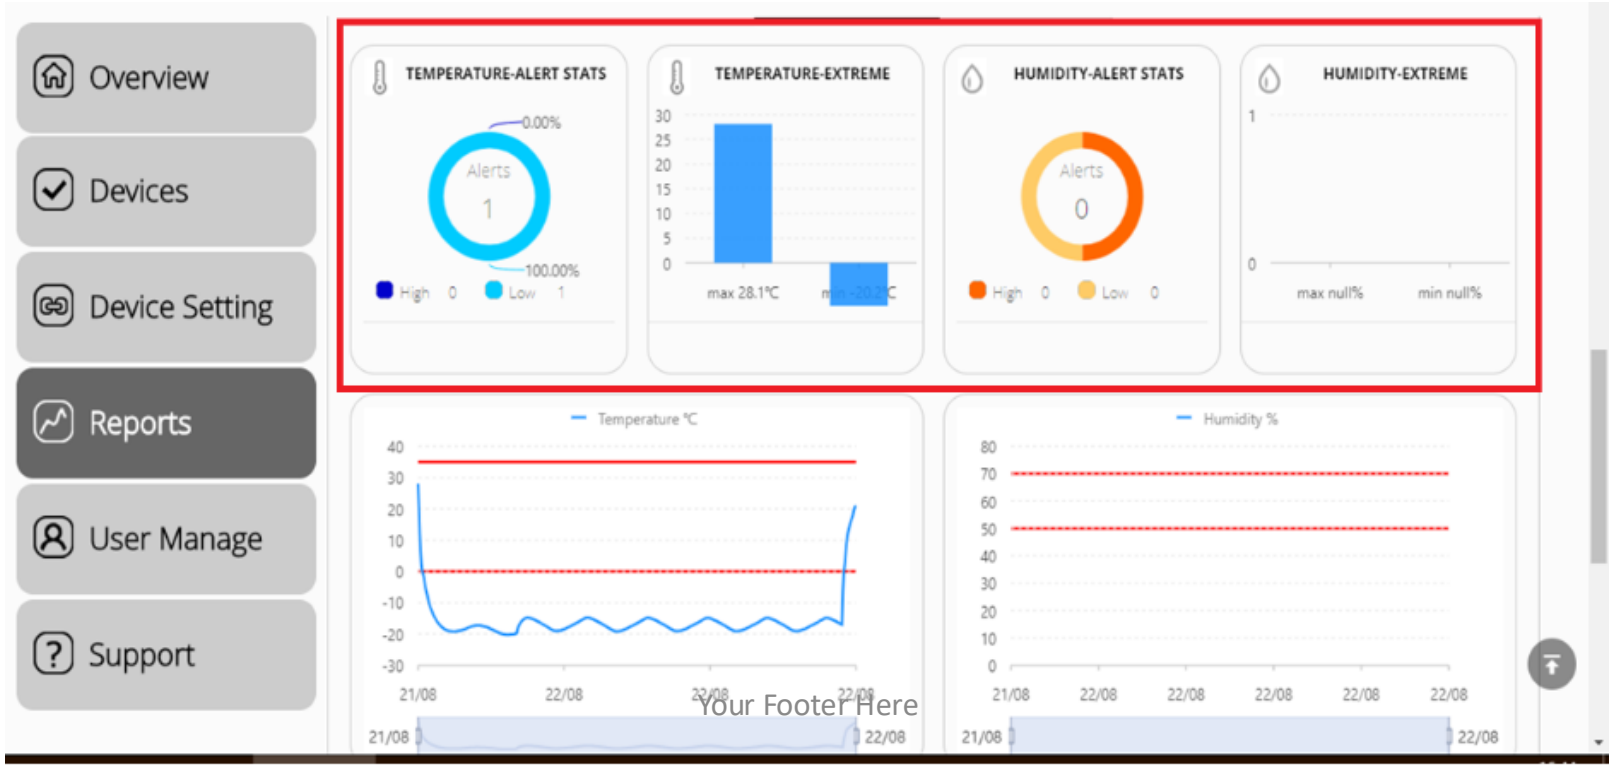

Technical Specifications Datasheet

	Configure	Parameter
1	Usage Type	Multi use(Reusable)+Rechargeable or Single use
2	Monitor Information	Temperature, Humidity, Shock, Location, Track routes
3	Temperature Sensor	Internal Texas Instruments (TI) Brand Digital Sensor
4	Temperature Measurement Range	-30°C ~ 70°C (-22°F ~ 158°F)
5	Temperature Accuracy Range	±0.5°C (-20°C ~ +40°C); ±1°C for other range
6	Humidity Measurement Range	5%~95%RH
7	Humidity Accuracy Range	±3%(20%~80%RH); ±5% for other range
8	Resolution(Temperature/Humidity)	0.1°C / 1%RH
9	Memory Capacity	Max 50000 readings
10	Location Type	LBS Base Station Positioning
11	Cellular	Global LTE 4G/5G, fallback 2G network.
12	SIM Card	Internal Embedded (Global Data Roaming)
13	Shelf Time	12 Months
14	Use Time	120 days use time for 1 charge with 120 reporting interval
15	Data Logging Interval	10 Min. (1/2/5/10 Min settable via platform)
16	Data Reporting Interval	10 Min. (10/20/30/60/120 Min settable via platform)
17	Environmental Rating	IP64
18	Cold Chain PDF Report	Get PDF report via USB2.0/ cloud platform/Frigga Track(Mobile App)
19	Dimensions/Weight	103 x 65.6 x 18.5 mm / 160 grams
20	Certifications	FCC,CE,RTCA/DO-160G,UN38.3,ROHS,WEEE
21	Storage temperature range	-10°C ~ +55°C

Visibility of the Entire Logistics

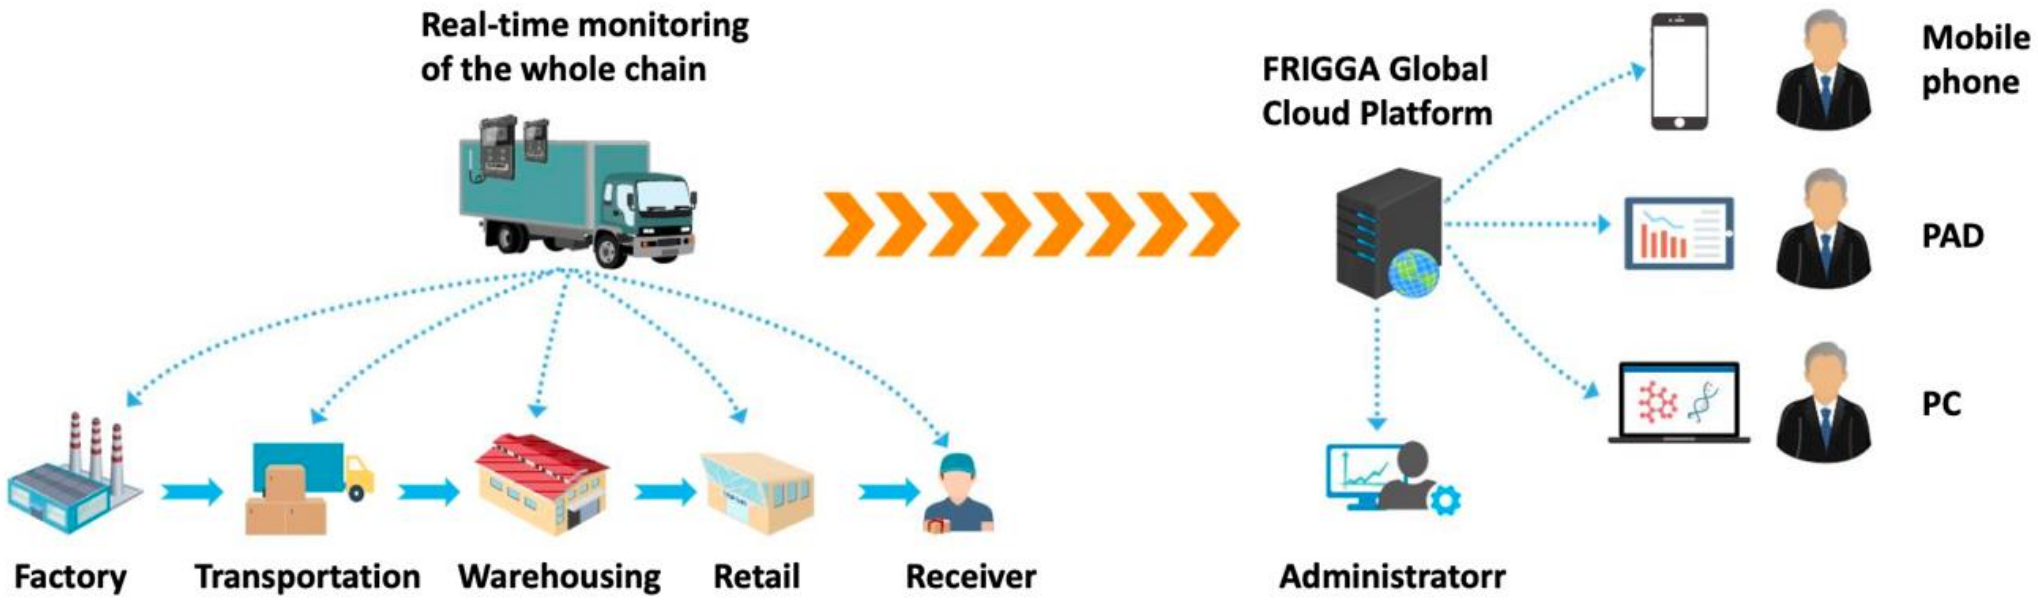

Hardware used worldwide

168+ countries coverage

Globally big data monitoring platform

Thank you

Web: www.powerise.co.ke

POWERISE SOLUTIONS.