


HOLE : 4 NOS. OF 16 MM DIA.

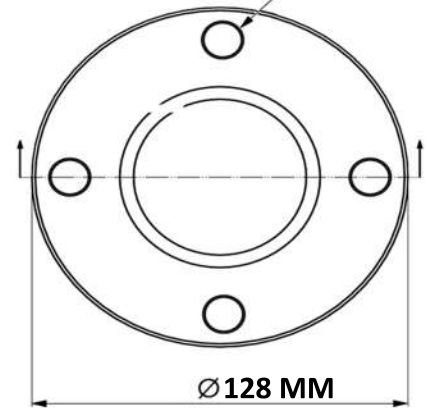

**FLANGE
PCD - 98 MM**

EQUIP-CODE	RTD LENGTH	THERMOWELL LENGTH	QTY.
TE (CHAHS BLOWER OUTLET)	350 MM	250 MM	01
TE	700 MM	600 MM	04

CUSTOMER: CLAIR		DRG.NO. - 280101
RTD SPECIFICATION		
TYPE	RTD (PT-100)	
CONFIGURATION	3 – WIRE (DUPLEX)	
PROTECTION HEAD (H)	DIA CAST ALUMINIUM FLAMEPROOF HEAD IP-67	
CABLE ENTRY	1/2" NPT (F)	
PROCESS CONNECTION (C)	1/2" BSP (M) ADJUSTABLE COMPRESSION FITTING	
MOC	SS 316	
OD	6 MM	
LENGTH (L)	350 MM	
THERMOWELL SPECIFICATION		
TYPE	BAR STOCK	
T/W - U - LENGTH	250 MM	
OD1	15 MM	
ID	7 MM	
C1	1/2" BSP (F)	
MOC	SS 316	
FLANGE (F1)	OD - 128MM DIA., PCD - 98MM DIA., HOLES- 4 NOS OF 16MM DIA., THICKNESS- 10MM	