
Security Turnstile

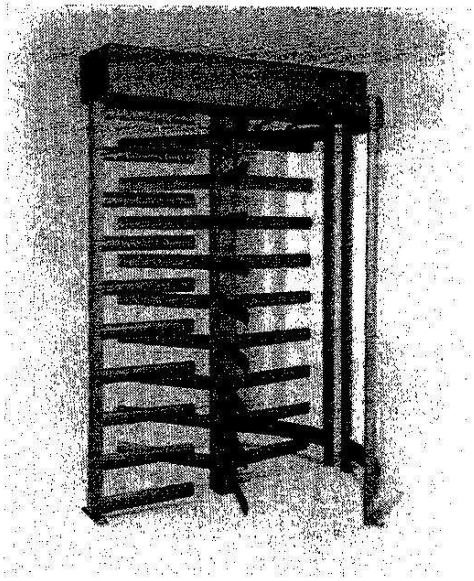

Construction: Anodized Aluminum

- **Heavy-Duty Aluminum Frame, Cage, and Rotating Arm Section**
- **Welded at All Contact Points**
- **Anodized Finish**
- **Sealed Ball Bearings at Top and Bottom**
- **Self-Centering Mechanism**
- **One-Inch Steel Locking Bars and Ratchets**
- **Removable Lock Plates**
- **Exceptionally Strong Aluminum Arms**

The Aluminum Series Turnstiles offer an attractive, functional and rugged access control concept. Applications may range from one unit used in a lobby of an office building to many units controlling all employee and visitor access to an entire facility.

This Turnstile is constructed of light-weight aluminum offering physical characteristics that are stronger than standard hot-dipped galvanized turnstiles. A combination of hardcoat anodizing, heavy aluminum extrusions, welded construction, and a heavy-duty controller mechanism, offer the ultimate in an appealing security turnstile.

A curved drum section which forms the passageway is constructed of 3.2 mm (1/8") thick heavy aluminum extrusions and ribbed inner walls welded together for added strength. Transparent Lexan® panels complete the drum section's passageway.

The revolving arm and barrier sections are fabricated from heavy 3 g/mm (2 lbs/ft.) aluminum extrusions measuring 6.4 mm x 76.2 mm (1/4" x 3") oval with an internal continuous cross section support. They are machined and fitted into heavy aluminum vertical channels and welded at all contact points to prevent arm sag, wobble and fall out.

Heavy-duty flange mount ball bearings support the revolving arm assembly at top and bottom. The bearings are sealed to protect against moisture and dust.

The control mechanism includes solid steel, heat-treated, hardened ratchets and locking bars that are 25.4 mm (1") thick for superior strength and wear. Continuous duty, 24 VDC (150 watt) solenoids control the locking and unlocking functions. All other components are industrial type, 600 volt rated for long lasting dependability.

The Aluminum Series Turnstile is shipped fully assembled and ready to install at the site. However, it can also be shipped knocked down. Anchors are provided.

Selection Charts

SERIES	TYPE	CONTROL	PASSAGE/FUNCTION
9831 NM	SINGLE	MANUAL	Free Turning One Direction. Locked Opposite Direction.
9832 FM	SINGLE	MANUAL	Free Turning in Both Directions.
9831 NE	SINGLE	ELECTRIC	Controlled One Direction. (Fail-Lock). Locked in Opposite Direction.
9831 UE	SINGLE	ELECTRIC	Controlled One Direction (Fail-Safe). Locked in Opposite Direction.
9832 LE	SINGLE	ELECTRIC	Controlled in Both Directions. (Fail-Lock).
9832 UE	SINGLE	ELECTRIC	Controlled in Both Directions. (Fail-Safe).

SERIES	TYPE	CONTROL	PASSAGE/FUNCTION
9834 NM	DOUBLE	MANUAL	Free Turning Two Directions. Locked in Opposite Directions.
9834 FM	DOUBLE	MANUAL	Free Turning in Four Directions.
9834 NE	DOUBLE	ELECTRIC	Controlled in Two Directions. Locked in Opposite Directions.
9834 LE	DOUBLE	ELECTRIC	Controlled in Four Directions. (Fail-Lock).
9834 UE	DOUBLE	ELECTRIC	Controlled in Four Directions. (Fail-Safe).

Horton Automatics
4242 Baldwin Boulevard
Corpus Christi, Texas 78405
512-888-5591
1-800-531-3111
Fax: 512-888-6510
A Division of Overhead Door Corporation

Horton Automatics, Ltd.
Unit A, Hortonwood 31
Telford, Shropshire
England TF1-4EX
0952-670169
Fax: 0952-670181

Specifications

Complete Turnstile Gates Includes drum section, barrier, rotating arm assemblies, heavy steel control channel across top, ball bearings at top and bottom, one-way and two-way locking mechanism

Gate Arms Heavy 3 g/mm (2 lb/ft) aluminum extrusions 44.4 mm x 76.2 mm (1-1/4" x 3") oval with 6.4 mm (1/4") thick cross section core. Machined and fitted into heavy aluminum supporting member, welded at all contact points to prevent sagging or wobbling and assuring rigidity and maximum strength.

Barrier Fabricated, machined and welded using the same material as the gate arms.

Drum Section Curved; forms the passageway through the security turnstile gate. Vertical supports and curved horizontal members of ridged aluminum extrusions and welded together for superior strenth and support. Transparent Lexan drum panels are 6.4 mm (1/4") thick to provide durablility and resistance to breakage.

Bearings Revolving gate arms supported at top and bottom with heavy duty flange mount type ball bearings. All bearings sealed for protection from water and dust and self aligning to compensate for minor installation problems.

Control Mechanism Self-centering feature returns arms to start position after each rotation. Locking accomplished with heavy-duty hardened steel ratchets and locking bars which are minimum 25.4 mm (1") thick solid steel and heat-treat hardened for superior strength and minimum wearing. All parts plated for protection against rusting.

Heavy duty, 24 VDC, 150 W solenoids control locking and unlocking function; continuous duty rated and moisture, oil and shock resistant. Other electrical components (relays, switches, etc.) industrial type, 600 volt rated.


Power supply to turnstile 115 VAC.

Appearance Modern design; all aluminum exterior, welded construction and hard-coat anodized after welding. Offers pleasing appearance yet is strong and durable. Available in clear or bronze, anodized colors. Other anodized colors available upon request.


Dimensions

Single turnstile 1524 W x 2261 H x 711 mm clear passageway (60 x 89 x 28 inches).

Dual turnstile 2438 W x 2261 H x 711 mm clear passageways (96 x 89 x 28 inches).

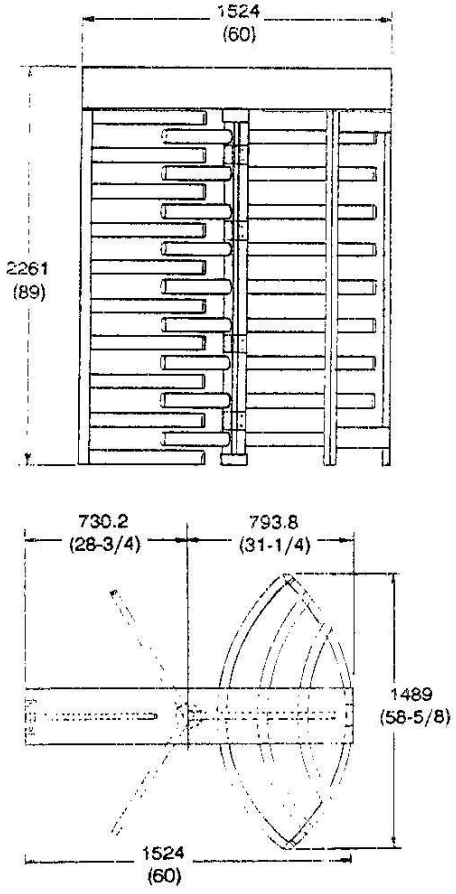

Single Turnstile

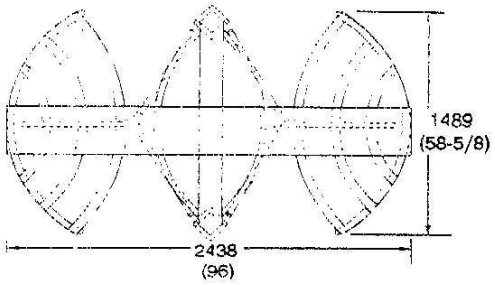

Dual Turnstile

Dimensions in millimeters. Dimensions in parentheses are in inches.

All specifications subject to change without notice. Information furnished by BURLE INDUSTRIES, INC. is believed to be accurate and reliable. However, no responsibility or liability is assumed by BURLE for its use, nor for any infringement of patents or other rights of third parties which may result from its use. No license is granted by implication or otherwise under any patent or other rights of BURLE INDUSTRIES, INC.

Copyright 1991 by BURLE TECHNOLOGIES, INC. All Rights Reserved.

Form F598-A, 3-91, Rev. 6-91. Printed in U.S.A.