




L E D S h a d o w C l o c k K i t

Assembly Guide

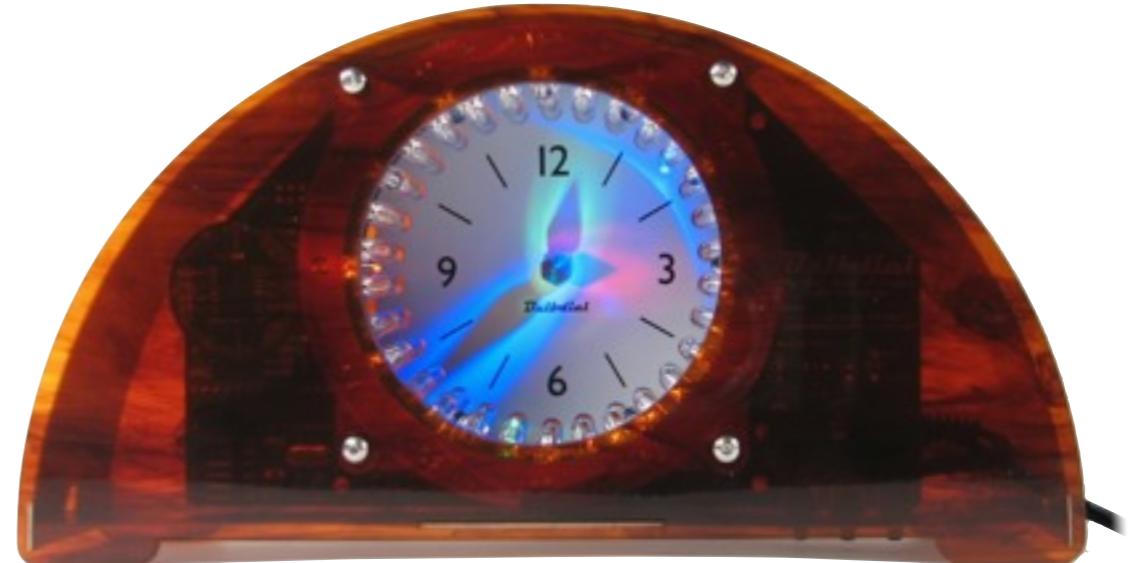

The **Bulbdial Clock** kit is based on an original design concept by David Friedman of IronicSans.com and developed at Evil Mad Scientist Laboratories.

The Bulbdial Clock works like an indoor sundial. Three rings of LEDs cast shadows of different lengths, forming three moving hands on the clock face.

This guide covers the procedures for assembling the Bulbdial Clock and its accessories. Please exercise appropriate safety practice while soldering.

An open-source hardware+software project. For design files, source code, & additional documentation, please visit: <http://www.evilmadscientist.com/go/BulbDialKit>

Support: <http://www.evilmadscientist.com/forum/>

Distributed by
Evil Mad Science LLC
<http://evilmadscience.com/>



Kit version 1.0
Manual v. 1.0f

STEP 0: Tool Checklist

Essential tools: Needed to build the kit:

1. Soldering iron + solder

A basic soldering iron meant for electronics, with a reasonably fine point tip. We recommend one of this design-- a "pencil shape" soldering iron (not gun!) with a base that holds the iron and a wet sponge. A tip in good condition (a "tinned" tip) should get shiny when hot-- able to melt and wet to solder.

While you don't need an expensive one, the iron *can* make a big difference in the time needed to build the kit. (Seriously. If you use one that is old and busted, or a \$10 radio shack iron, or that thing from the dollar store, you should expect to spend at least twice as long soldering!)

Our recommendation for a low-cost iron:
model WLC100 by Weller, about \$40.



You'll also need some solder. Thin *rosin-core* solder (roughly .020 - .040" in diameter) is the most common type for electronic soldering, and is the only choice that is appropriate for electronic kits. Either standard (lead-bearing) or newer "lead free" solder types will both work just fine.



2. Angle flush cutters

Small nippers for clipping loose wire ends close to the circuit board.

e.g., Sears Craftsman



3. Electrical power

The Bulbdial Clock kit comes with a regulated universal-input power supply that accepts worldwide voltages and puts out 5V at up to 150 mA. If you're using your own external power, make sure that it's regulated, provides 4.5 to 5 V DC, and is rated for at least 100 mA. (3 "AAA" cells can do the job, for example.) Please be careful: Inappropriate voltage or polarity can cause permanent damage.

(International users may need to supply a plug adapter to fit the prongs into local outlets.)

Suggested, but not required

1. Small pliers with smooth jaws

Very helpful for final LED alignment. The jaws should be smooth so that you don't scratch the LEDs. Needlenose pliers with masking tape over the jaws can be a good solution.



2. Resistor lead forming tool



Allows fast, neat bending of resistor leads. Not many parts like this in the Bulbdial kit, but if you're obsessive....

And for the adventurous...



1. USB-TTL Cable

FTDI model TTL-232R or equivalent. A "smart" converter cable with a USB interface chip inside. One end hooks up to your USB port, the other to the clock. This allows you to program the Bulbdial Clock through the Arduino development environment (<http://arduino.cc/>).

Besides programming, the cable can also be used to set the time on the Bulbdial clock through a serial sync program.

The 5V version of the cable (TTL-232R-5V) can be used to provide USB power to the Bulbdial clock.

2. Computer, Internet access, USB port....

All of the software and source code that you'll need to reprogram the clock is available online for free. You'll need a reasonably recent vintage computer (Mac, Windows, or Linux) and internet access.

Additional information is available at the project page:
<http://www.evilmadscientist.com/go/BulbDialKit>

STEP 1: It's the BOM.

Your kit came with a *bill of materials*: an up-to-date list of what's in your particular kit. The exact items may differ between versions of the kit, for example between RGB and monochrome options.

Bulbdial

Bulbdial Clock Kit: Bill Of Materials
Standard 3-color version



Congratulations on your new Bulbdial Clock kit! This document lists everything that comes with the kit. If anything is broken or missing, please let us know right away and we'll get you squared away.

To put your kit together, you'll need the build instructions.
Please visit: <http://www.evilmadscientist.com/go/bulbdialkit>

Main Kit	Line	PCB location	Description	Needed	Kit Qty
	1	-	Blue PCB	1	1
	2	-	Green PCB	1	1
	3	-	Red PCB	12	13
	4	JP1, LED1-10	Zeroohm Jumper Wires ("Resistors with one black stripe")	1	1
	5	R11	Resistor, 10 k Ohm, 1/6 W (the small one)	9	11
	6	R1-R9	Resistor, 24 Ohm, 1/4 W	1	1
	7	R10	Resistor, 68 Ohm, 1/4 W	1	1
	8	Quartz	Oscillator Crystal, 16 MHz, 20 ppm	2	2
	9	C1,C2	Capacitor, 18 pF ceramic. (Marked with black stripe)	3	3
	10	S1,S2,S3	Tactile button switch, Right angle, long actuator	1	1
	11	J2	Header, male, 6-position SIL, right-angle	2	2
	12	M1	Header, female, 4-position SIL, vertical	2	2
	13	C3,C6	Capacitor, 0.1 µF ceramic	1	1
	14	U1	ATmega168-20PU microcontroller, pre-programmed	1	1
	15	J1	Power jack, 2.5 mm	30	31
	16A	(See instrux)	Blue LED, 5mm, Ultrabright, 20°	30	31
	16B	(See instrux)	Pure Green LED, 5mm, Ultrabright, 20°	12	13
	16C	(See instrux)	Red LED, 5mm, Ultrabright, 20°	1	1
	17	-	Custom LED Bending Guide, 6 mm plywood	8	8
	18	-	Hex Standoff M/F, Aluminum, 3/8" long, 4-40 thread	4	4
	19	-	Hex Standoff F/F, Aluminum, 7/8" long, 4-40 thread	1	1
	20	-	Printed Clock face, 1/16" acrylic	1	1
	21	-	Gnomon Spike, Nickel-plated, 3/8" x 4-40 thread	1	1
	22	-	Button socket cap screw, Stainless, 3/16" x 4-40	1	1
	-	-	Hex wrench, alloy steel, 1/16"	8	9
	-	-	Button socket cap screw, Stainless, 3/8" x 4-40	1	1
	-	-	+5.0 mA, Universal input, Center positive	4	5




In the instructions, we refer to components by their line item number on the bill of materials. For example, #14 is the ATmega168 microcontroller.

In some places, the assembly procedure differs between kit versions.

In particular, watch out for RGB ONLY or MONO ONLY instructions, which are specific to the 3-color or monochrome versions of the kit. If you aren't sure which you have, please consult your BOM.

STEP 2: The Plan


In the first part of the build, we'll be placing various electronic components on the large blue circuit board.

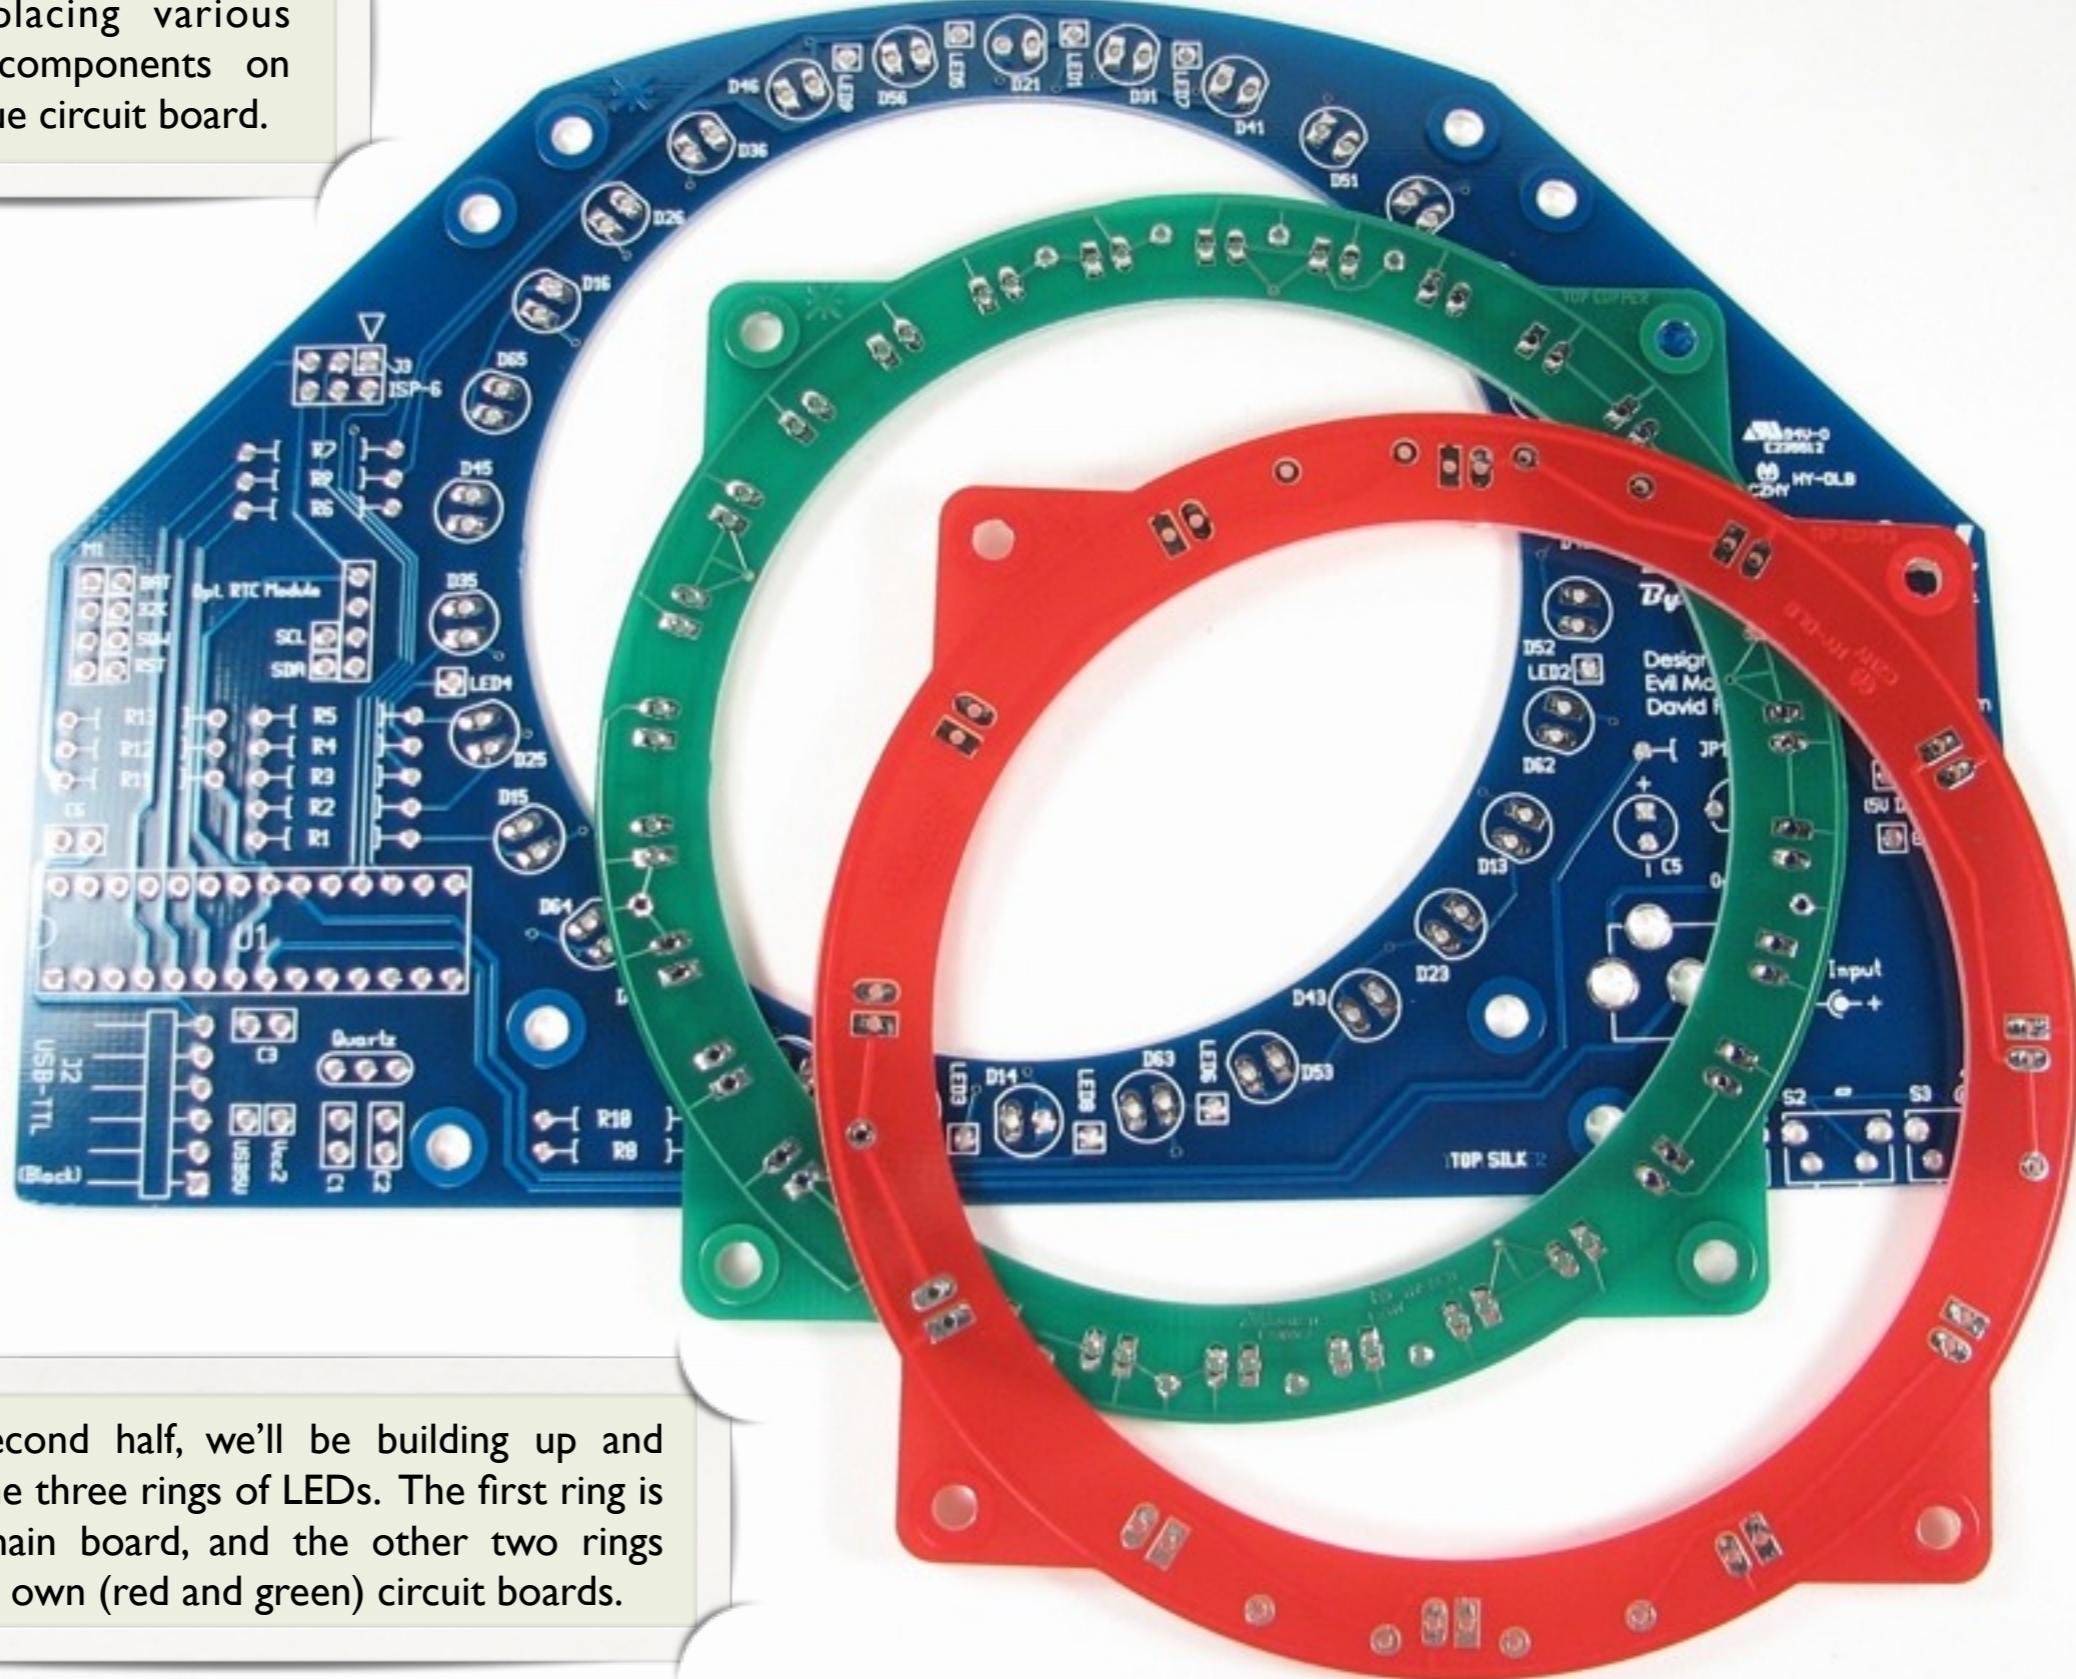

In the second half, we'll be building up and aligning the three rings of LEDs. The first ring is on the main board, and the other two rings have their own (red and green) circuit boards.

STEP 3: Placing the first component

Our first component is a “zerohm” jumper, #4. It goes in location JPI on the main circuit board. (And for this first one, we’ll take it slowly.)

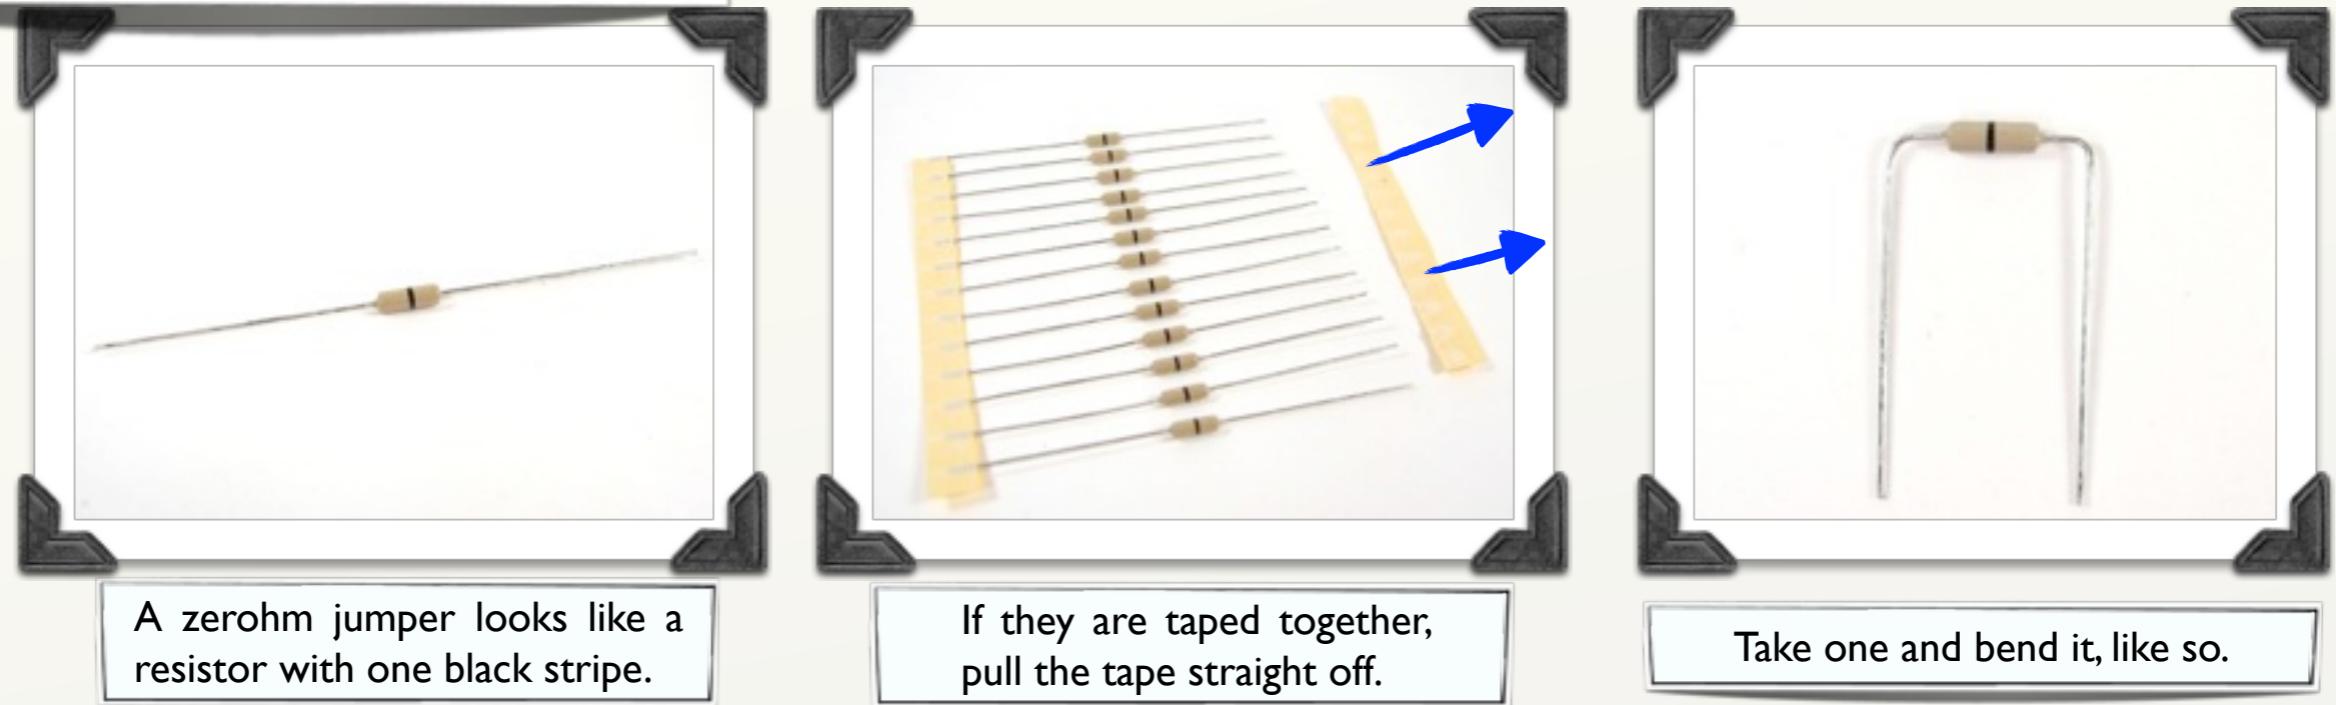

(Next... Soldering!)


STEP 4a: Some hints on soldering

As the old Heathkit manuals say, “it is interesting to note” that the vast majority of problems reported with soldering kits turn out to be due to unreliable solder connections.

Before we go further, here’s a quick refresher, with our suggested procedures for adding components to the circuit board. These procedures apply to most components in the kit.

Adding components to the circuit board

- (0). Pre-form the leads of components if needed.
(For example, like the jumper in step 3.)
- (1). Insert each component into the circuit board, from the top, at its given location. Push it flush to the board
(Note that some components, like the chip and LEDs, need to be inserted with a particular orientation.)
- (2). If your component has flexible leads, gently bend the leads out, up to 45° , to hold it in place while you solder.
- (3). One at a time, from the back side, solder the leads of the component to the circuit board.
 - Your tip needs to be shiny (tinned). If not, melt some fresh solder against it and quickly swipe clean on a wet sponge.
 - Place the solder against the joint that you wish to connect.
 - Touch the iron to the solder and joint for about one second. Count it out: “one thousand one.”
 - The solder should melt to the joint and leave a shiny wet-looking joint. If not, let it cool and try again.
- (4). If the component has long and/or or flexible leads, clip off the extra length, close to the board. (But not so close that you’re clipping the board itself.)

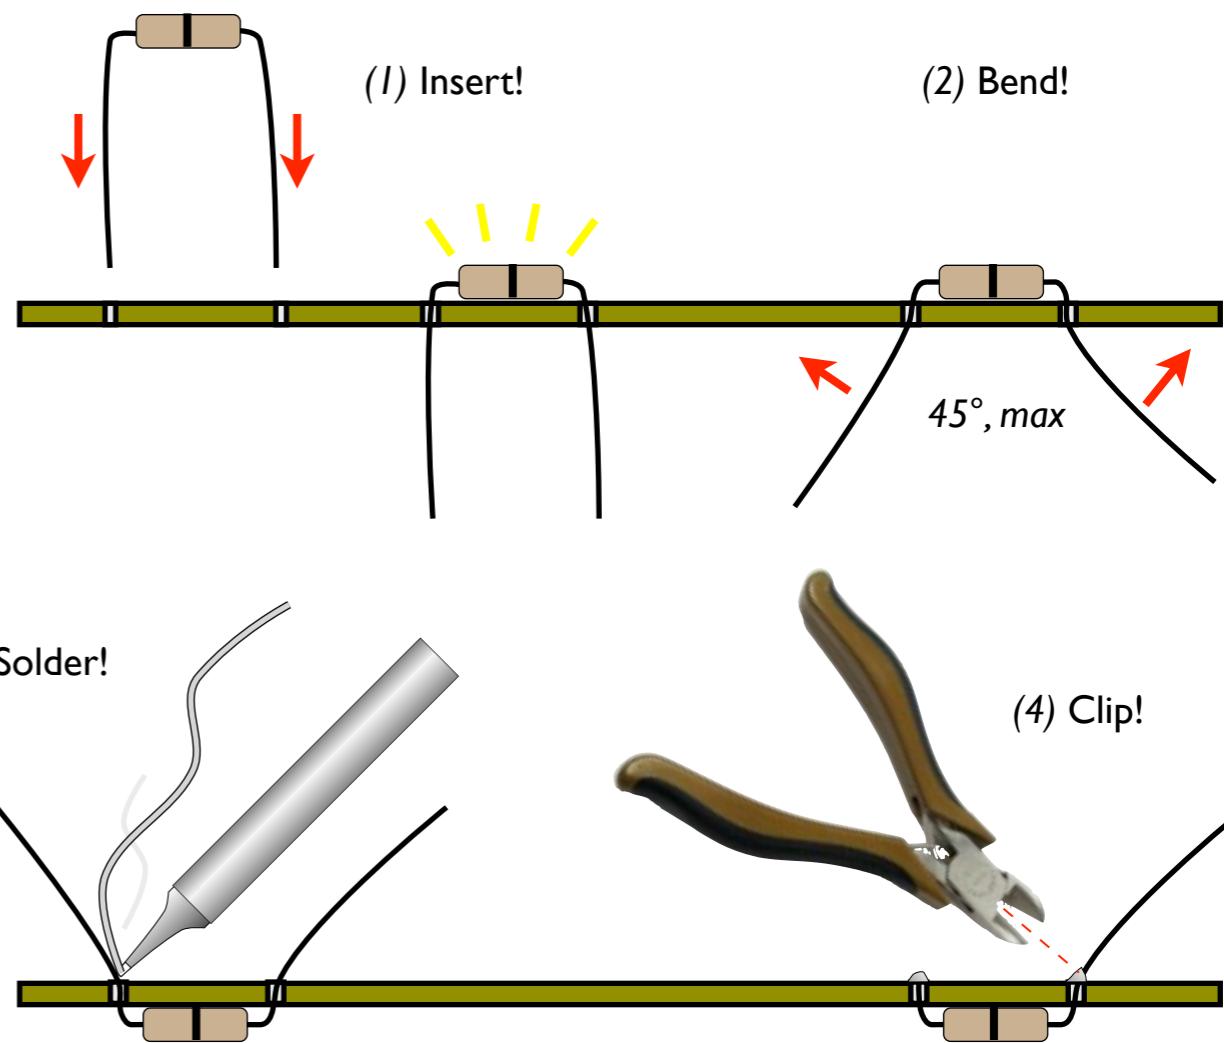


TO BE CONTINUED...

STEP 4b: Soldering that first component


(Where we perform those steps that we just described.)




We've already inserted the jumper at location JPI.

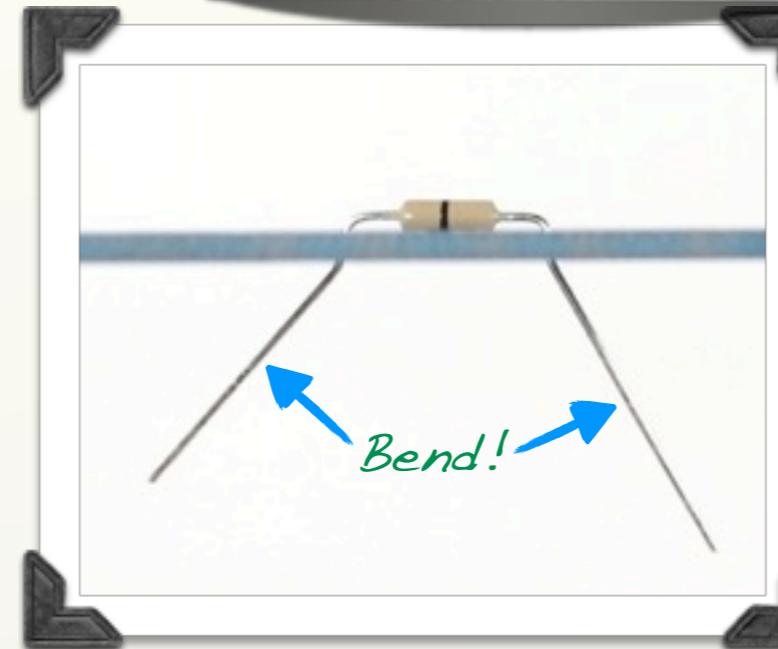


Now bend out the leads to hold the jumper in place while we solder

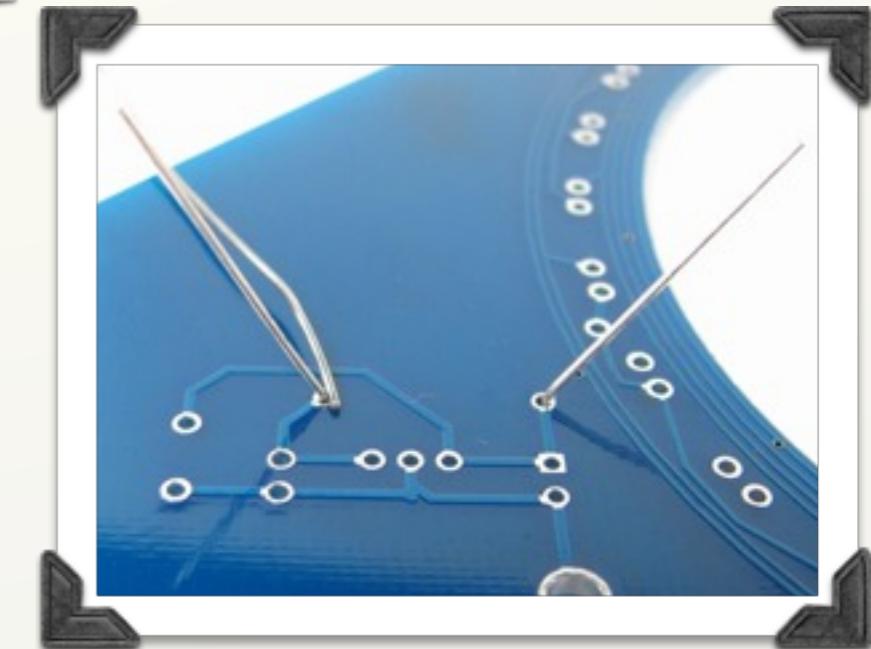


Flip the board over and get ready to solder.

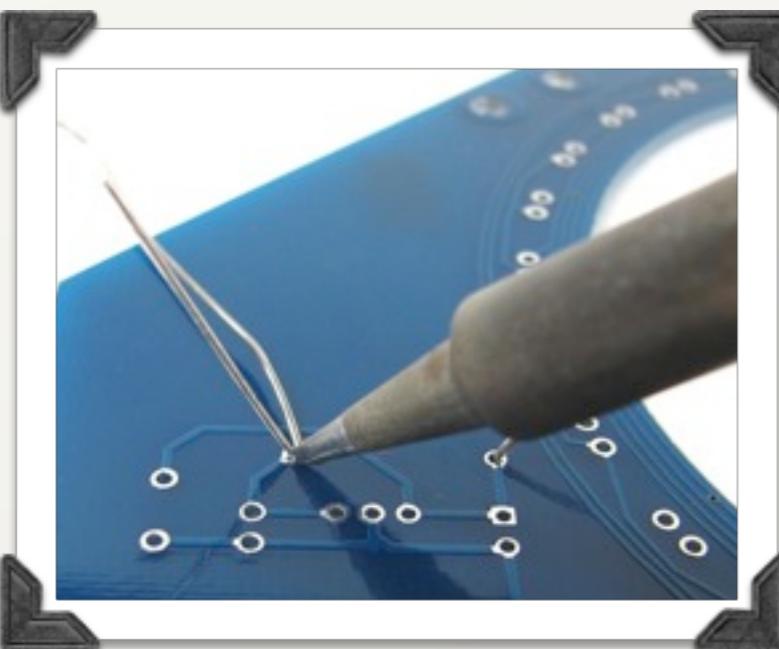

Solder both pins to the board.

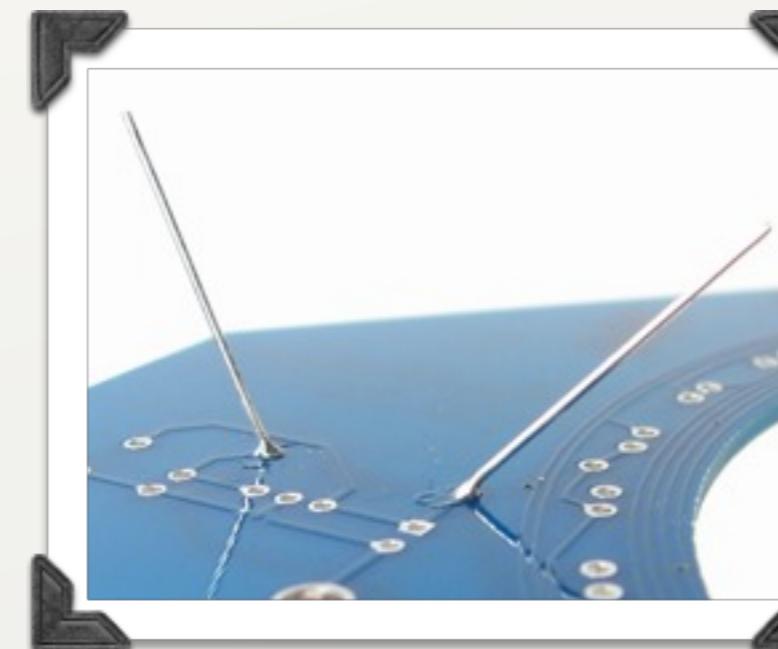

Inspect the solder joints; make sure that they look shiny and wet.

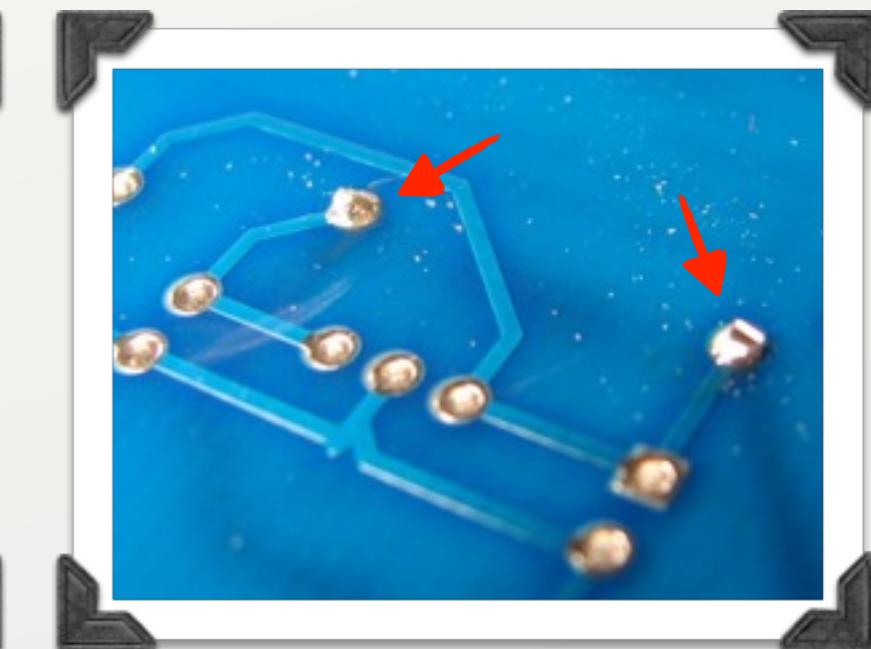

Clip the excess leads short.

STEP 5: One or two resistors

Now that we've stepped through the basics, we can proceed at a faster pace.


Resistors are added to the board in the same way as the zeroohm jumper, and are not sensitive to orientation.

If you have the RGB kit:

Part **#7** is a 68 ohm resistor (color code blue-gray-black-gold). It's the one "normal size" resistor that looks different from all the others. Install it in location R10.


If you have the mono kit:

Go on to Step 6, leaving R10 empty for the moment.

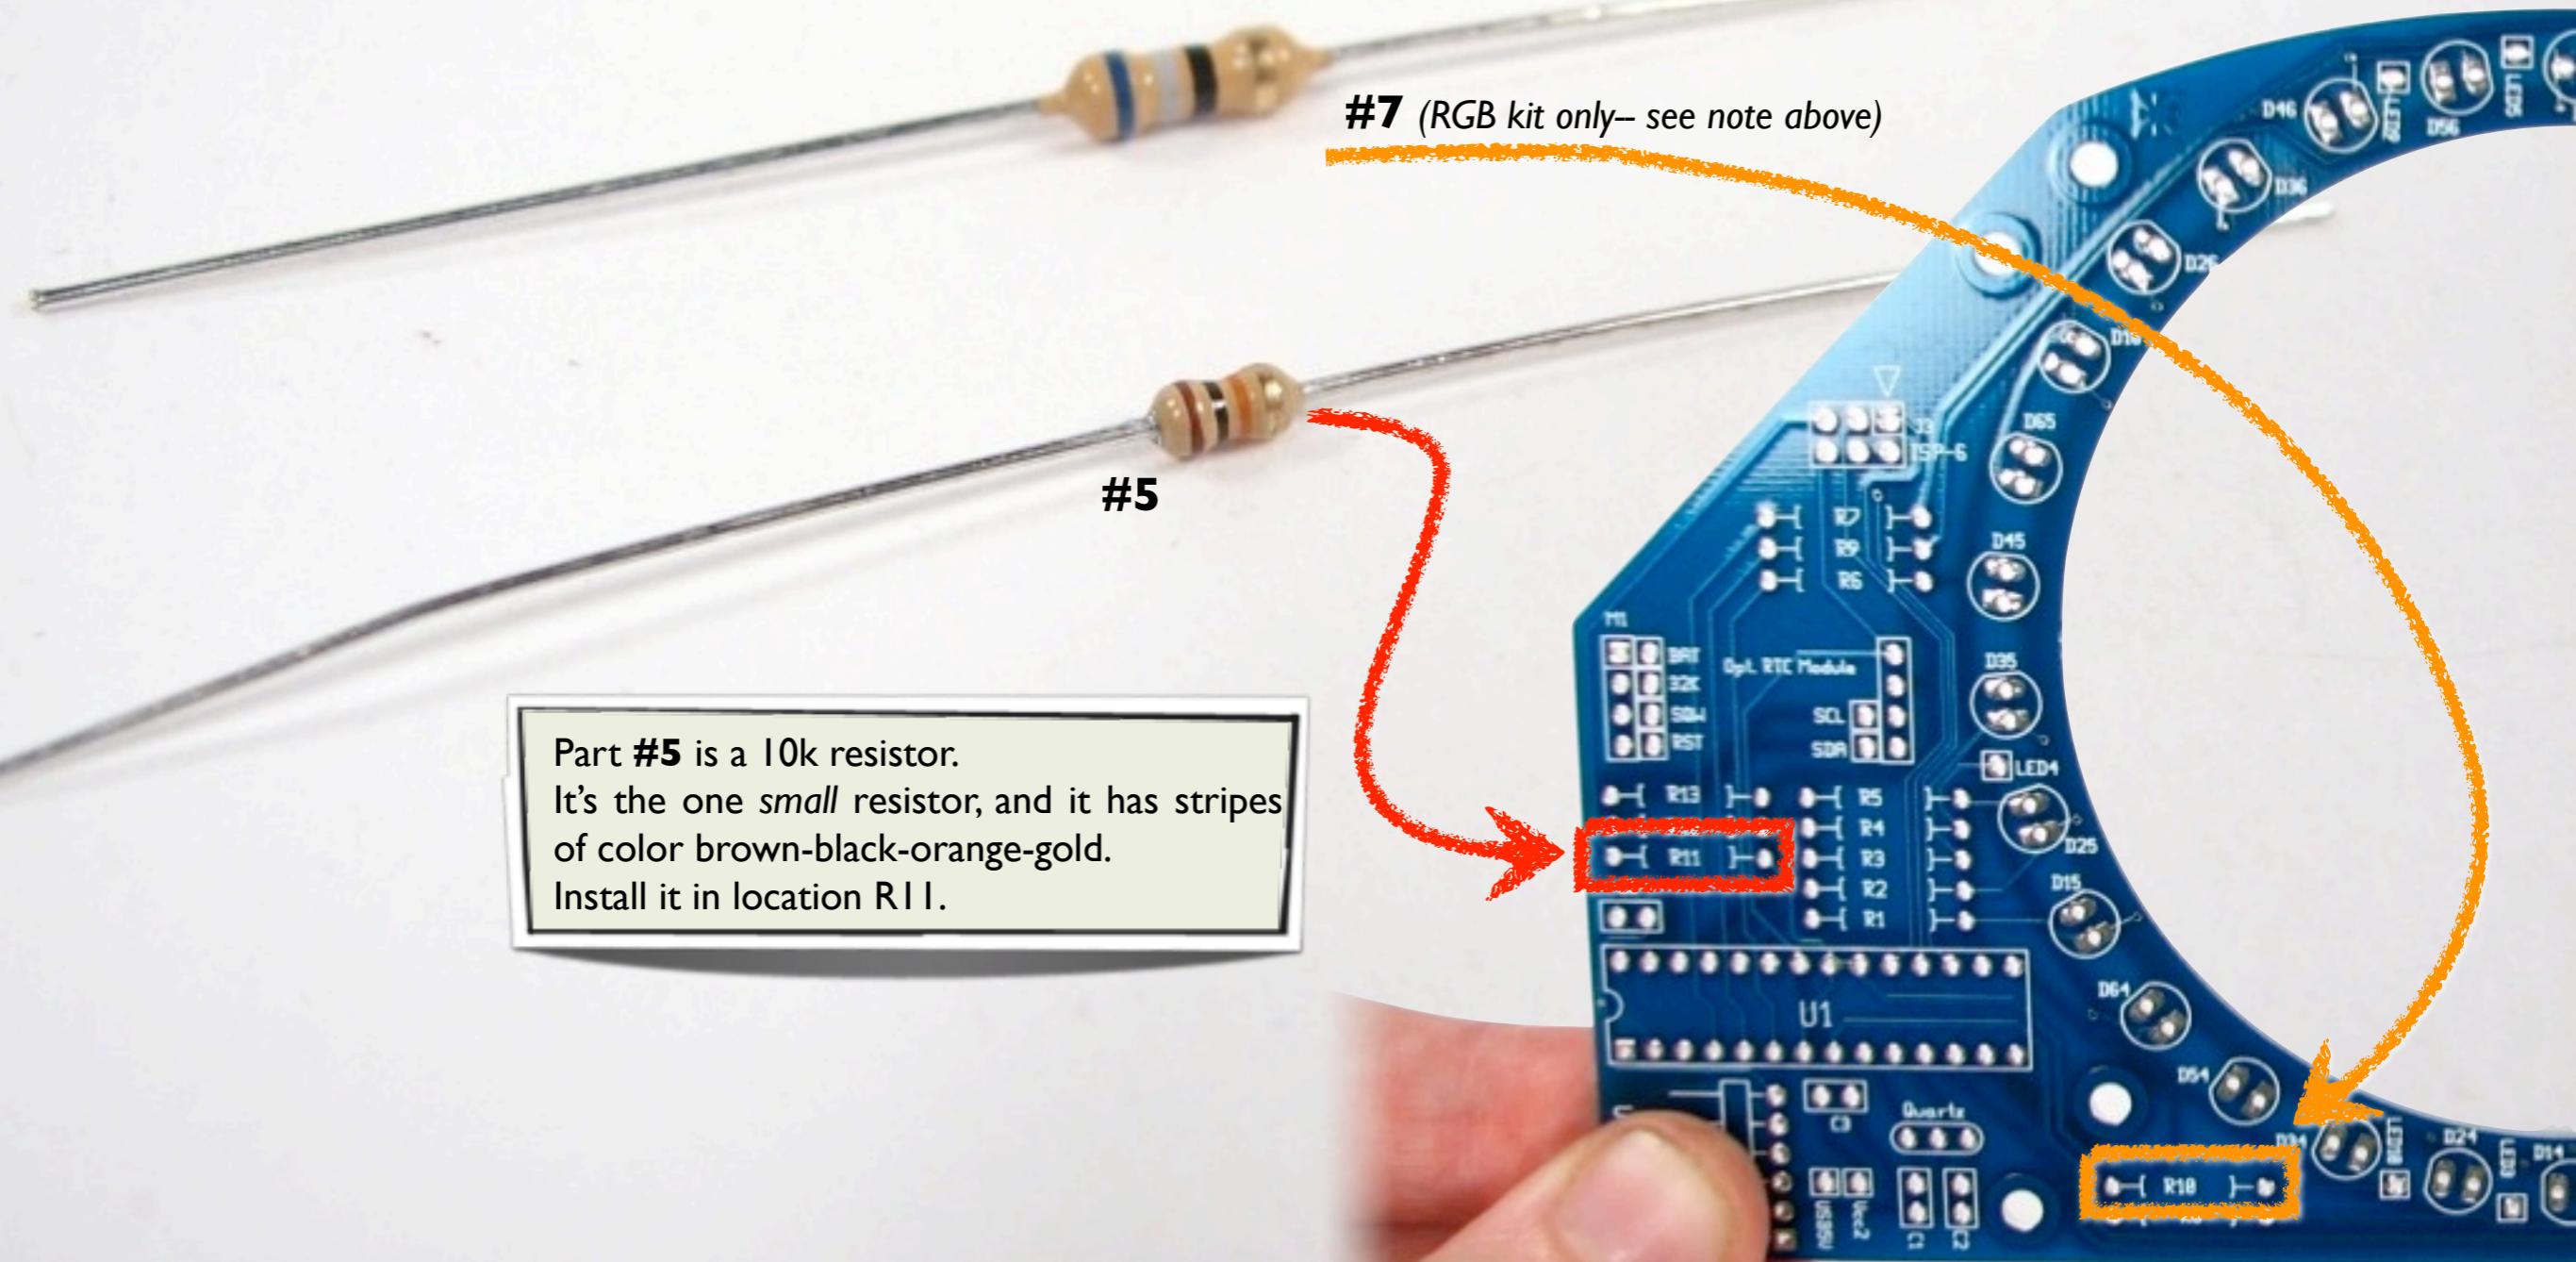


Part **#5** is a 10k resistor.
It's the one *small* resistor, and it has stripes of color brown-black-orange-gold.
Install it in location R11.


STEP 6: The rest of the resistors

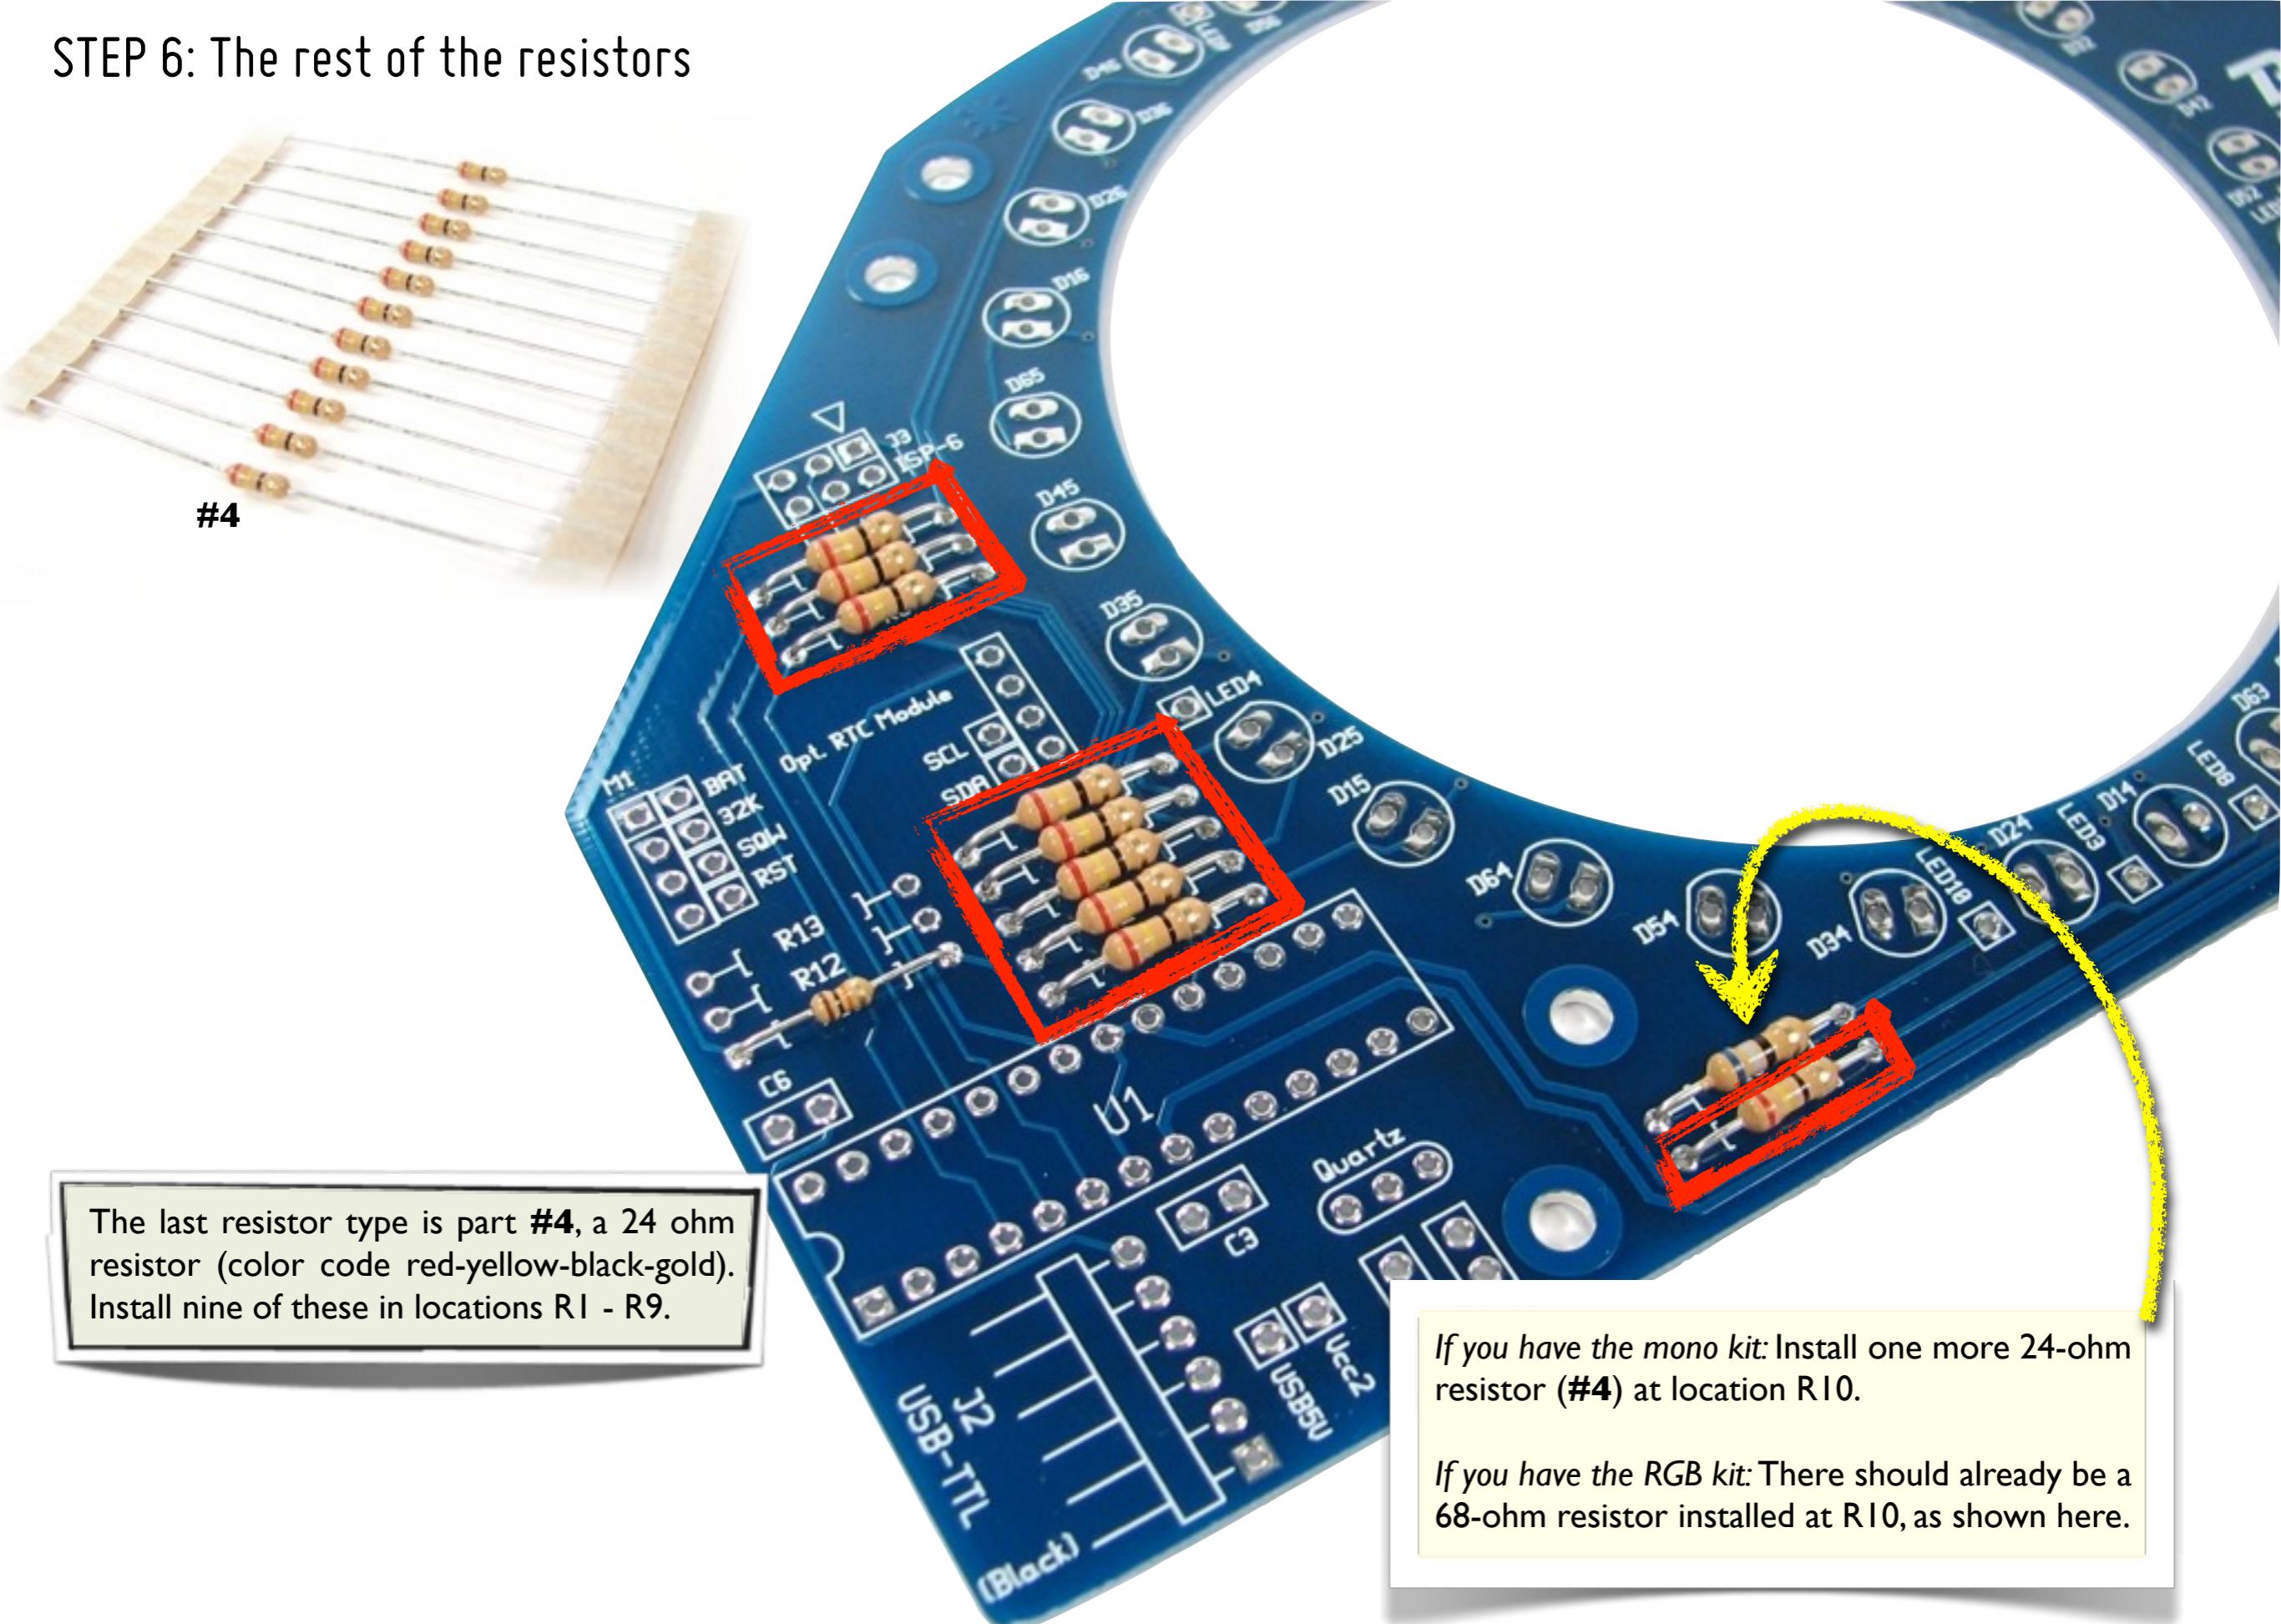

STEP 7: Crystal & Caps

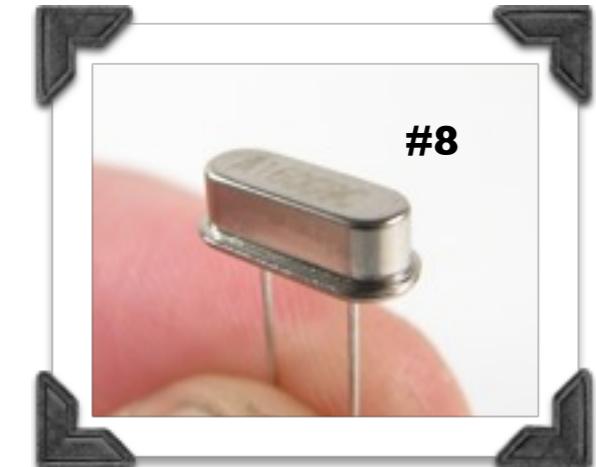

Install part **#8**, a 16 MHz quartz crystal. Its two pins go in the outer two holes of the location marked "Quartz." Solder both pins in place, much like a resistor.

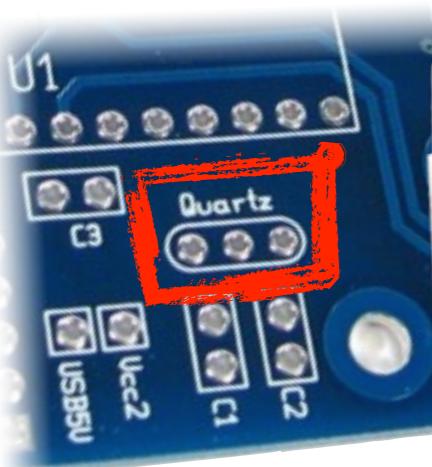

Parts **#9** are 18 pF ceramic capacitors-- little yellow beads with two pins. There are two similar types of ceramic capacitors in the kit, so these ones are marked with a *black stripe*.



Solder these two capacitors on the board at locations C1 and C2.




If they are taped together, pull them straight out of the tape.

STEP 8: Two more caps



(C6)

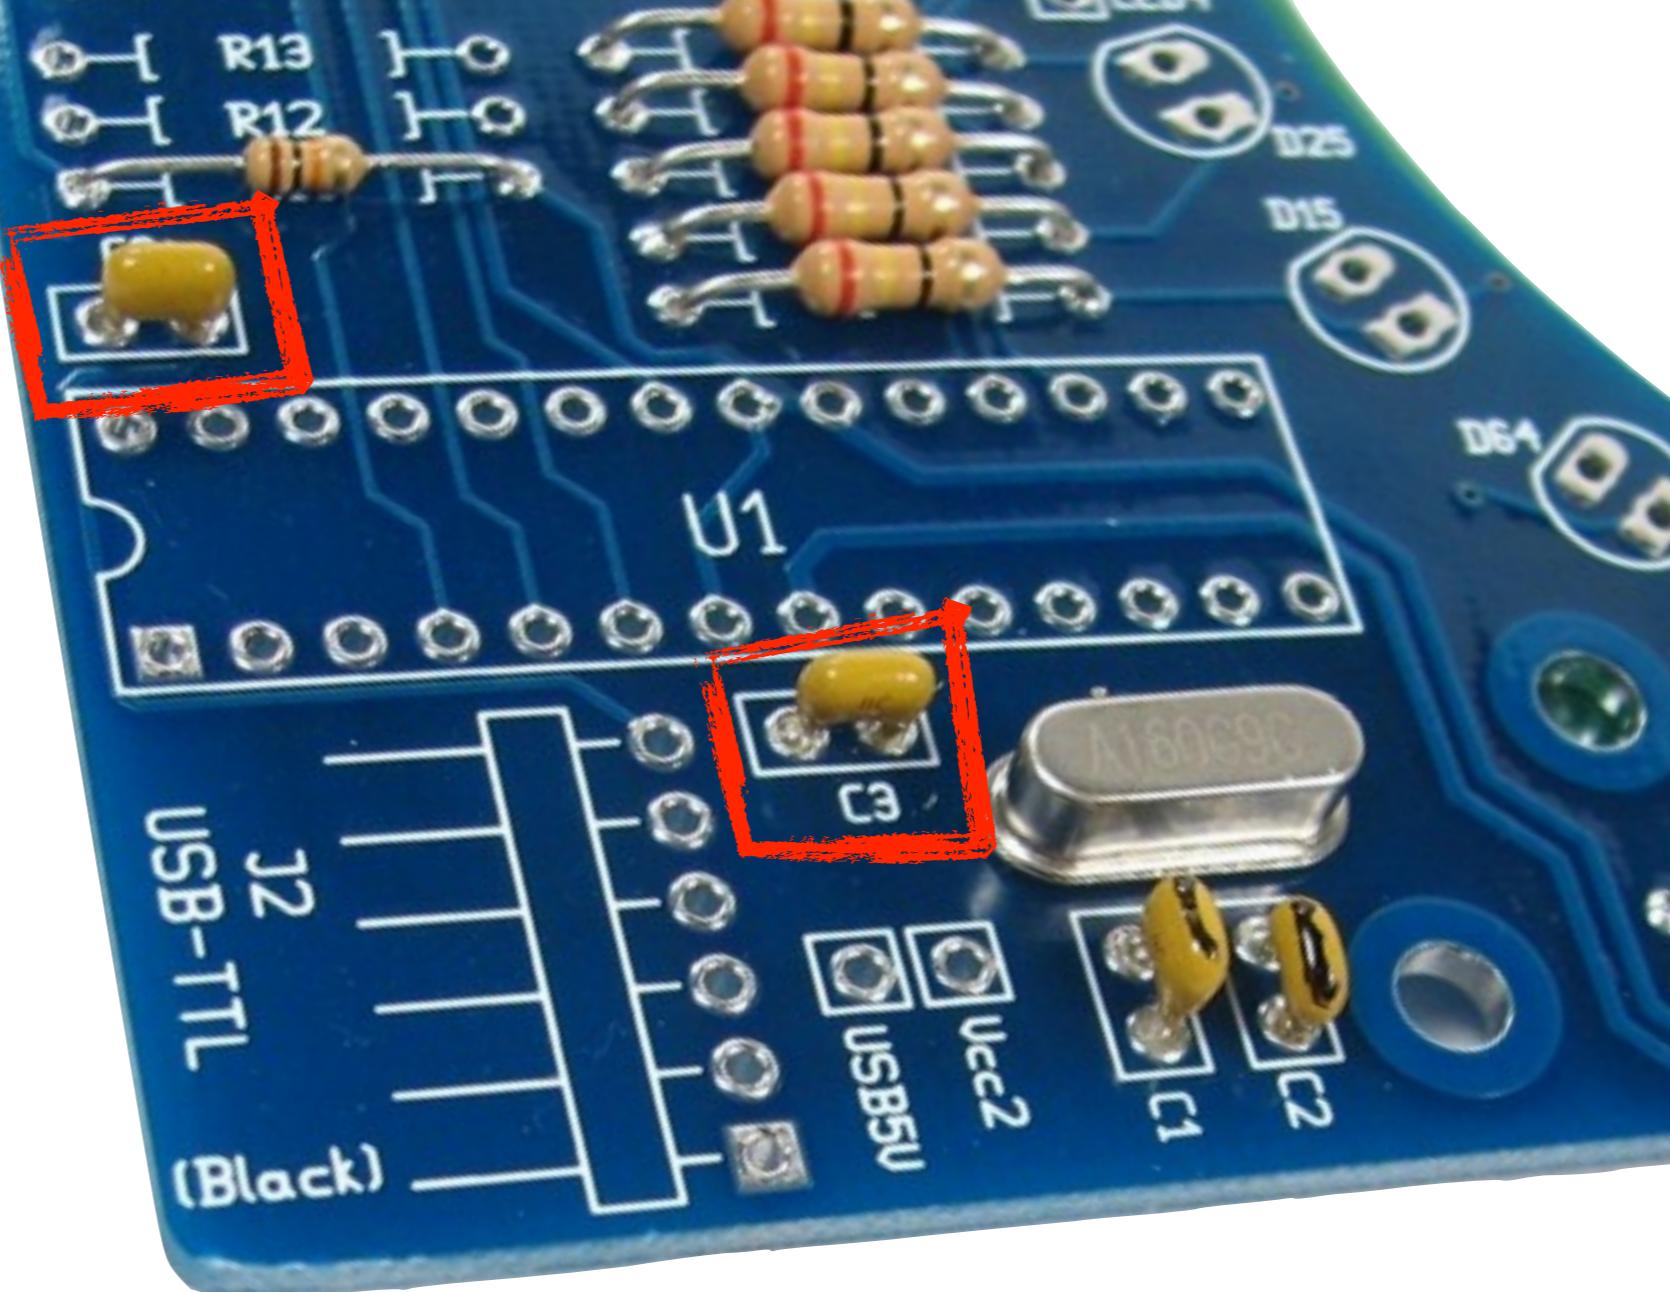


Parts #13 are 0.1 μF ceramic capacitors that look almost the same as the 18 μF caps. (These ones don't have the black stripe.)

Install two of them, at locations C3 and C6.


STEP 9: The USB-TTL connector

In this step, we add a header that allows the Bulbdial clock to be connected to a computer through an FTDI USB-TTL cable.


If you do not plan to connect to a computer, you can skip this step.

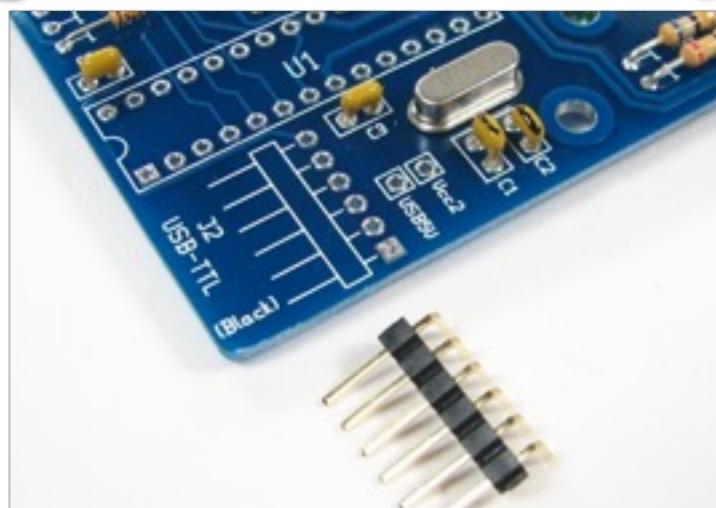


Part #11 is a 6-pin header that goes at location J2.

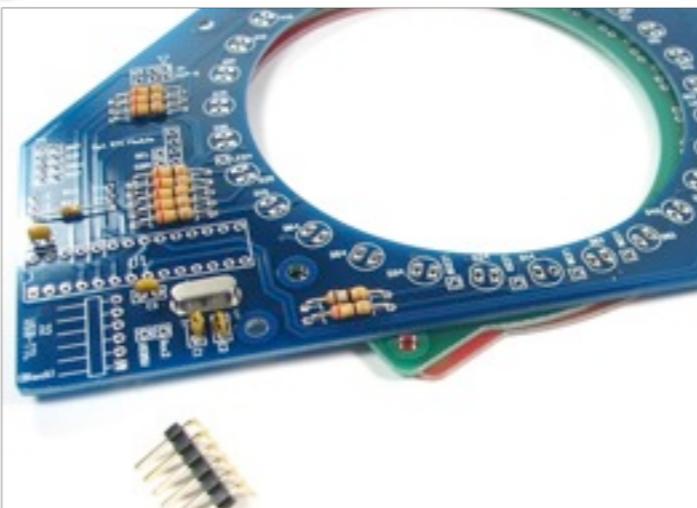


Set the circuit board atop the other two, to raise it a bit above your work surface.

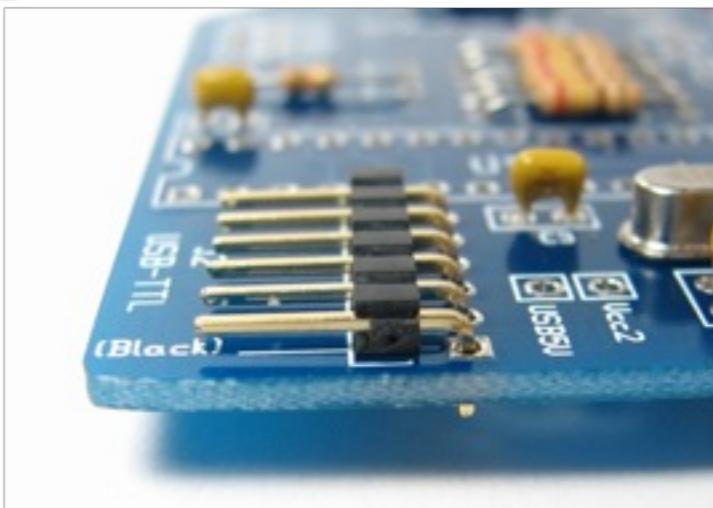


Place the header in its location; it should sit flat as shown.

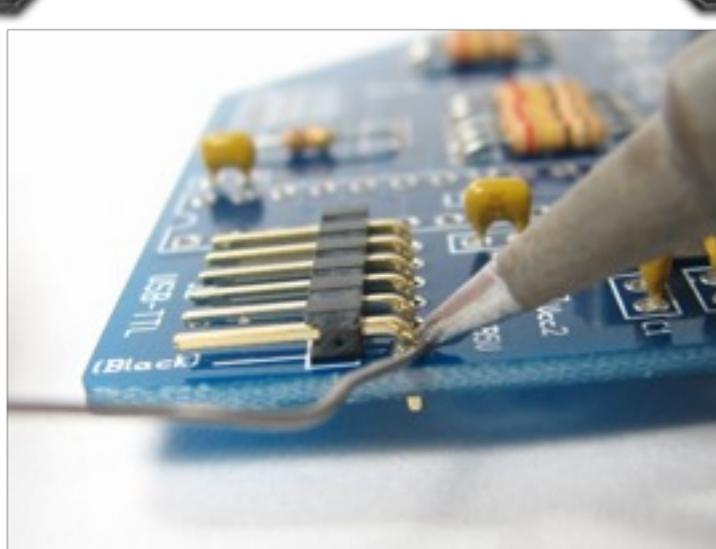

From the top, solder one pin of the header to tack it in place.

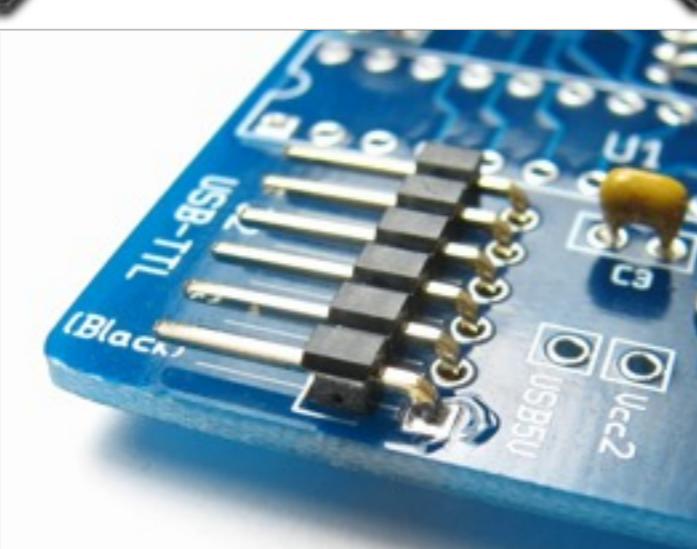


Here's how it looks with one pin tacked in place.

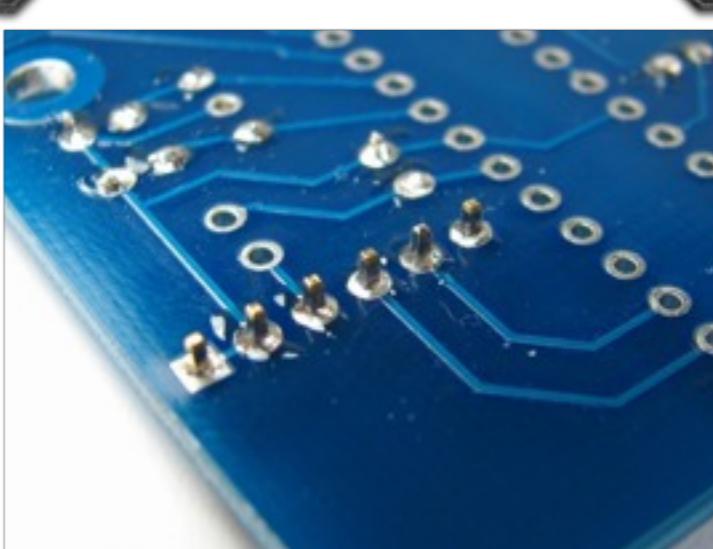

Solder the other five pins on the bottom, and then finish up the first one. The leads do not need trimming.

STEP 10: Buttons!

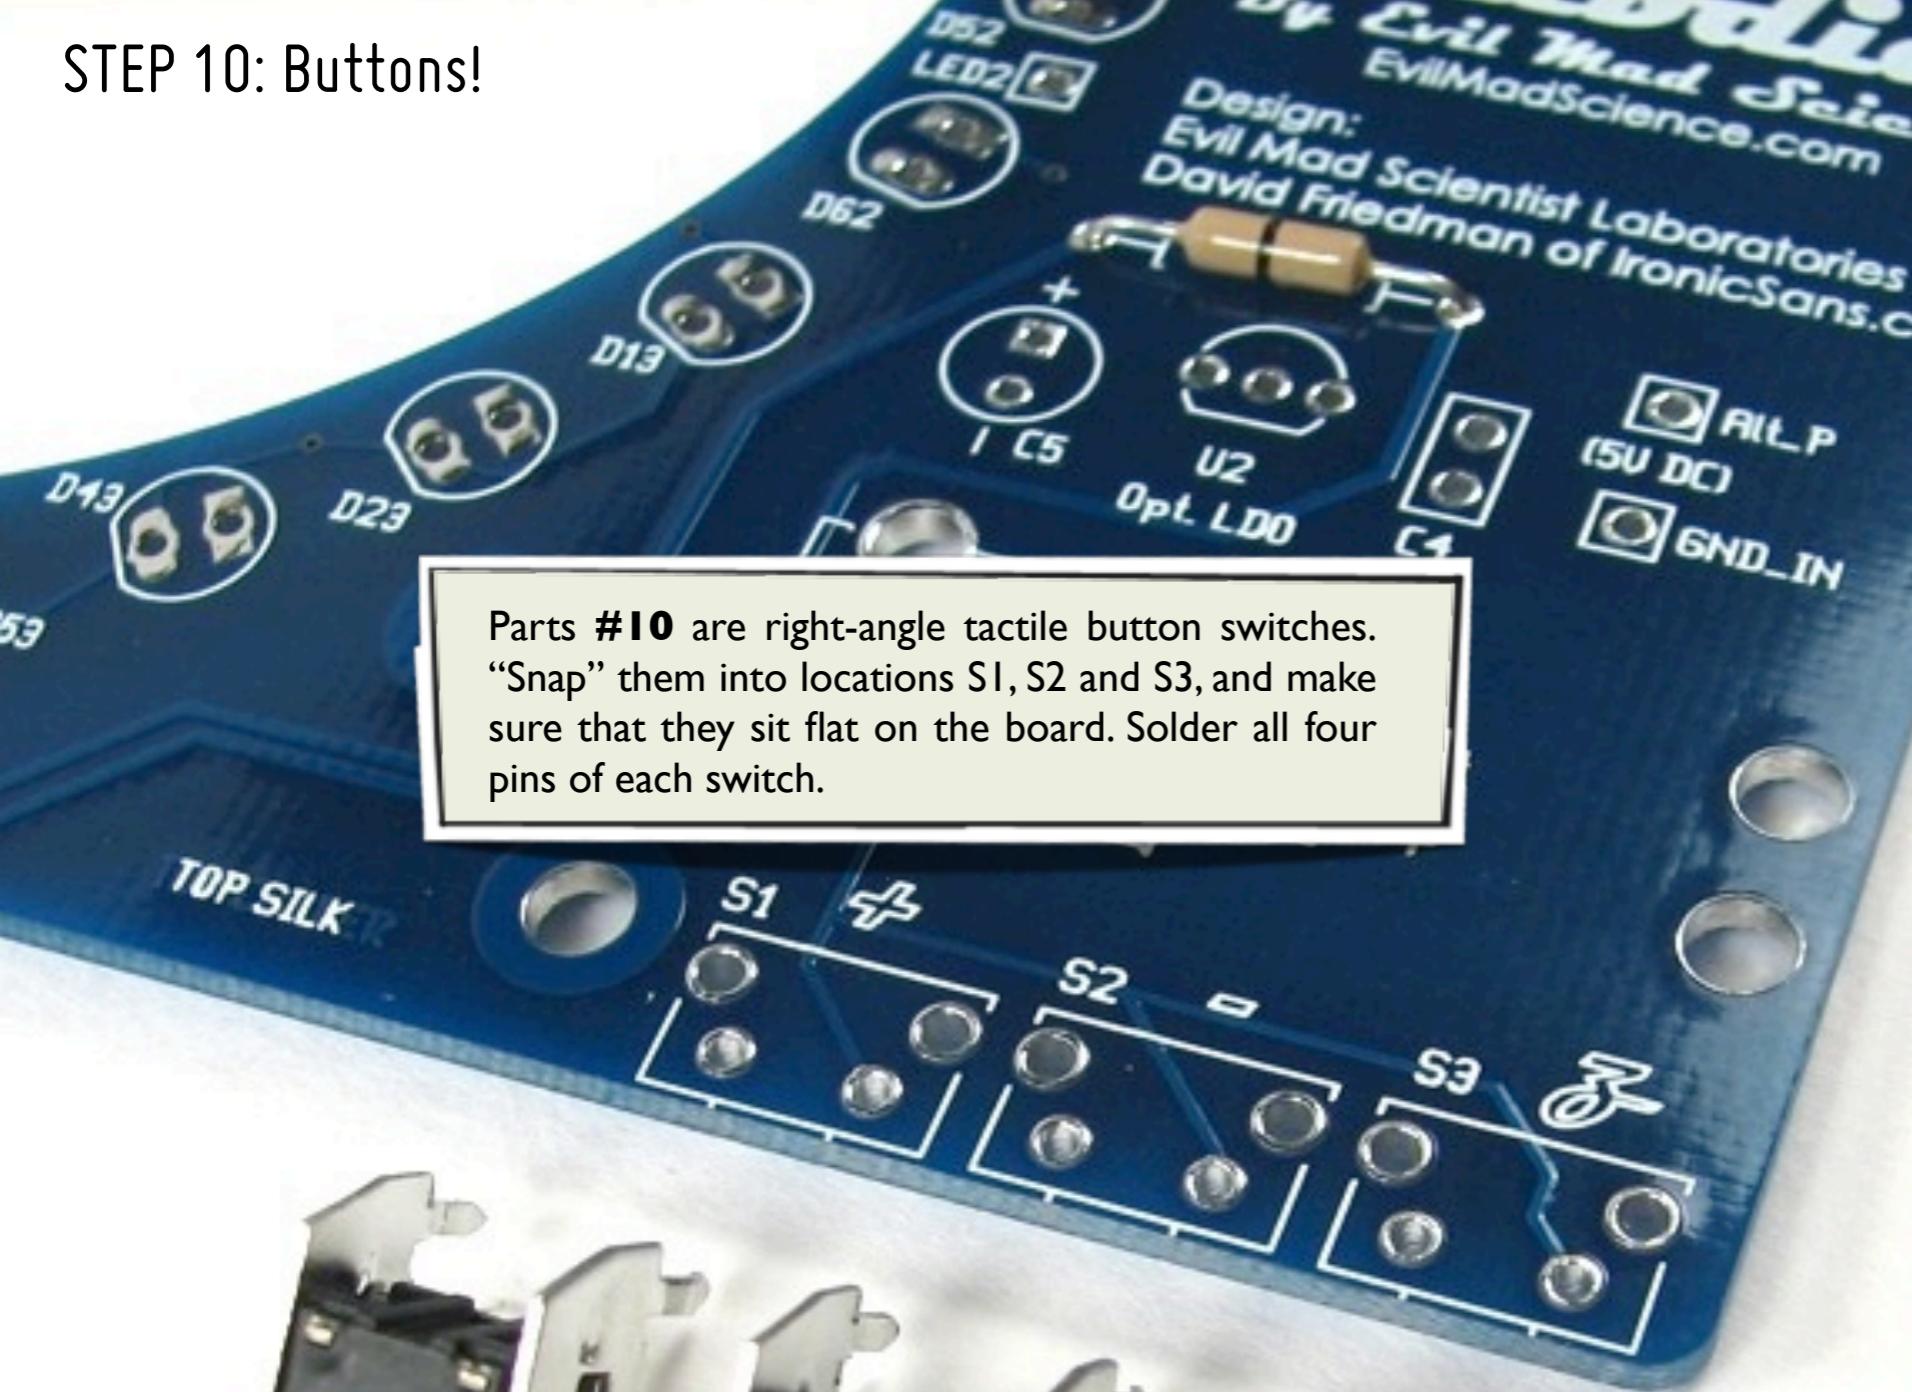


STEP 11a: AVR Microcontroller

Part #14 is an ATmega168, a type of AVR microcontroller. It goes in location U1, and must be oriented correctly.




First, identify the end of both the chip and of location U1 that have the half-moon shape.

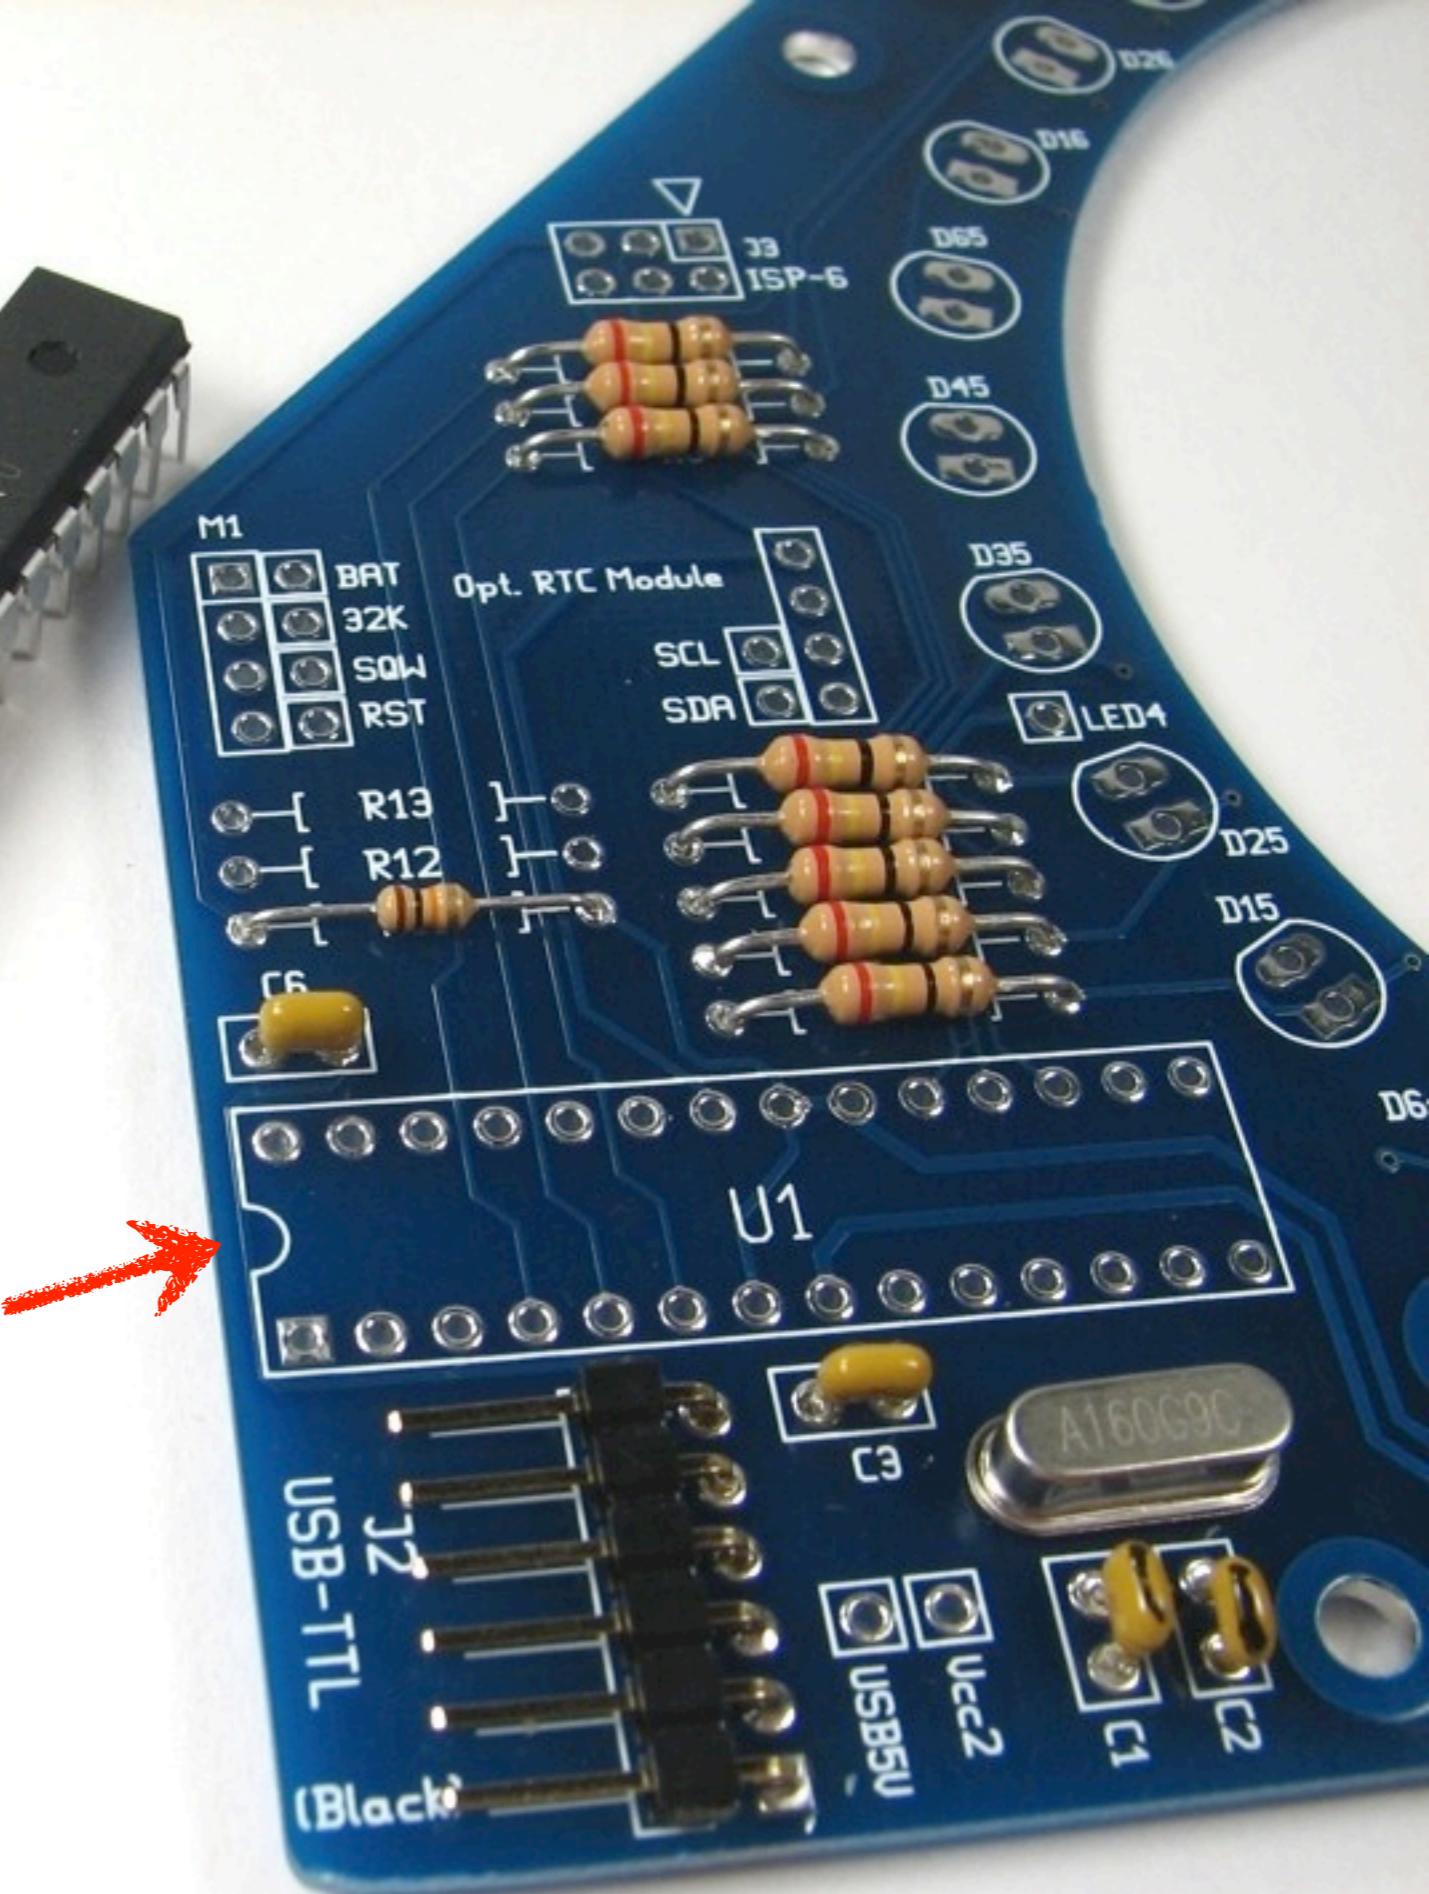

TO BE CONTINUED...


STEP 11b: AVR Microcontroller, continued

Now place the chip in its location, matching the marks on the chip and circuit board.

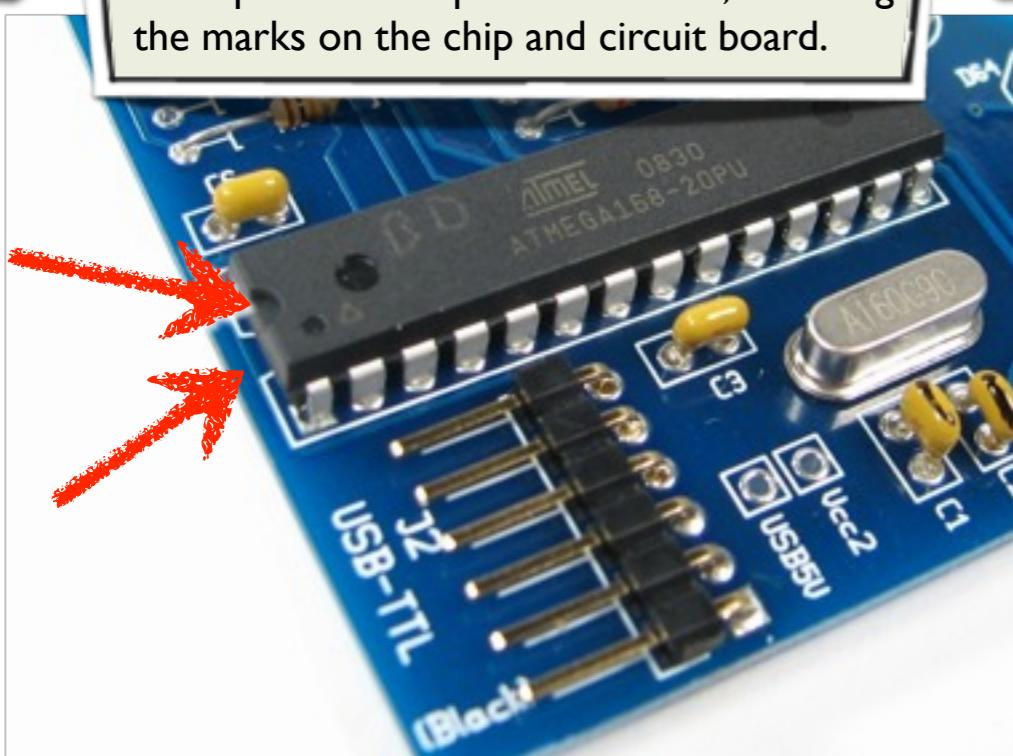


The chip should easily slip into the board. If necessary, bend the pins of the chip to straight up and down before inserting the chip. Do not bend them by hand; bend all pins on one side at a time by pushing them against a hard flat surface.

From end of chip:

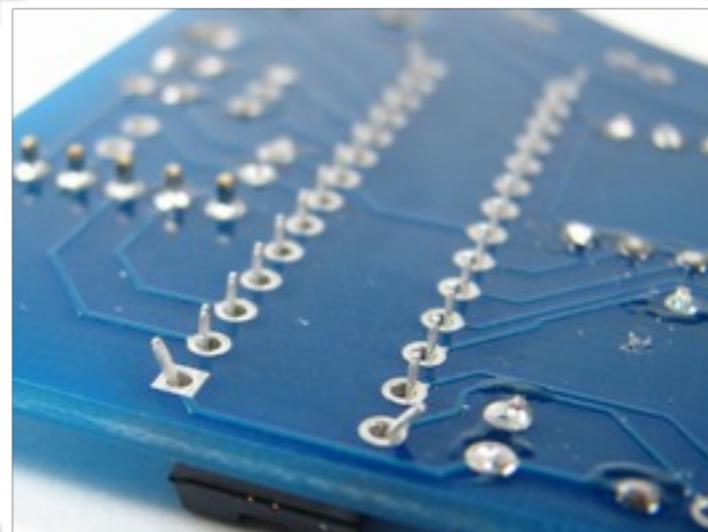


To hold the chip in place while you solder it, you can bend out the corner pins, again by up to 45°.

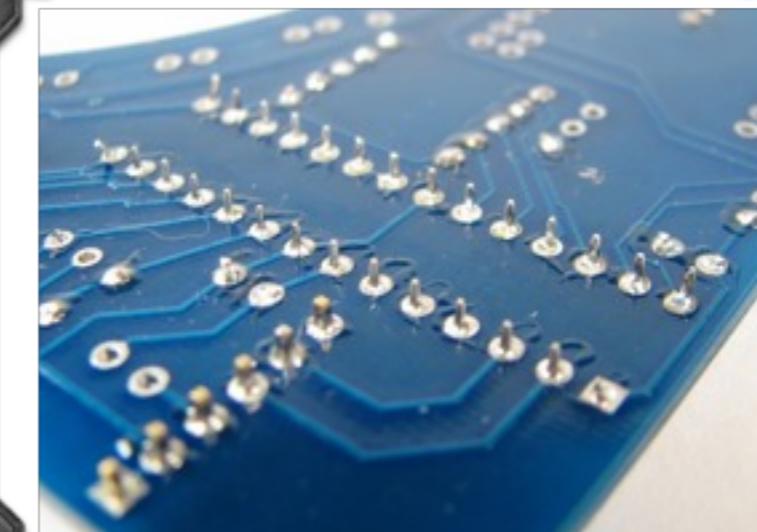


Solder every pin of the chip. Remember to keep the soldering time per pin brief. The pins do not need to be clipped.


STEP 12: Power jack

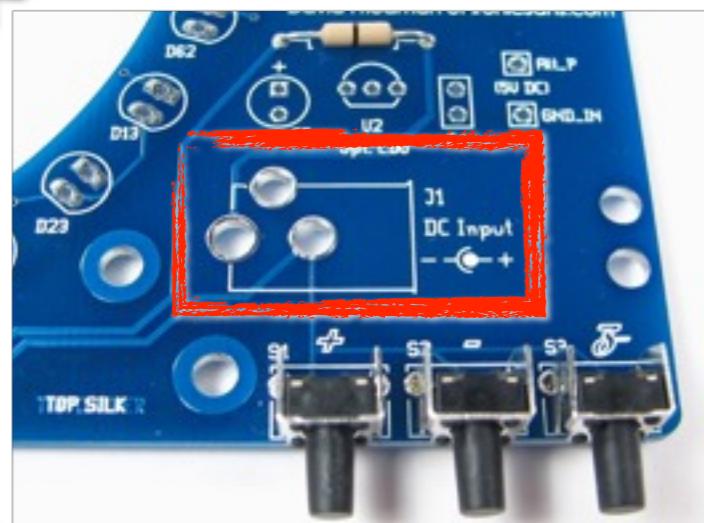


The DC power jack, #15, goes in location J1, matching the outline on the board.

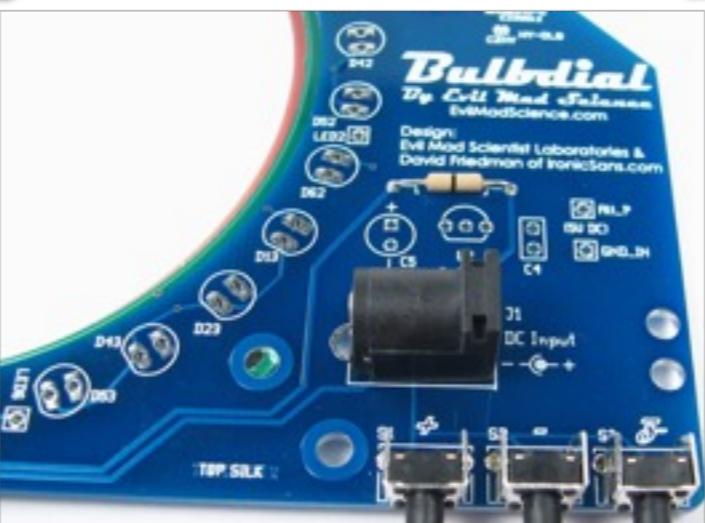

Set the circuit board atop the other two, to raise it a bit above your work surface, as in step 9. Place the jack in its location.

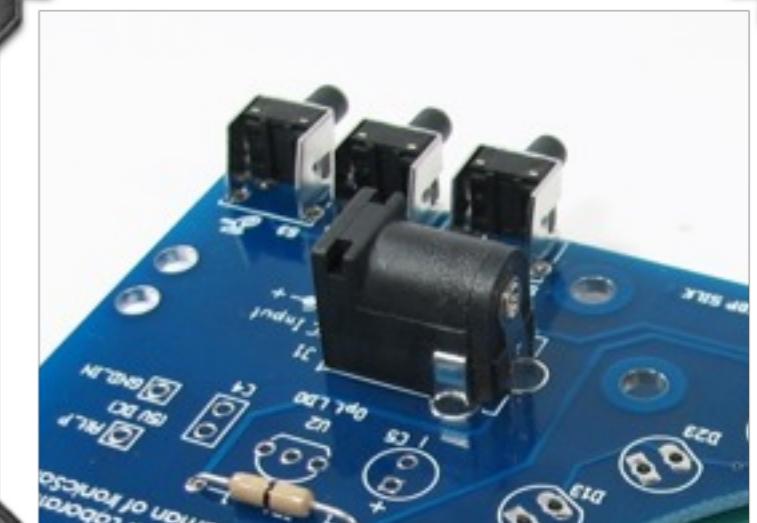


From around back, it is possible to solder one pin of the jack to tack it in place.

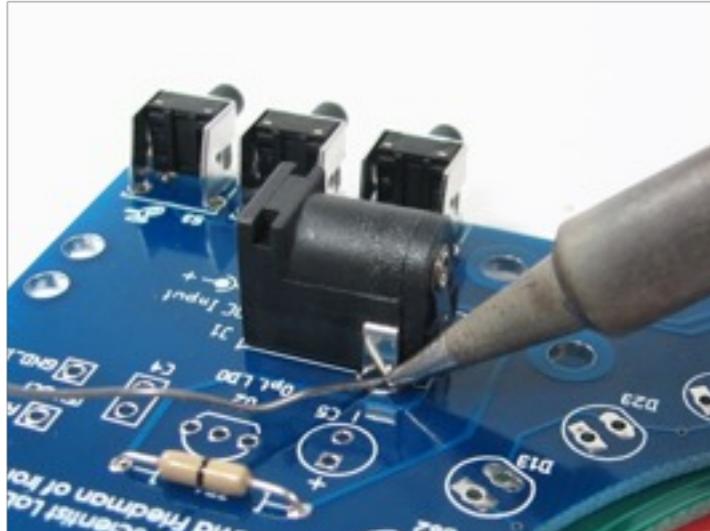

Solder one pin of the connector to tack it in place. The larger metal here takes a while to heat, up to about 8 s.



Here's the view from the bottom side after tacking the jack in place. Solder the other two holes as well.

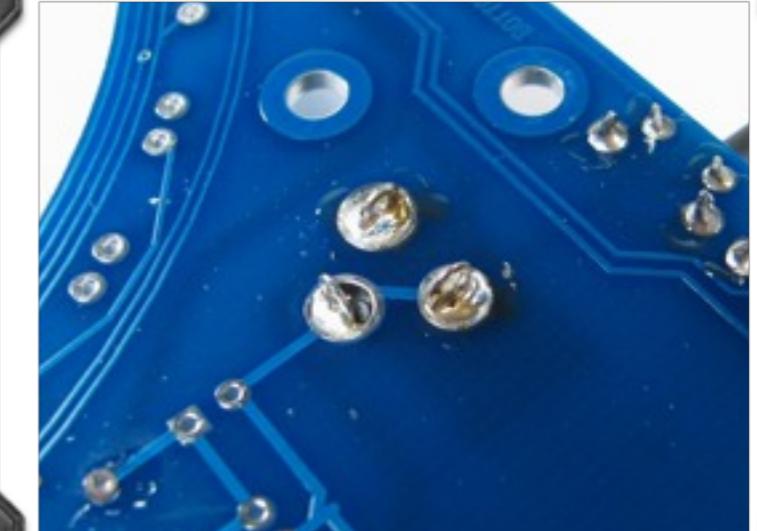

All three holes are now soldered. It is not necessary to completely fill the holes with solder.


STEP 13: RTC Sockets

In this step, we add the sockets that allows the Bulbdial clock to be connected to a real-time clock module (e.g., Chronodot)



If you do not plan to use an RTC module, you can skip this step.




Parts #12 are 4-pin female headers that go at location M1.

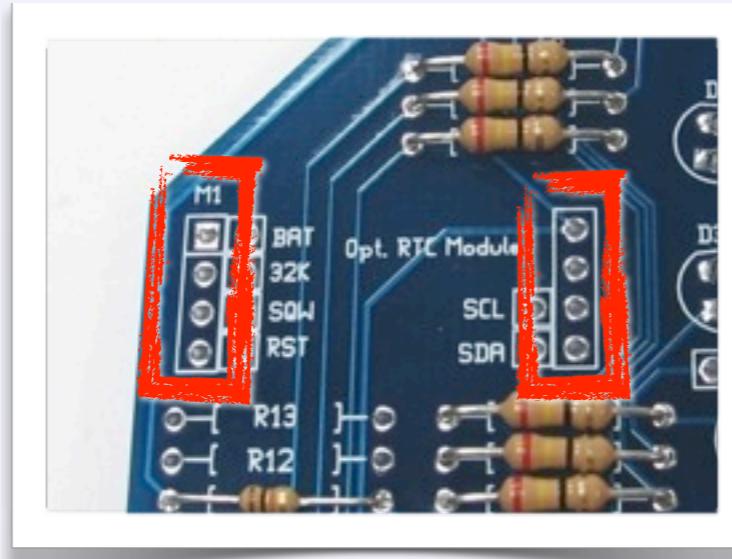


There are actually two locations at M1, the headers go in the outer positions.

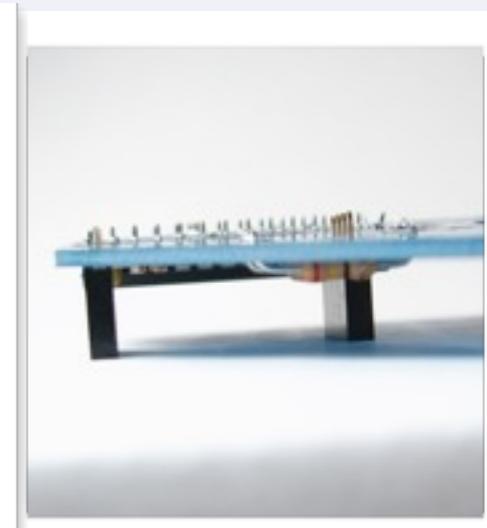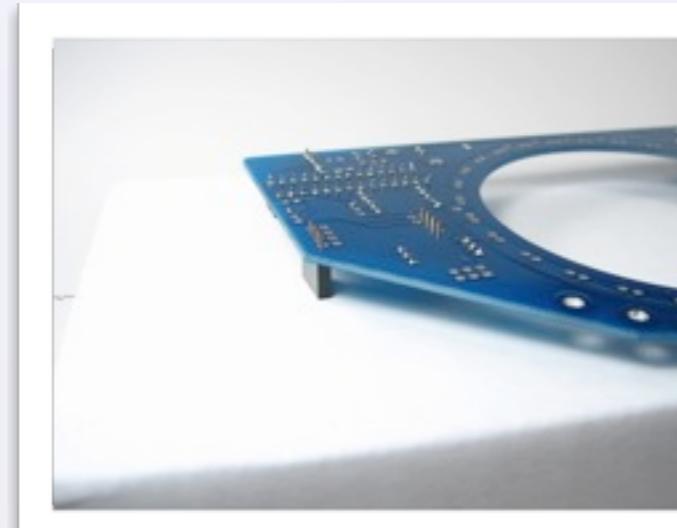


Put the headers in their places. Turn the board upside down to rest flat on the headers. To verify that they are sitting flat, it may be helpful to rest it on top of a pedestal, such as the kit box.

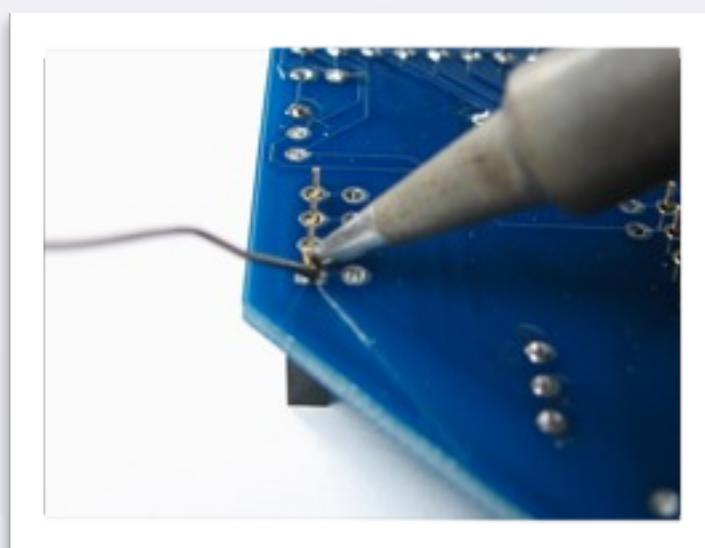


Solder one pin of each header to tack them in place.

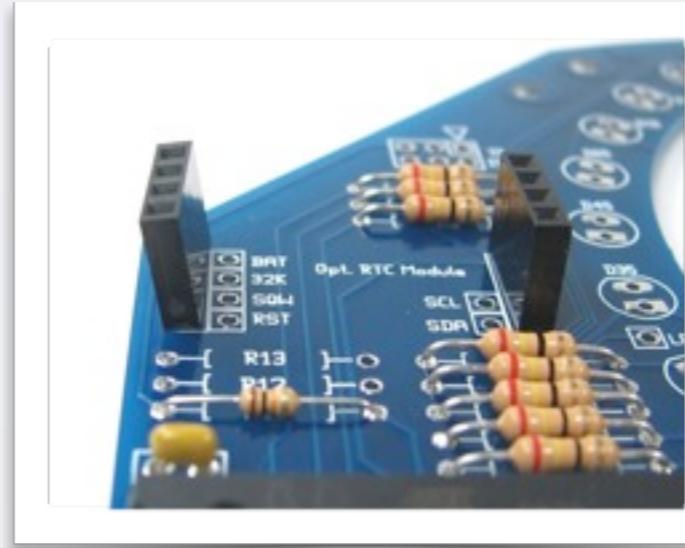

With only one pin soldered, the headers are somewhat “hinged”-- do your best to straighten both of them.

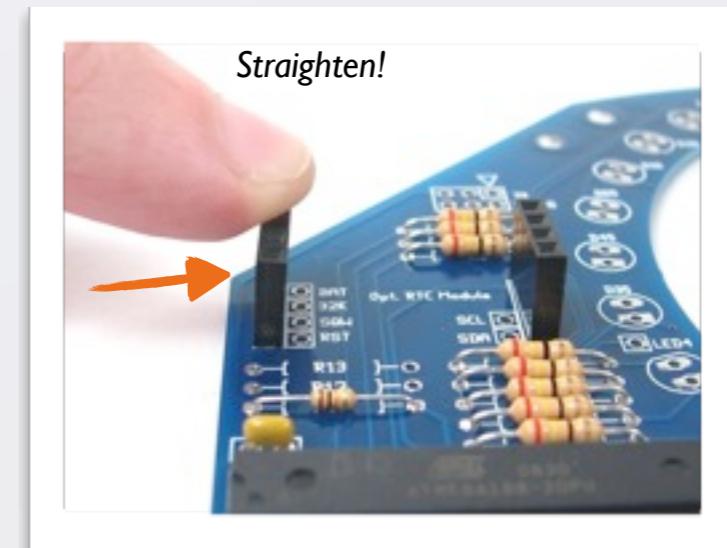

Straighten!
Finally, solder the remaining three pins of each header.

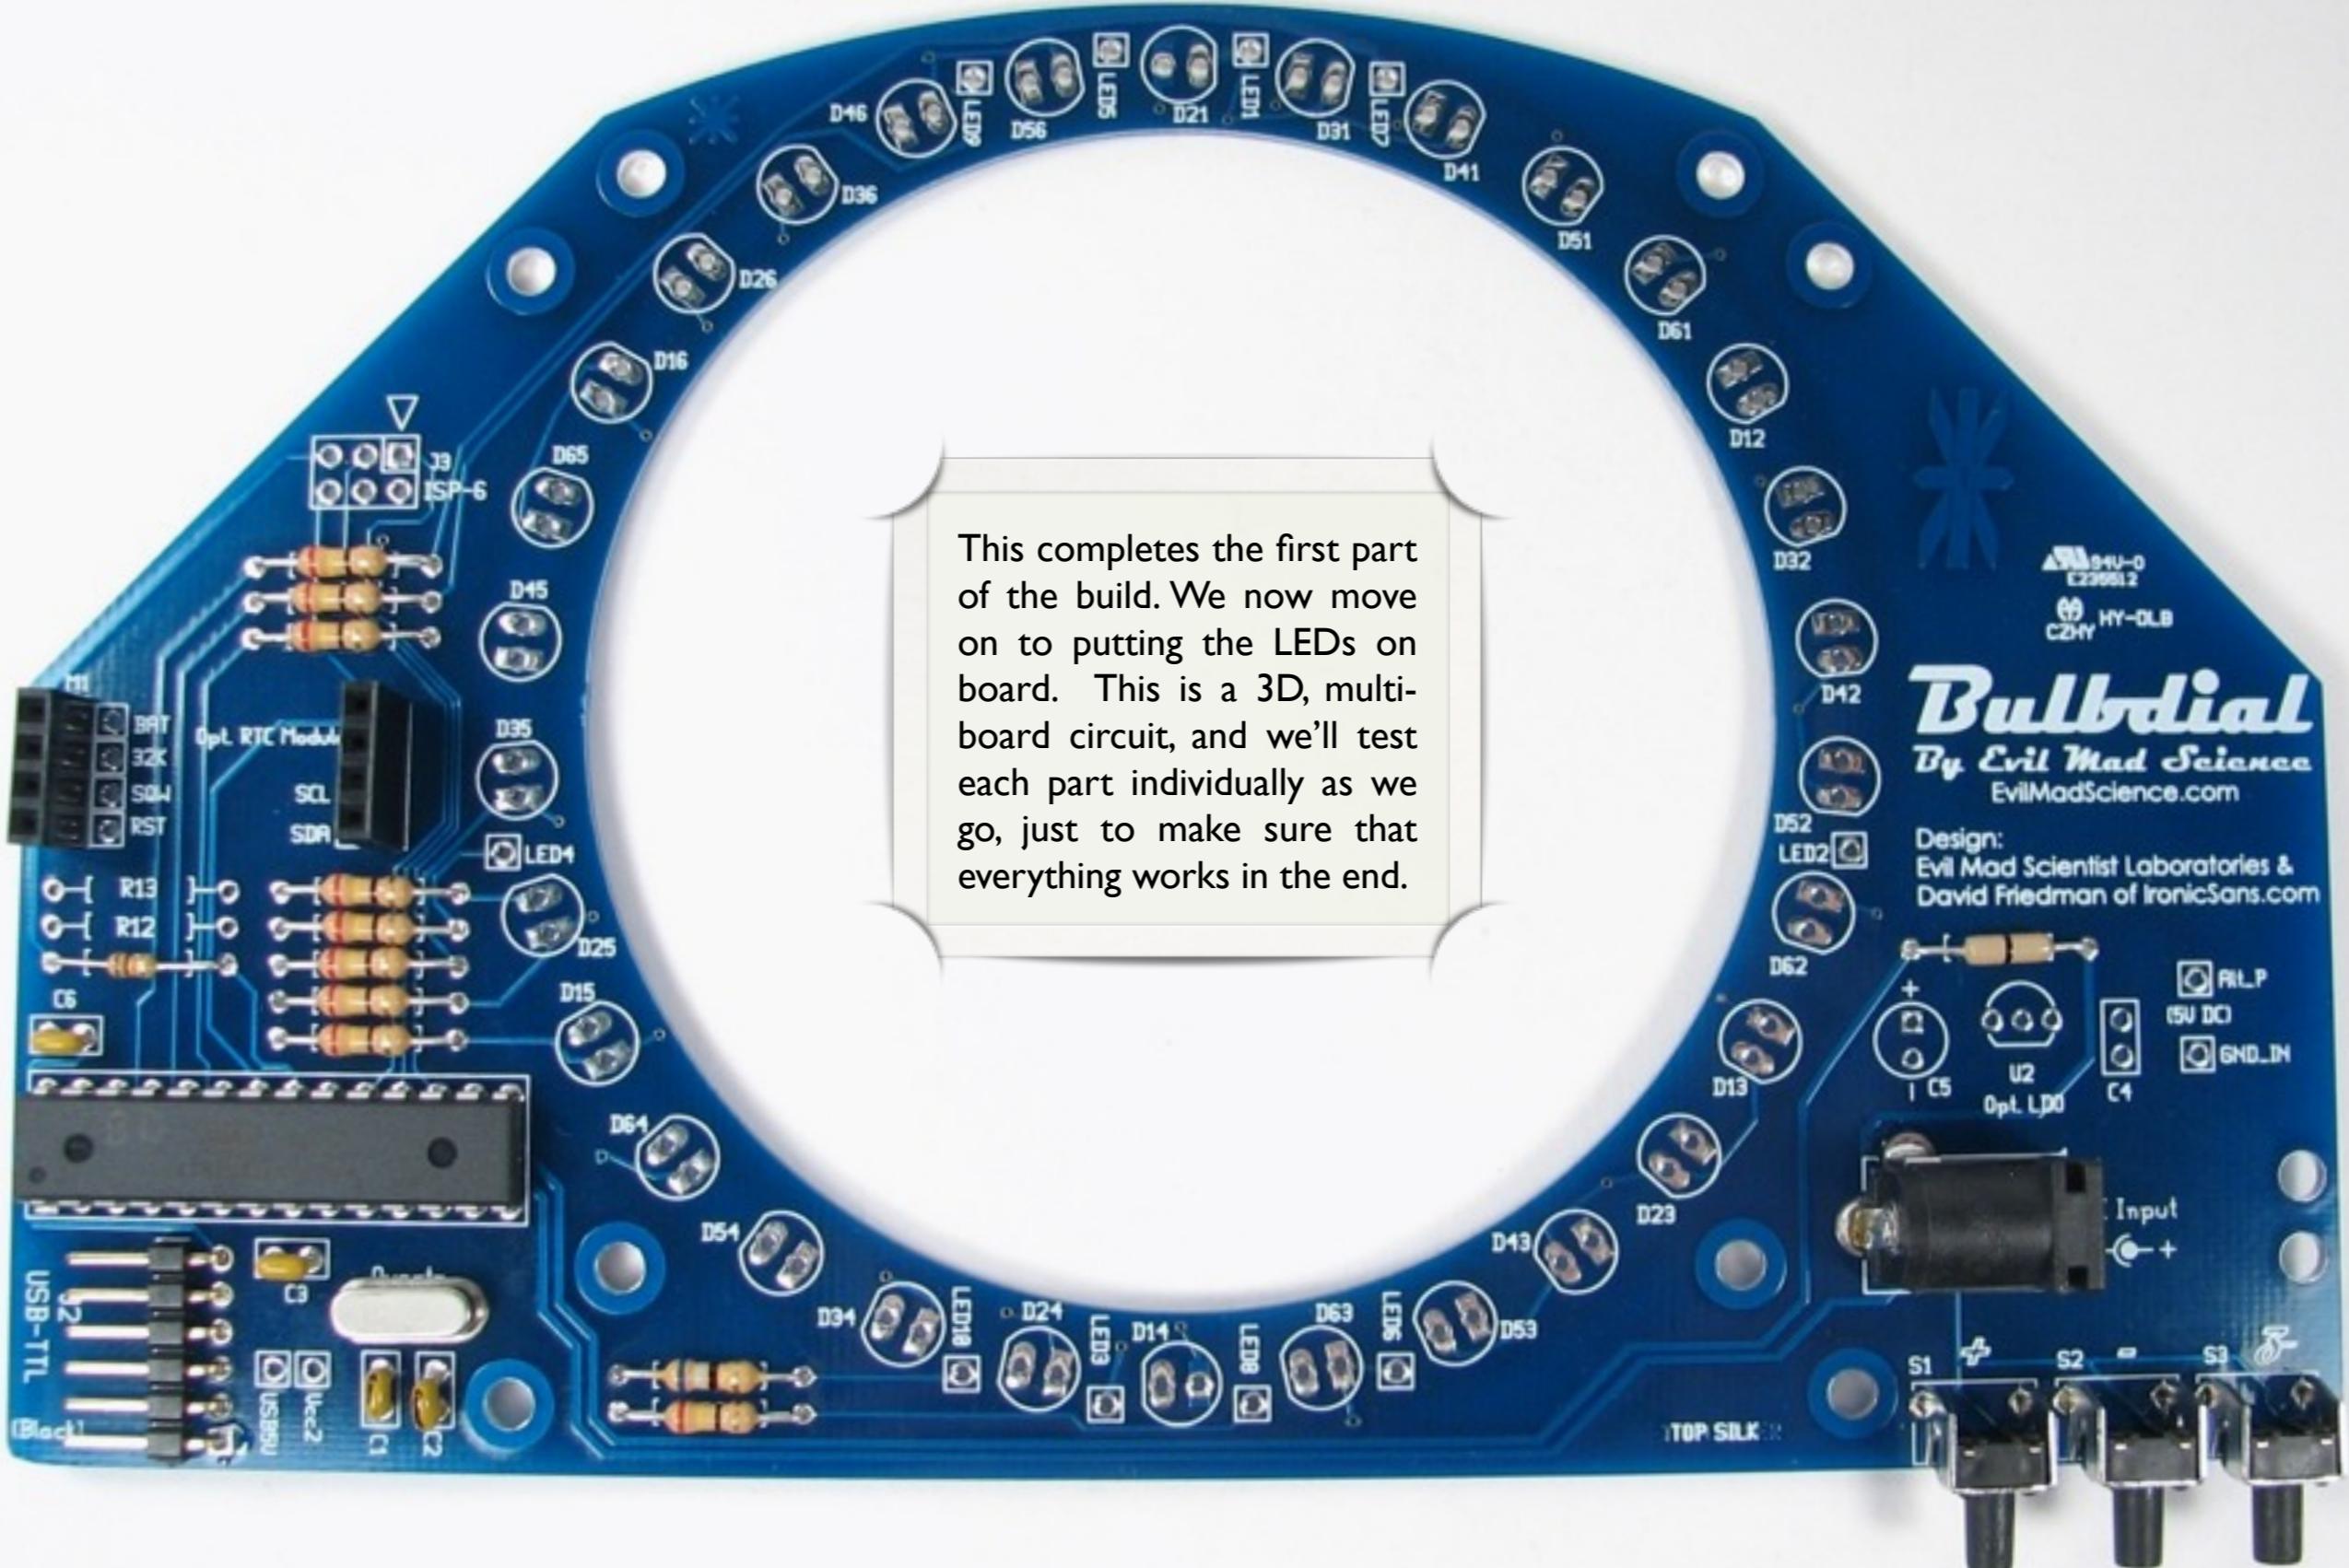

This completes the first part of the build. We now move on to putting the LEDs on board. This is a 3D, multi-board circuit, and we'll test each part individually as we go, just to make sure that everything works in the end.


STEP 14: The LED bending guide

Properly aligning the LEDs to make good shadows is an important part of the assembly process. We use several tools, including this LED guide, to ease this process along.


[If you do not have an LED guide, bend the LEDs 5.4 mm from their base, in the direction shown.]




The LED bending jig is part #17. To follow along, grab an LED from your bag of blue* LEDs, #16A.

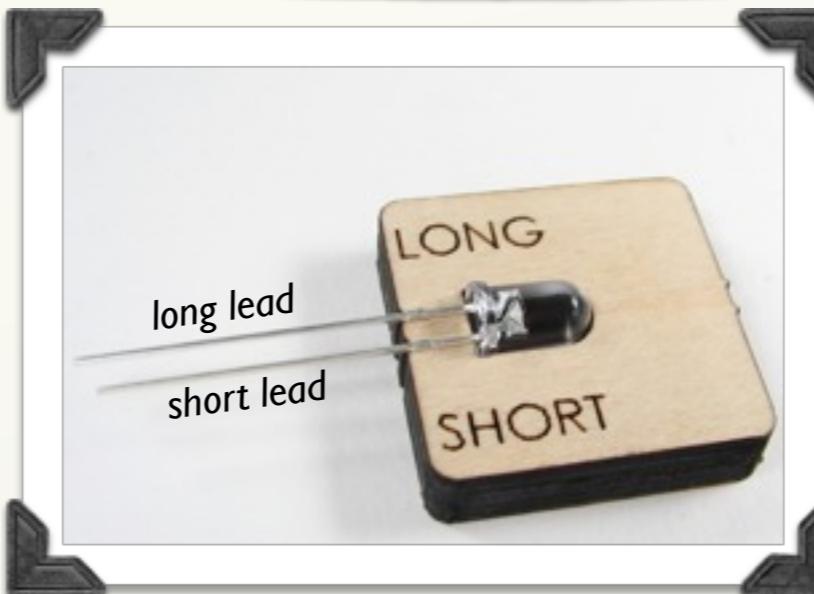


Each LED has a long and short lead. Place an LED in the jig, being careful to put the short lead on the side labeled "SHORT."

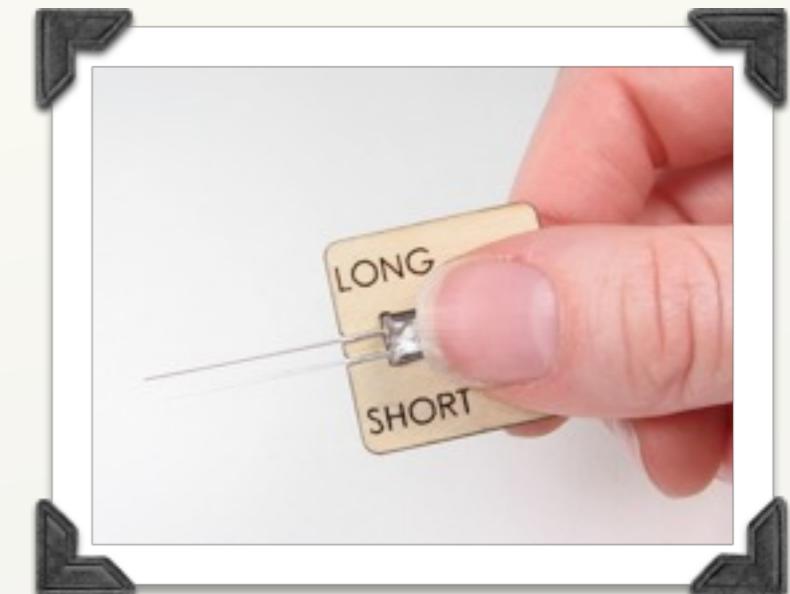


Use your thumb to hold the LED body in place.

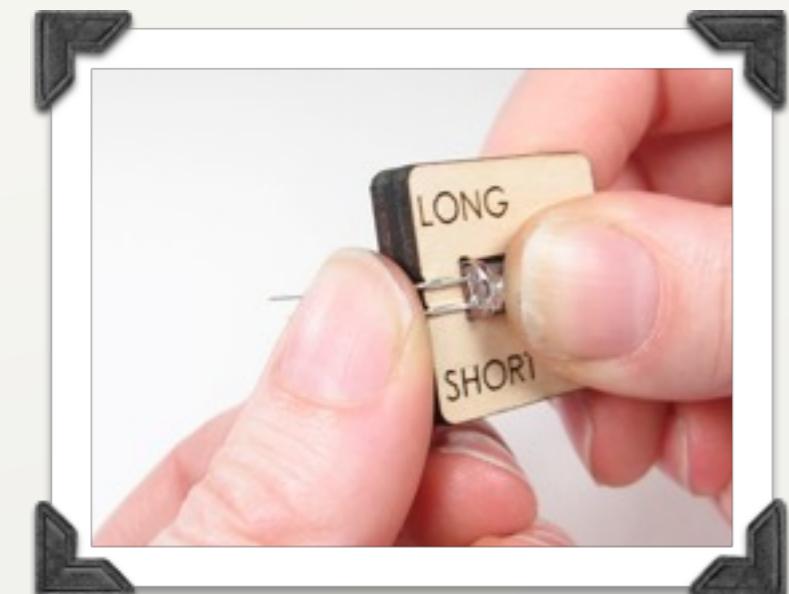

Use your other thumb, or a firm surface, to bend the leads firmly around the corner.

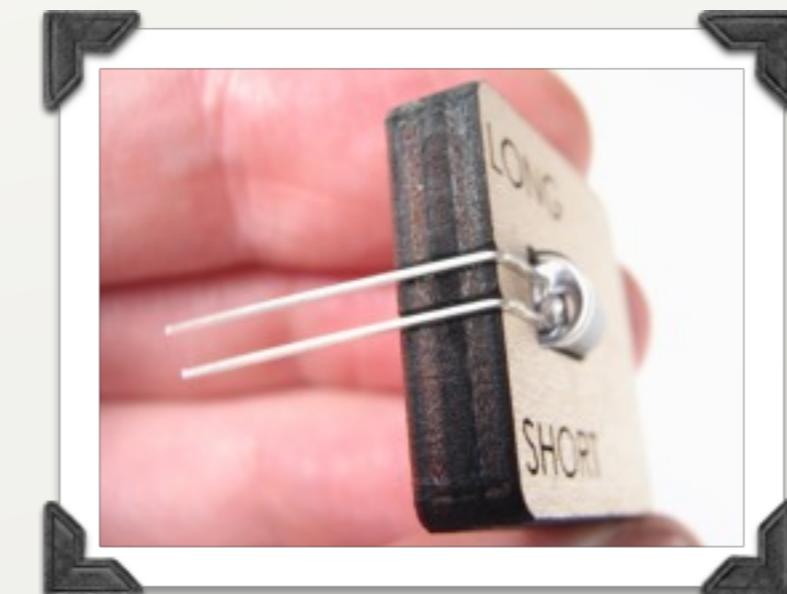


Executed properly, the LED should have a sharp, right-angle bend and not spring out.

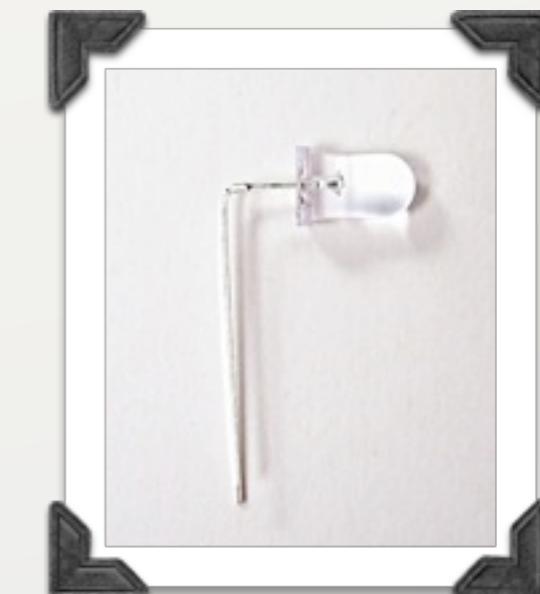

The LED, bent with the guide, with its 90° turn intact. Your LEDs should look like this.


STEP 15: Get ready to build the “blue” ring.

Before starting to put the first ring of LEDs together, gather up the necessary materials and have them at the ready. You’ll also need to bend the first 30 LEDs to shape. We’ll be using this setup to locate the LEDs in place before soldering them.

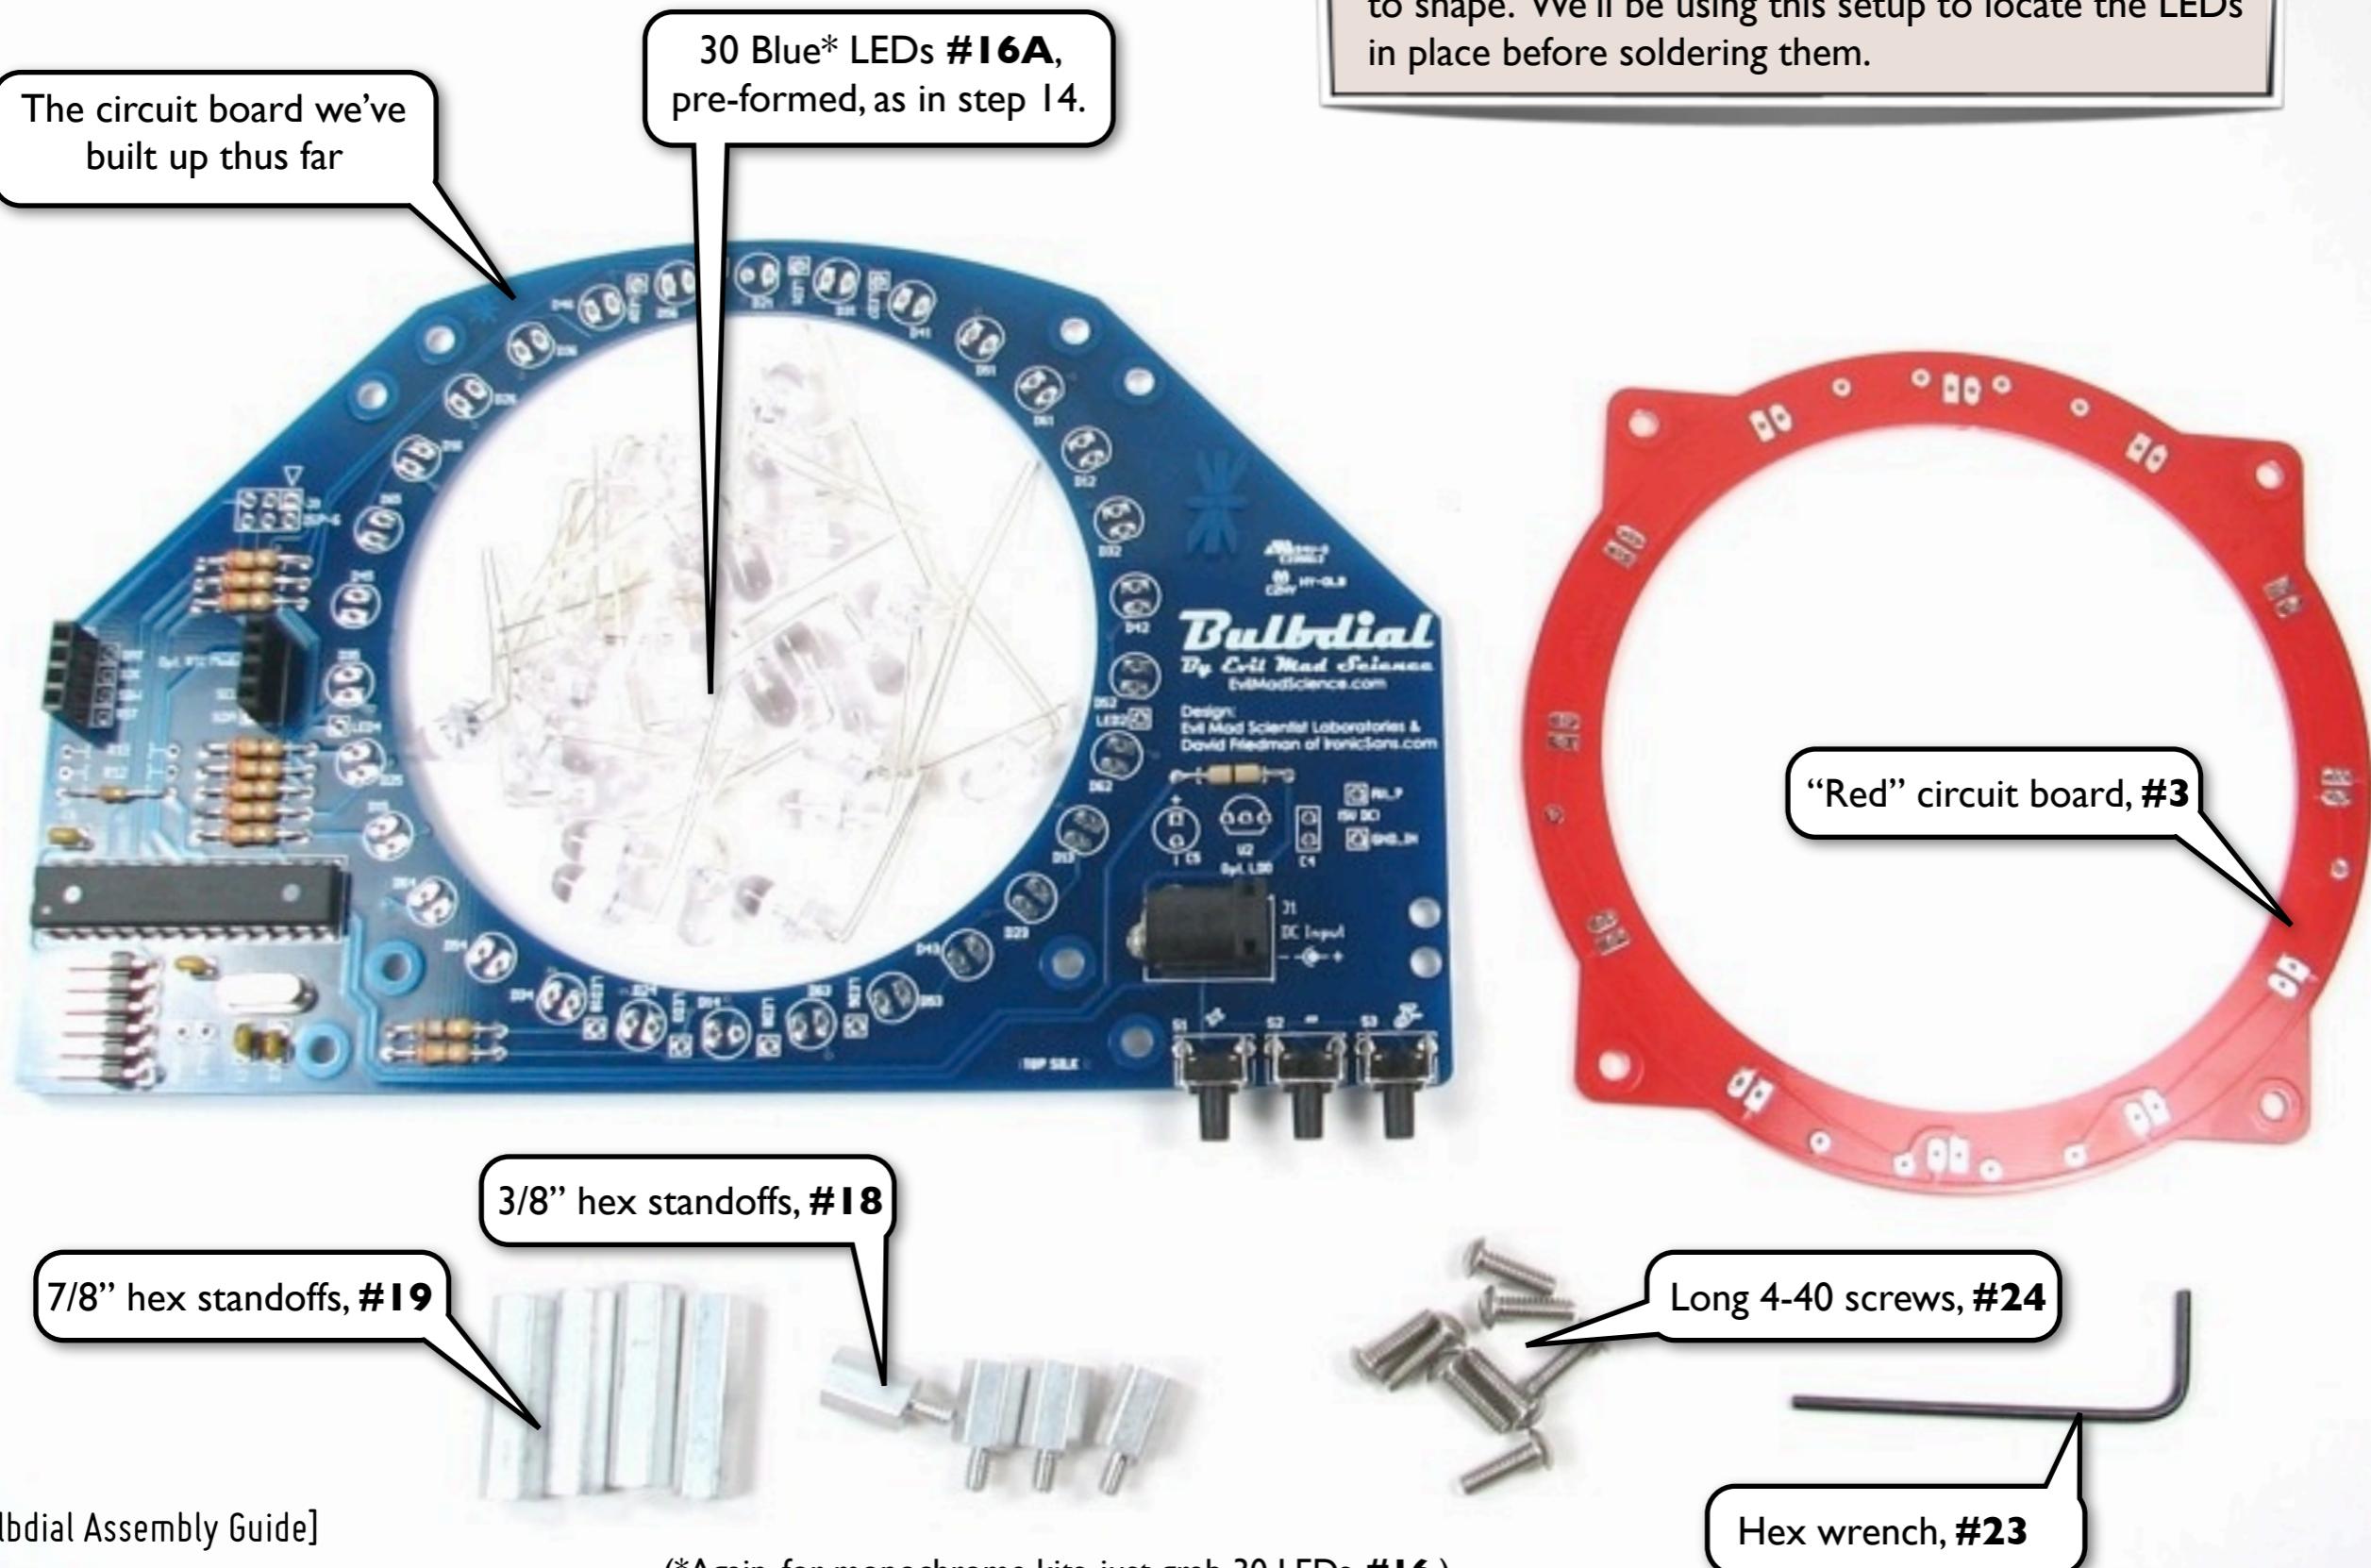


STEP 16: The temporary bridge

Use the screws to mount the four long hex standoffs on the top side of the circuit board, in the outer four holes.
(Do not tighten the standoffs; this is a temporary fixture.)




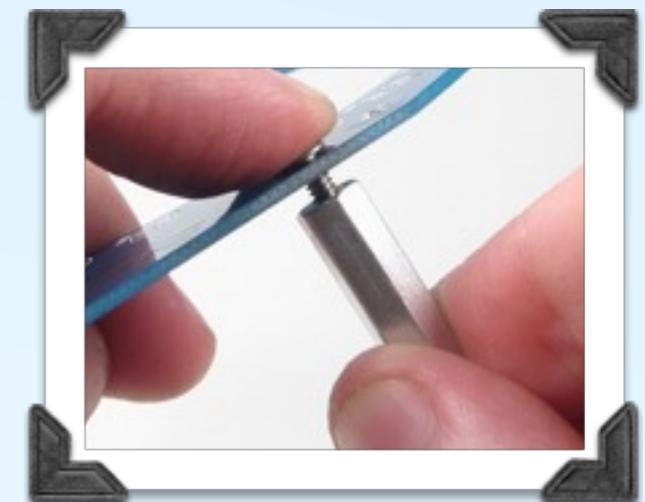


Tip: If you press your finger over the screw head, you can usually screw on the standoffs without using the hex wrench.

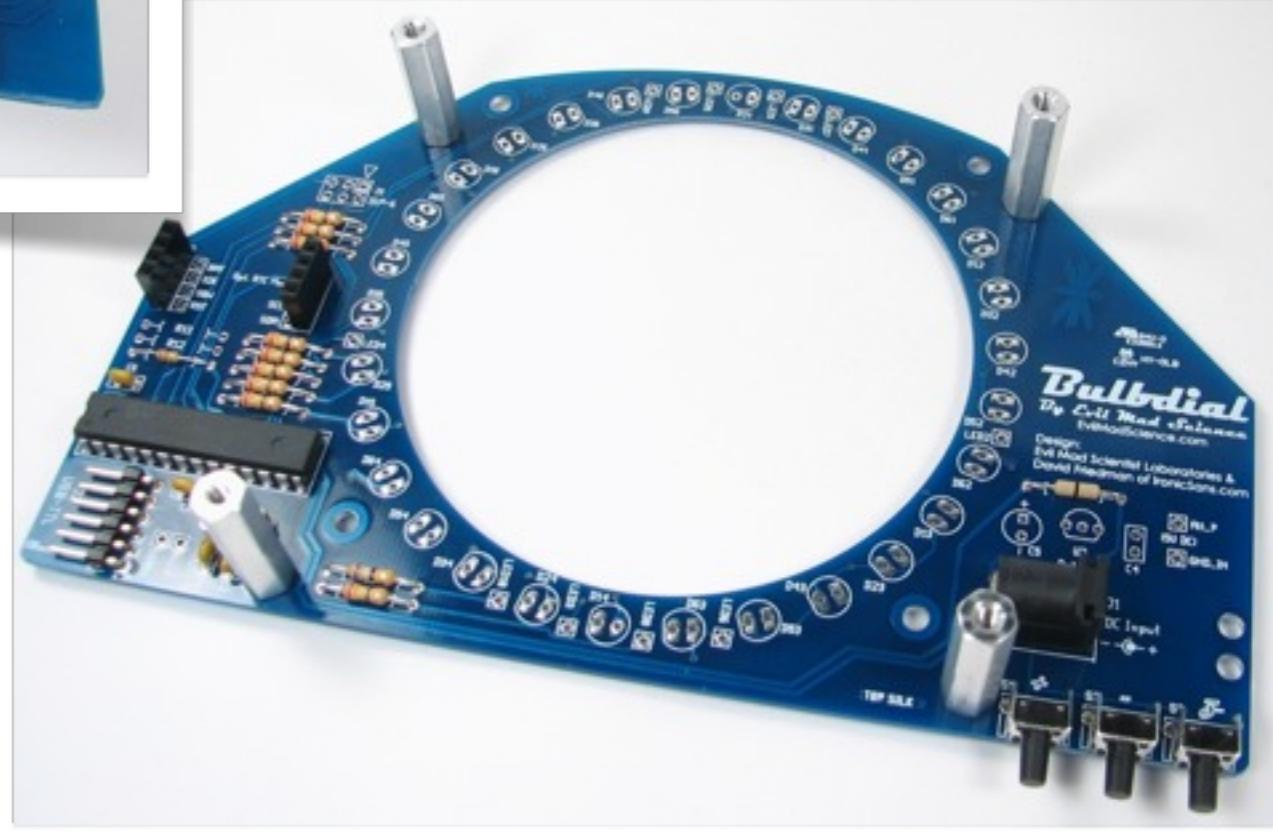

STEP 17: Insert first ring of LEDs


Turn over the board so that it sits on the standoffs.

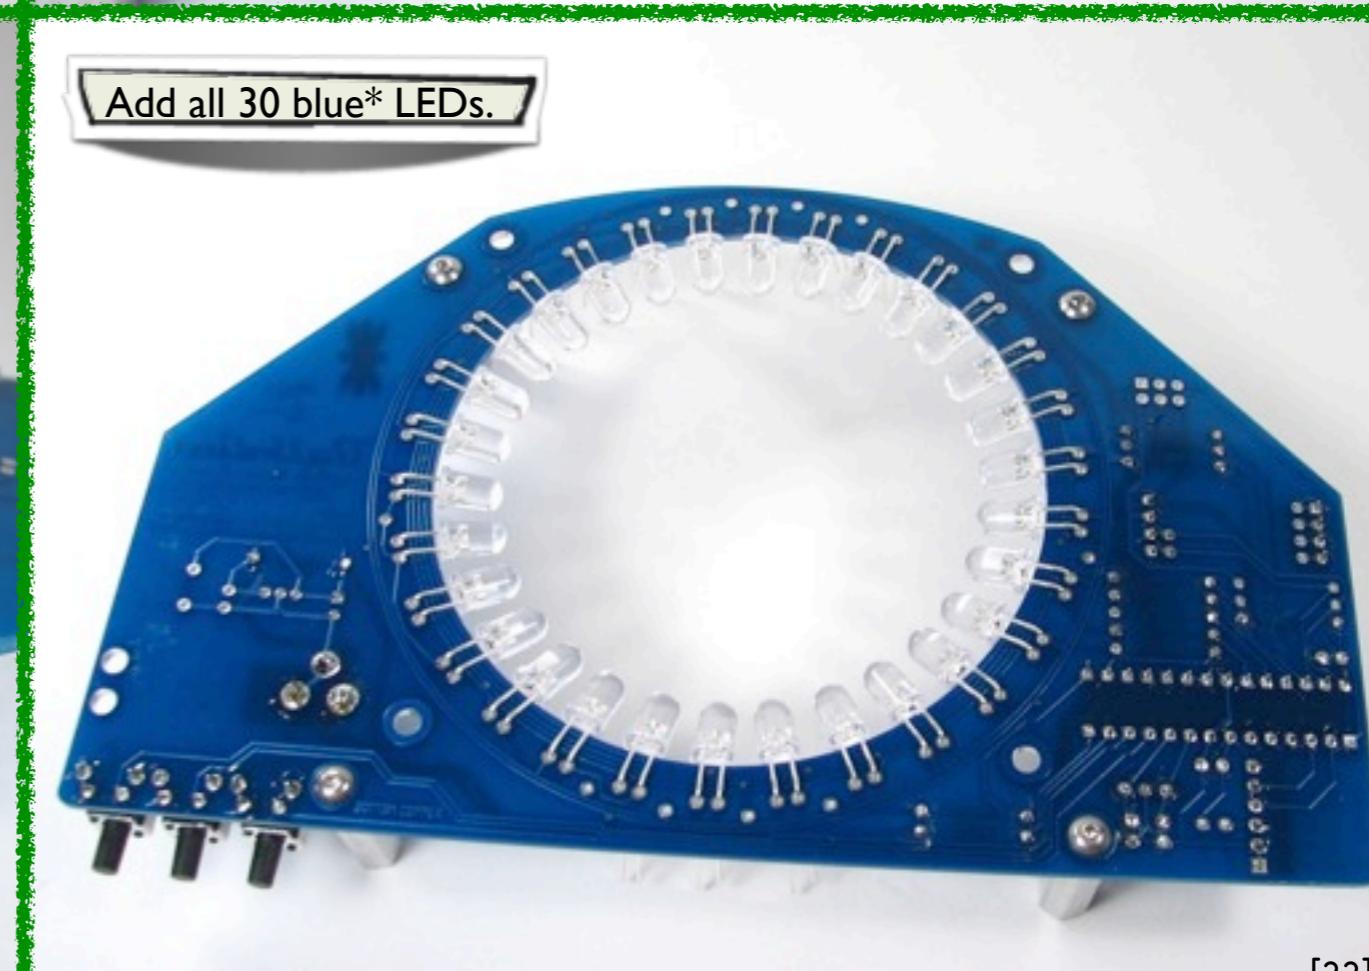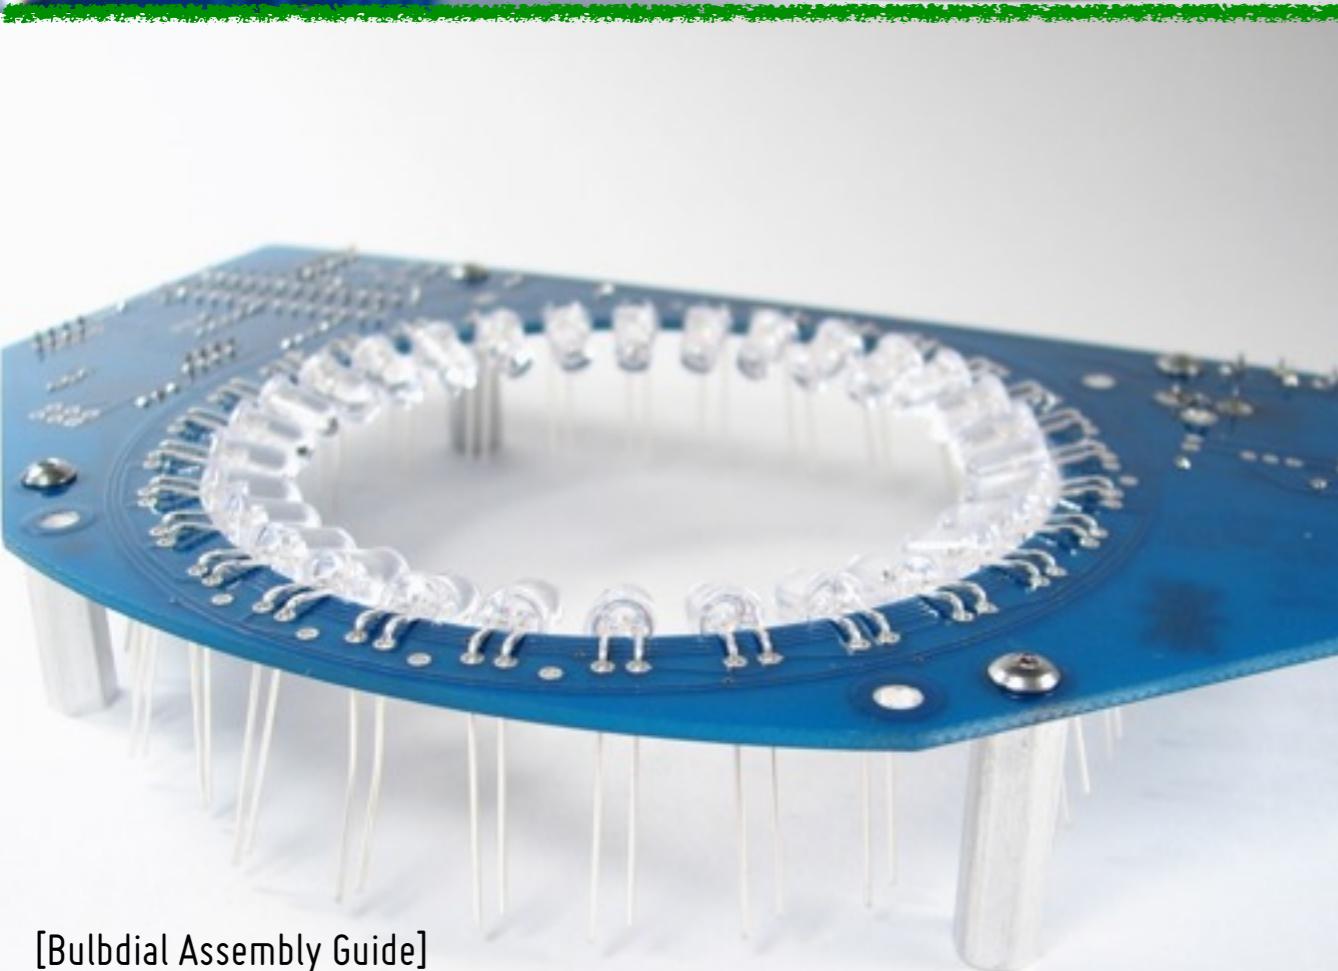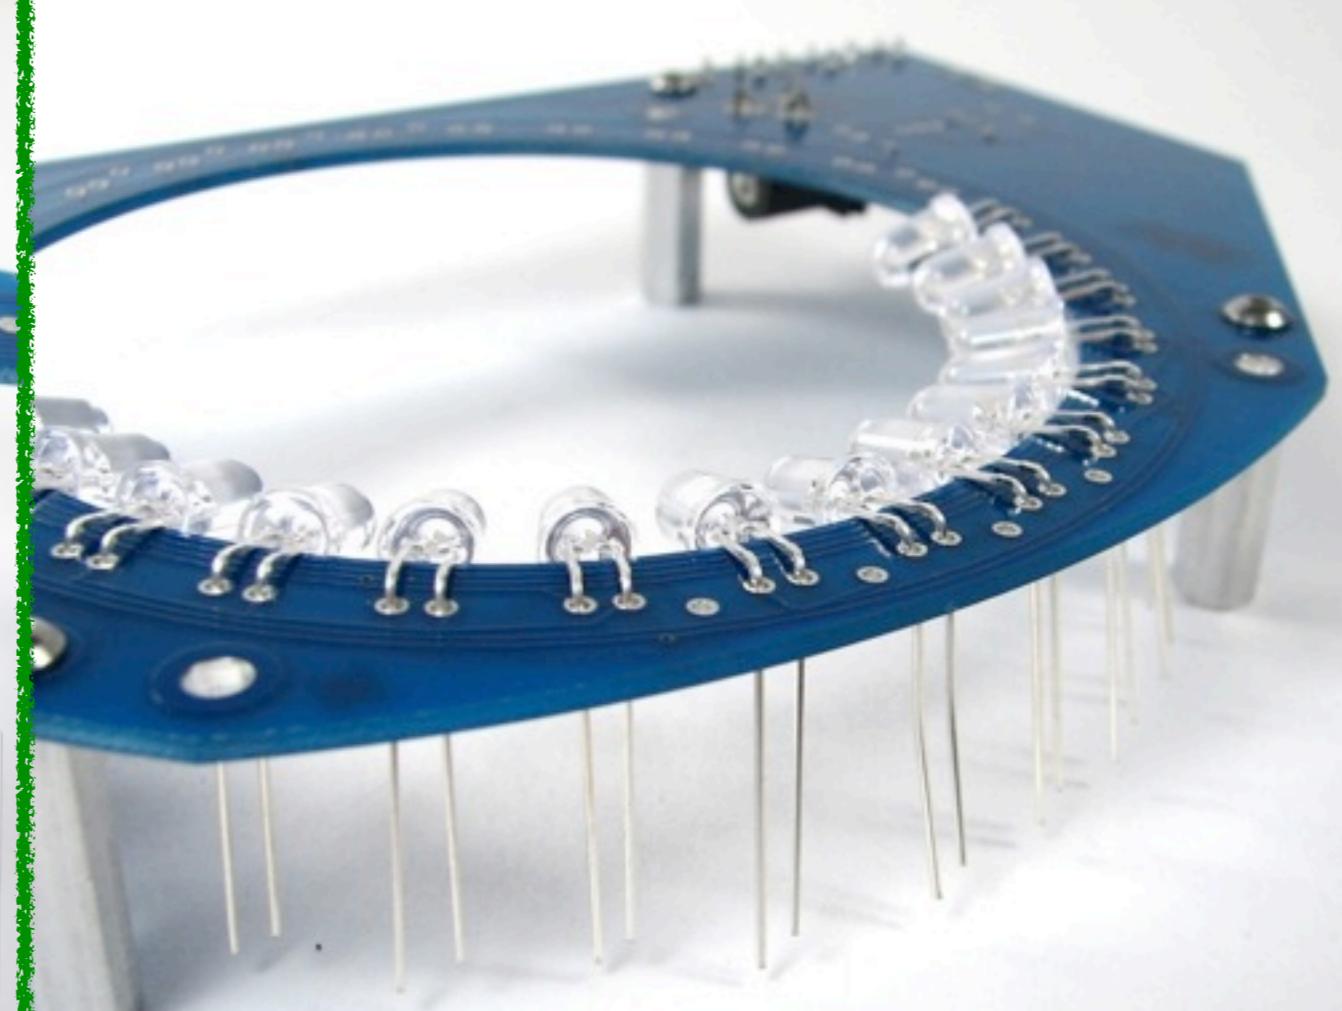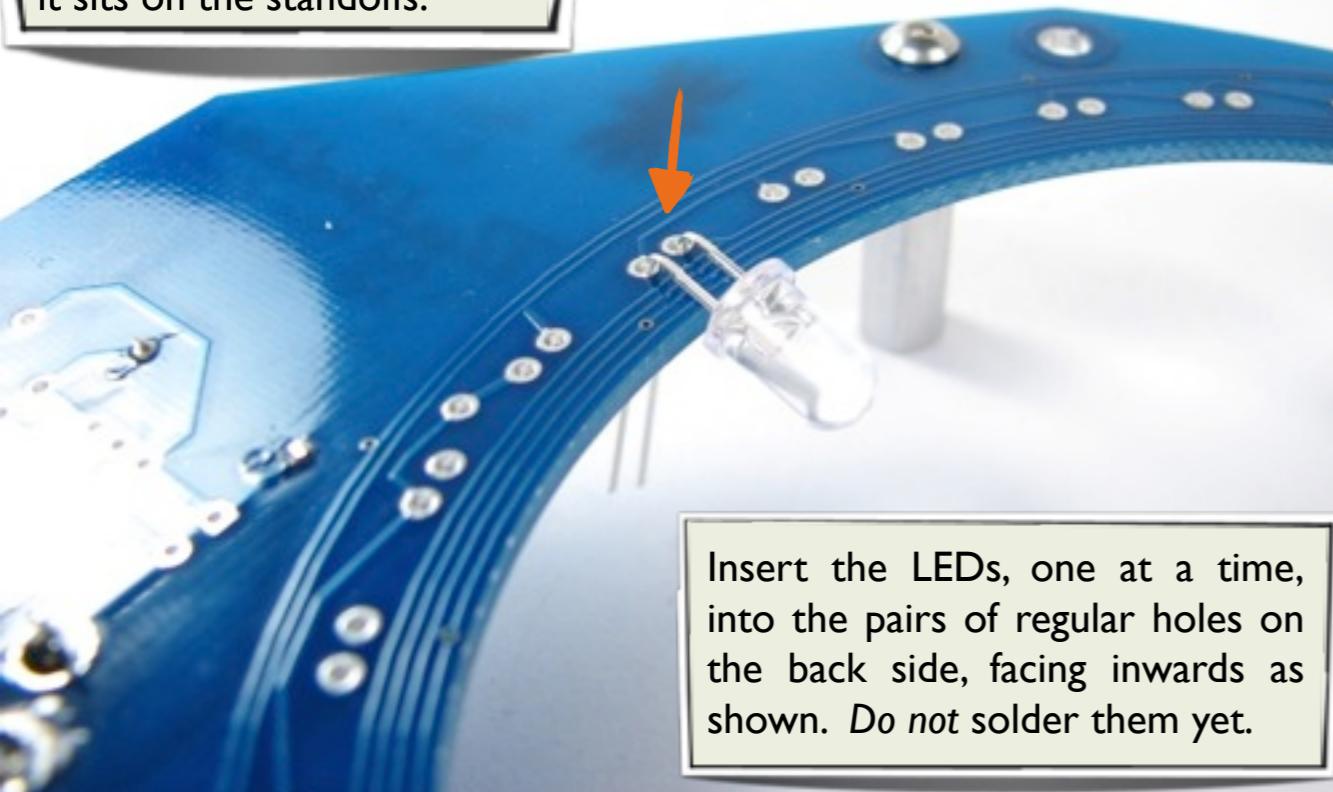


STEP 18: Add the red retaining ring




Identify the top and bottom of the red circuit board. The top side has solder features and red ink; the bottom is blank and translucent.

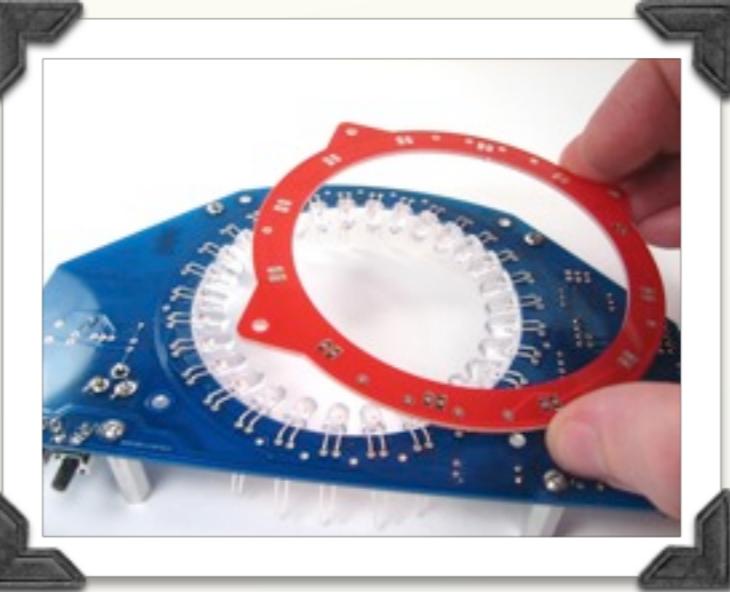


Place the red circuit board over the LEDs. Its bottom (blank) side should rest against the leads of the LEDs.

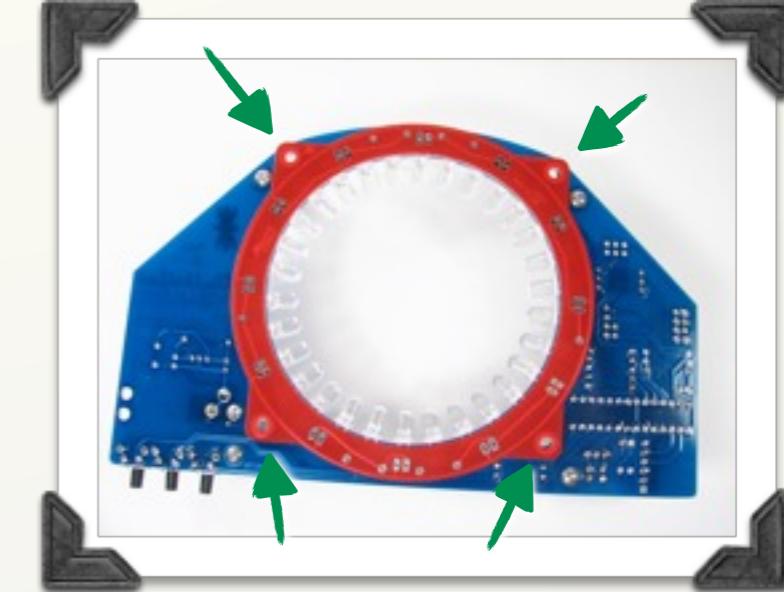

Line up the four corner holes of the red board to the matching holes on the main board.

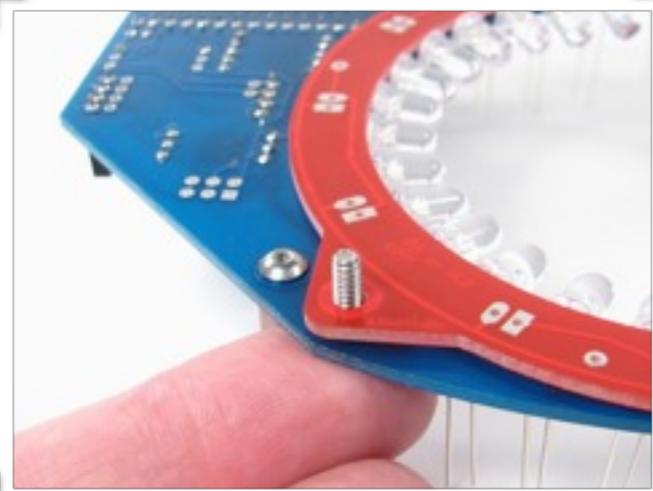

Without flipping the assembly over, feed a screw up through one of the corner holes.

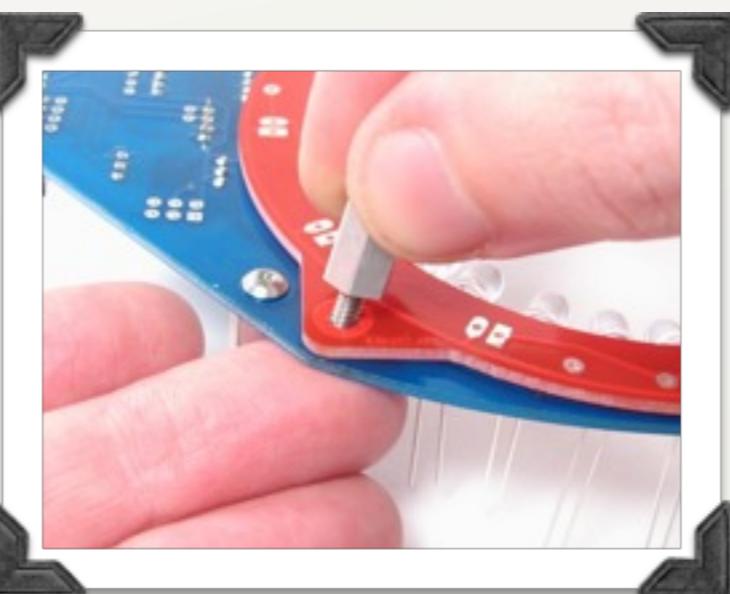


Hold the screw in place while you thread on one of the short M/F hex standoffs. Do not tighten it yet.




Add the other hex standoffs the same way. Once you have two on board, the LEDs should be protected against falling out.


STEP 19: Clamp & inspect the ring of LEDs

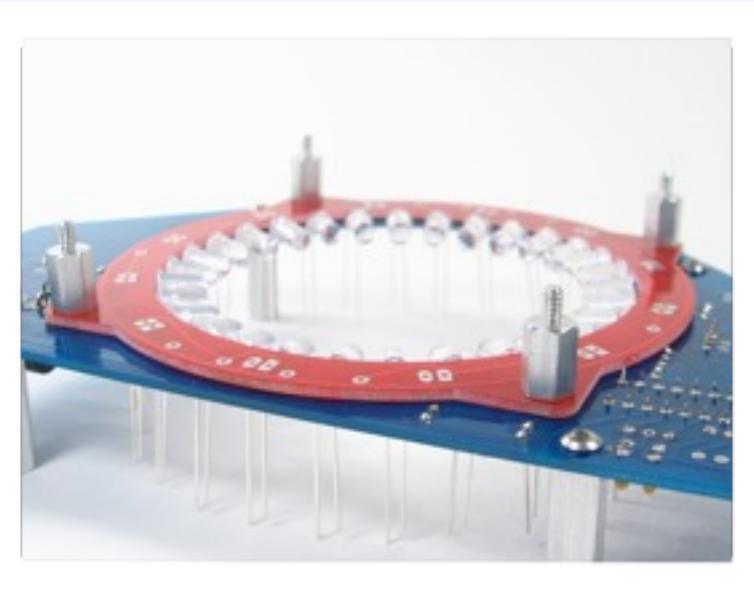


Finish adding the four short standoffs. This loosely “clamps” the LEDs in place.

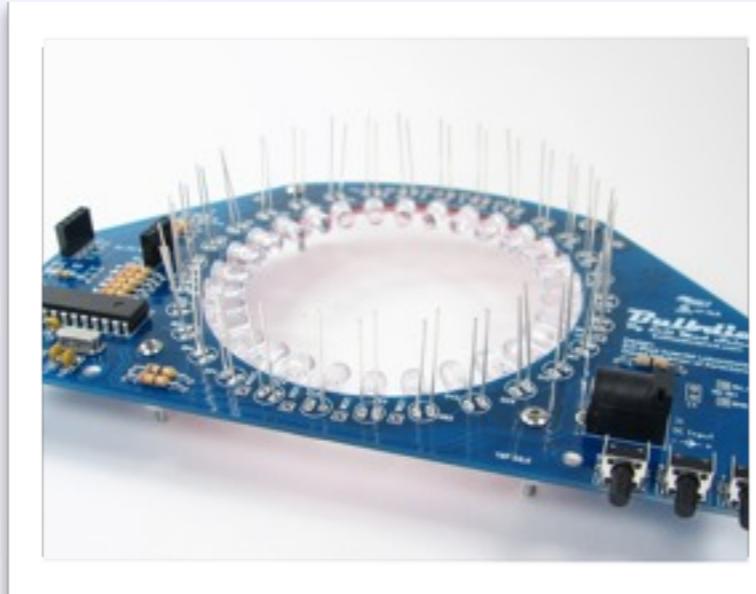


The four long standoffs can now be removed. (You may prefer to wait until after the upcoming inspection steps.)

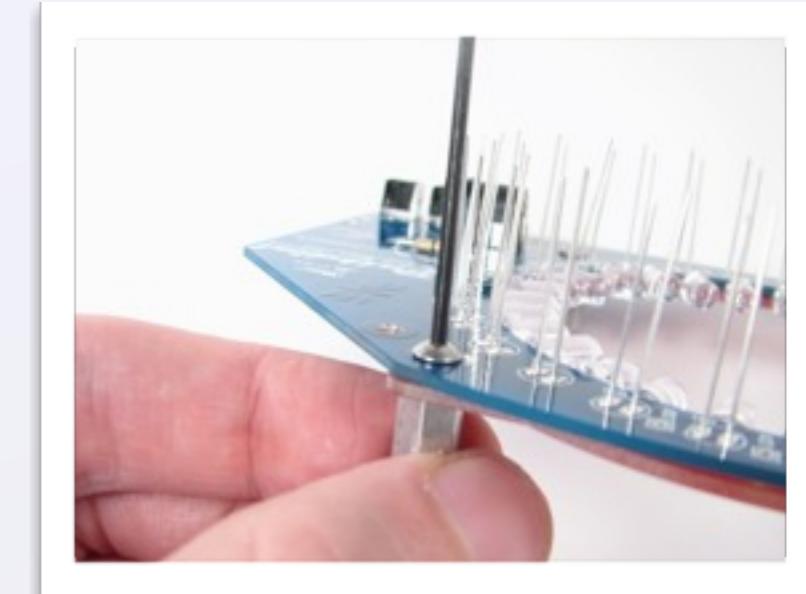


Use the hex wrench to gently tighten the four short standoffs in place. Only go to “finger tight” Do not overtighten.

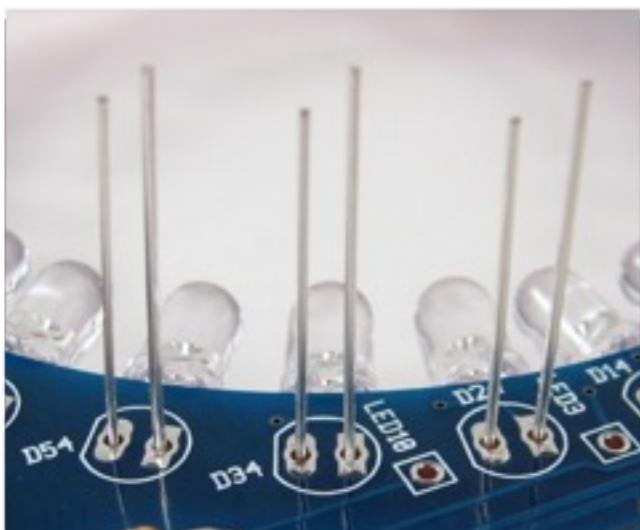

Inspection I: The LED locations have a squared-off pad and a rounded pad. Make sure— for each LED —that the short lead is at the rounded pad.

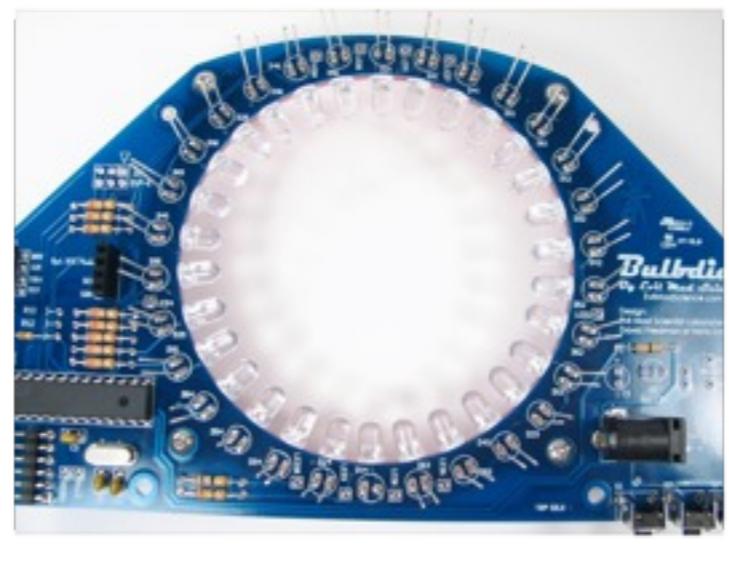


Inspection II: Check that all of the LEDs are roughly pointing towards the center and in the same plane— not wildly pointing up or down.

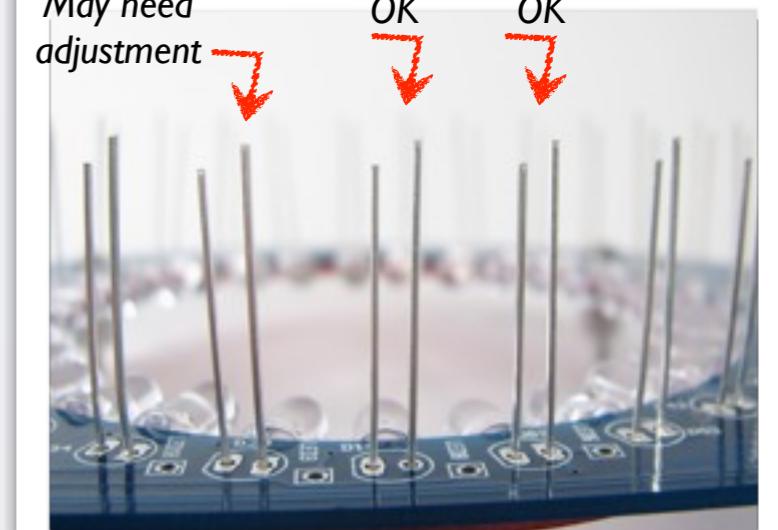

Inspection III: The leads of each LED should point straight up, not at an angle. If not, nudge the LED to correct it.

After inspection, remove the four long standoffs (if you have not already done so).


STEP 20: Solder the short leads of the LEDs

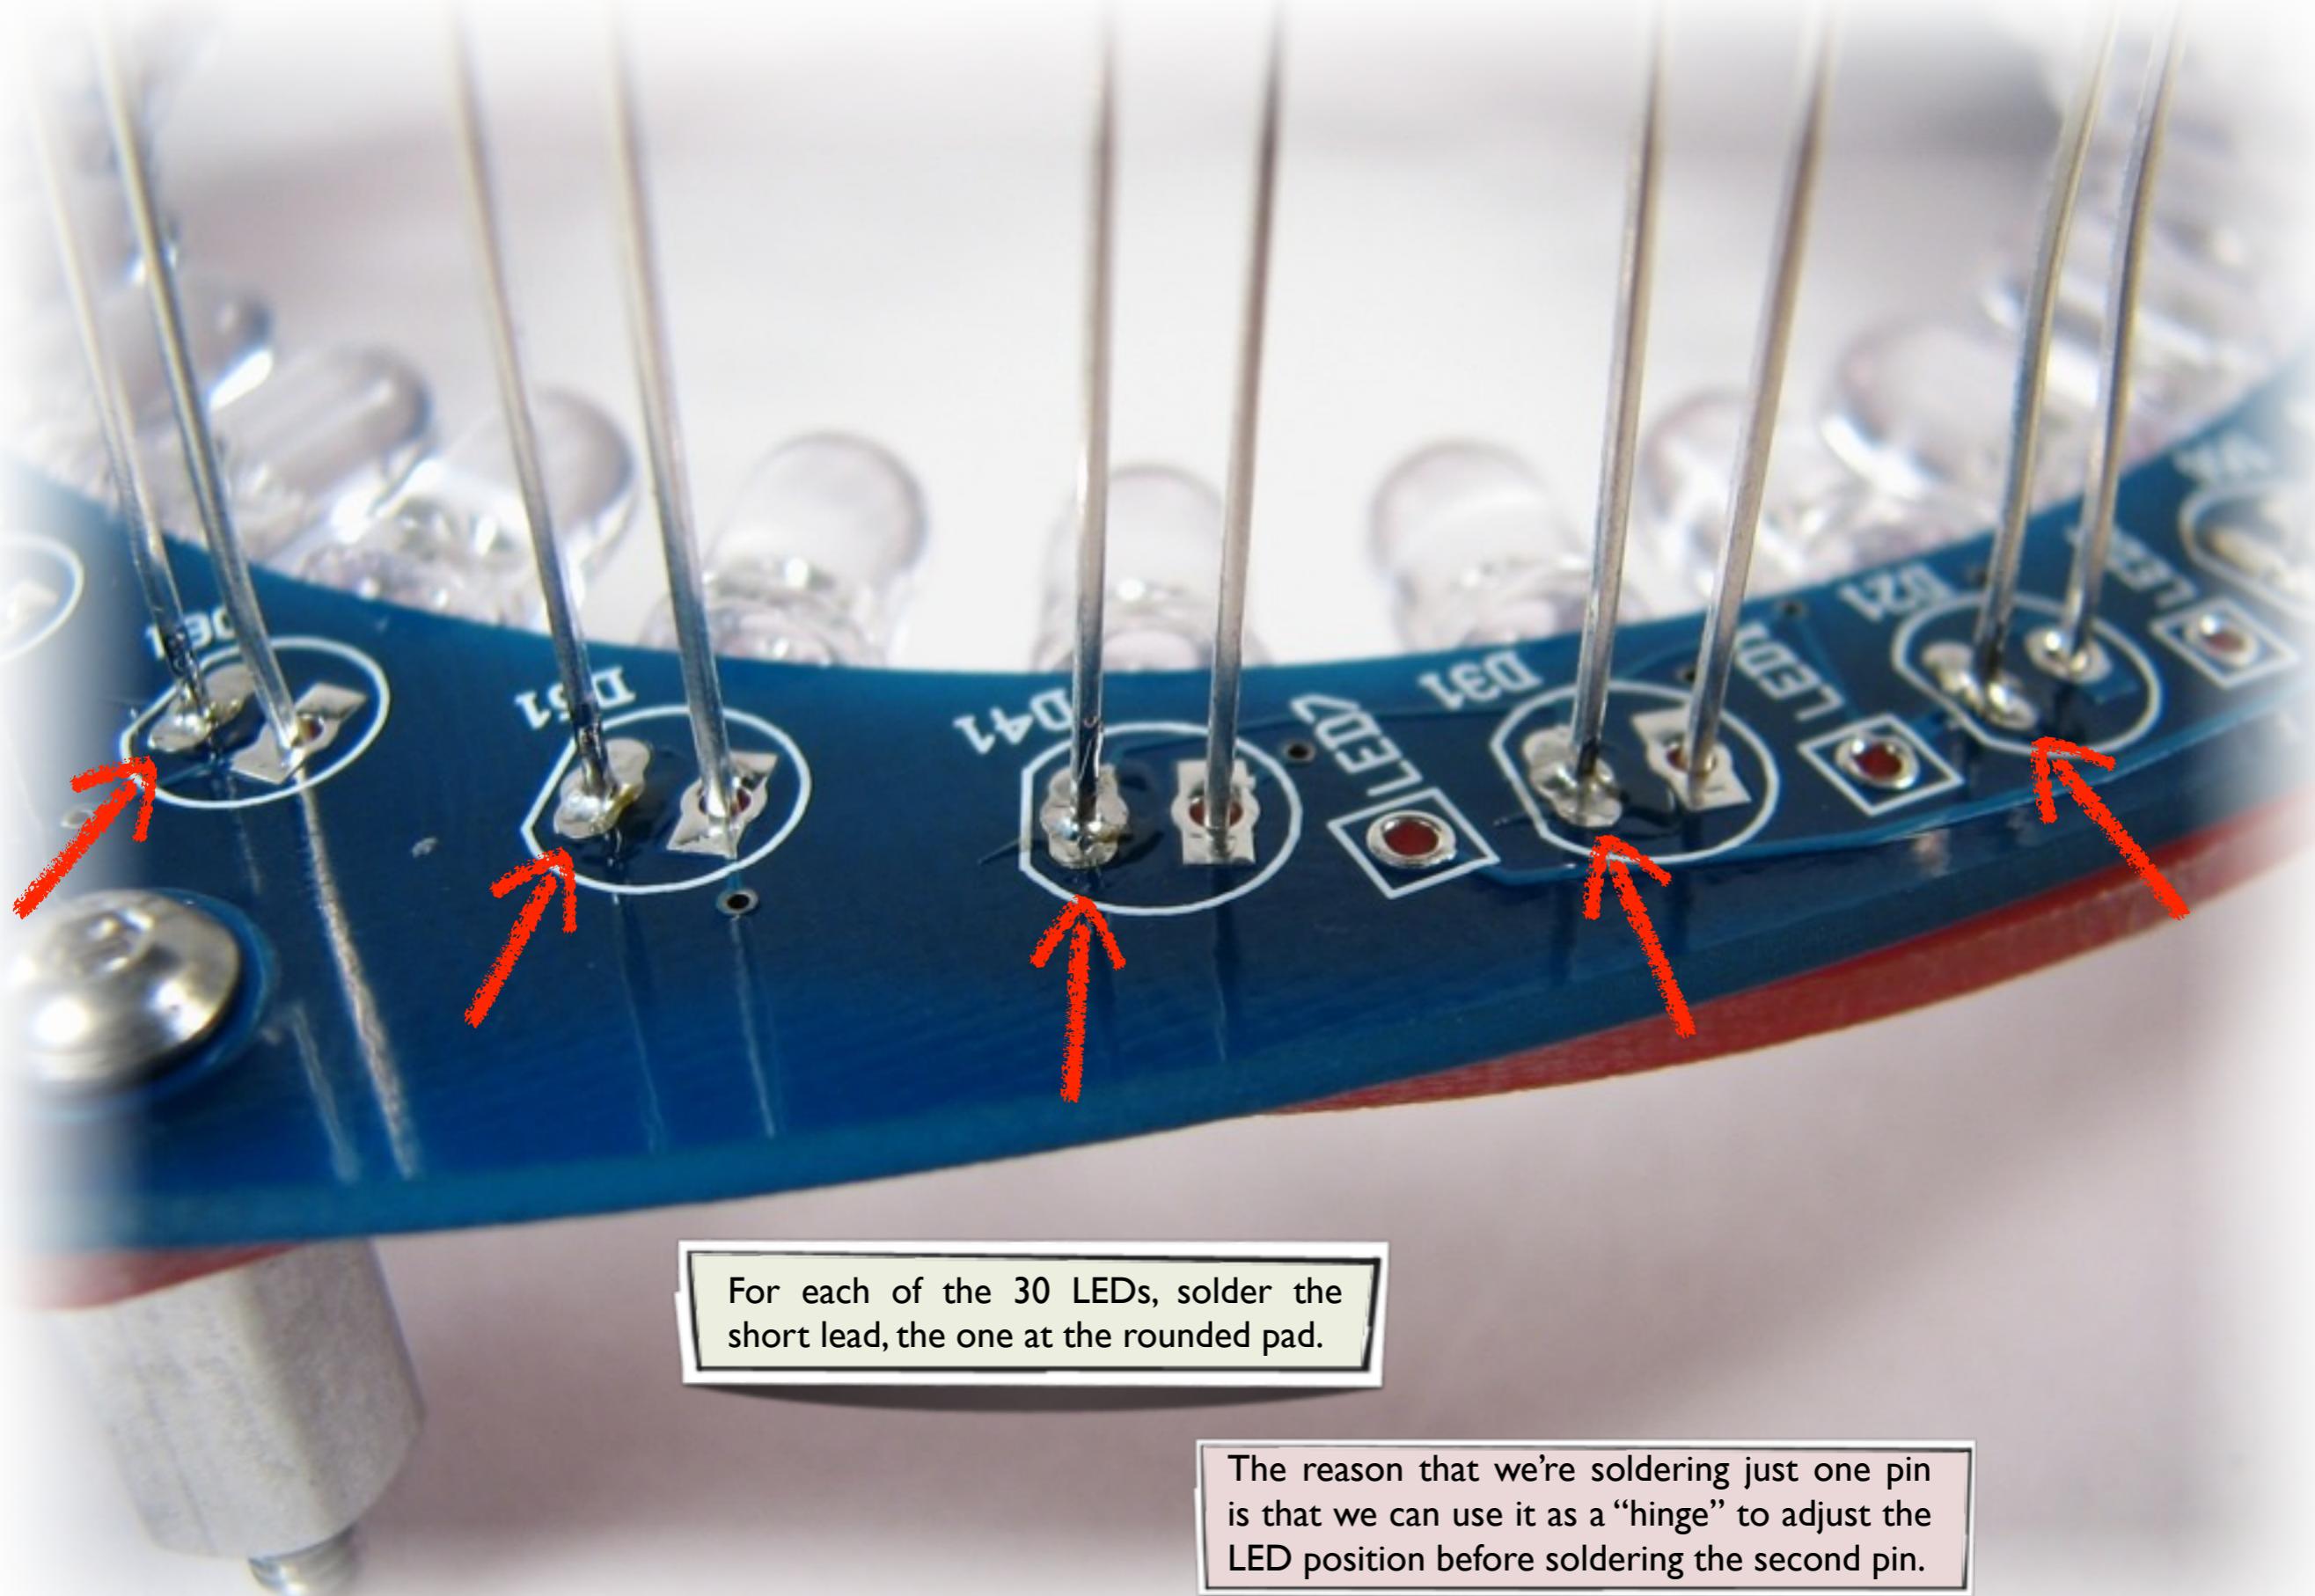


For each of the 30 LEDs, solder the short lead, the one at the rounded pad.

The reason that we're soldering just one pin is that we can use it as a "hinge" to adjust the LED position before soldering the second pin.


STEP 21: Post-soldering inspection & pointing

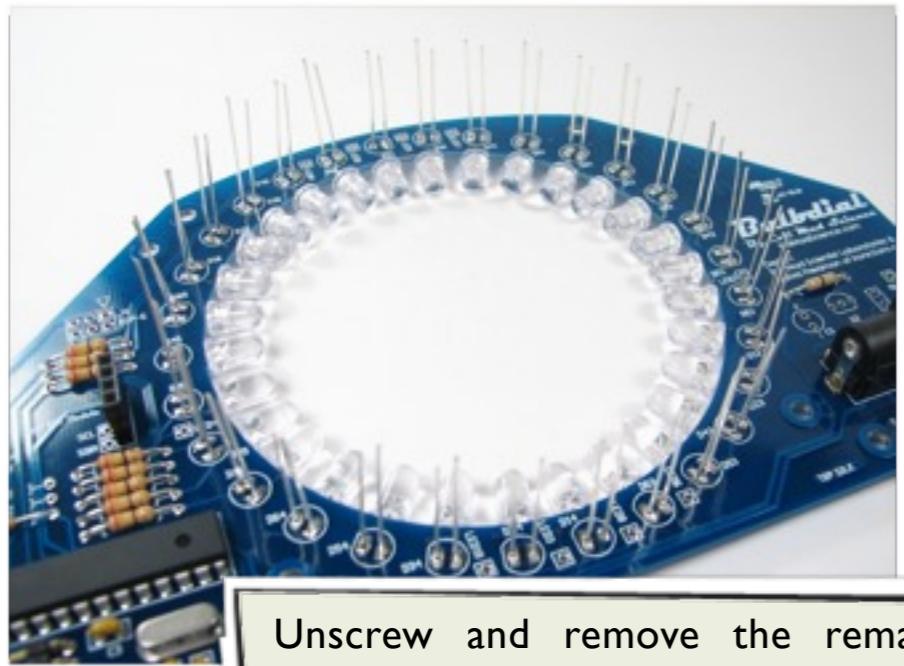

Unscrew and remove the remaining standoffs, as well as the red circuit board.

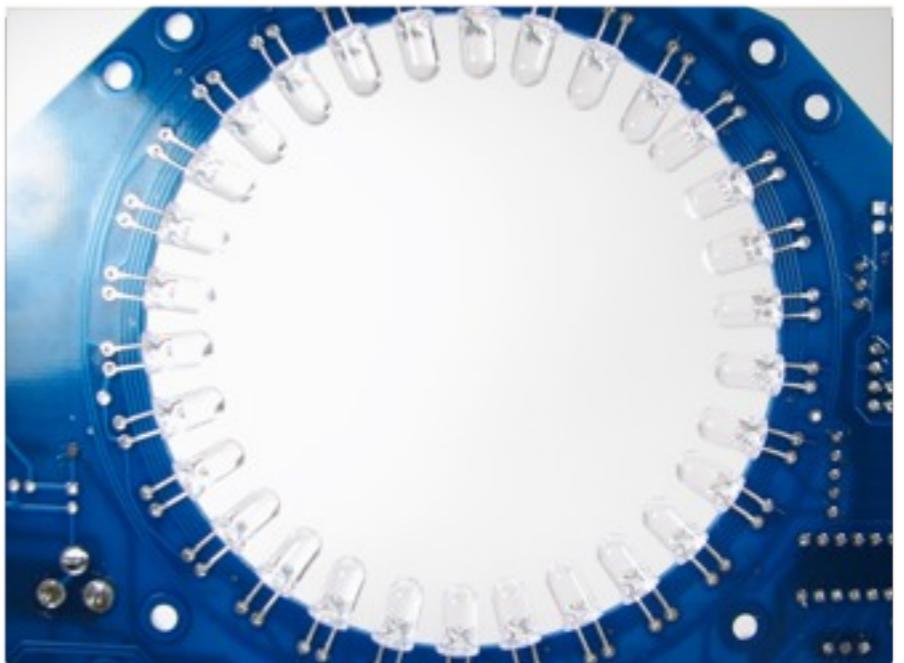


Right now we want to make sure that every LED is pointing towards the very center of the circle. You may find it helpful to sight across the ring to identify LEDs that are not.

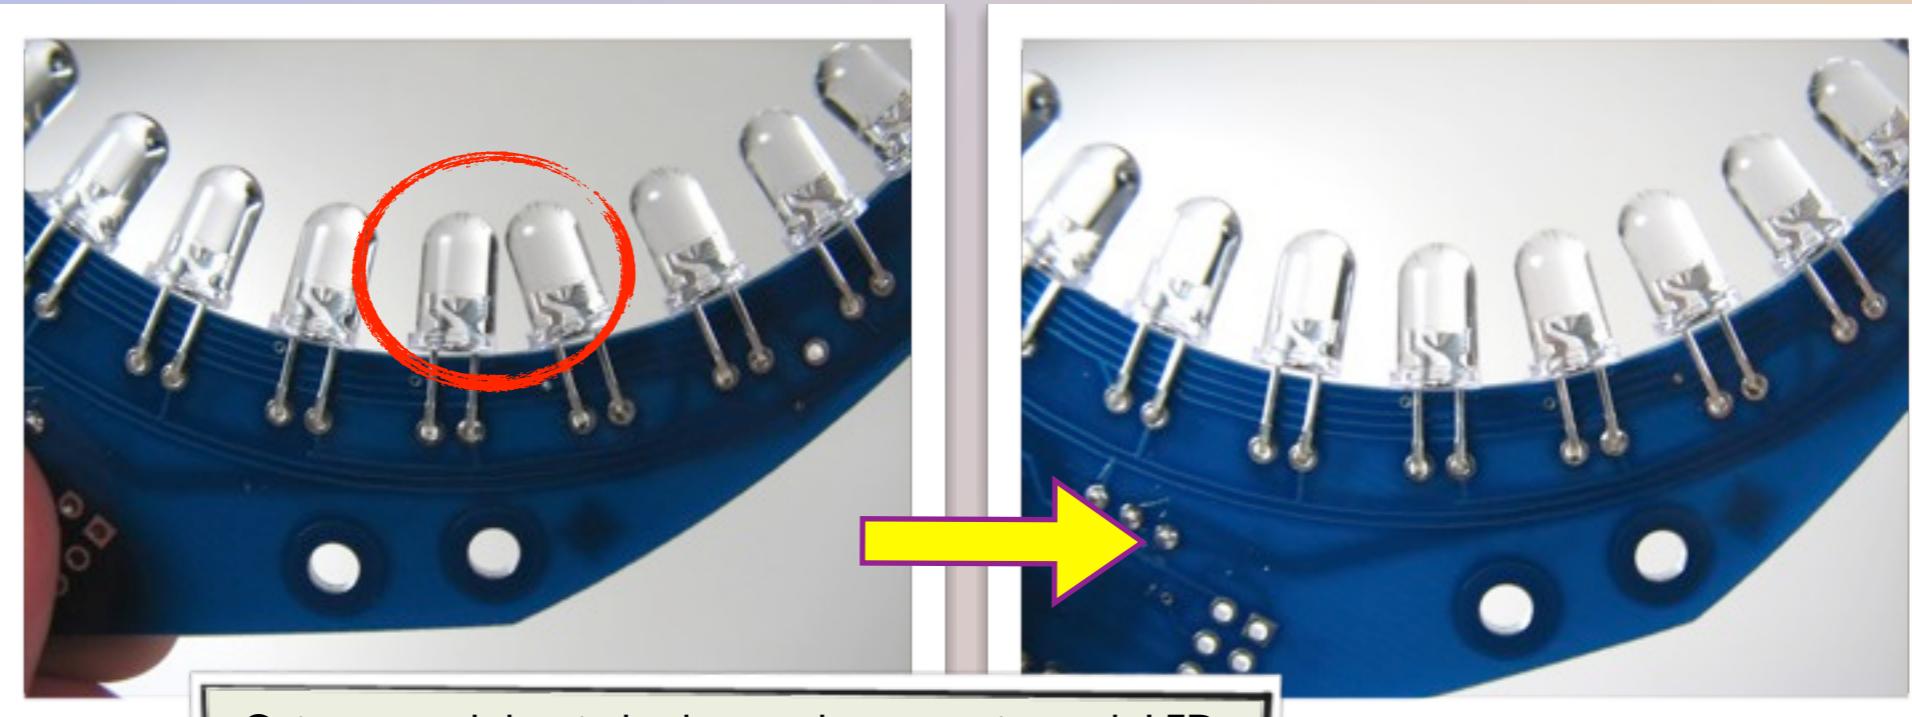

Going around the circle, do your best to point each LED in the correct direction. Be gentle when bending the LEDs, and try not to bend them more times than needed.

STEP 22: Finish soldering the first ring


For each of the 30 LEDs, solder the remaining lead, and then trim all the leads short on both pins.

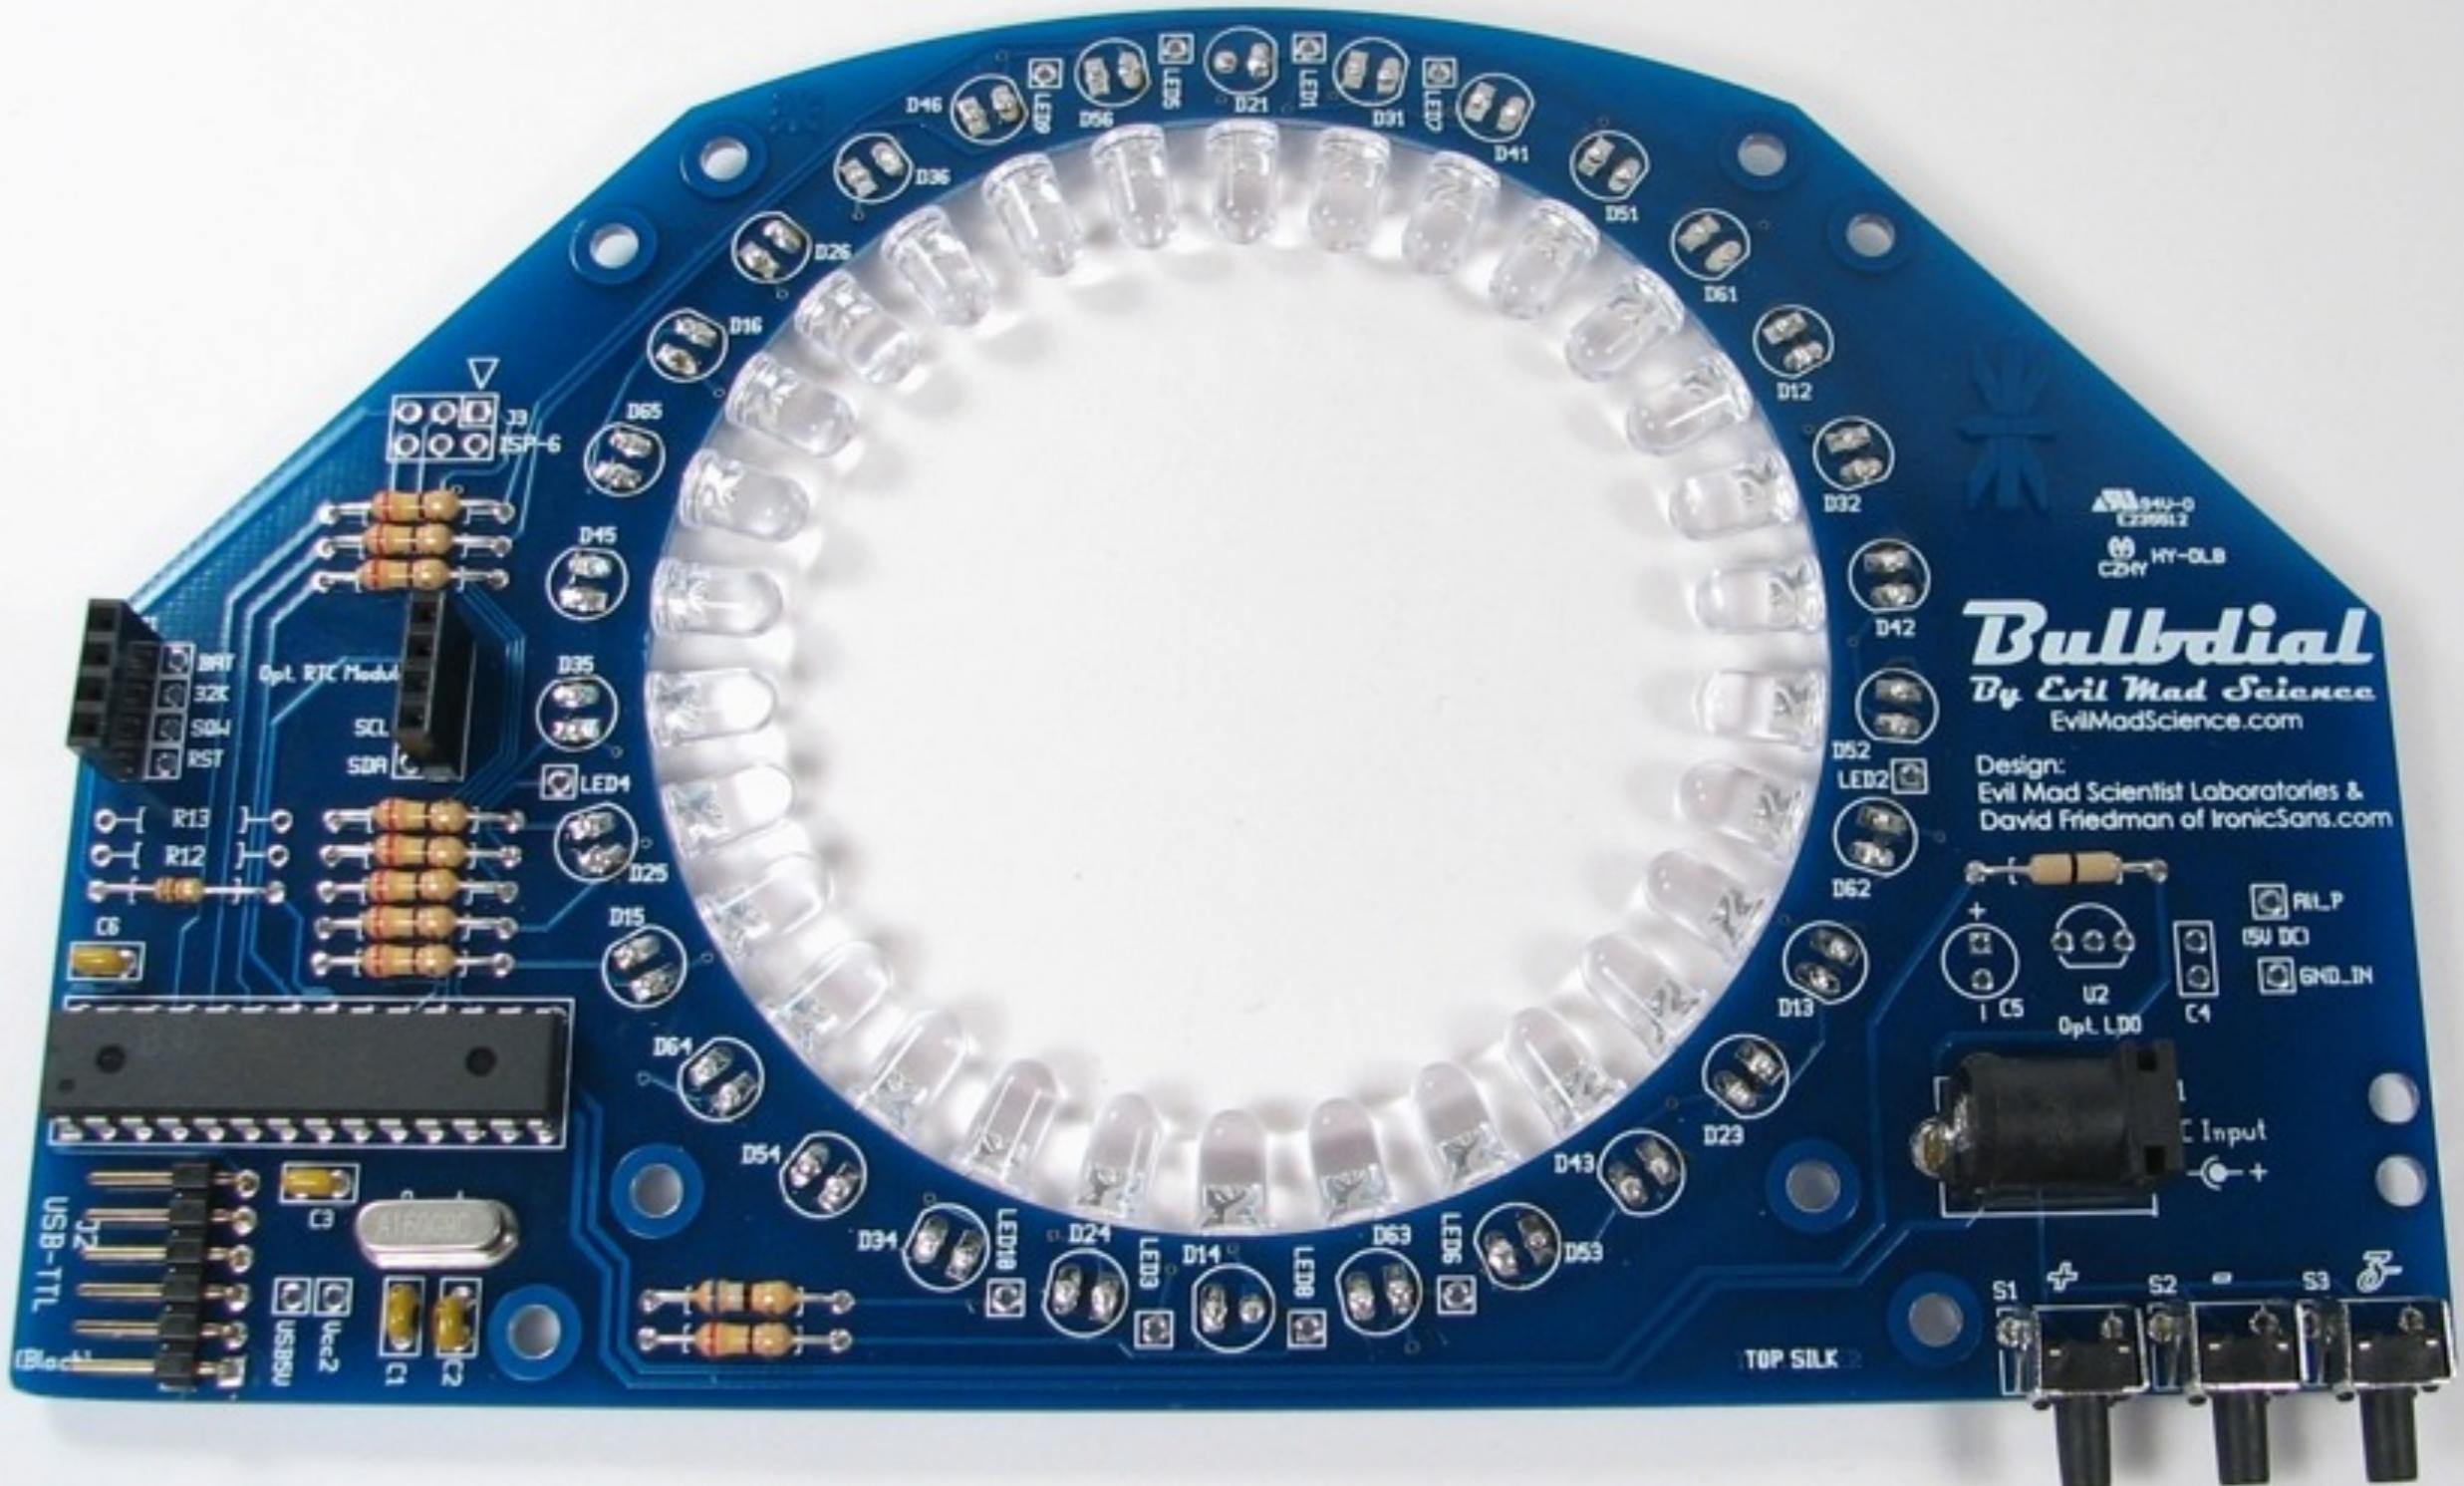


Next: We'll test the assembly thus far, and point the LEDs in the final configuration.

STEP 23: Adding the clock face


We'll need the clock face to be in place for the next couple of steps.

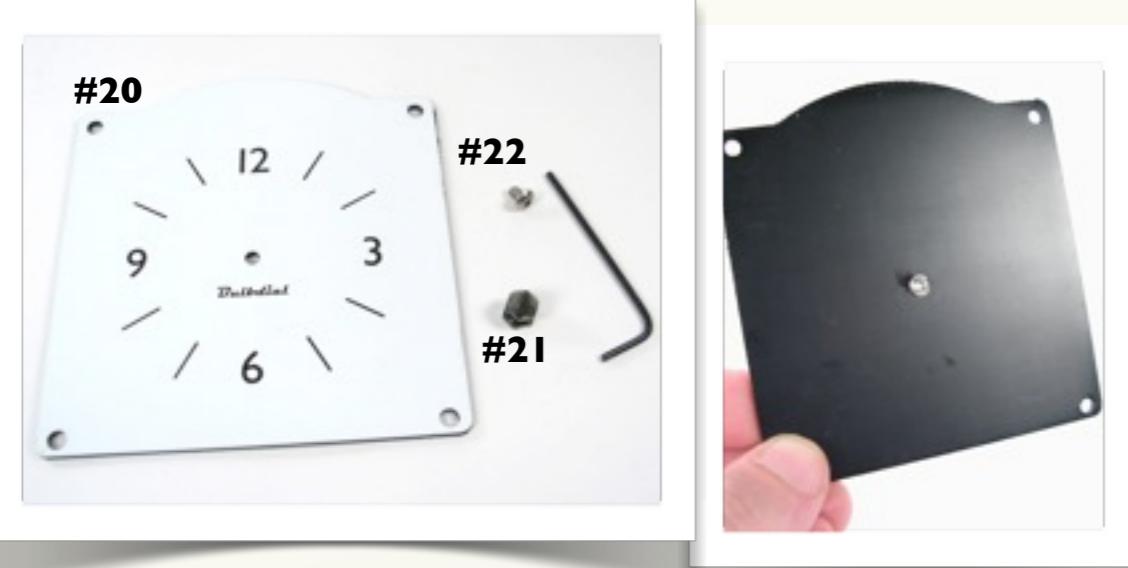

And now, the clock face, **#20**. Put the short screw, **#22**, though the back of the clock face, and screw it into the gnomon spike, **#21**. Hold the spike with your fingers while you tighten the screw with the hex wrench. As usual, be careful not to overtighten.

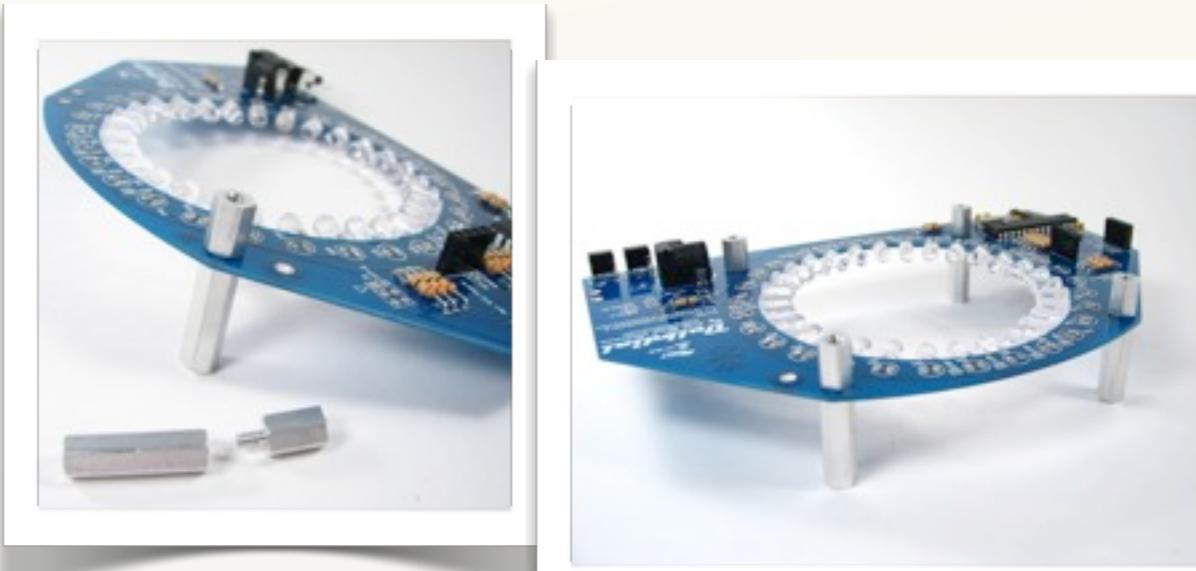

Thread four of the short M/F standoffs into the four long standoffs, through the board as shown. The short ones go on the top side. The threaded parts poke through the “inner” four holes-- the ones that match the holes on the red board.

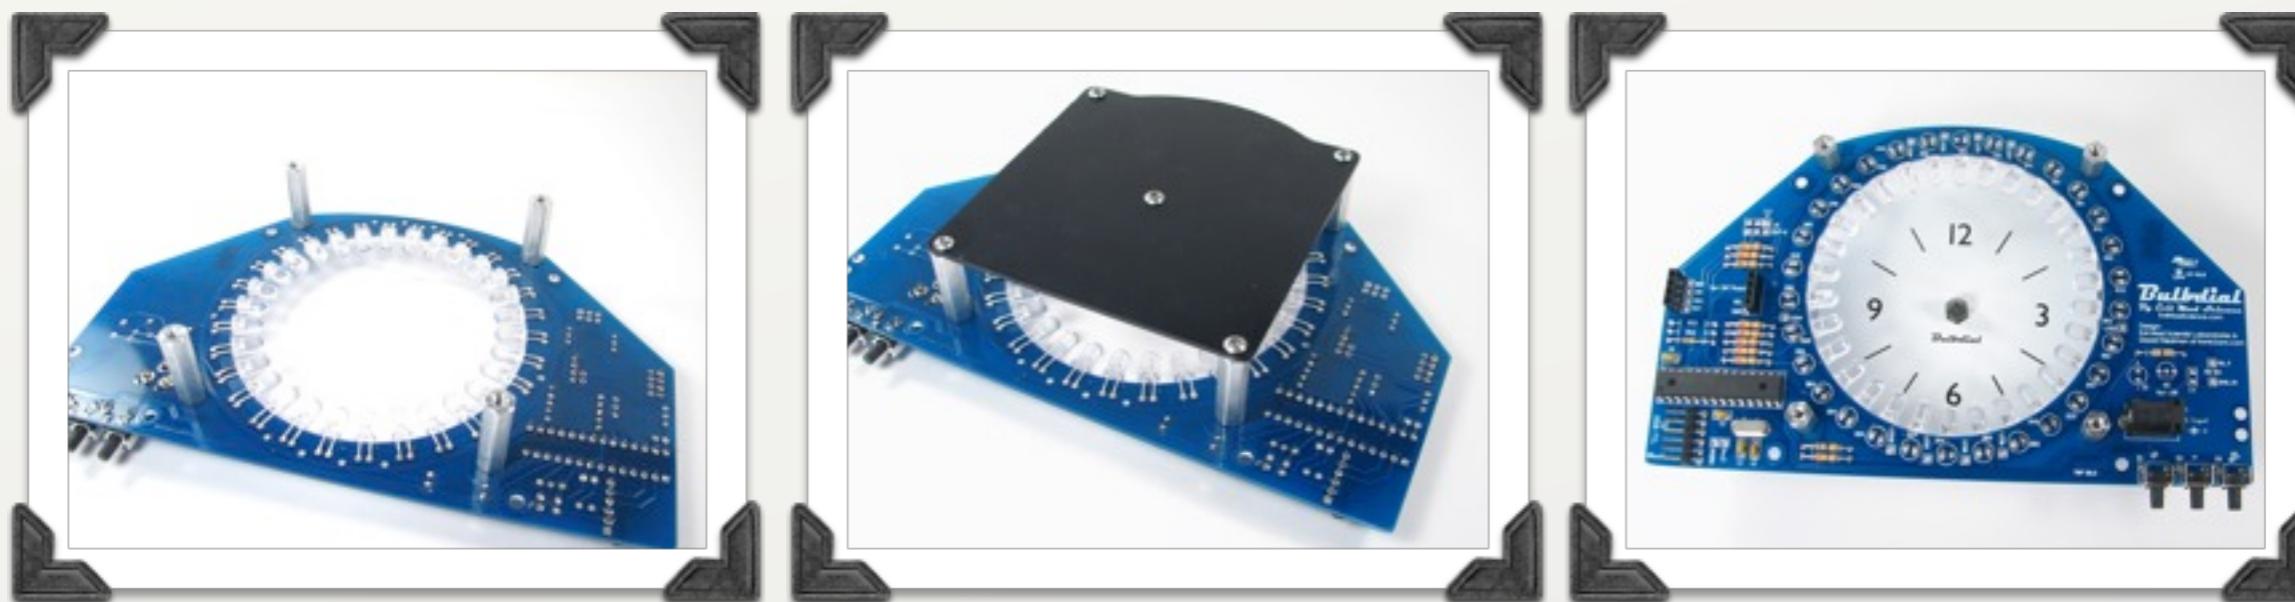


Flip the assembly over...

... and add the clock face. Screw it in place with four of the longer screws. It does not need to be tightened.

And there we are: starting to look a lot like a clock.

STEP 24: Plug 'er in.

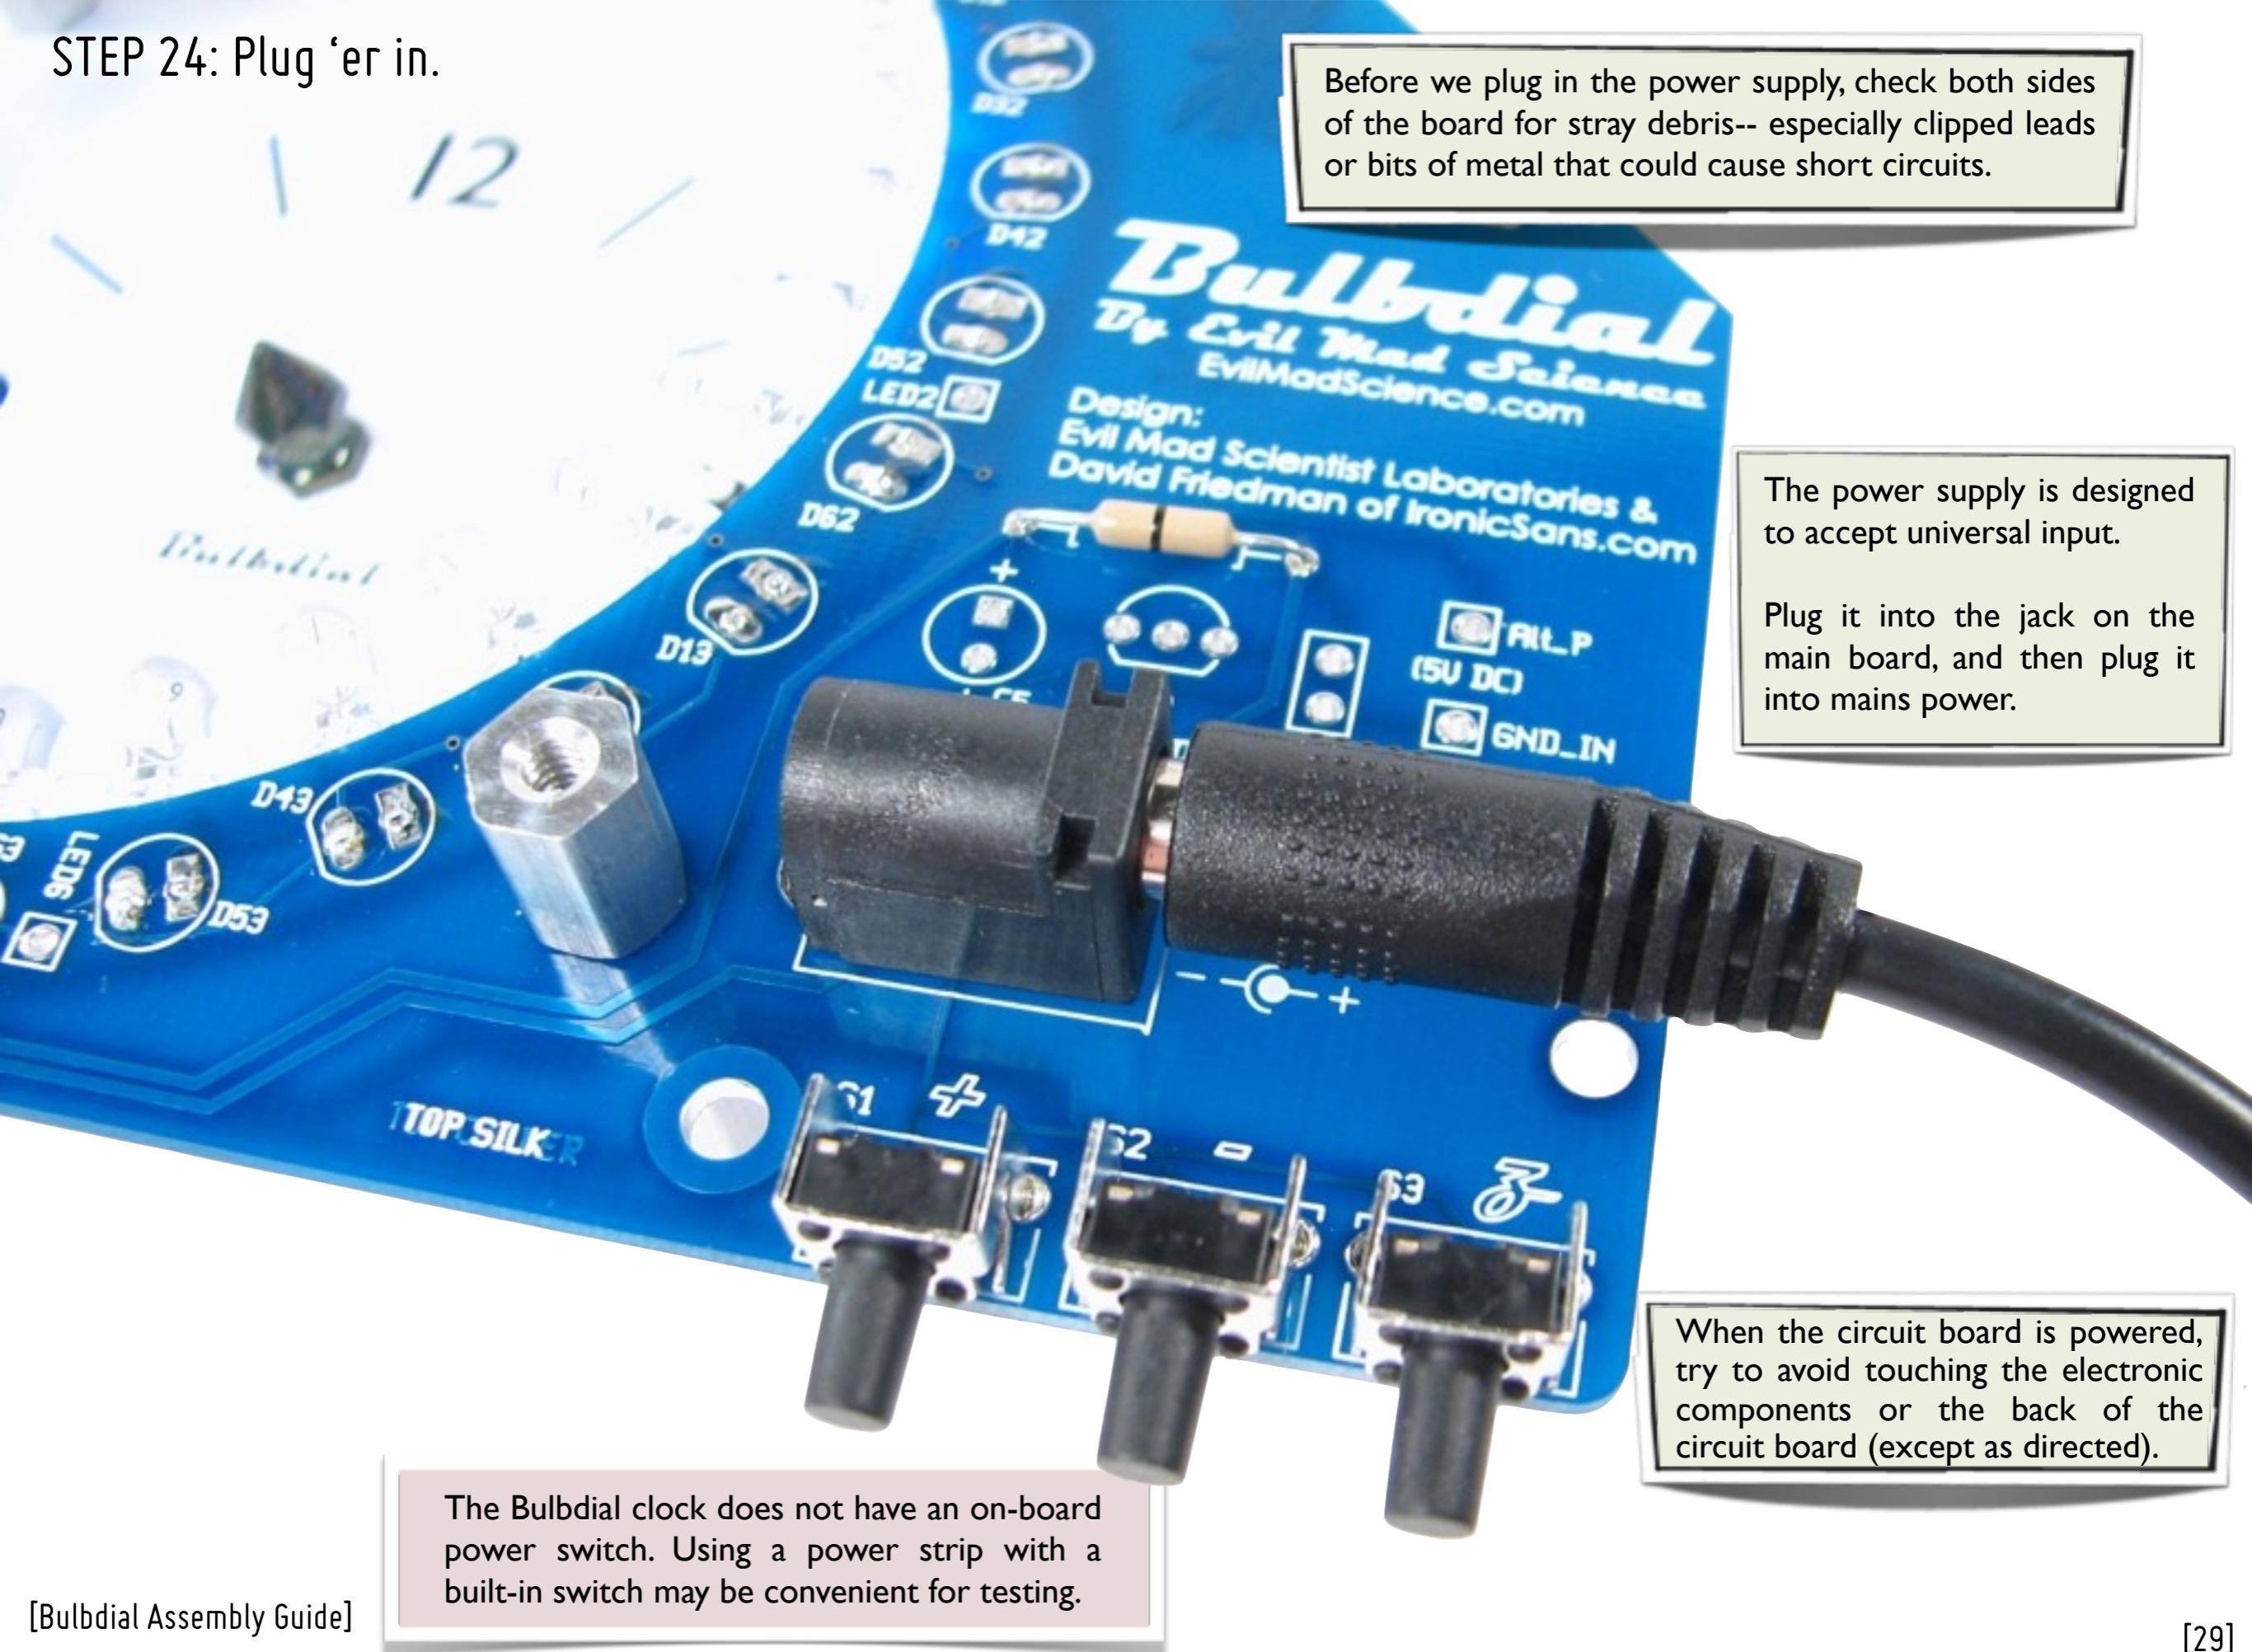

Before we plug in the power supply, check both sides of the board for stray debris-- especially clipped leads or bits of metal that could cause short circuits.




The power supply is designed to accept universal input.

Plug it into the jack on the main board, and then plug it into mains power.

When the circuit board is powered, try to avoid touching the electronic components or the back of the circuit board (except as directed).

The Bulbdial clock does not have an on-board power switch. Using a power strip with a built-in switch may be convenient for testing.

STEP 25: “And then it started blinking!”

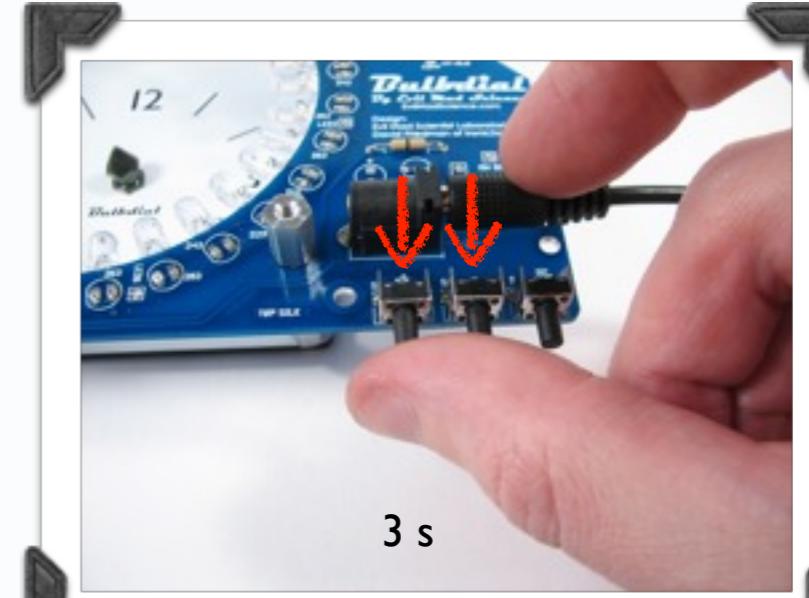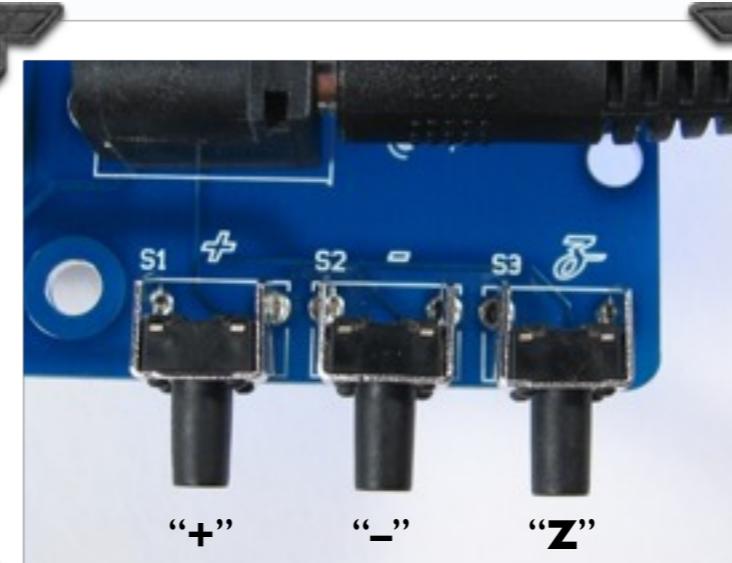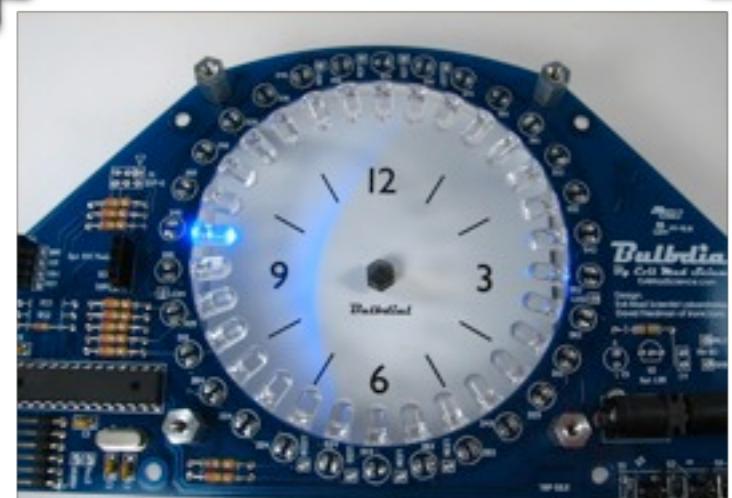

If everything is correctly soldered on the board, the clock will come up in regular “time display mode” after a two second delay.

What you’ll see looks like one LED slowly moving around and blinking. This is the not-yet-aimed second hand of the clock, and the blinking is to let you know that it’s lost power and doesn’t know what time it is. Press any of the buttons to stop the blinking.

The three buttons are labeled “+,” “-,” and “Z.”

In time display mode, the + and – buttons control brightness with seven levels, and the Z button toggles sleep mode (where the LEDs are fully off).

Troubleshooting

If you don’t see any LEDs coming on, the first thing to do is to unplug the power supply.

The most likely cause of trouble is an incomplete solder joint somewhere on the board. Carefully inspect your solder joints and touch up any questionable ones before trying to apply power to the board again.


Do not proceed to step 26 until things look good here.

To exit time display mode and enter “alignment mode,” hold down both the + and – buttons for three seconds.

(Alignment mode is used to help align the rings of LEDs.)

STEP 26: Test drive alignment mode...

As indicated earlier, hold the + and – buttons for 3 s to enter alignment mode.

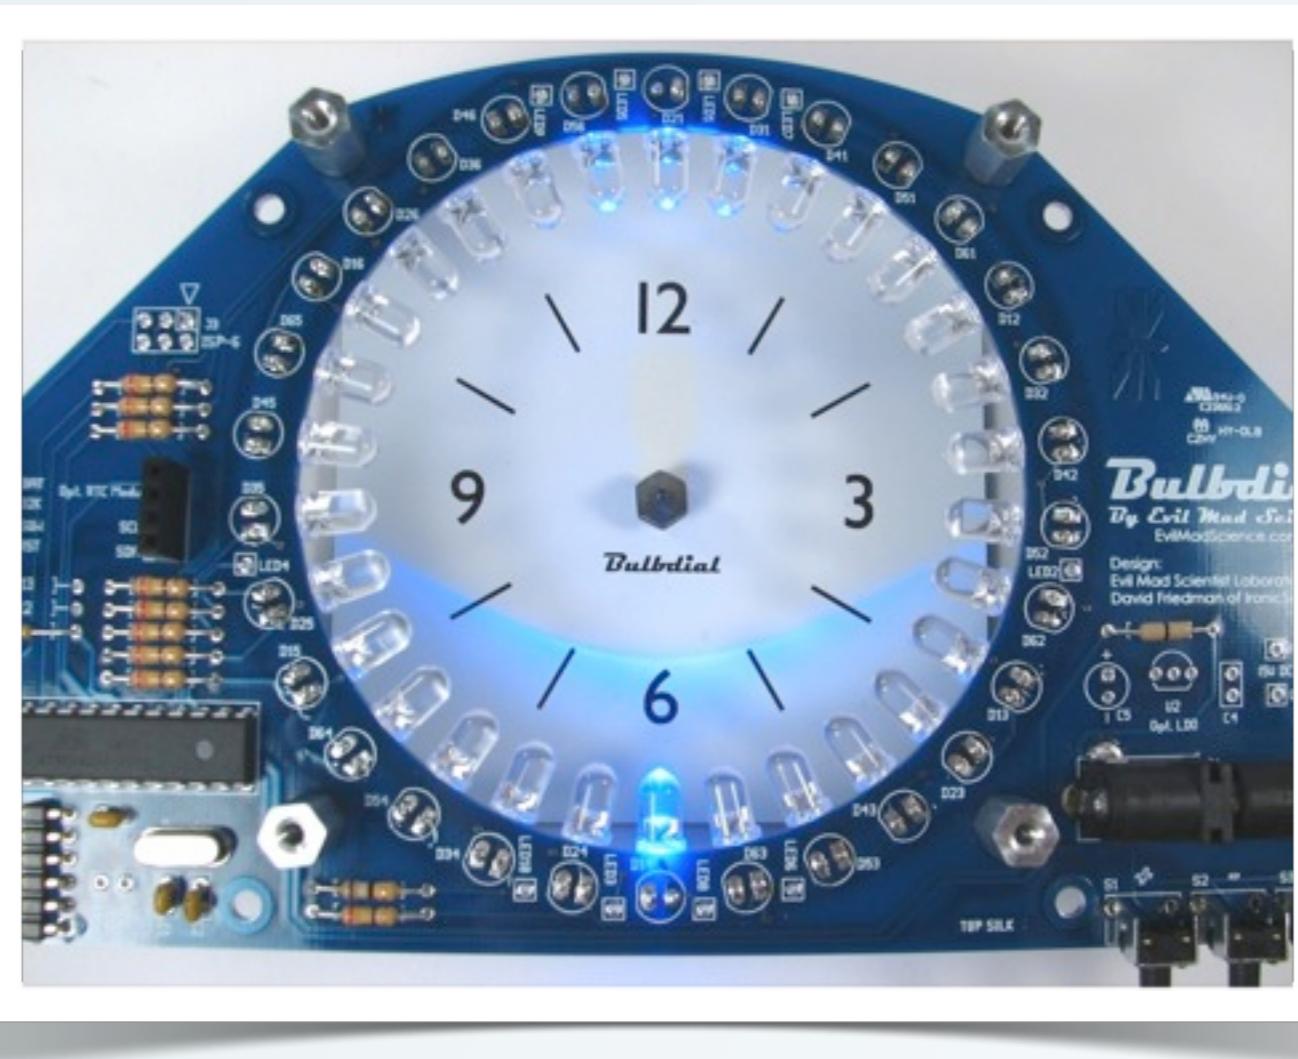

In alignment mode, one LED is lit at a time.




- There are six sub-modes within alignment mode. You can cycle between them by hitting the **Z** button:

1. Blue (lower) ring: Auto advance
2. Blue (lower) ring: Manual advance
3. Green (middle) ring: Auto advance
4. Green (middle) ring: Manual advance
5. Red (upper) ring: Auto advance
6. Red (upper) ring: Manual advance

- In auto-advance mode, the lit LED advances on its own. The rate of advance, and the direction, is controlled by the + and – buttons.
- In manual advance mode, the lit LED stays put until you press the + or – button, which advances the lit LED clockwise or counterclockwise by one position.
- To exit alignment mode, hold the **Z** button for three seconds or cycle power to the clock.


Try out alignment mode, and use it to verify that every one of your LEDs lights up before you go on to the next step.

STEP 27: Putting hands on the clock

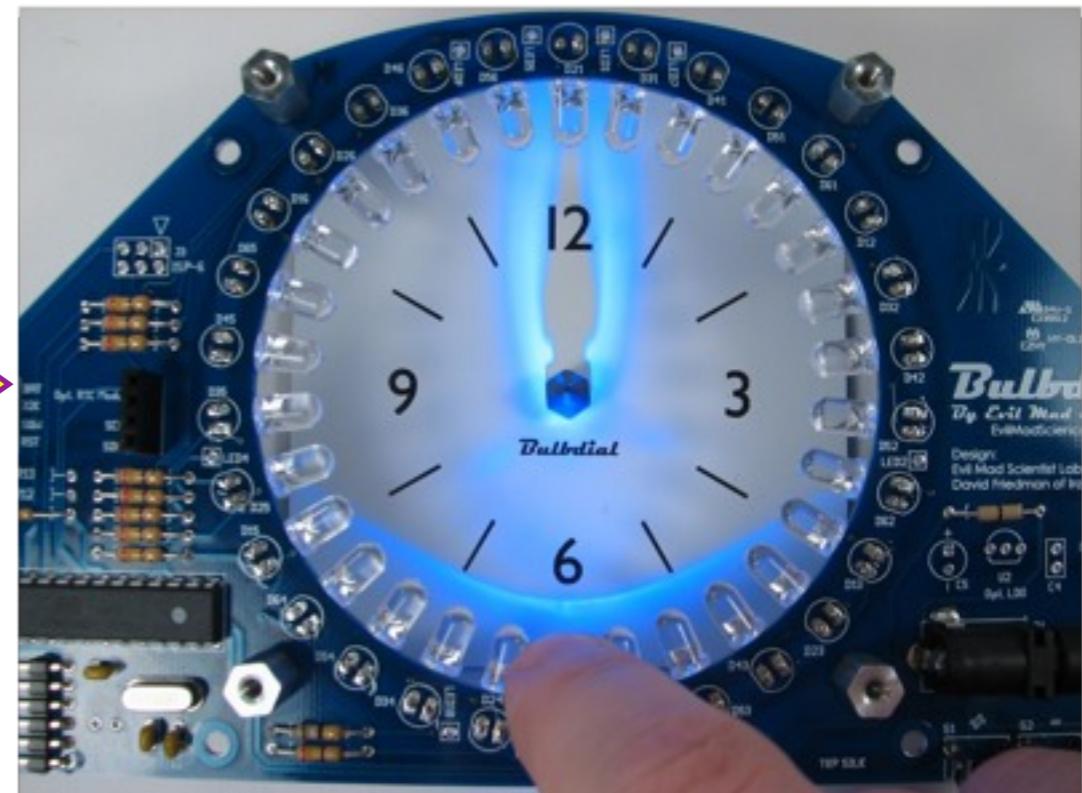
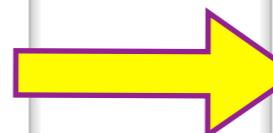
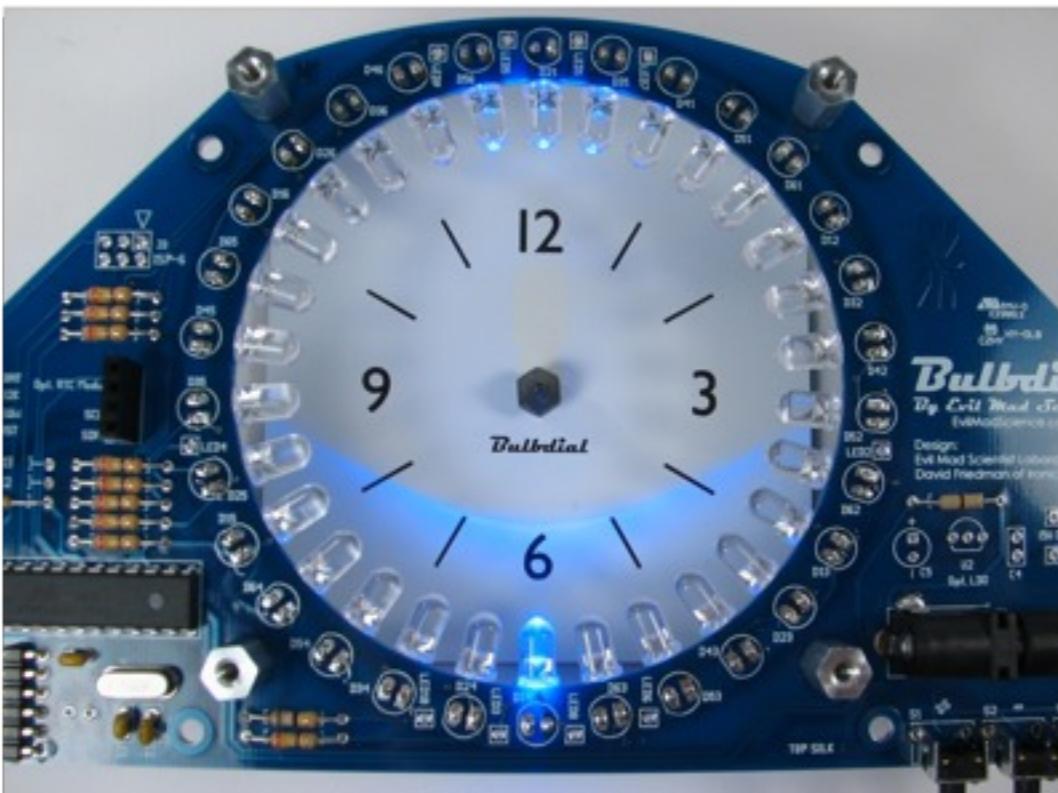


Use manual alignment mode to step through the LEDs one by one. One by one, bend each LED down with your finger until it points in the right direction to form a shadow of the gnomon.
(Try not to touch other parts of the circuit board.)

Ideally, each shadow will look something like this. However, you should expect there to be variation, and (initially) poor alignment of some LEDs. In the next step, we'll deal with a less ideal case.

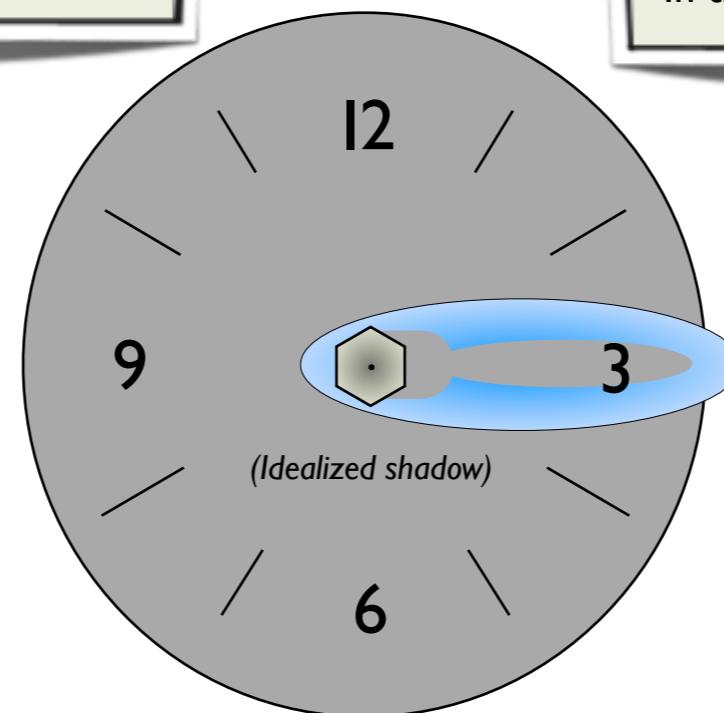

STEP 28: Cleaning your hands

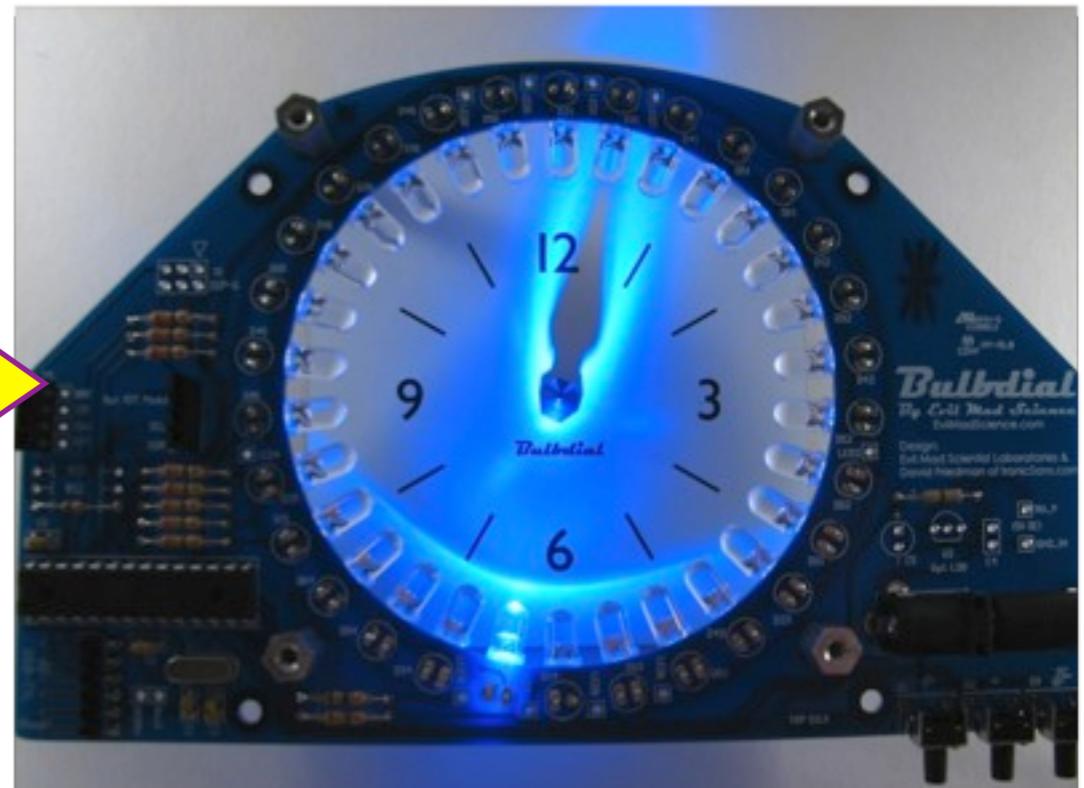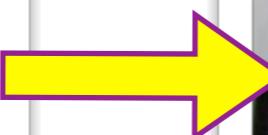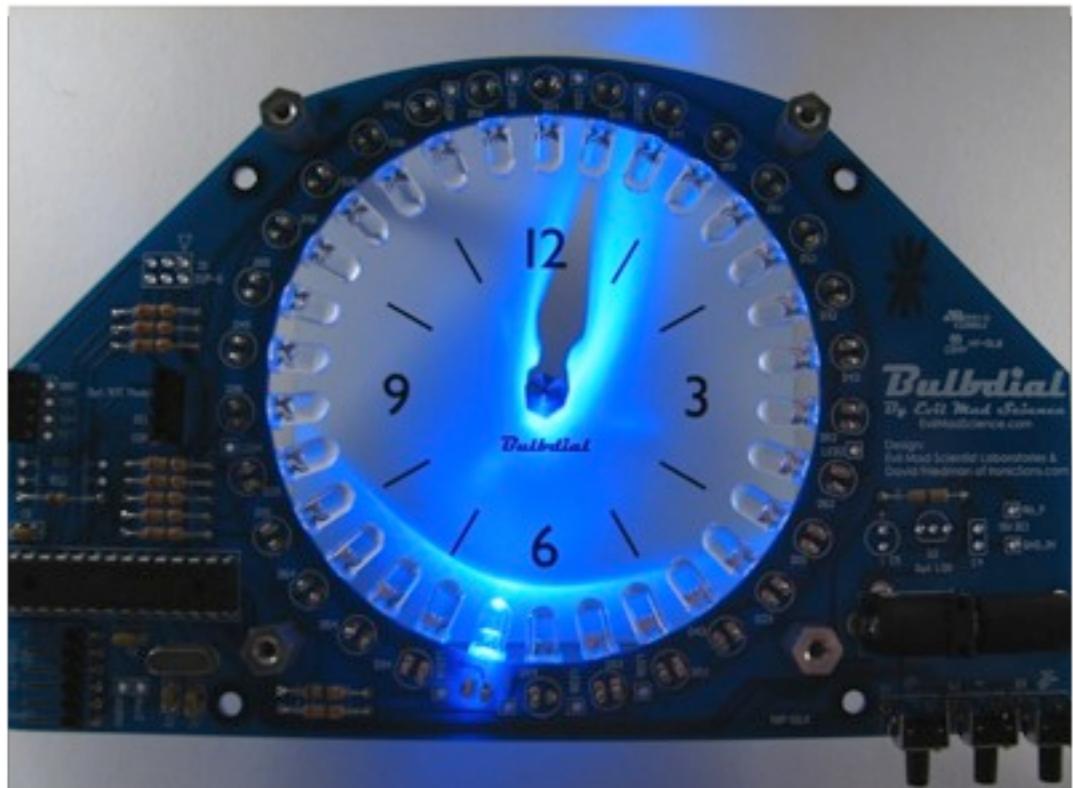

The next LED over was not initially aligned as well—this is the best that could be done by pressing it straight down. The shadow is not centered well.

After carefully bending the LED to point in the right direction, it looks much better.

- If your projected spot of light is pushed too low, you can push the LED back up to correct it.
- If your projected spot of light is not centered on the gnomon, you can bend the LED sideways using your fingers (if nimble) or with fine tip pliers. (See discussion in Step 0.)
- When applying force to the LEDs, be careful to move them in a firm, controlled manner. You are trying to bend the metal leads of the LED, not damage the LED itself.

Big hint: Do not spend more than a couple of minutes on this step. Get the LEDs basically aligned and move along. Why?


1. It's a shadow clock. Forming readable shadows is your top priority. The edges of the LED spot are a secondary feature.
2. There is natural variation in both the brightness and viewing angle of LEDs. Tiny variations in these can affect the spot size.
3. This is only one ring. Variation in LED position and angle will be less noticeable once all three rings of LEDs are lit at once.




That wraps up the blue ring of LEDs. In the next section, we'll add the LEDs to the green ring, using a similar set of procedures.

STEP 29: Prepare for the “green” ring.


The “main assembly” that we’ve built up thus far, complete with standoffs & clock face.

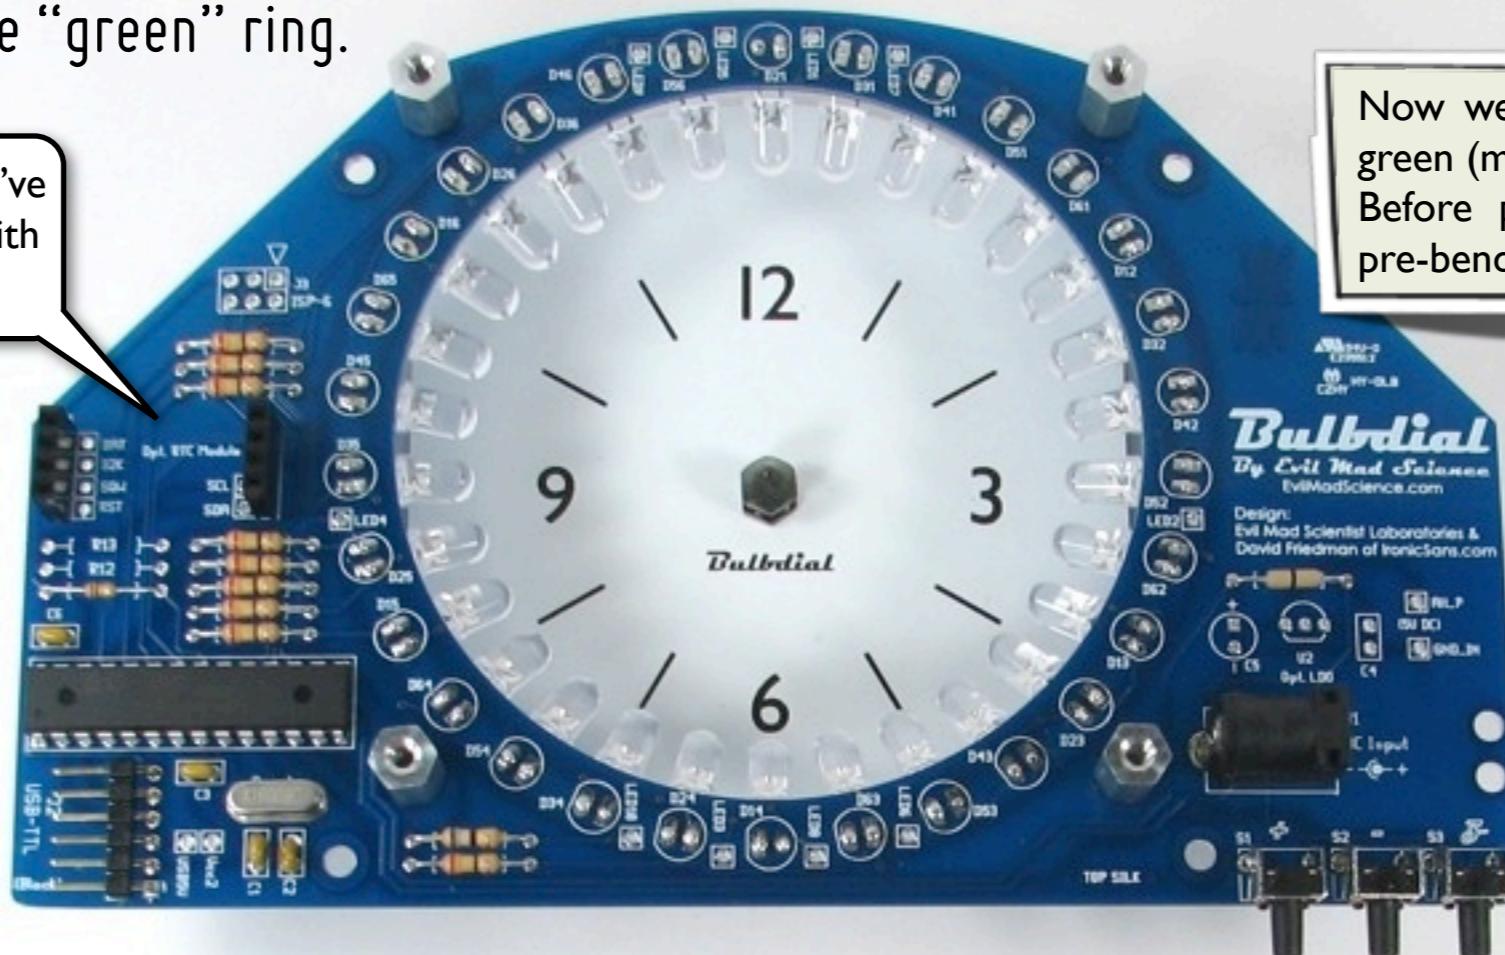

Now we gather up parts to build the green (middle) ring of the clock. Before proceeding to the next step, pre-bend the 30 LEDs that we'll need.

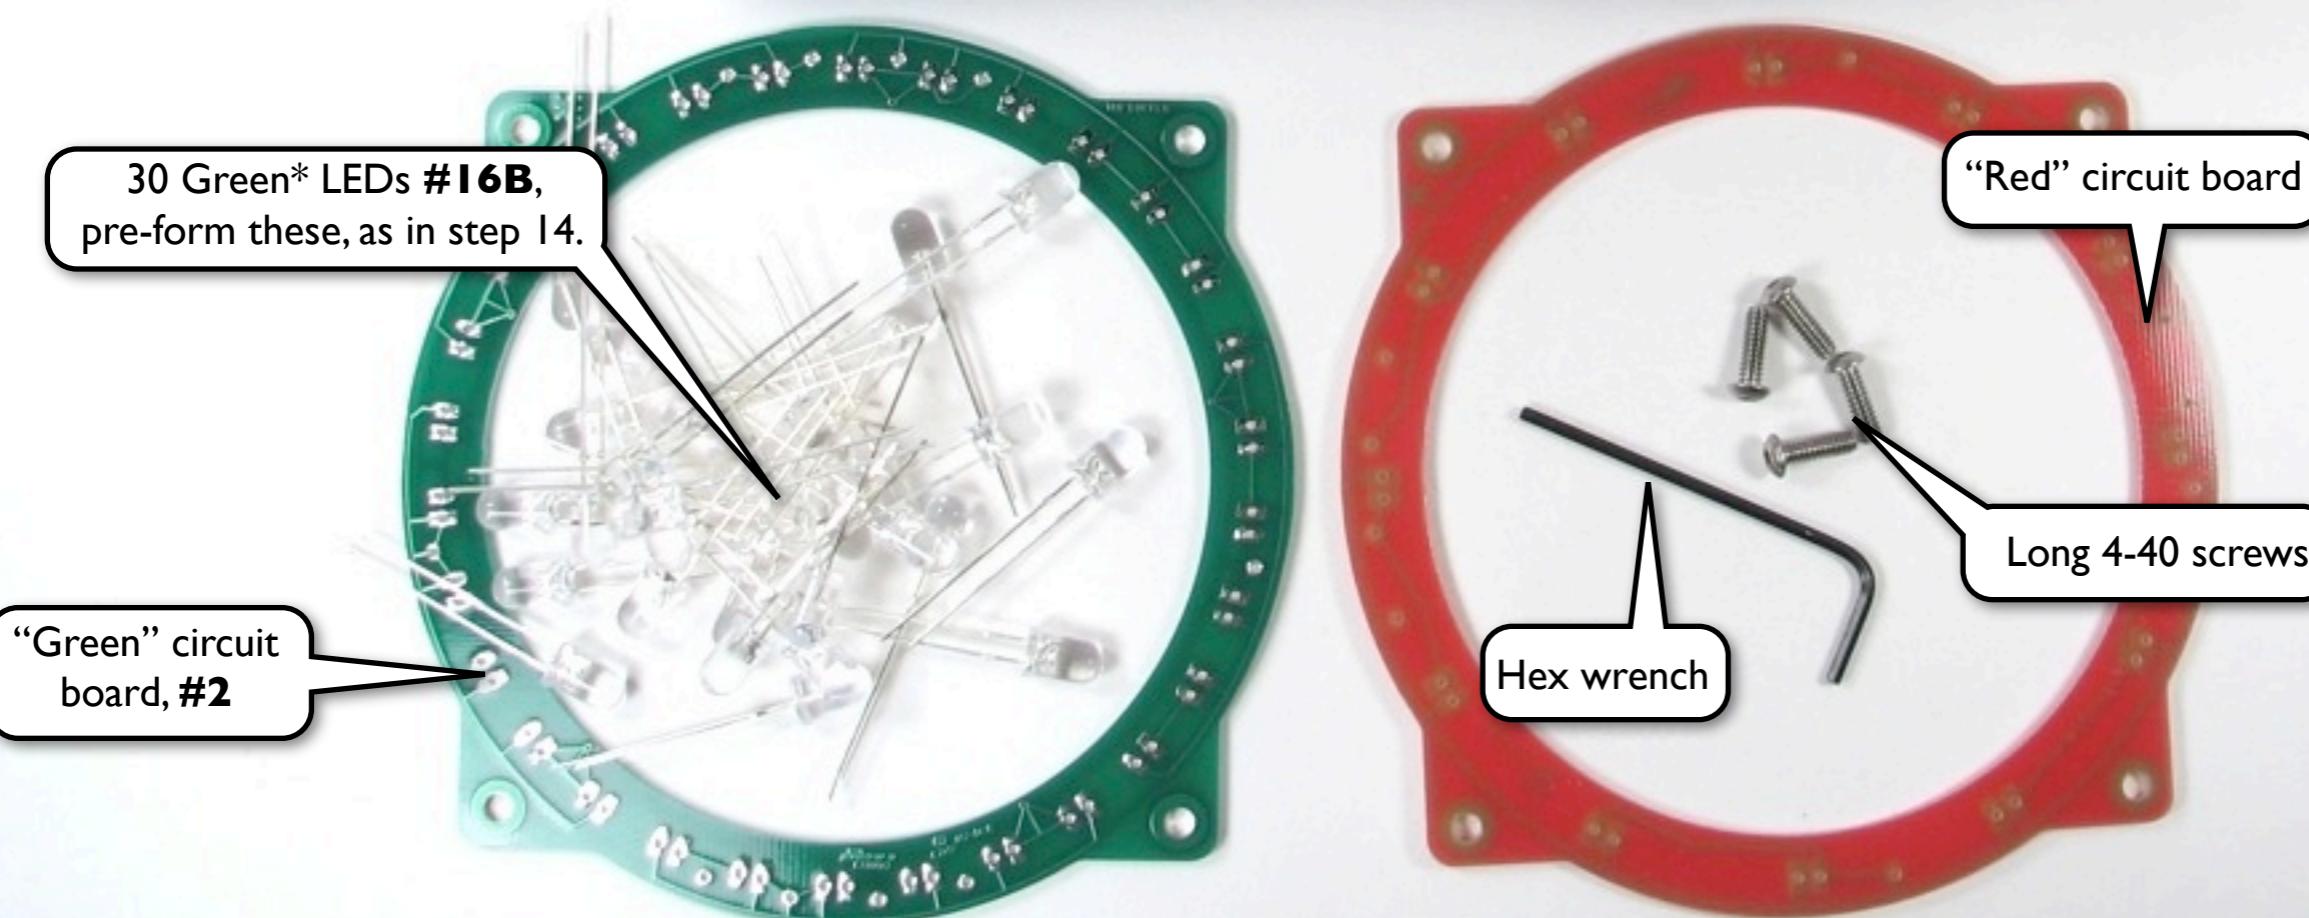

STEP 30: Filling and clamping the green ring

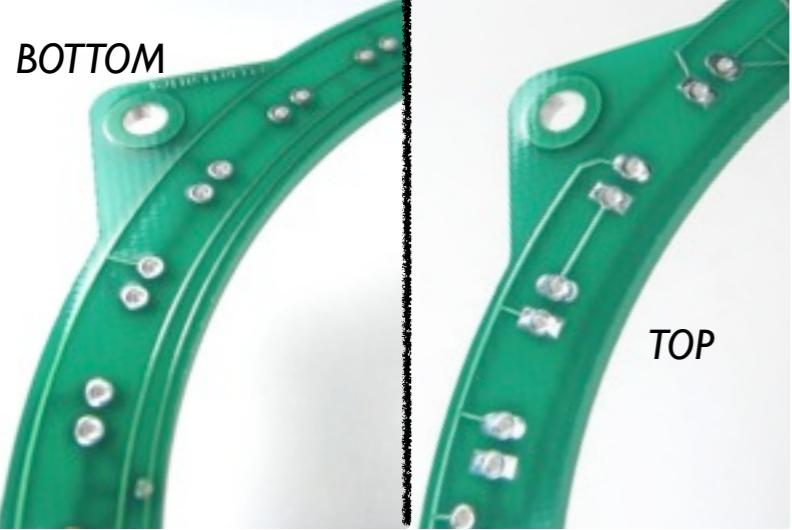


Identify the top and bottom of the green circuit board. The top side has pairs of wide solder pads, while the bottom has only circular rings.




Hold the ring in your hands. Begin inserting the LEDs into the pairs of holes on the *bottom* side, much as we did on the main board.




Add all 30 LEDs.

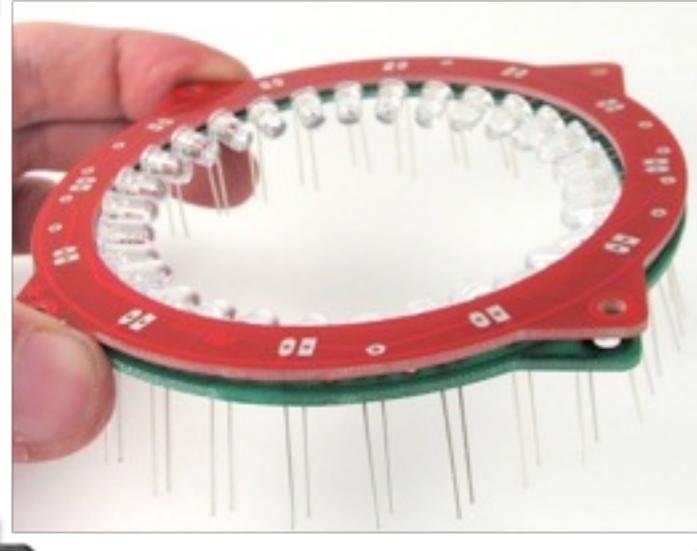

Place the red ring on top of the filled ring. As in step 18, place the bottom (blank) side of the red ring touches the LEDs.

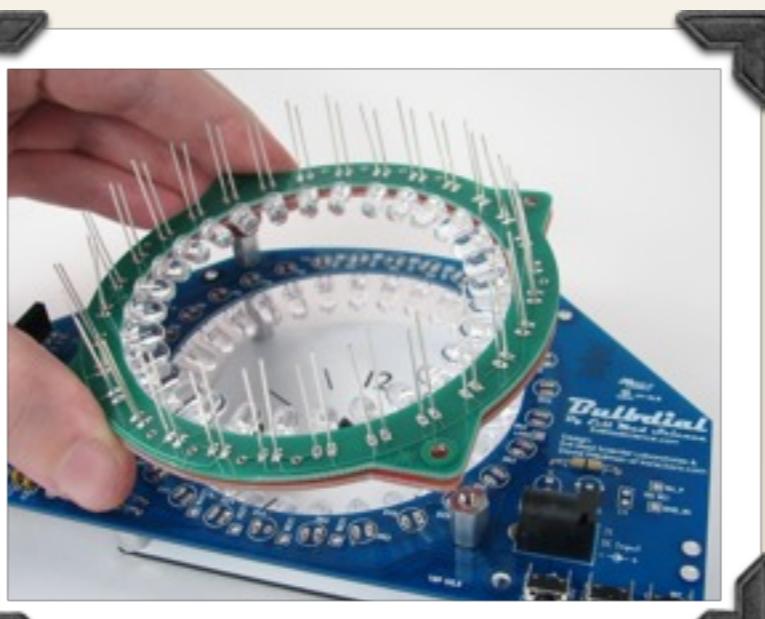


Hold the two rings together so that the LEDs don't fall out. Flip it over and place it atop the main assembly.

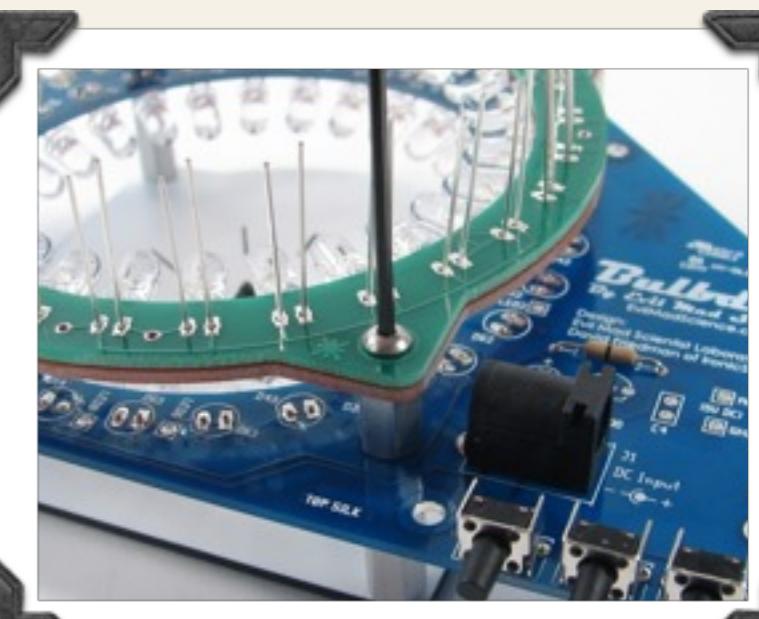


Screw down the rings in all four corners, using the long screws. As before, this loosely “clamps” the LEDs in place.

STEP 31: Inspect & solder the green ring


Here, we effectively repeat steps 19-22 for the green ring.

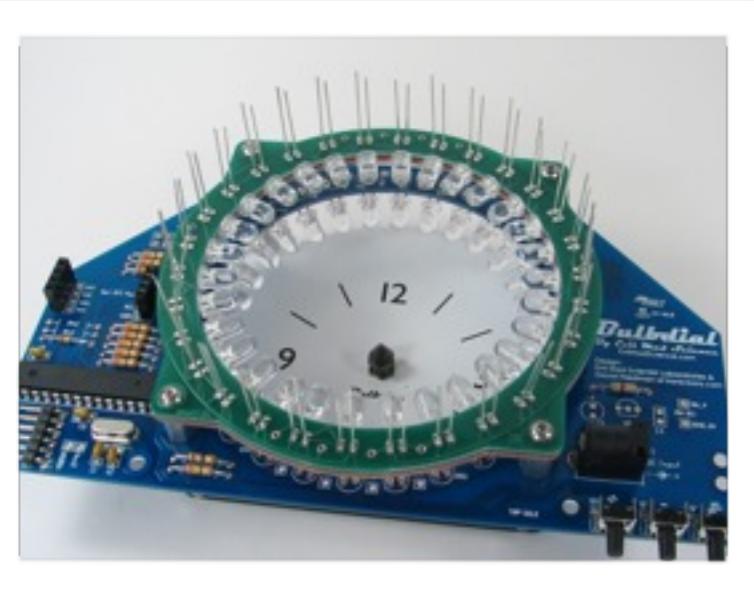


We now have the LED-filled green ring clamped in place on top of the red one.

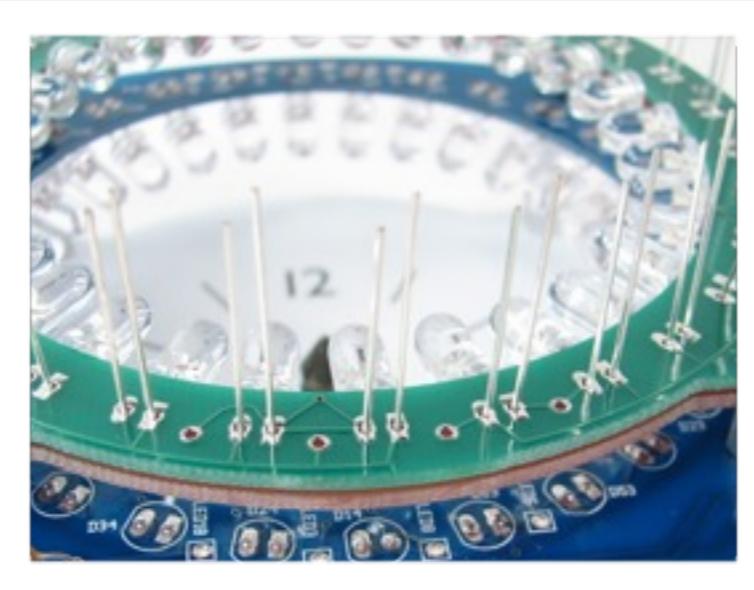

As in step 19, for each LED, check that the short lead is above the rounded pad, that the LEDs are roughly pointing towards the center, and that the leads point straight up.

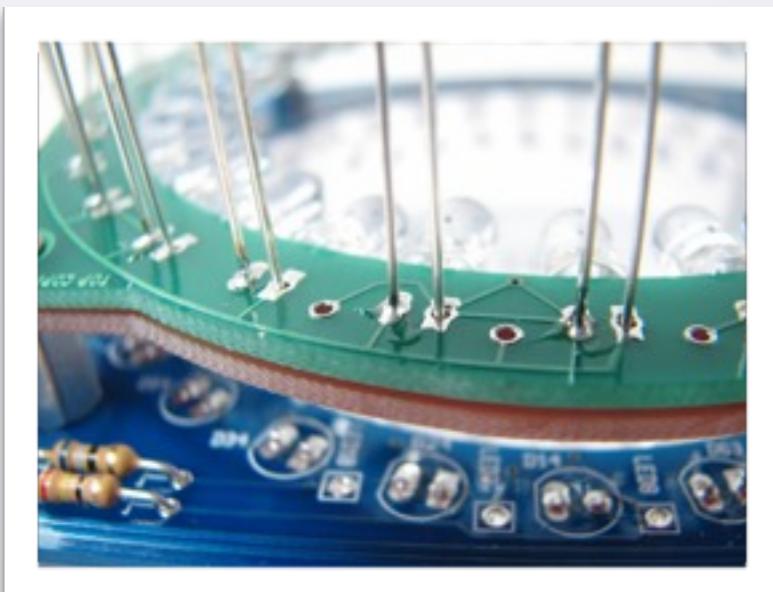

As in step 20, solder the rounded pad of each LED. After that, unscrew the red & green rings from the main assembly.

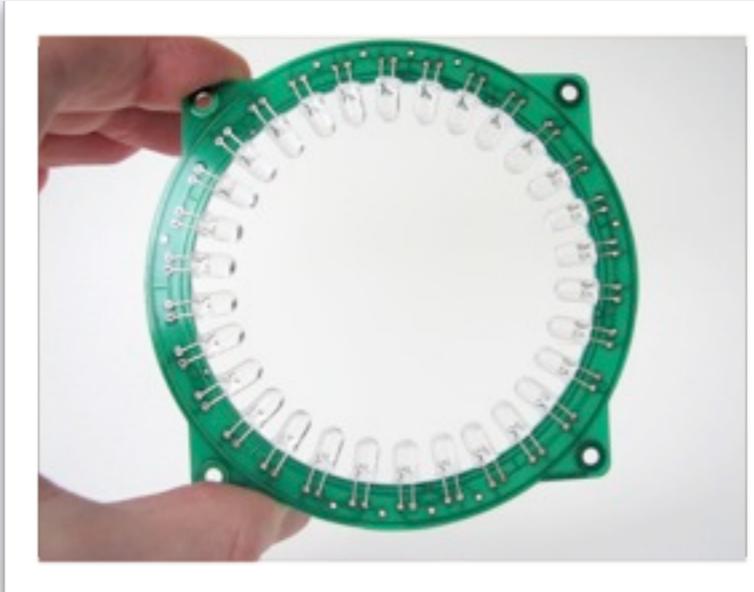



As in step 21, inspect the ring and do your best to point the LEDs at the center of the ring. (This will improve centering of your shadows.)



Finally, as in step 22, solder the remaining lead of each LED and trim the leads short.

STEP 32: Orienting the boards


Soon, will mount the boards together. Before that, we need to get their orientations correct. The *top* side of each board has a secret asterisk ("star") shape in the *upper left corner*.

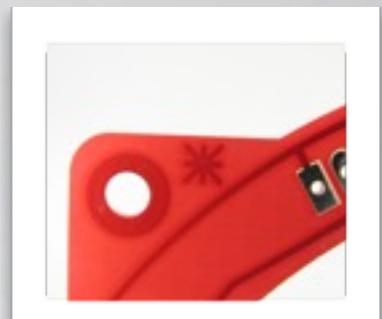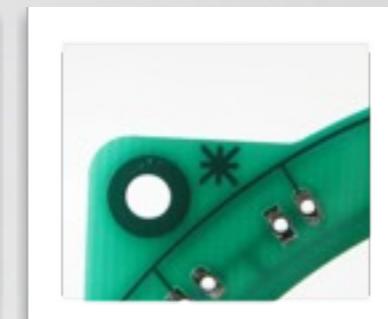


Locate these three asterisks.




STEP 33: Add inter-board connectors

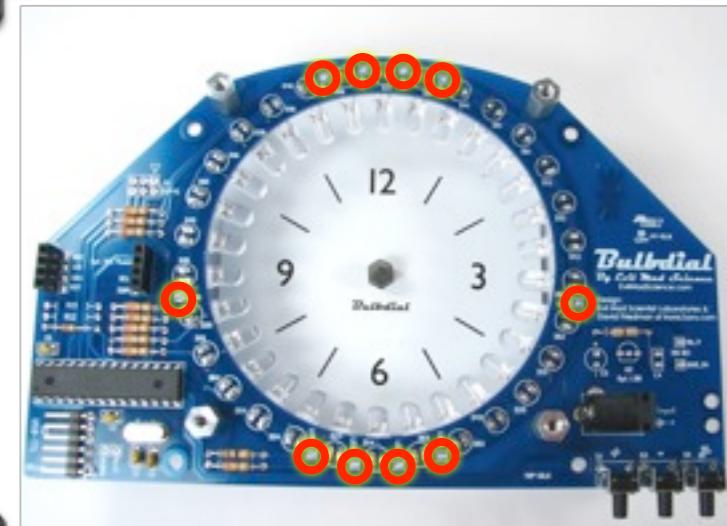


The connectors between the circuit boards are ten zeroohm jumpers. They go in the circled locations, marked LED1 – LED10.

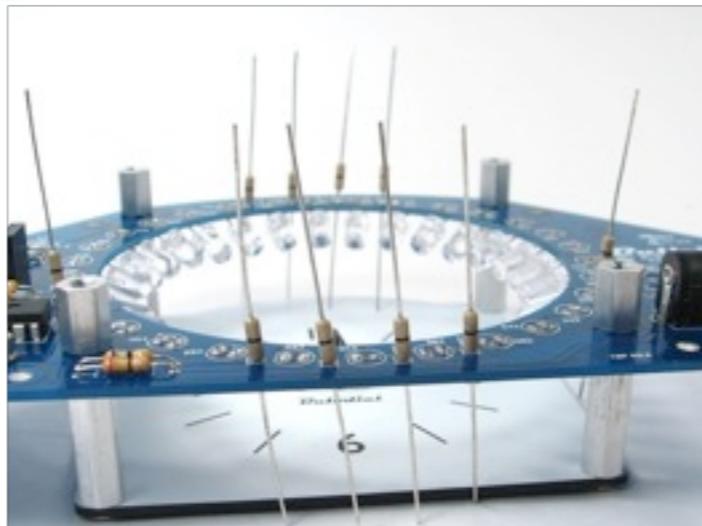

Place the ten jumpers in those locations, on end vertically as shown.

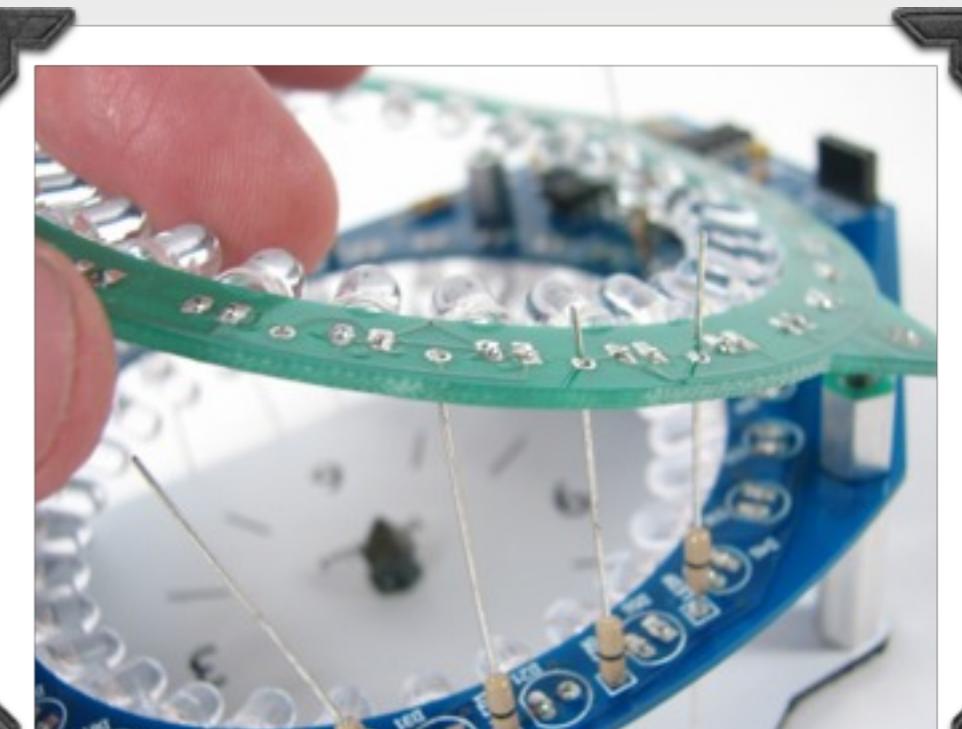

Locate the green circuit board with the correct orientation—Asterisk to the upper left. Going clockwise from the asterisk, feed each of the jumpers through the matching hole on the green board.

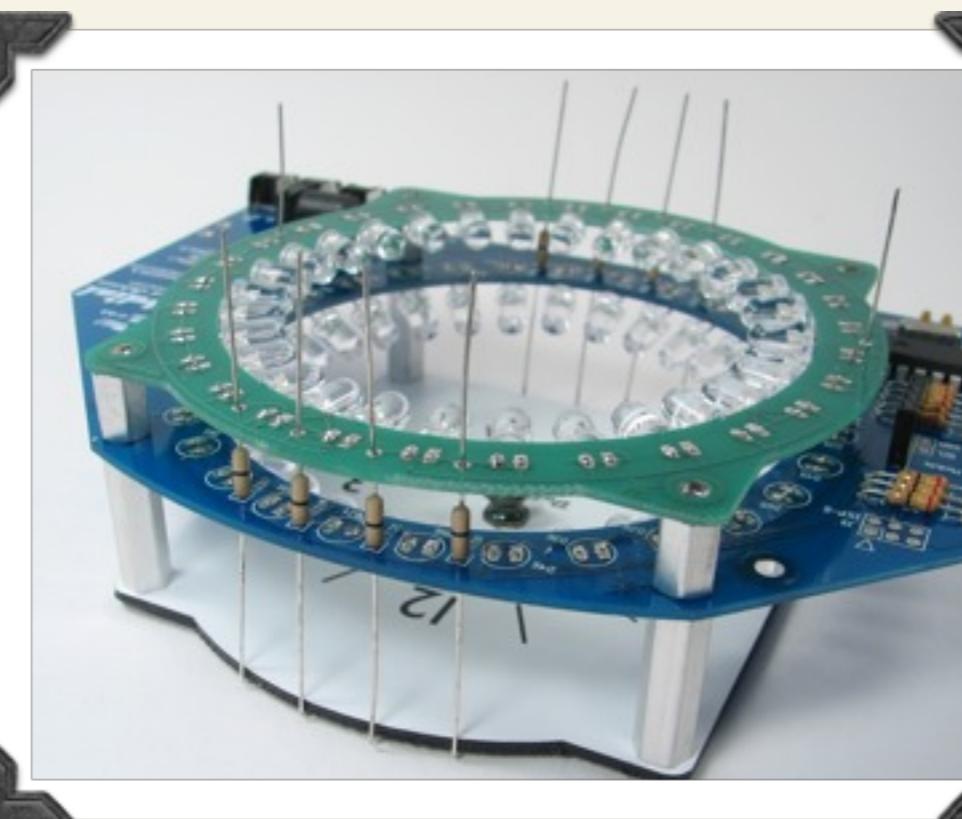


Lower the board as you go around to make sure that the jumpers don't pop back out.


Once all ten jumpers are fed through, verify that the circuit boards are correctly oriented—with an asterisk in the upper left of each.

(Do not solder these in place yet.)



STEP 34: Soldering inter-board connectors

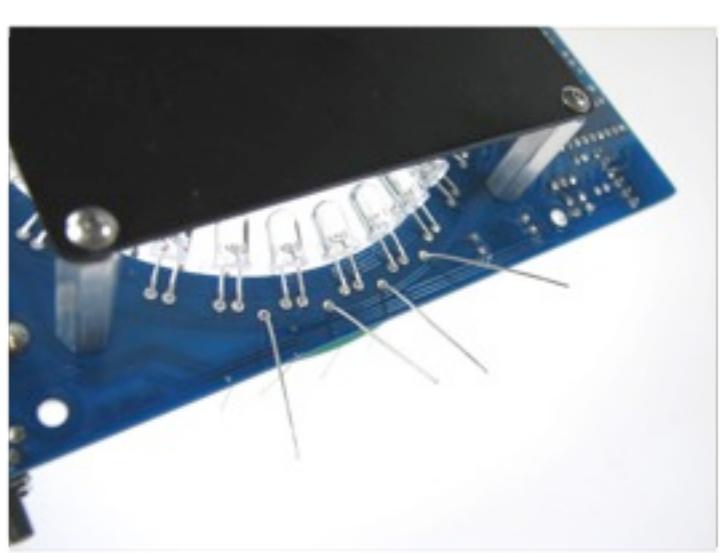



On the bottom side of the main board, bend out the jumper leads so that they don't touch the clock face.

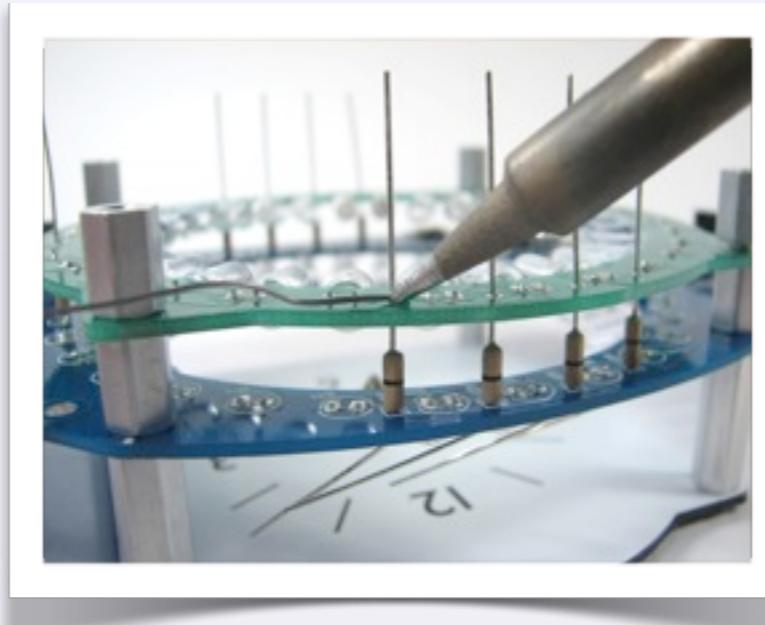

On the top side, screw down the green board with the last four M/F standoffs. Solder the ten jumpers in place on the top side. *Do not clip the leads— we'll need those later for hooking up the red circuit board.*

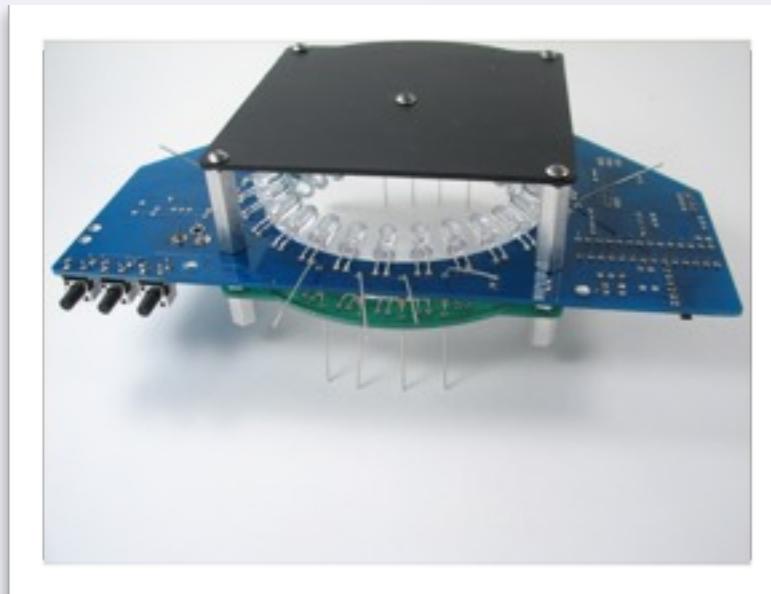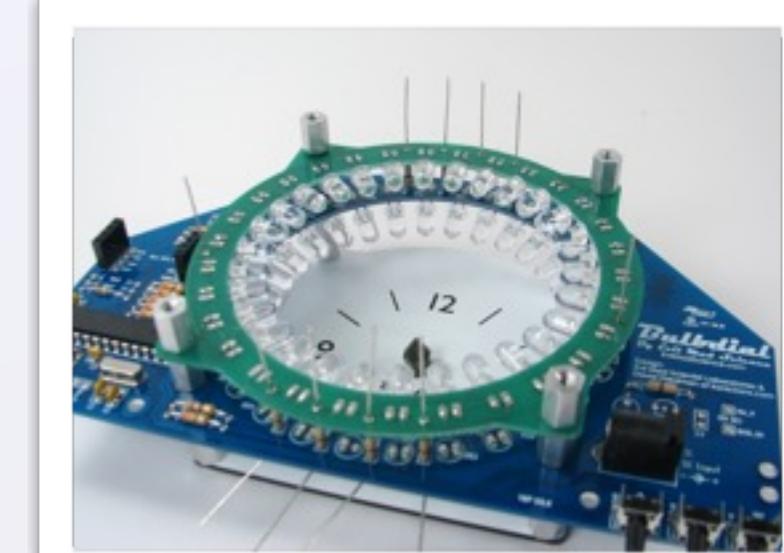


Flip the assembly over.

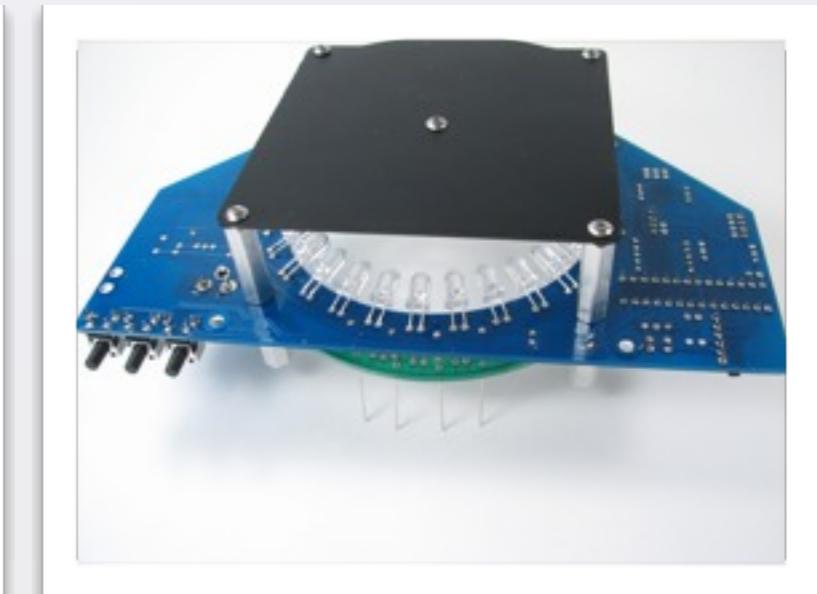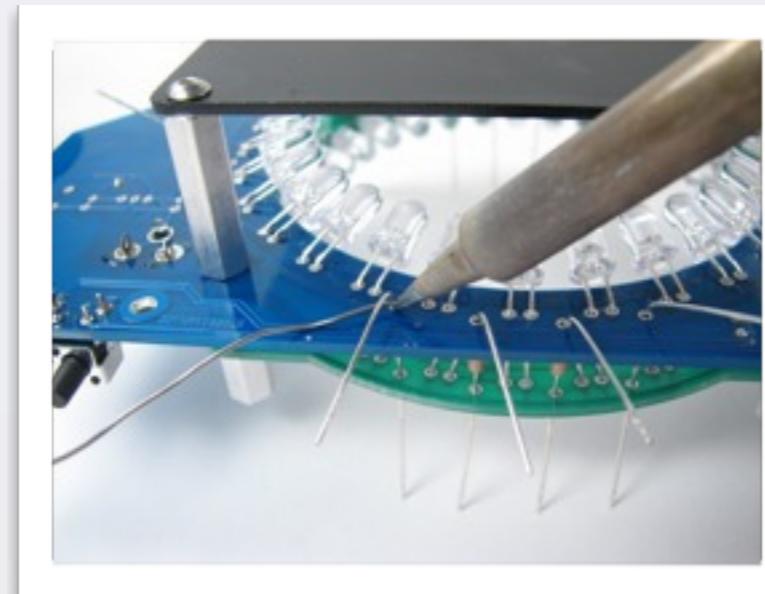



Solder the ten (bent) jumper pins to the bottom of the main board. Clip the jumper leads short on this side only.

The green ring is now ready for testing. Again, check for stray debris on the circuit board before plugging it in.

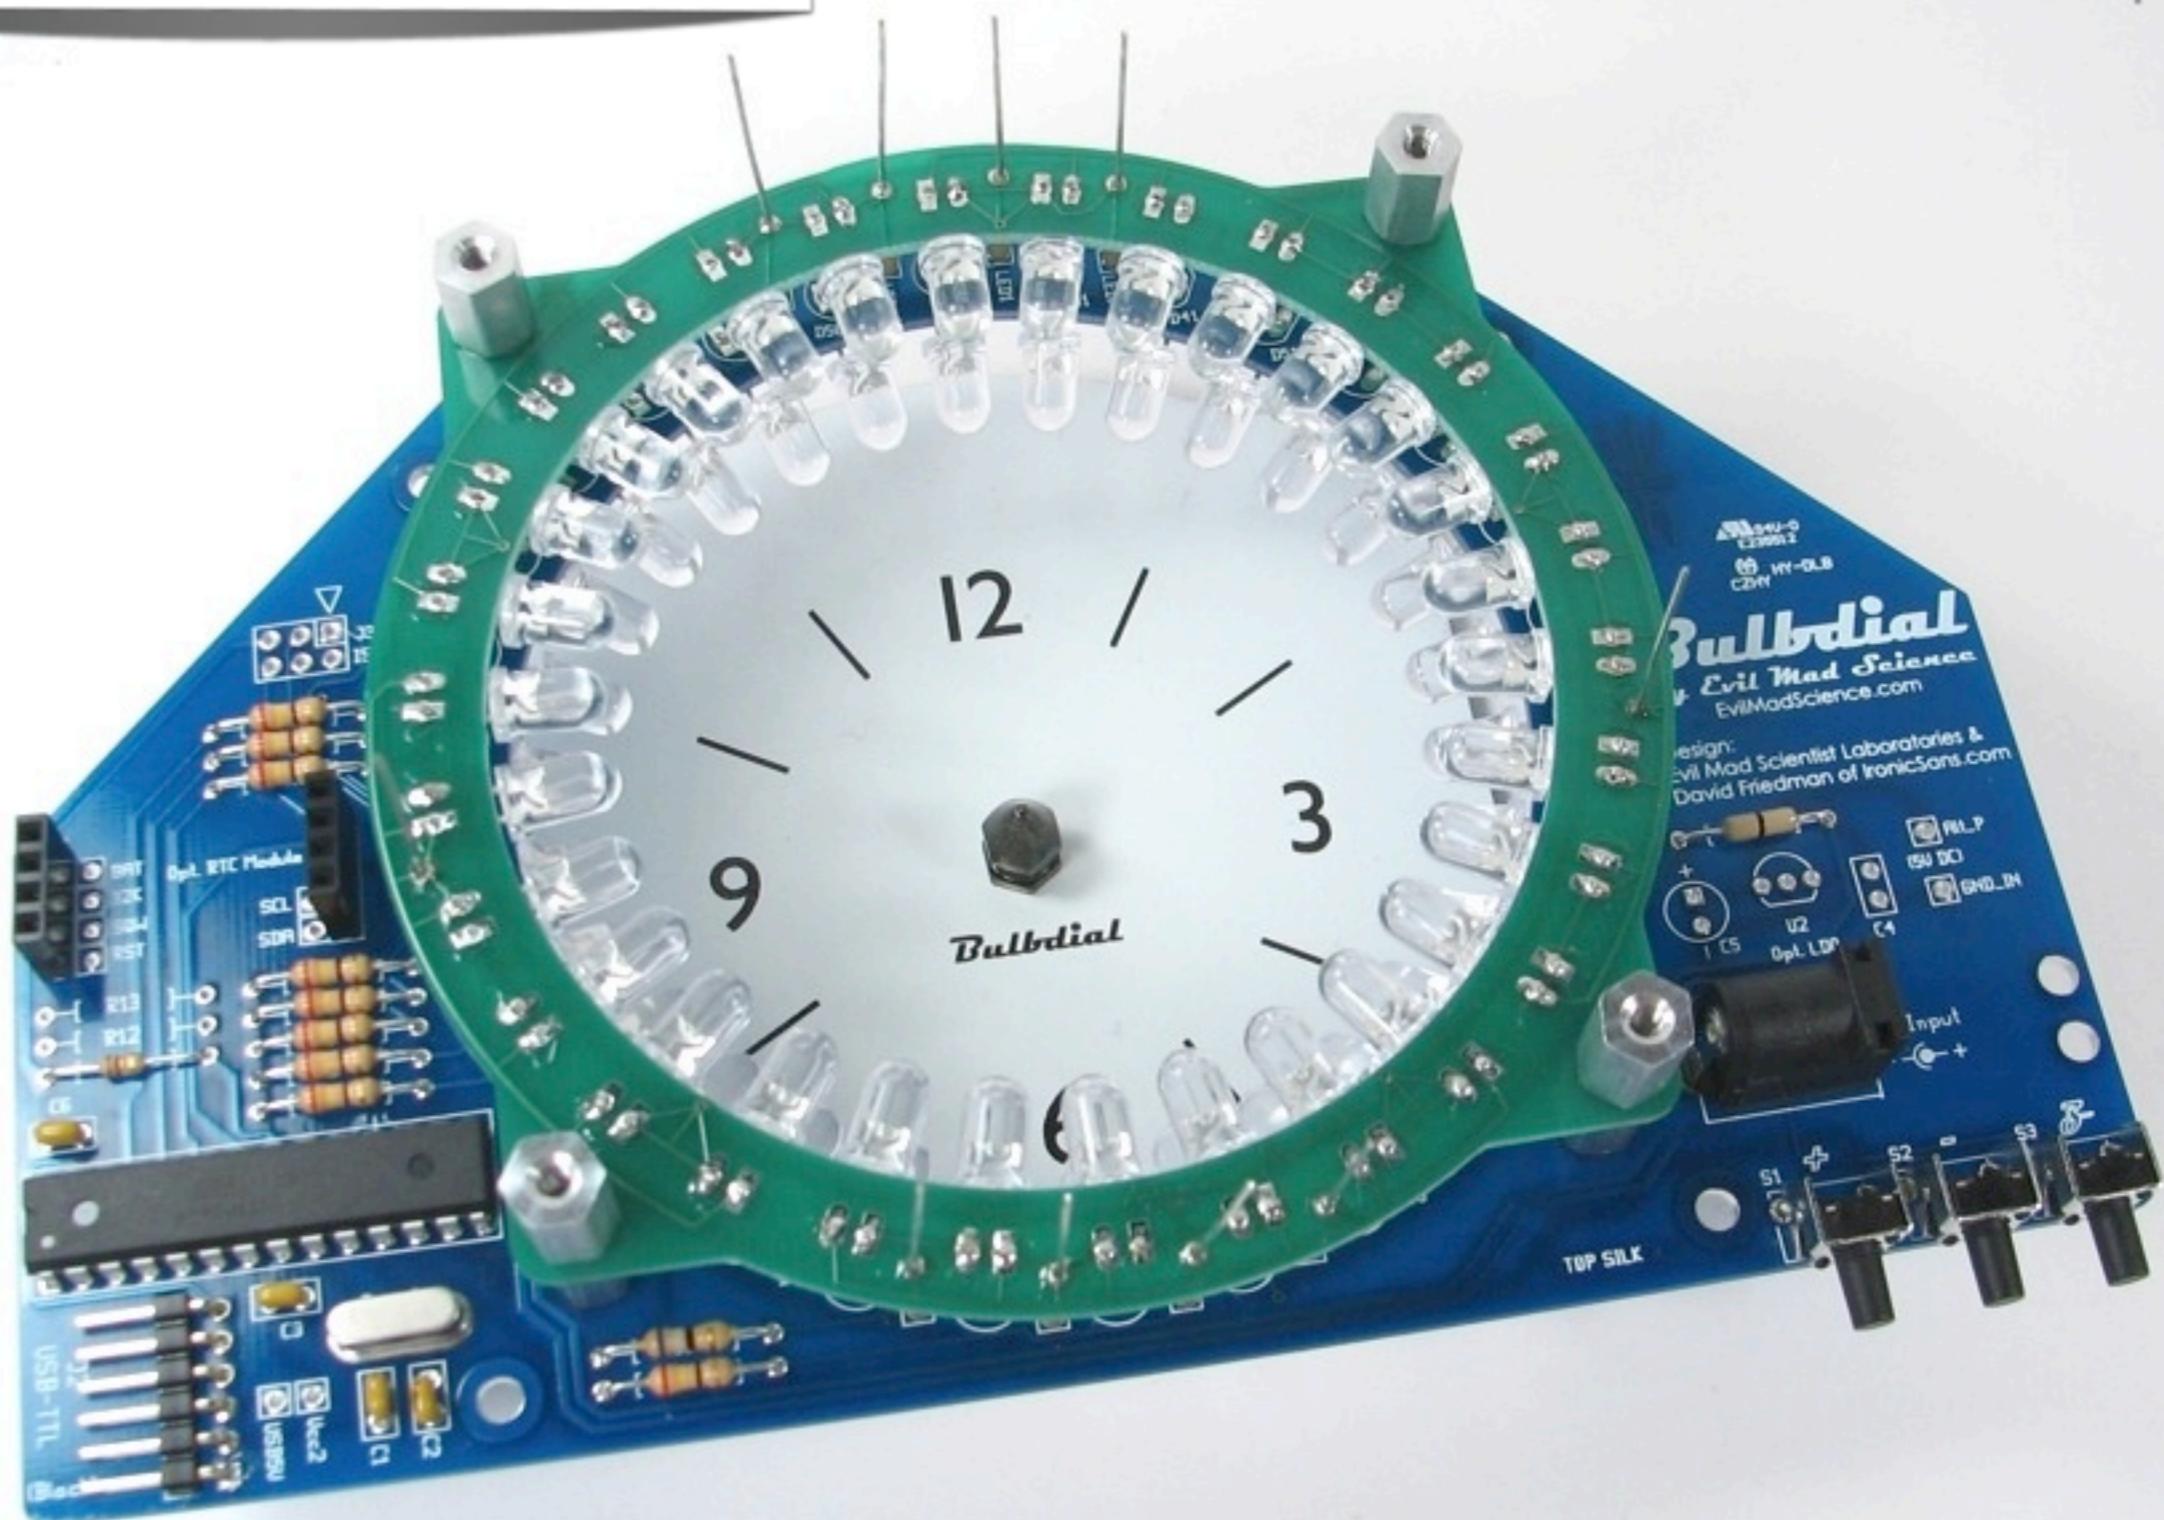

STEP 35: Test & align LEDs on the green ring

The procedure for testing and aligning the LEDs on the green ring is the same as for the LEDs on the main board.

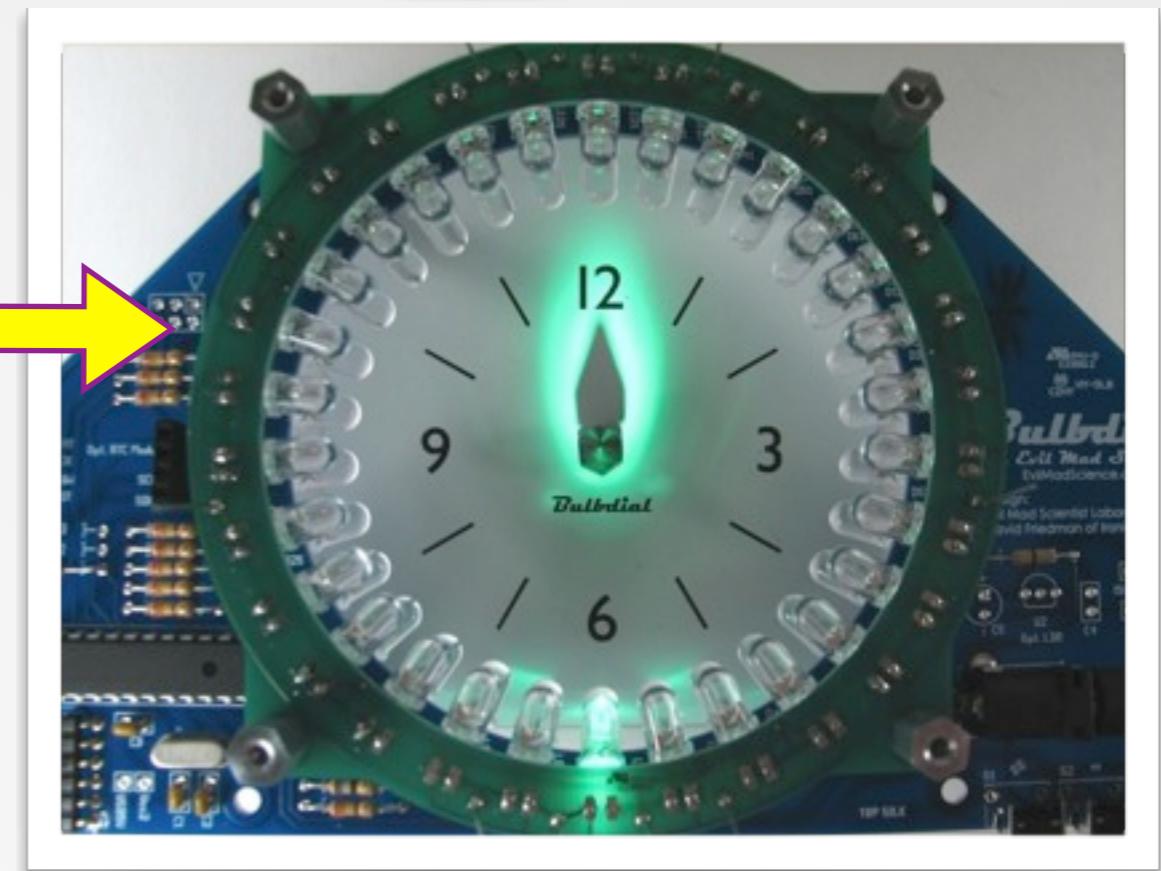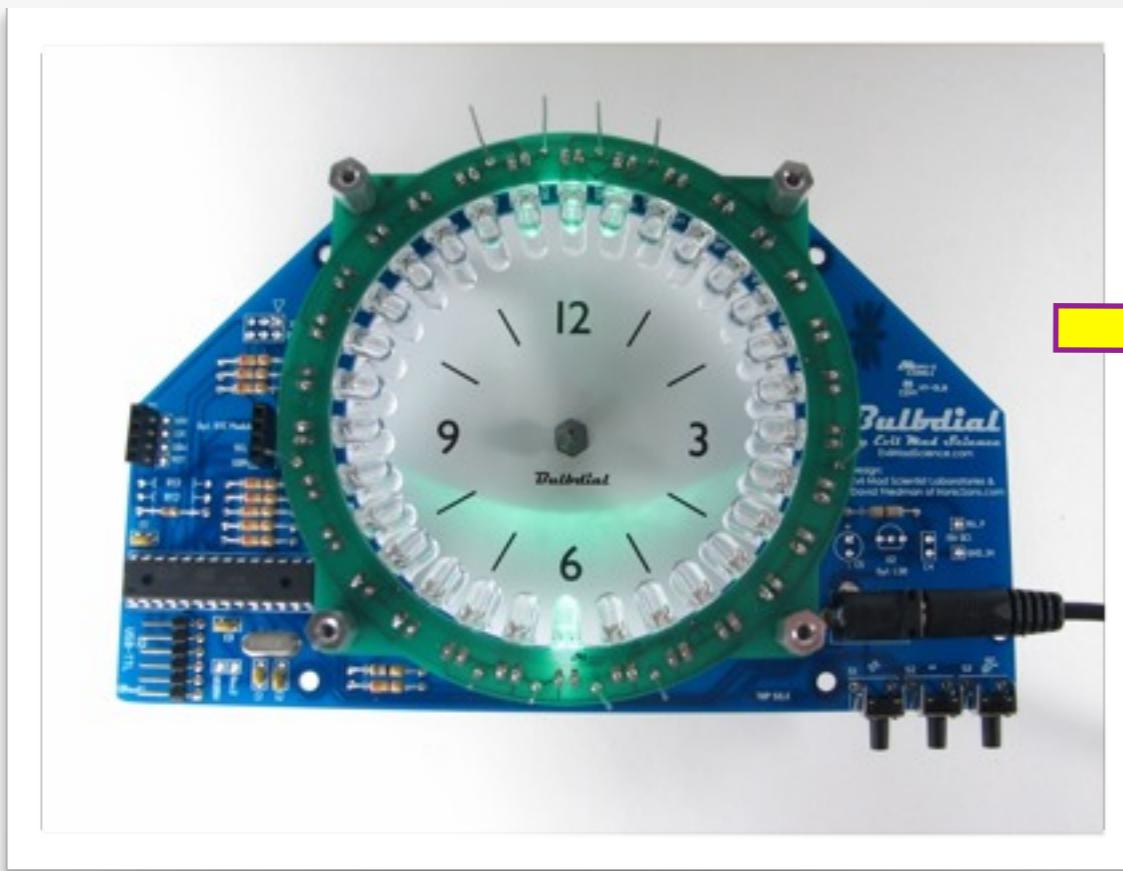

Use manual alignment mode to step through the LEDs one by one on the green ring. Make sure that every one of them is working, and then bend them to form a clear shadow of the gnomon. You may find it helpful to look back at steps 26–28 for reference.

Troubleshooting

If any LEDs do not light at this stage, it is likely to be a problem with soldering of a pin on the green board, or on the jumpers that connect it to the main board.

If any problems persist, be sure to resolve them before moving on to the next step.

STEP 36: Get ready to build the red ring




As before, use the LED bending guide to prepare 12 red LEDs*, #**I6C**, to go on the red circuit board.




STEP 37: Populate the red ring

Hold the red ring with your fingers, bottom (blank) side up. Put the 12 LEDs into the holes.

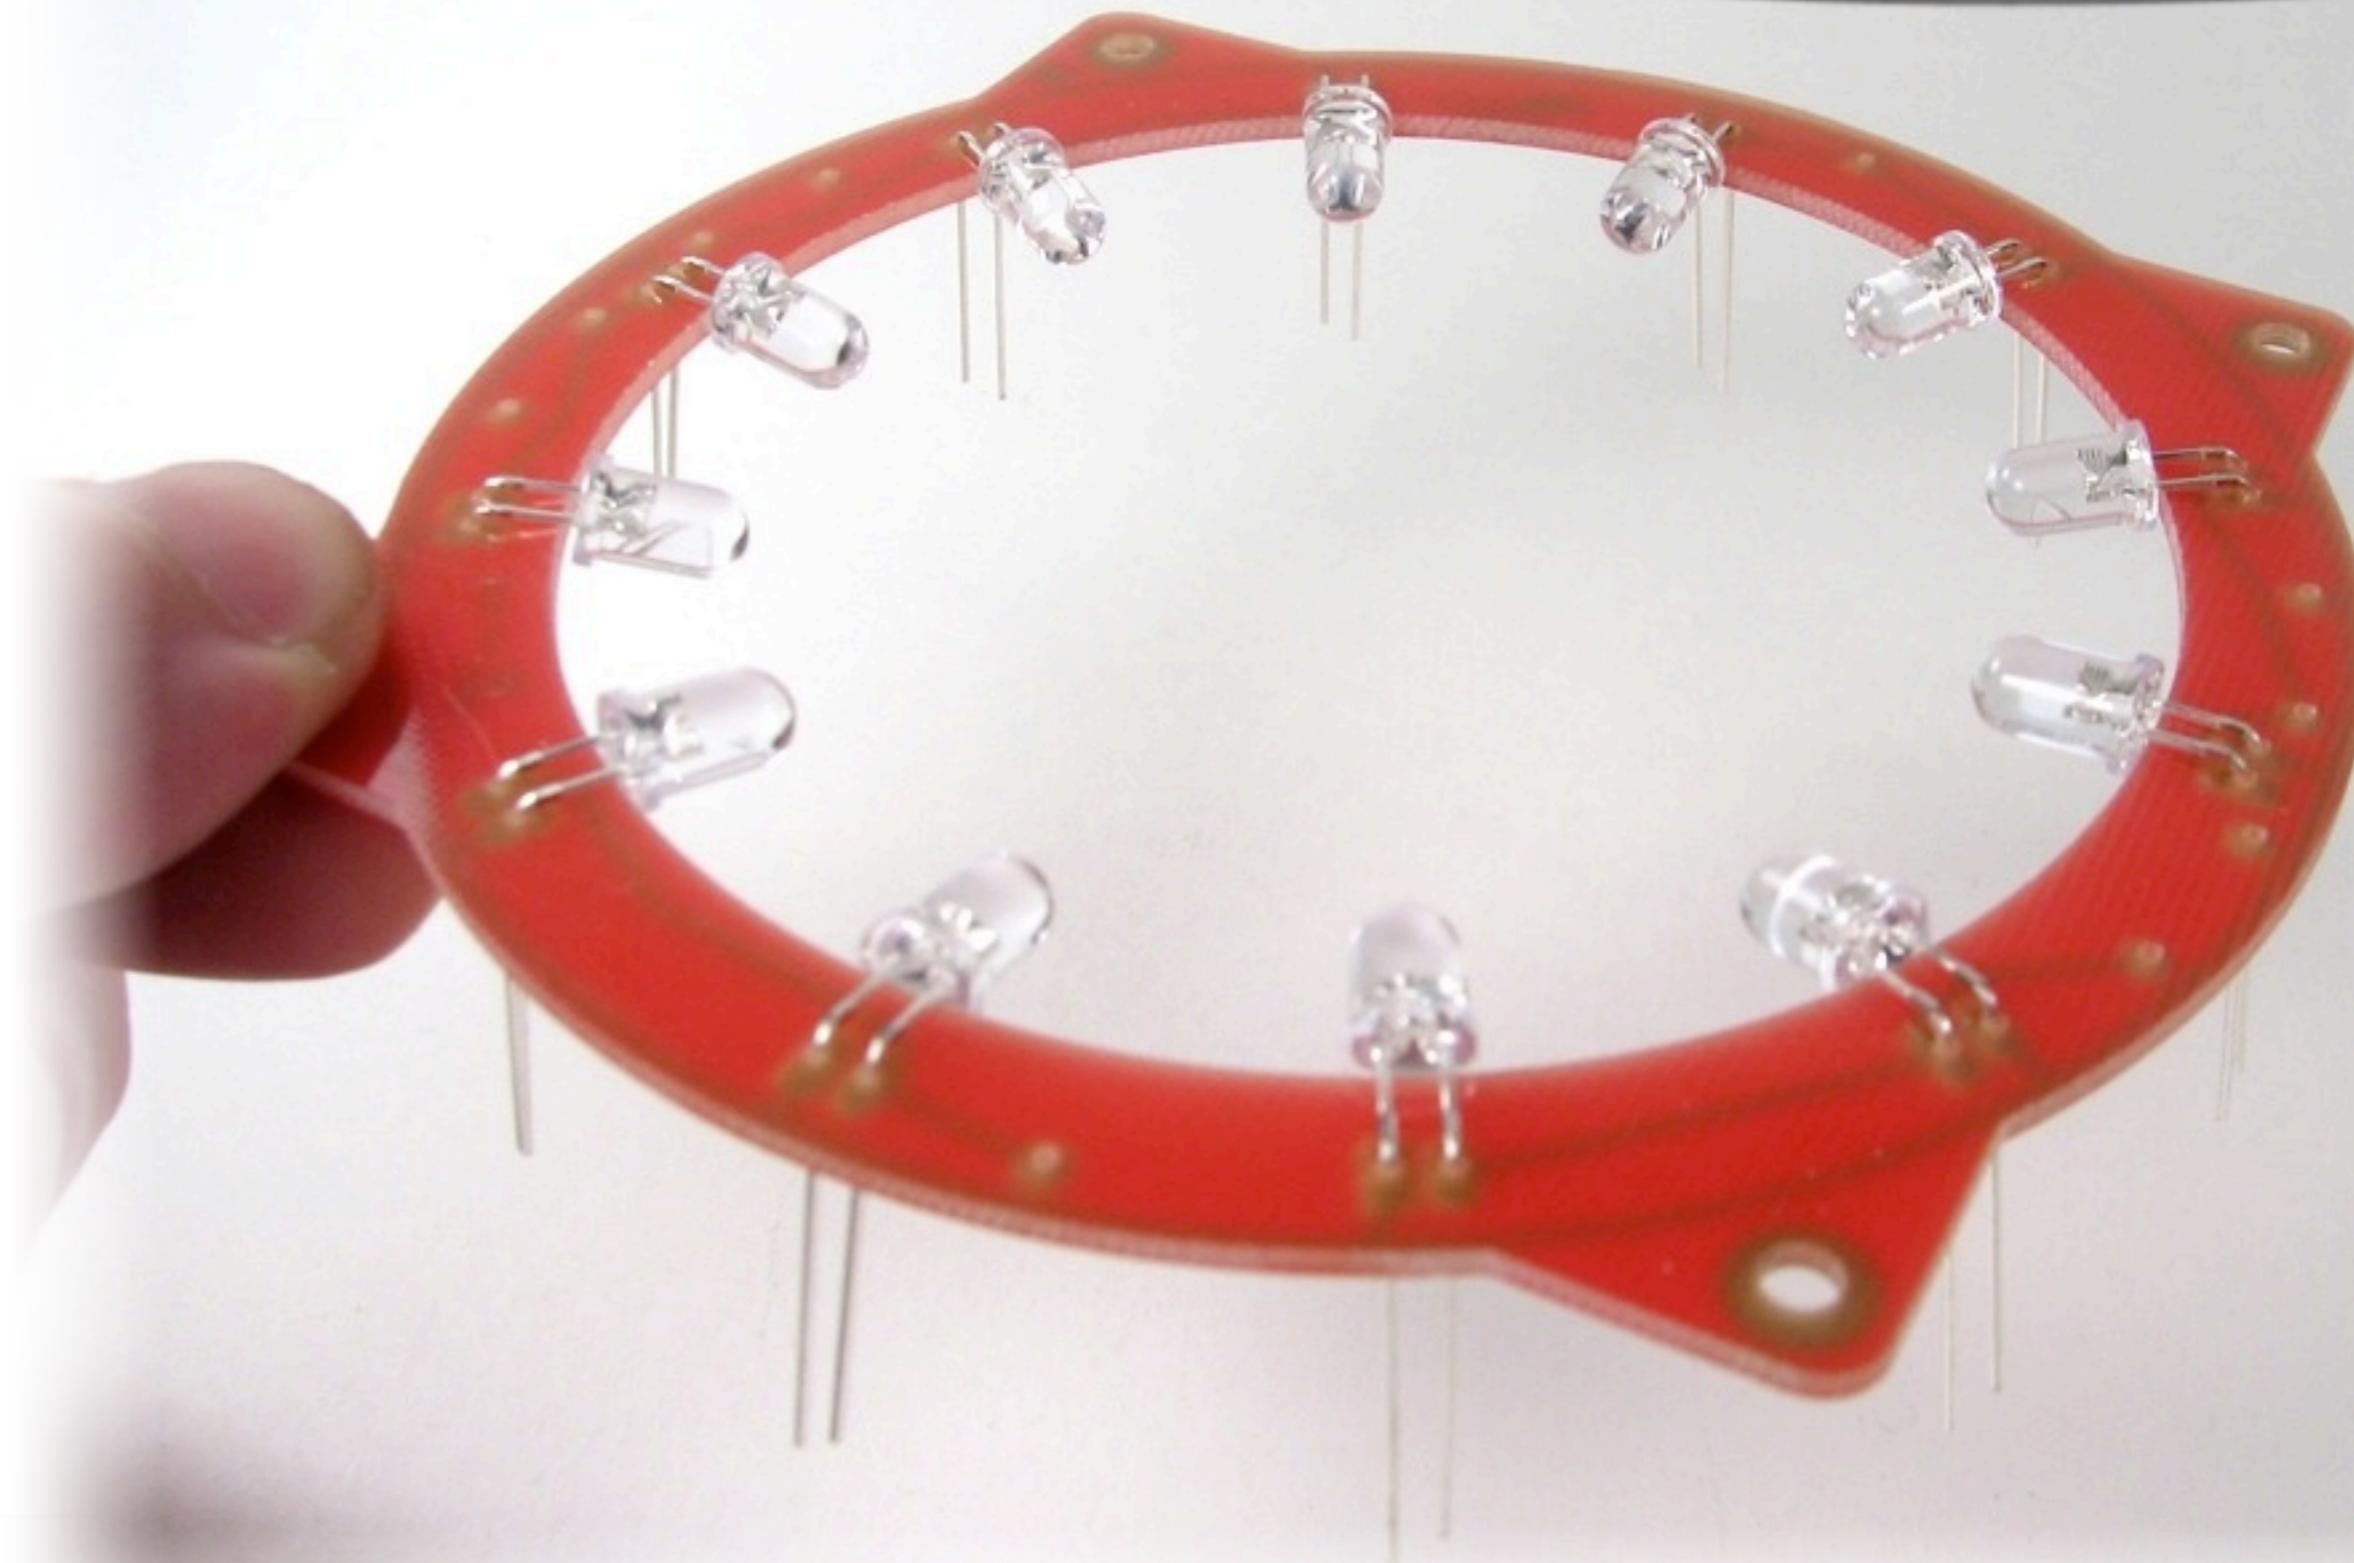


STEP 38: Inspect & solder the red ring

The red ring is less dense and more forgiving in terms of LED alignment; we can just bend, rather than clamp these LEDs into place.

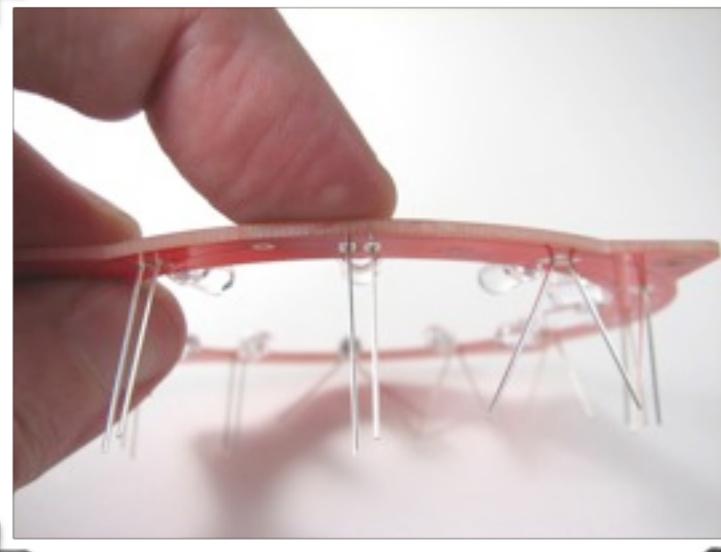


Hold the LED in place firmly with your finger.

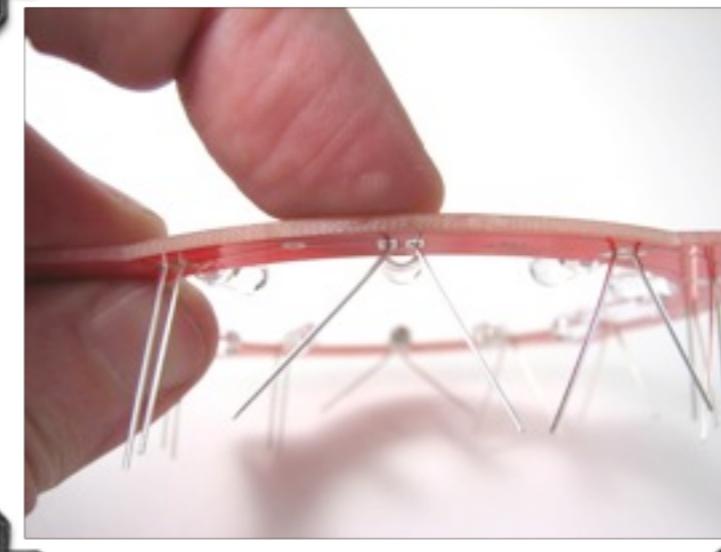


Bend both leads out by about 45°.



The ring, ready for soldering

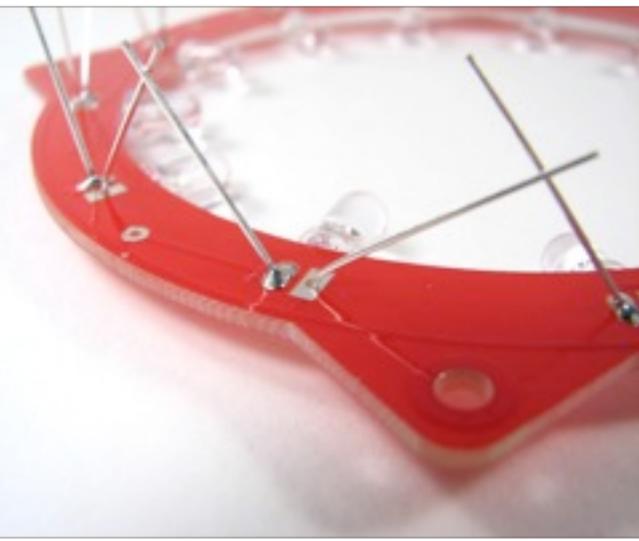

As in step 20, solder just the rounded pad of each LED.




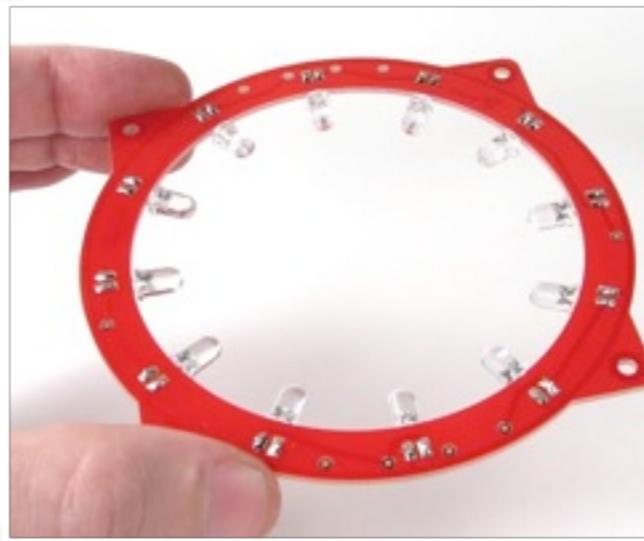


Point each LED carefully towards the center of the circle and then solder the other lead of each LED. And then clip the leads short.



Finally, locate the asterisk on the board so that we can align it to the boards below.



STEP 39: Adding the red ring

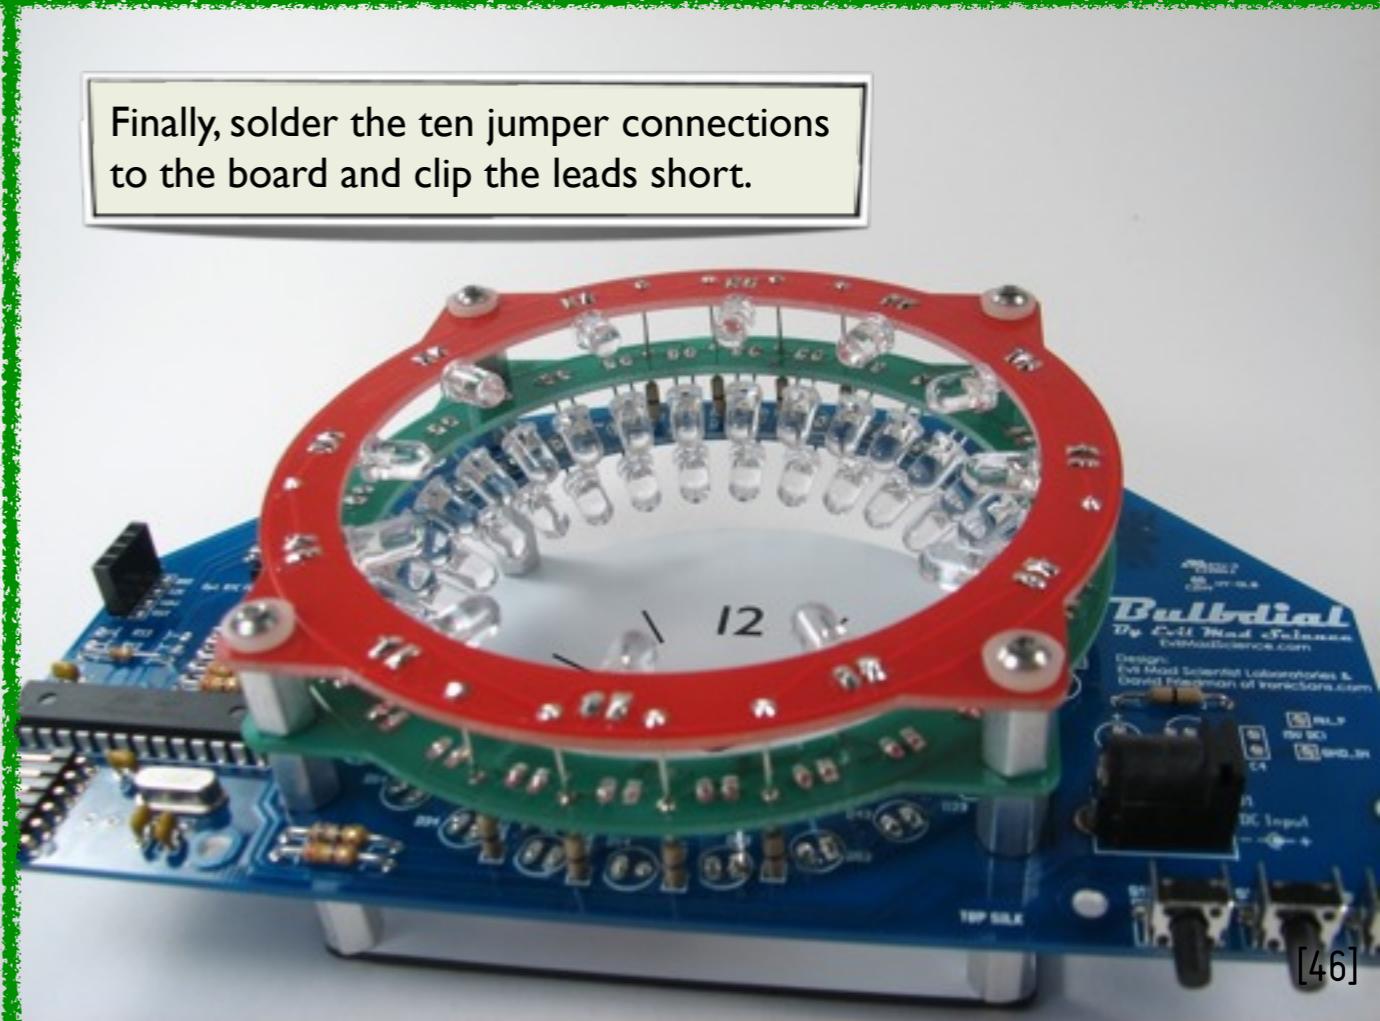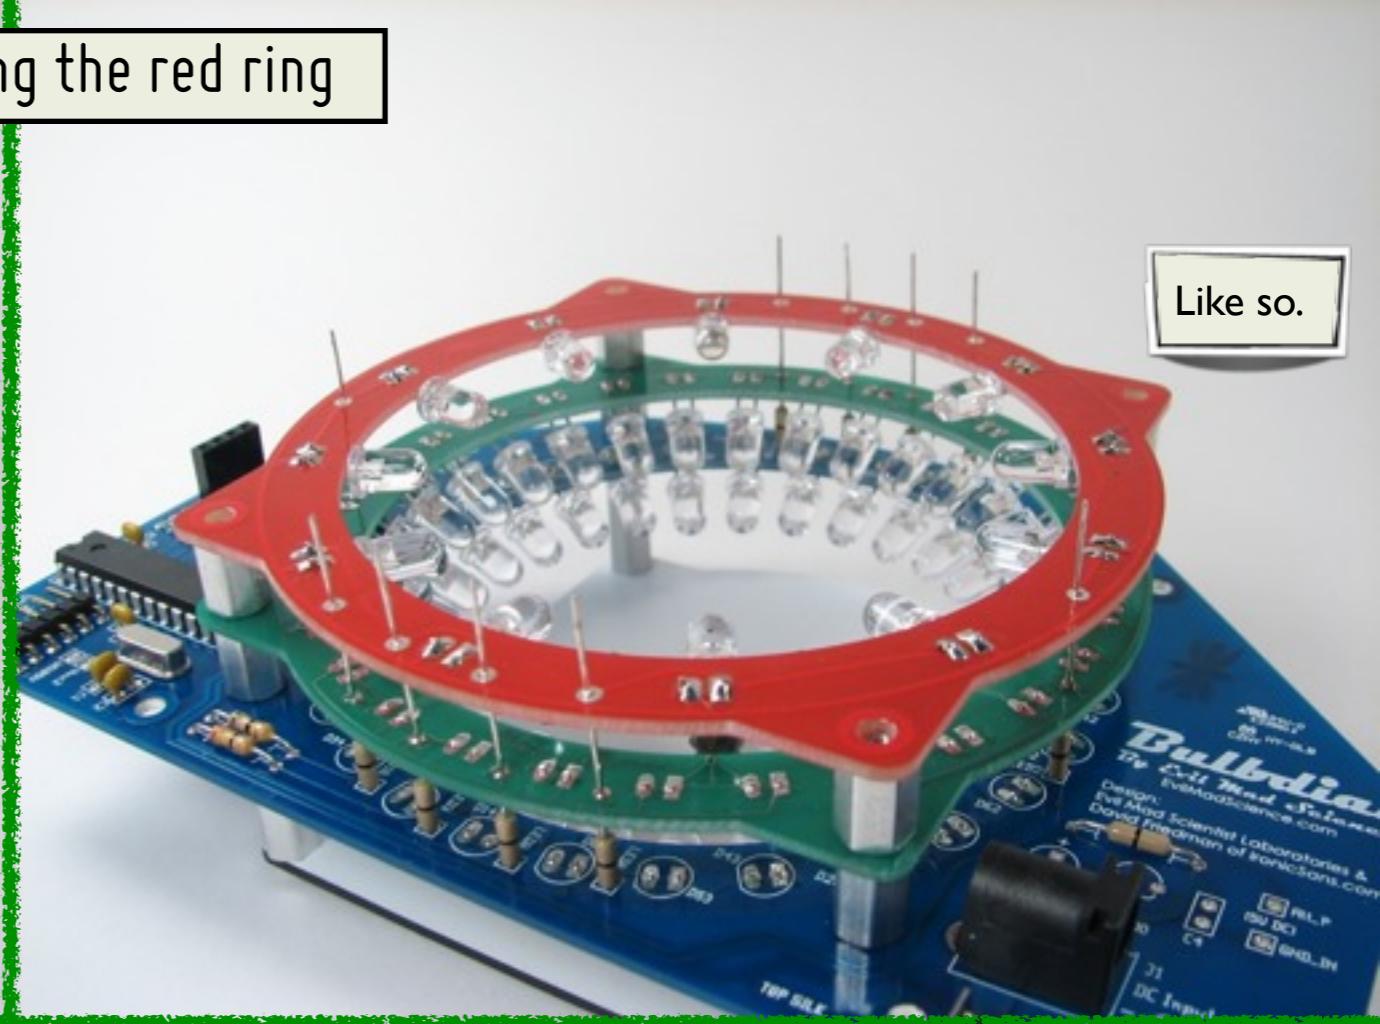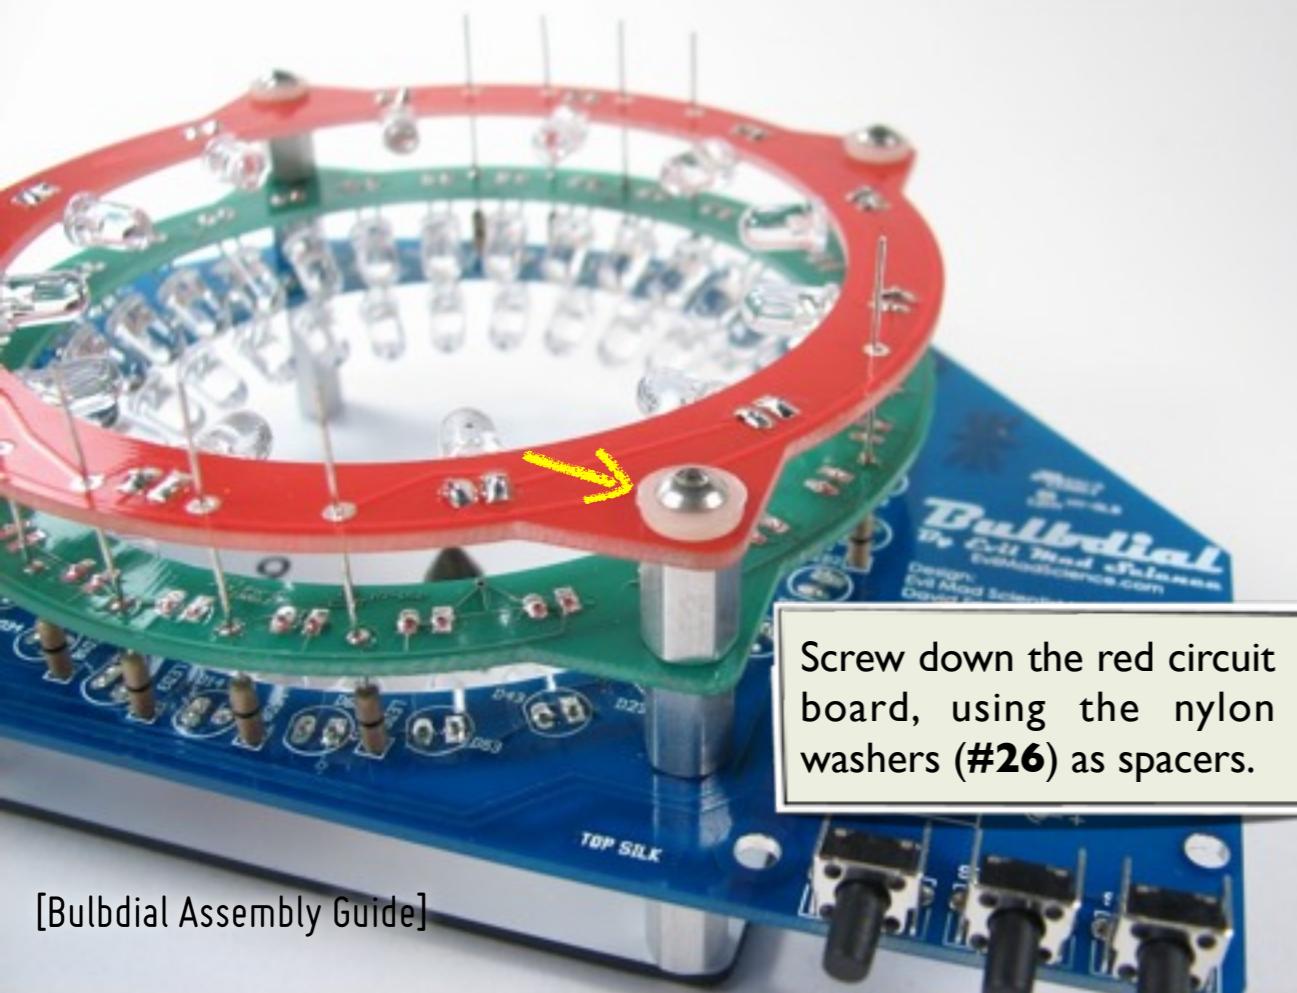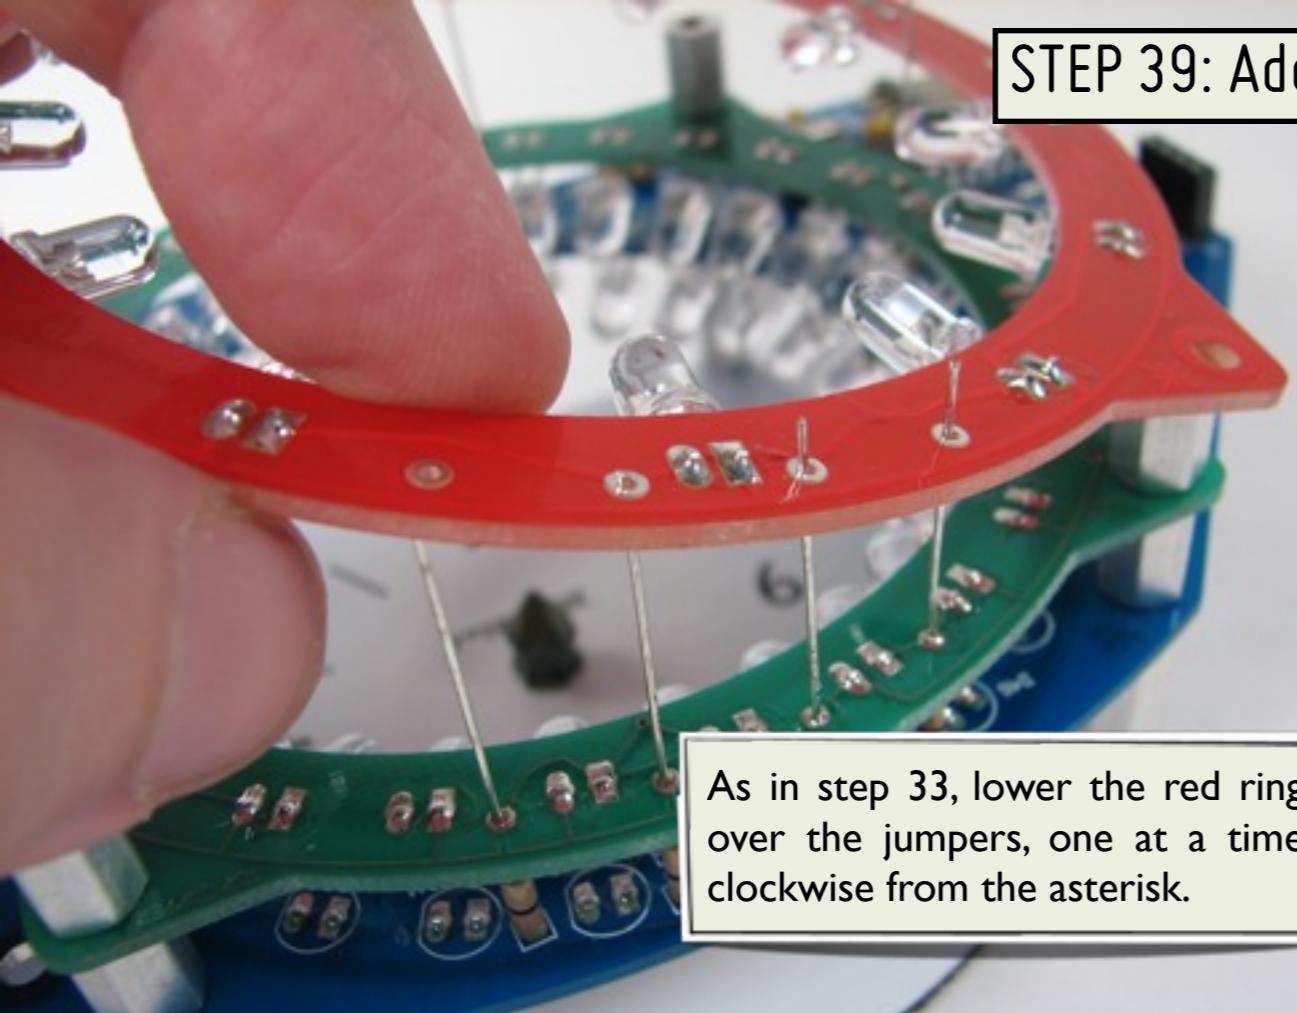

STEP 40: Test & align LEDs on the red ring

The red ring is now ready for testing. Again, check for stray debris on the circuit board before plugging it in.

The procedure for testing and aligning the LEDs on the red ring is the same as for the LEDs on the main & green boards.

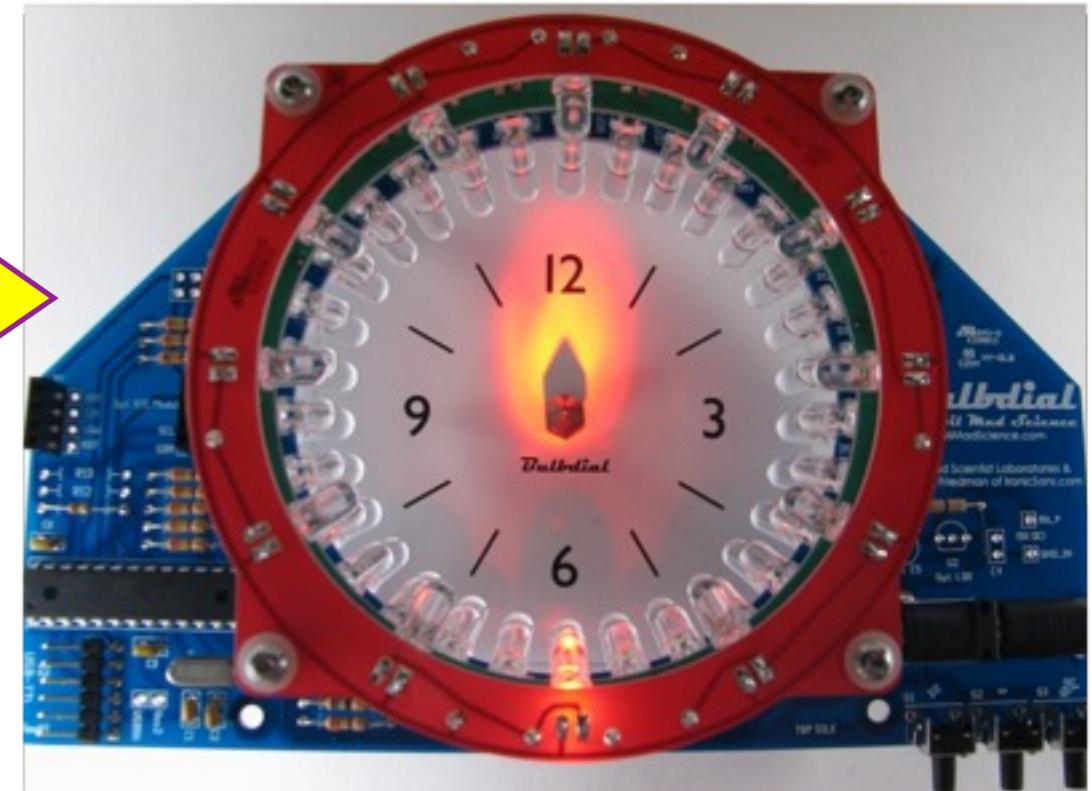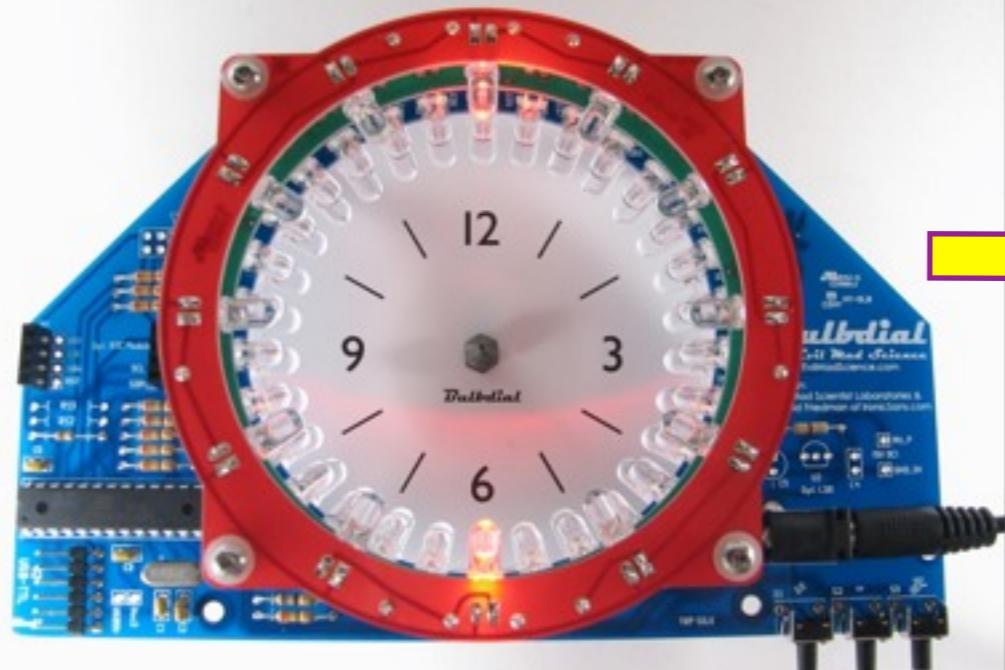


Use manual alignment mode to step through the LEDs one by one on the red ring. Make sure that every one of them is working, and then bend them to form a clear shadow of the gnomon. You may find it helpful to look back at steps 26–28 for reference.

Your Bulbdial kit should now be ready to use.
Next, we move onto the optional Chronodot
module and case kit.




Chronodot 1: Parts

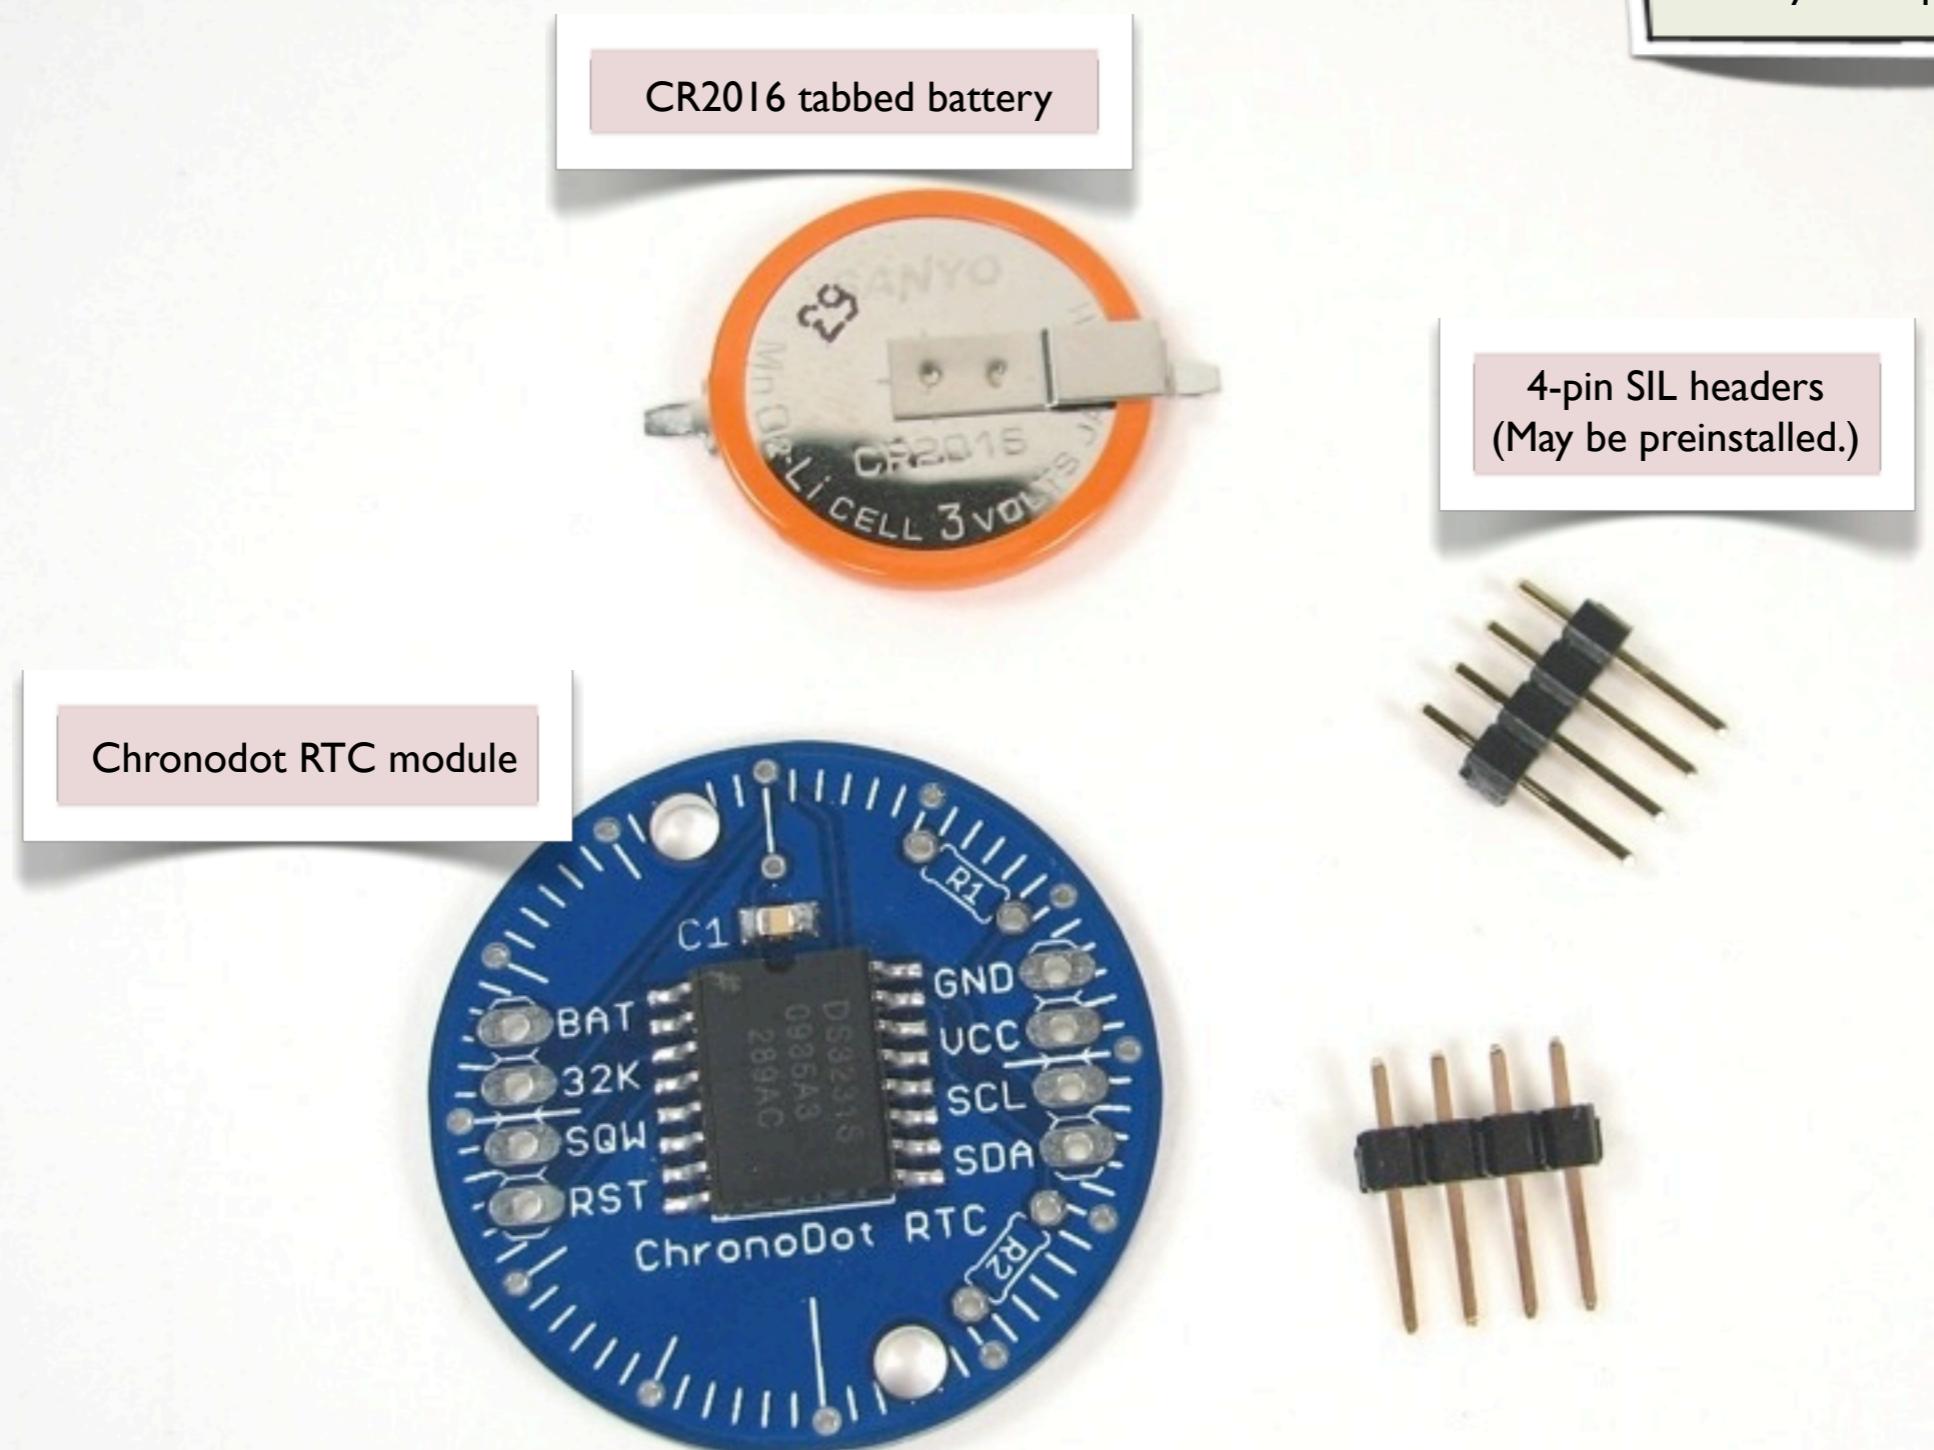


Chronodot 2: Adding headers


Insert headers into
receptacles on Bulbdial PCB

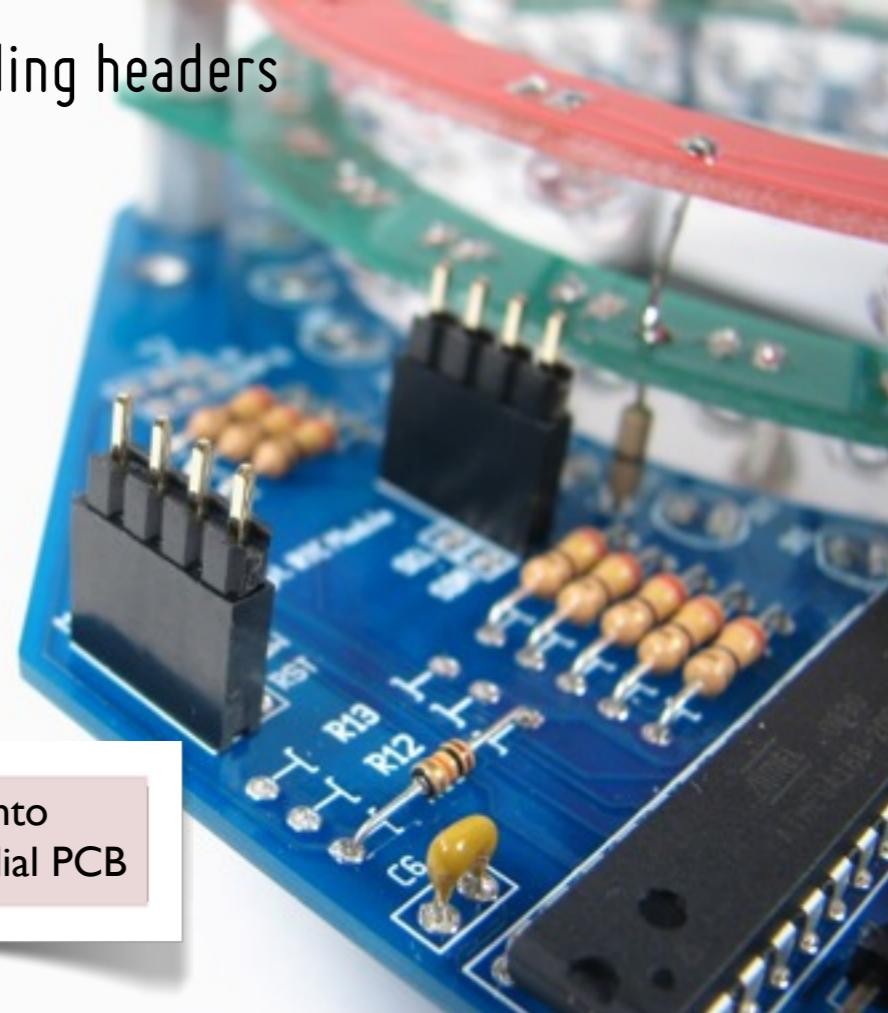

Place Chronodot on those
headers-- note orientation.

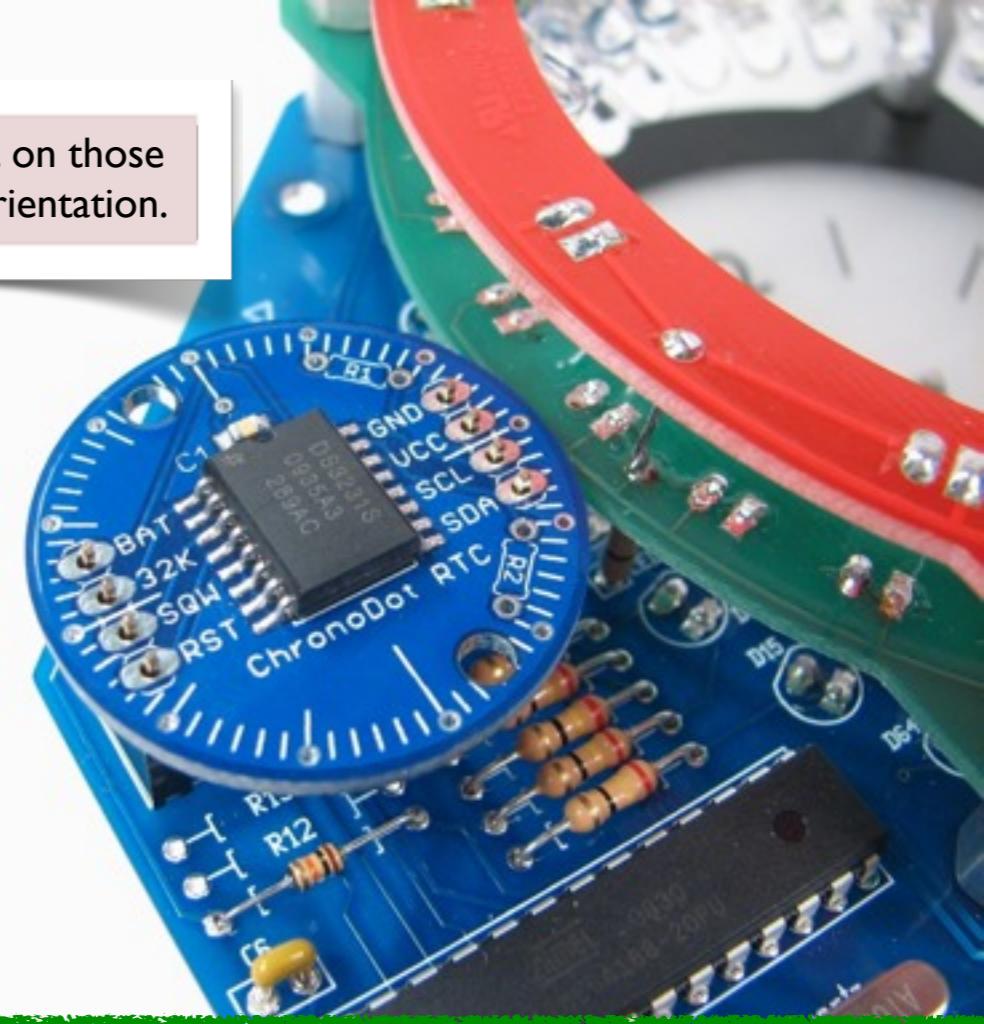



With POWER OFF,
solder the 8 pins.

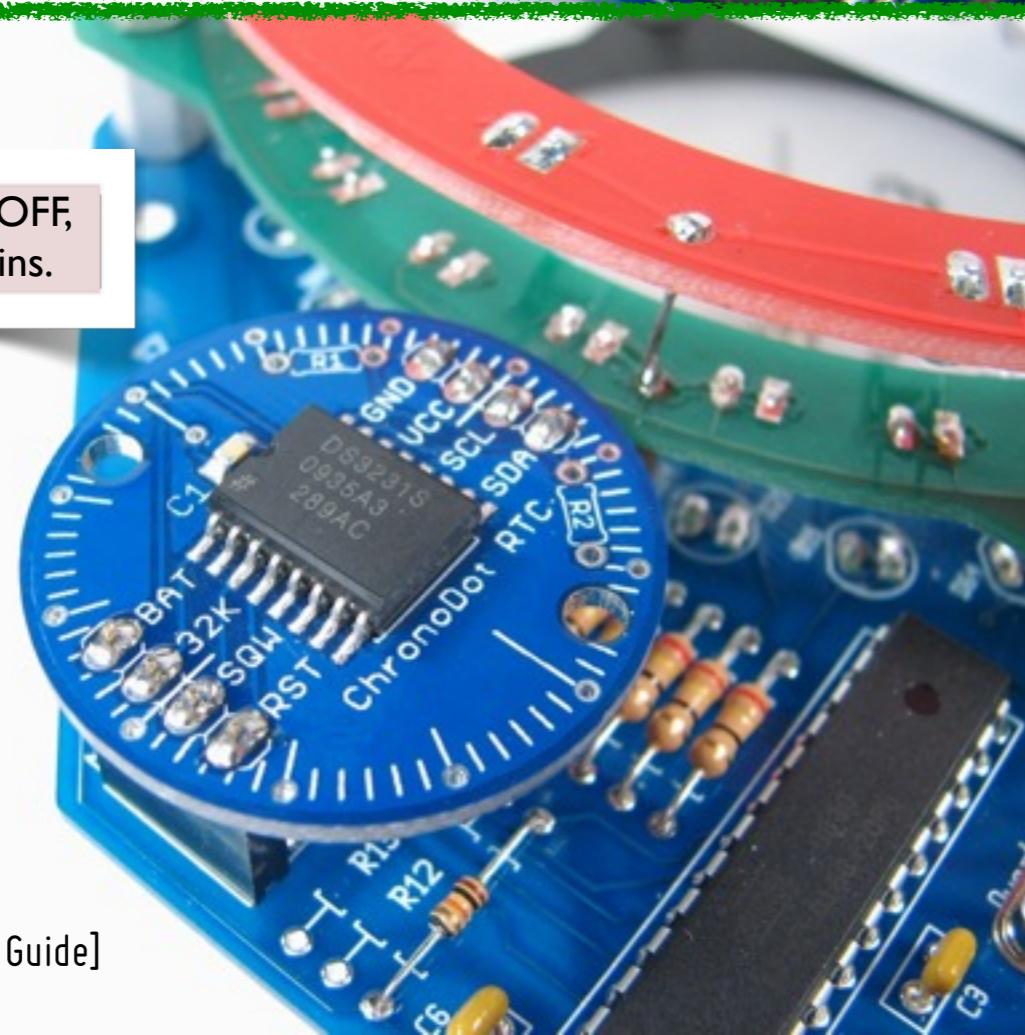

Next, we'll need to
add the battery.



Chronodot 3: Soldering the battery

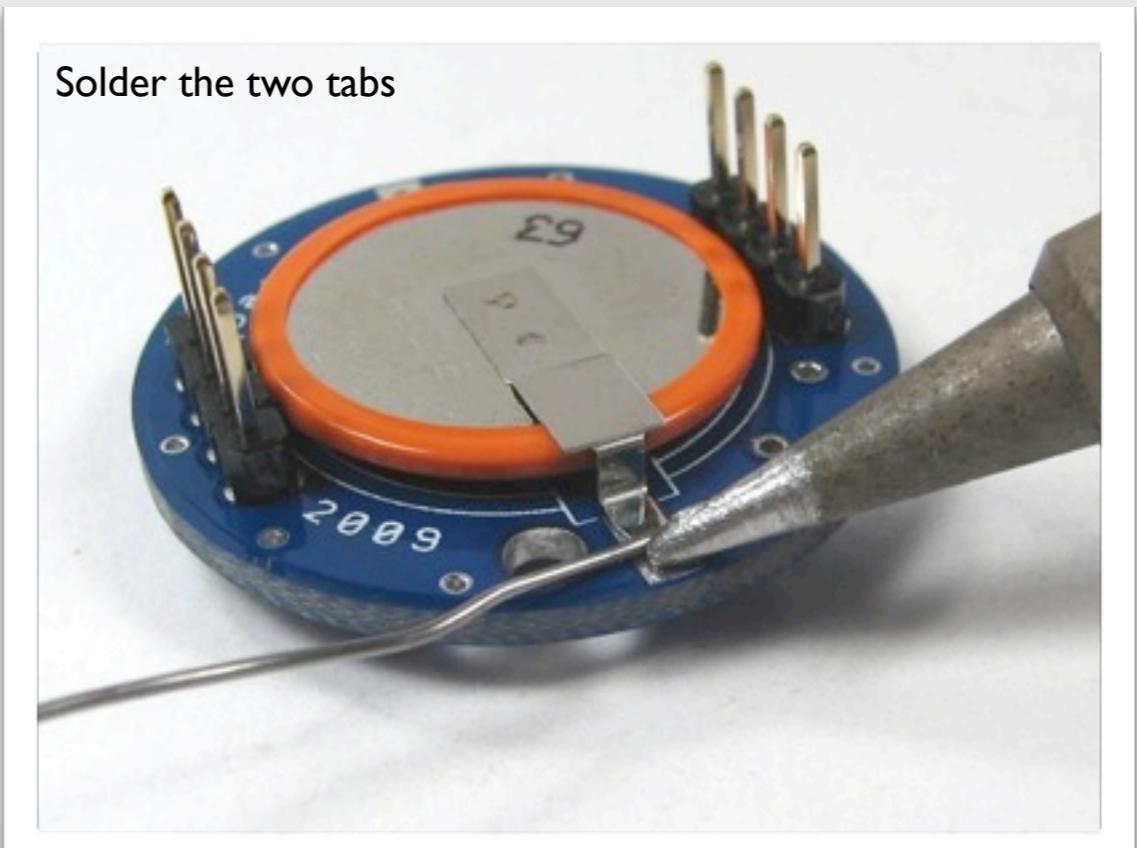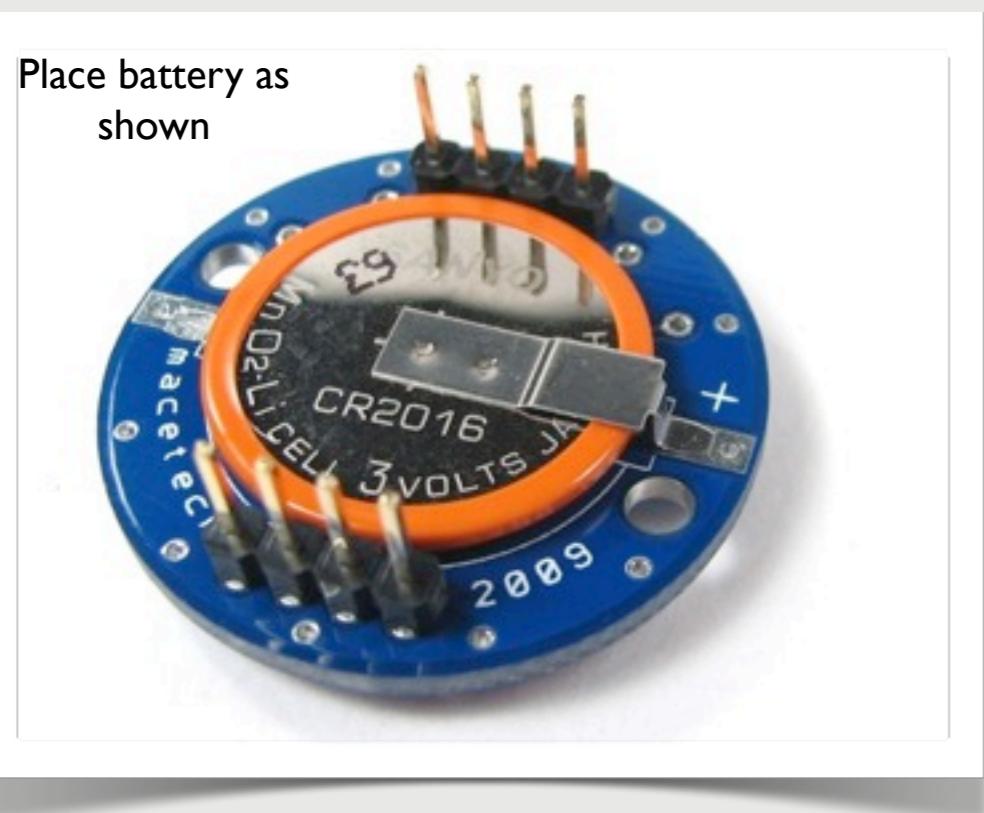


Note: the Chronodot is active and powered as soon as the battery is added.

Be careful not to rest the pins on conductive surfaces-- that can short circuit the battery and drain it very quickly.

Chronodot 4: Use it


The clock must be restarted to detect the Chronodot. If it is detected at startup, the time displayed will not be 12:00:00, nor will it be blinking.

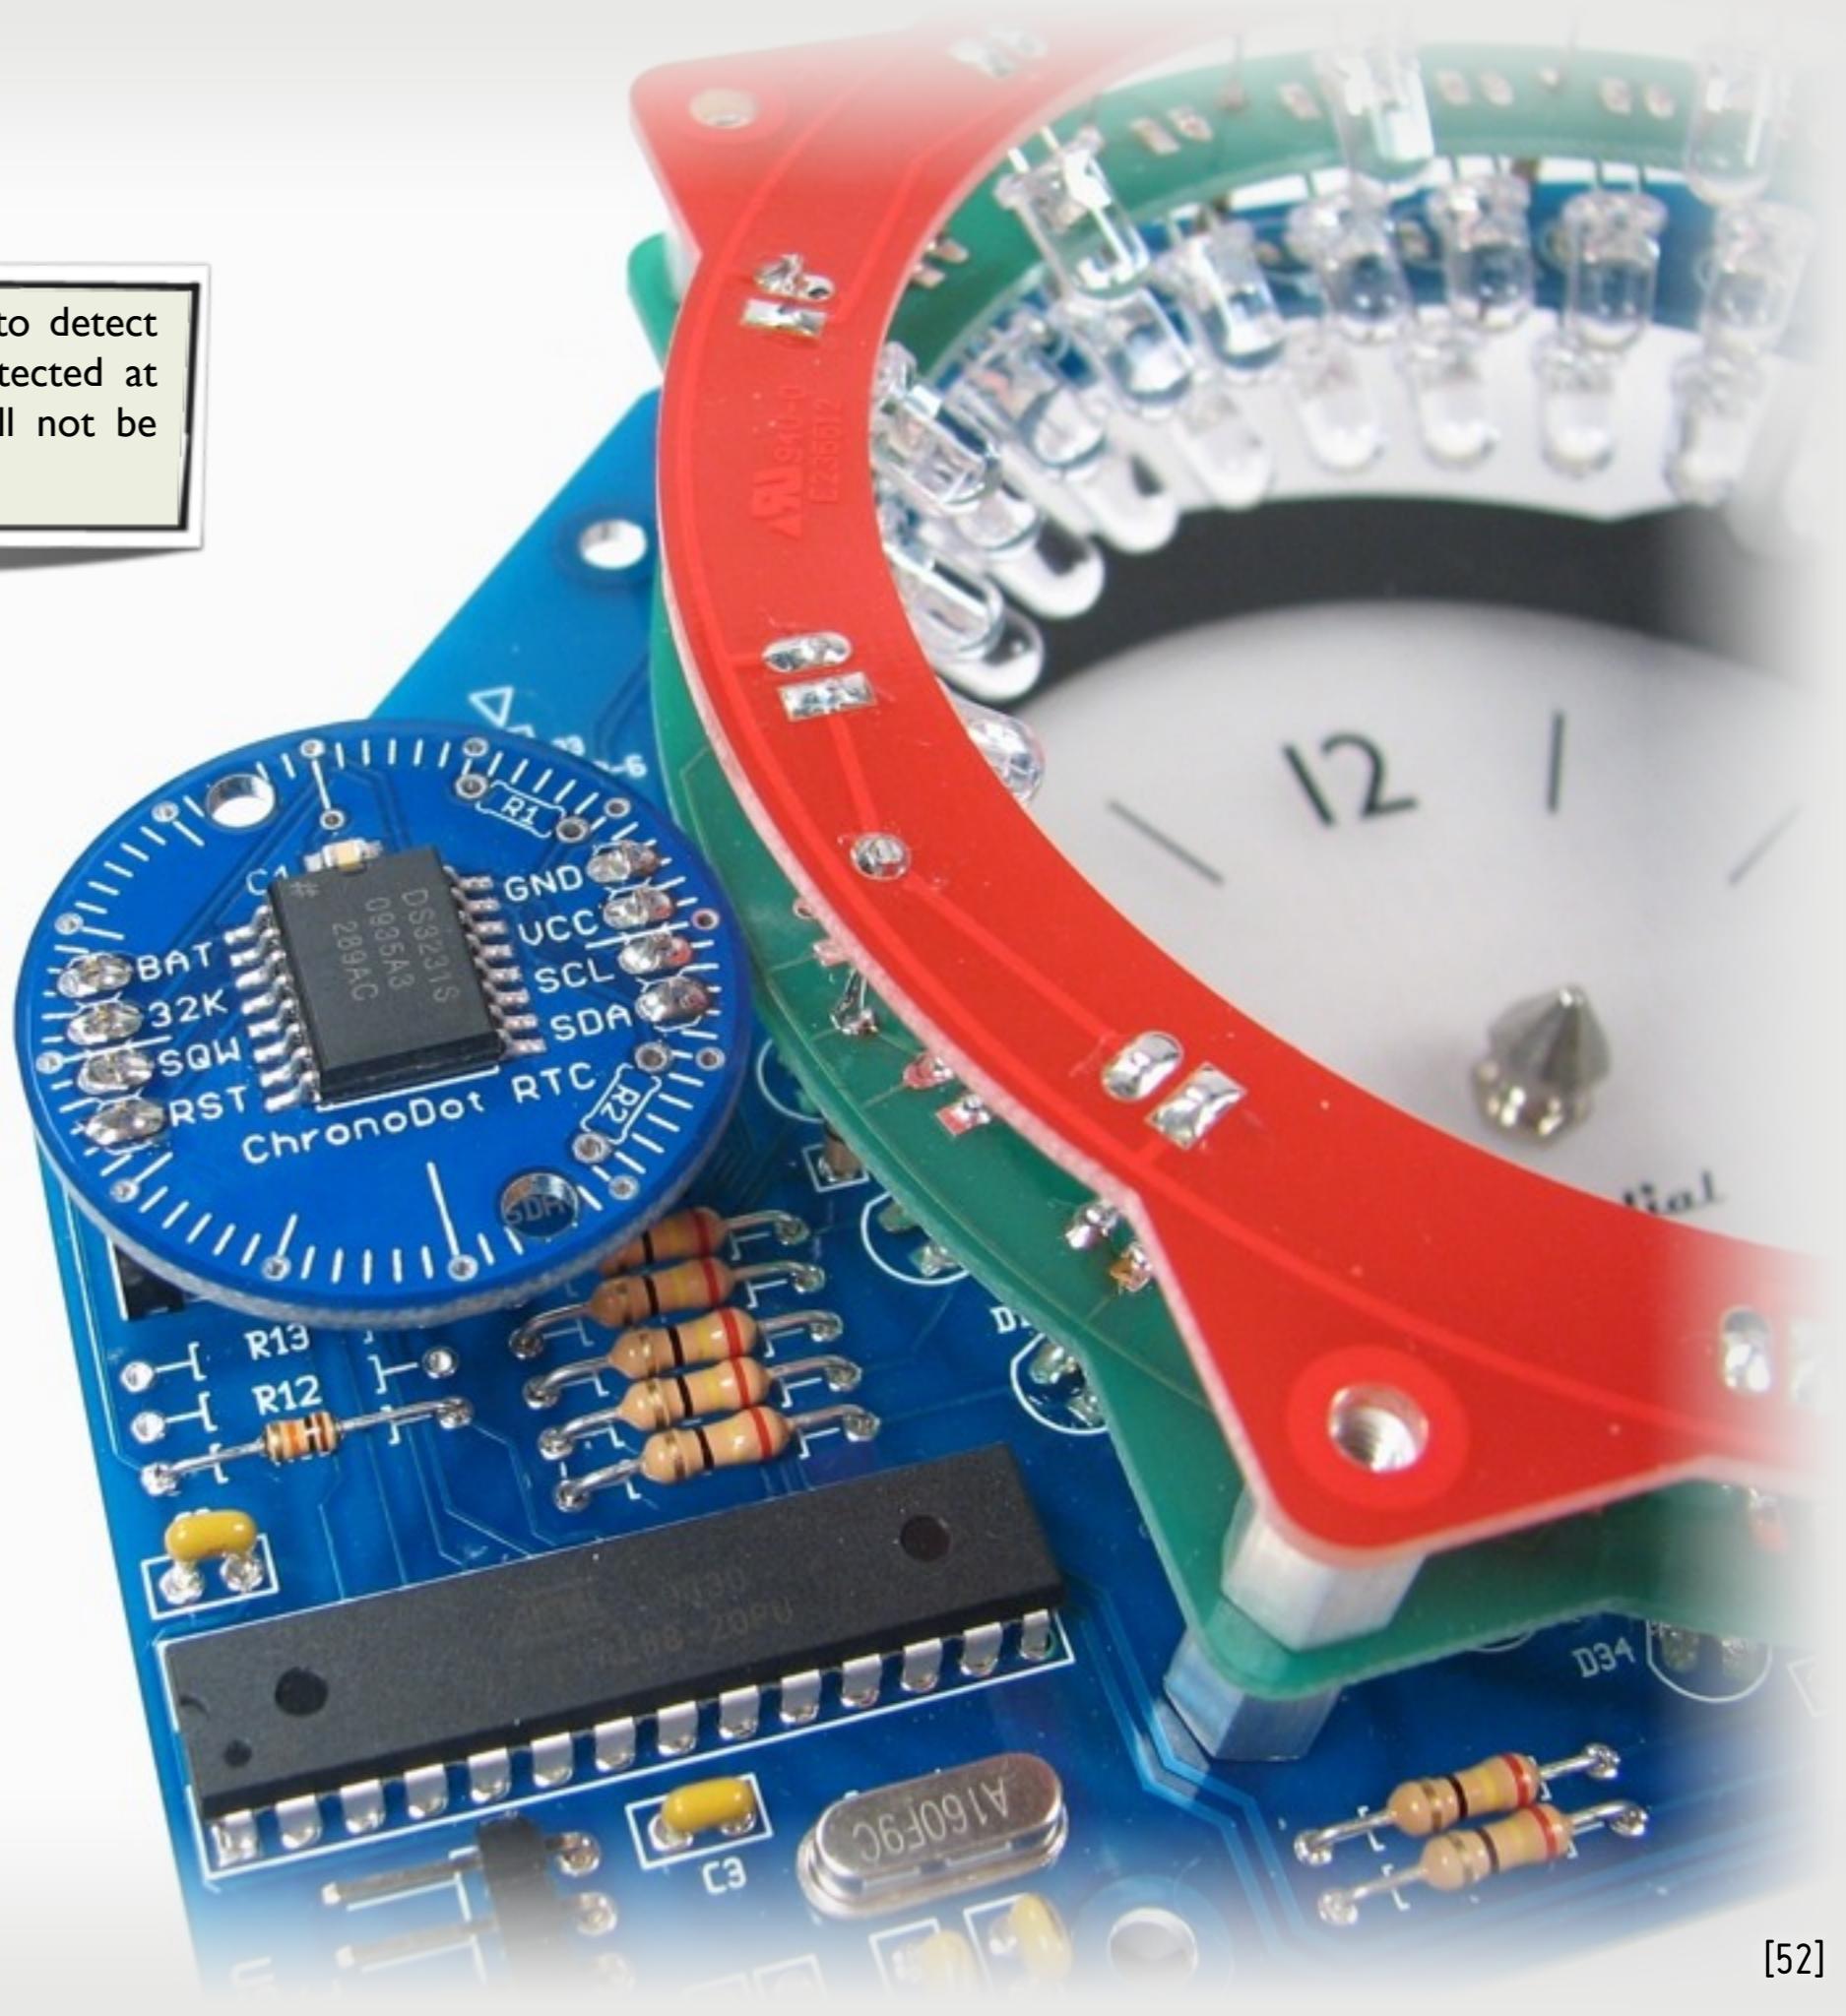


Case 1: Here are the case parts




Case 2: Prepping the clock mechanism

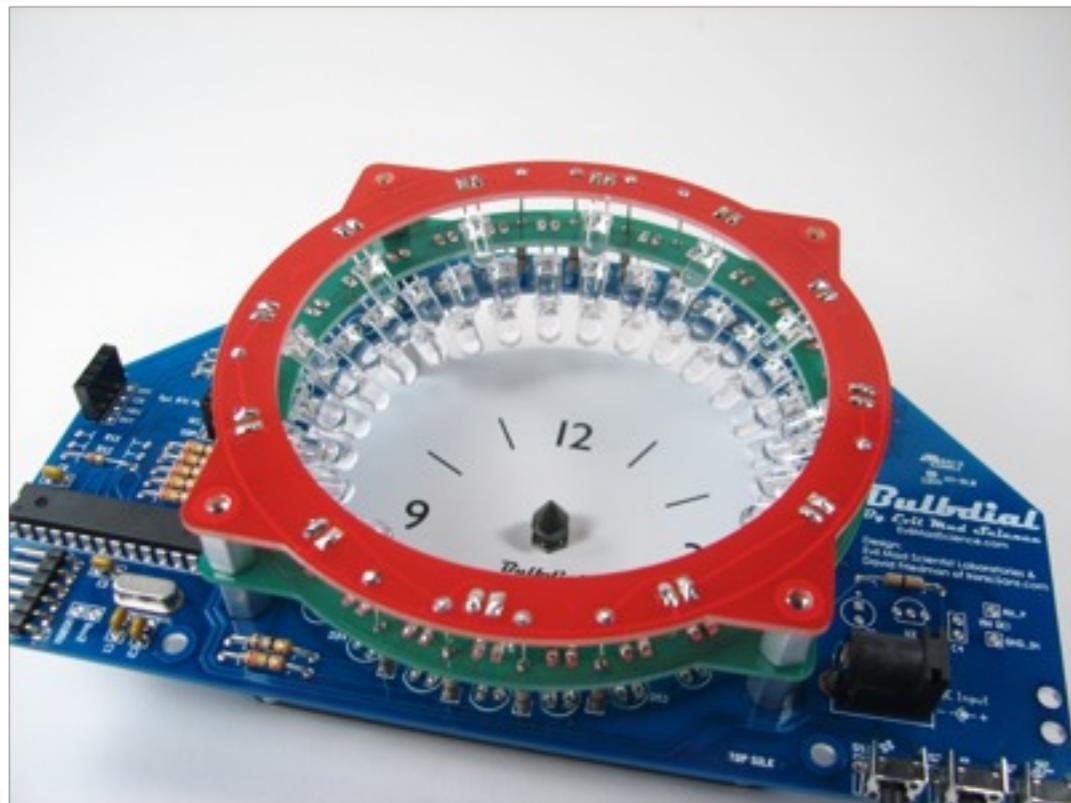

Also unscrew the four screws that hold the clock face in place.

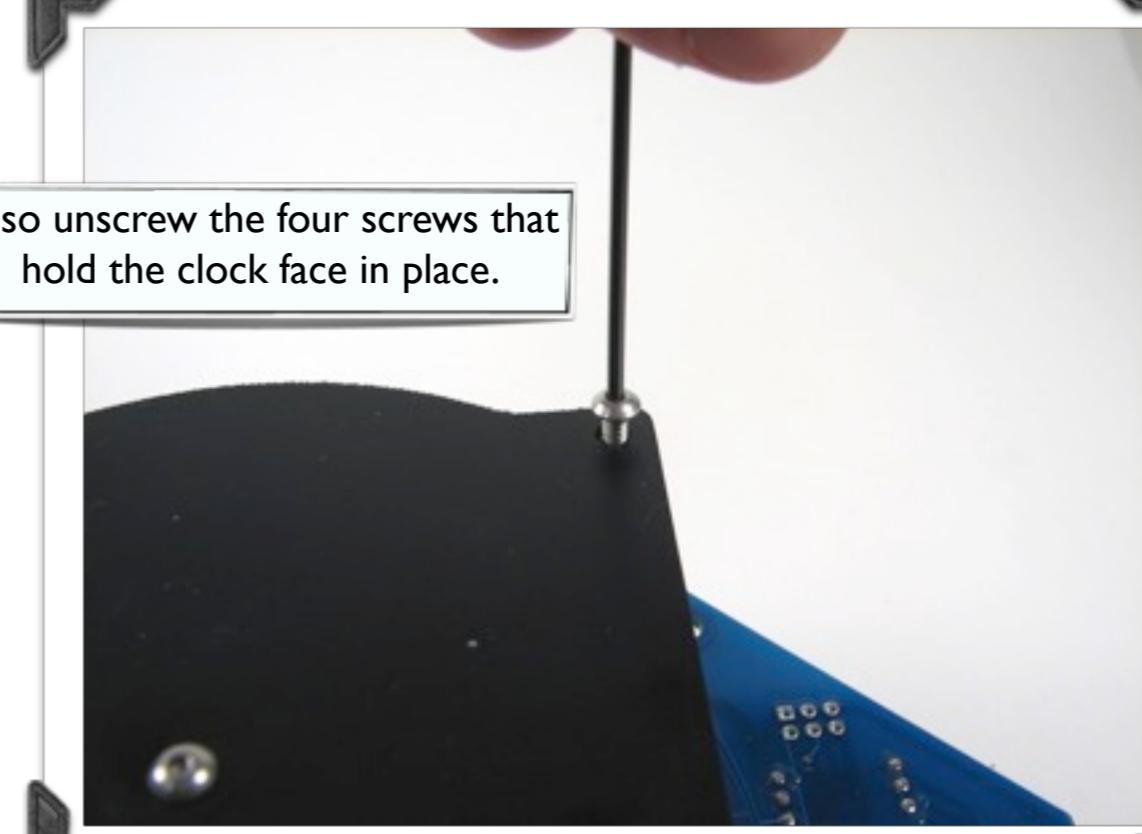



Take the screws and washers out of the red ring.

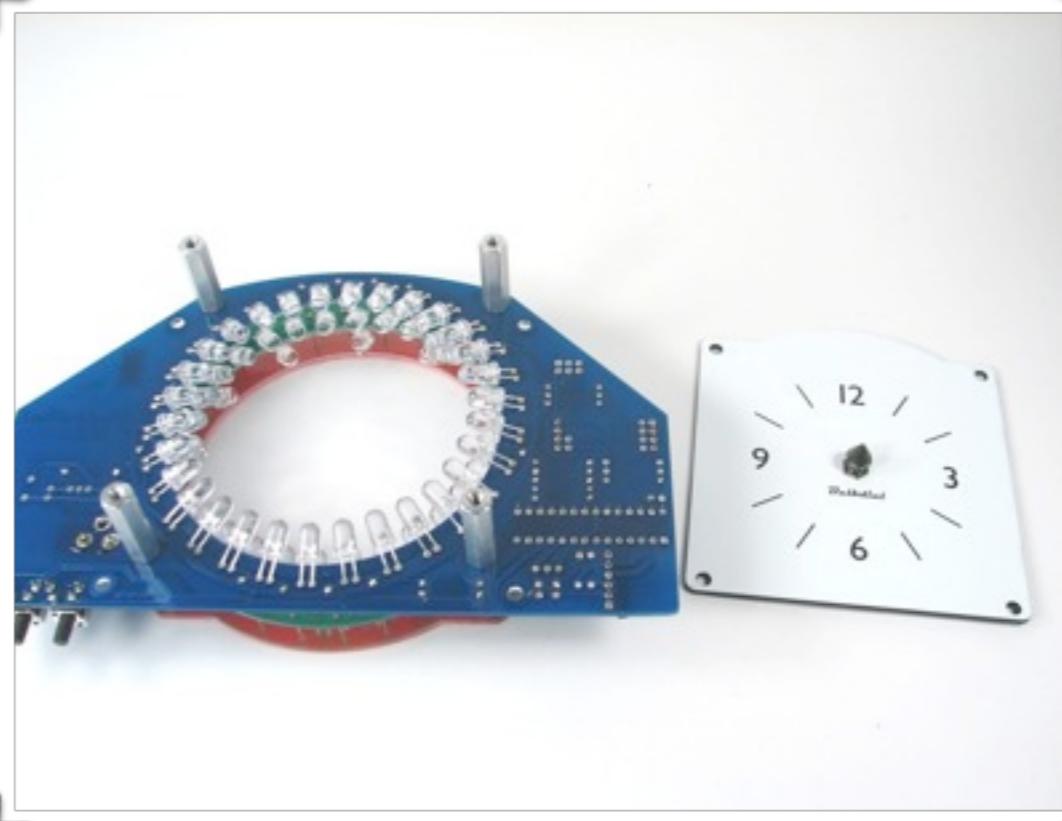


Case 3: Peeling the dirt away...



Most pieces have protective plastic film on one or both sides. Peel it off and discard.

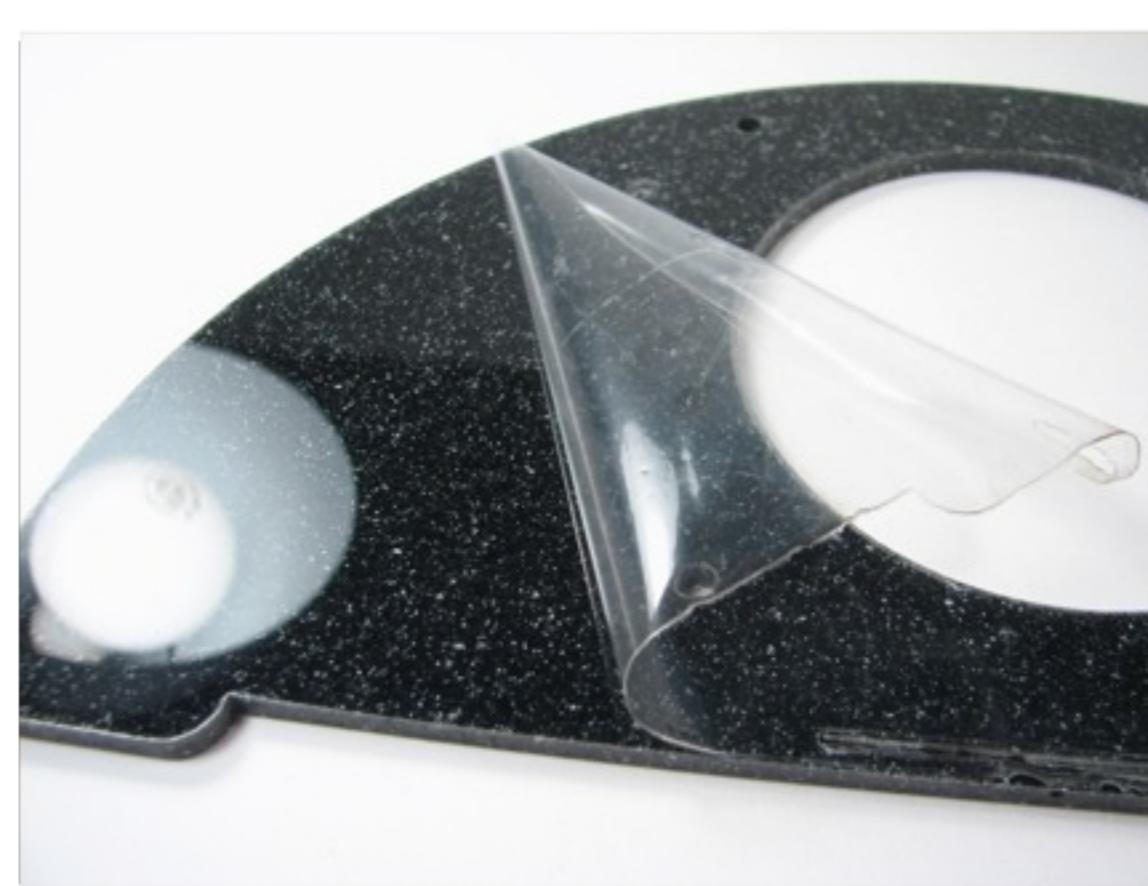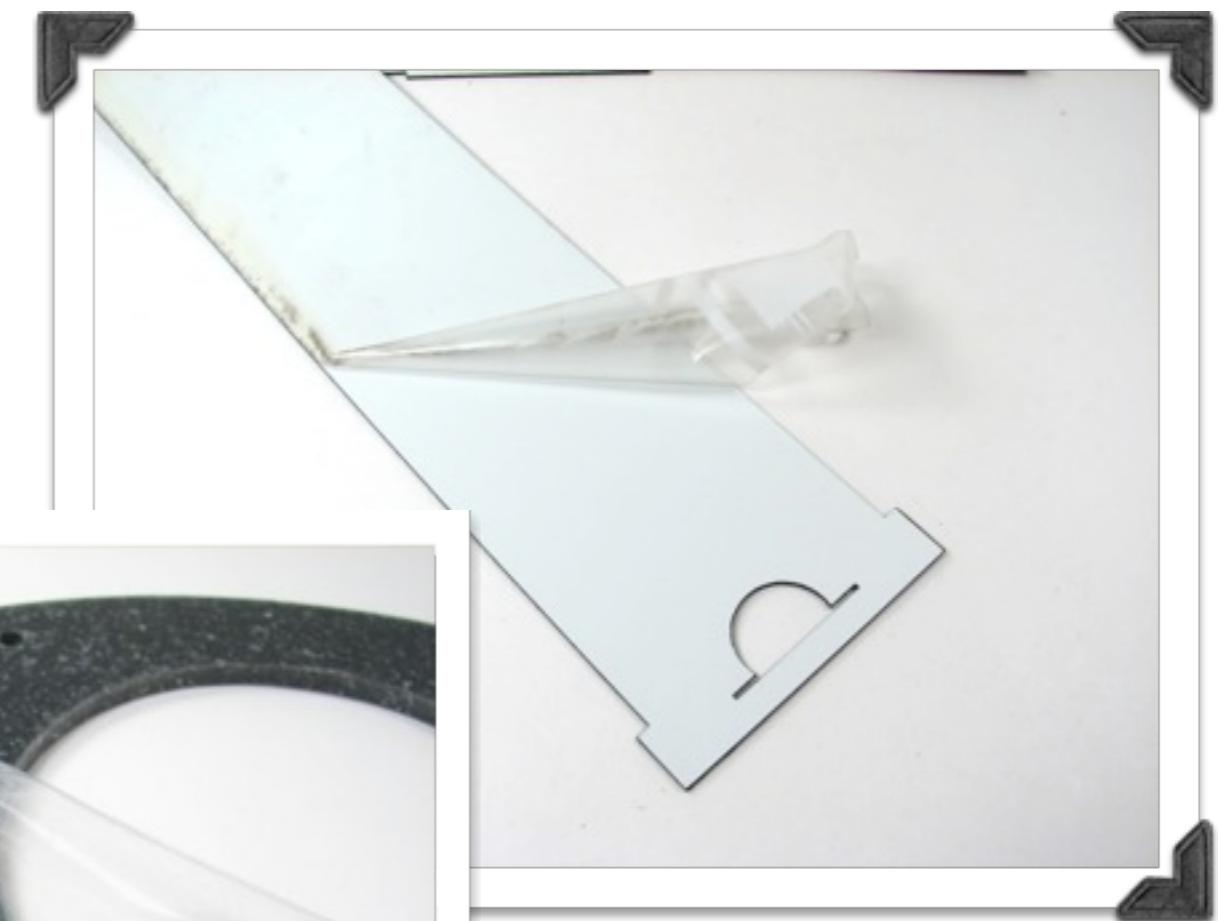

Case 4: Checking for clogged holes

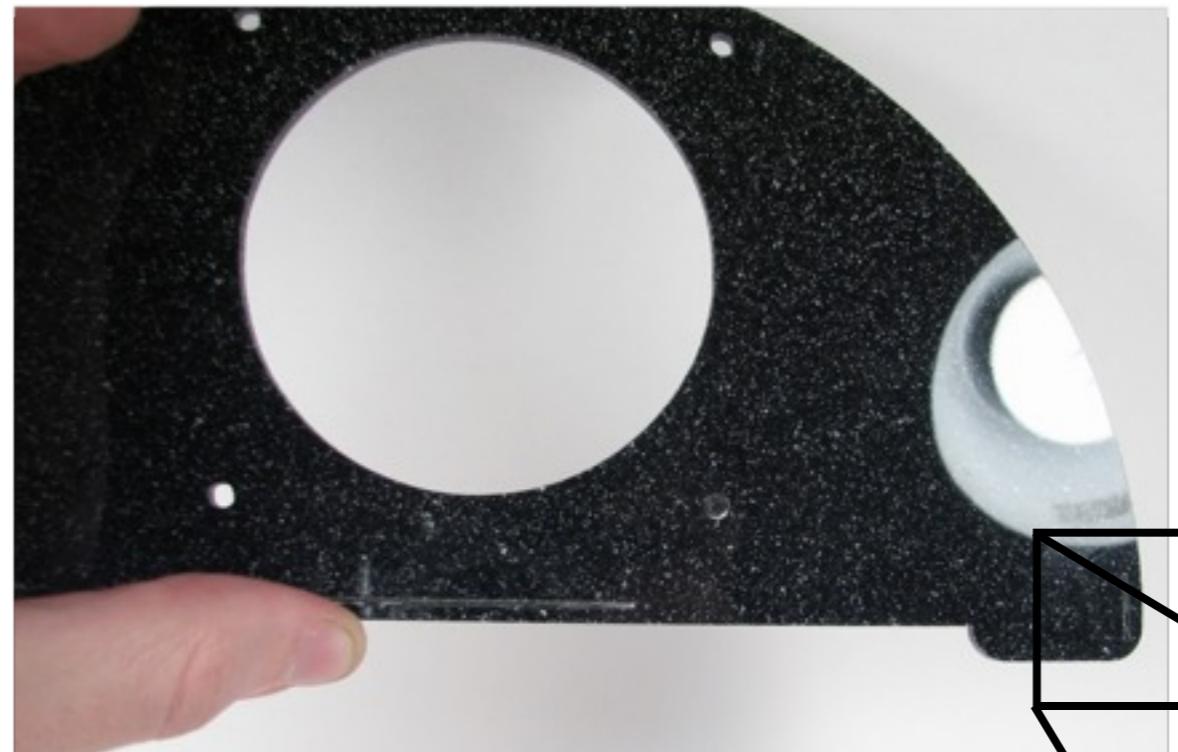

This slit had a long sliver of case plastic.

Each faceplate has four small holes and three thin slits. Check for debris in these holes and *carefully* push it out if you find any. The leads of a spare resistor work well.


(The corresponding pieces of the thin cover plastic must be able to slip into the holes of the faceplates.)



This slit had a sliver of case plastic in it.




Case 5: Installing the case

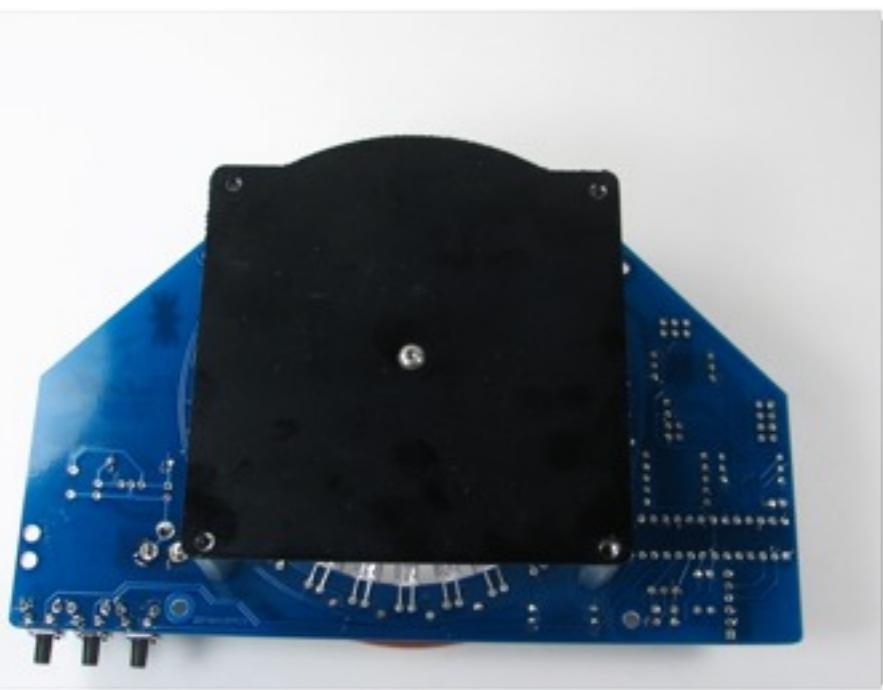


On the back side of the clock assembly, place, but do not fasten, the clock face where it goes.

Put one face plate over the back, lining up the holes with the standoffs and the holes in the clock face. Use the long screws to fasten it and the clock face in place.

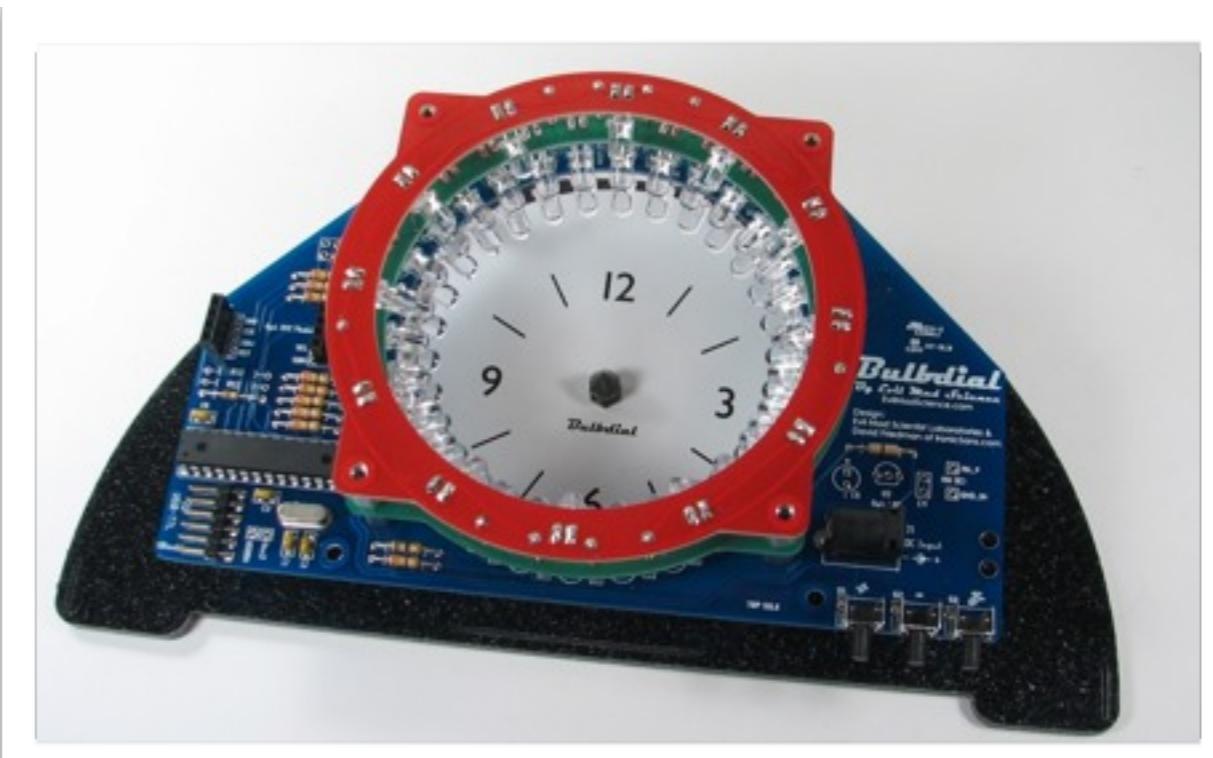

Case 6: Installing the case, continued.

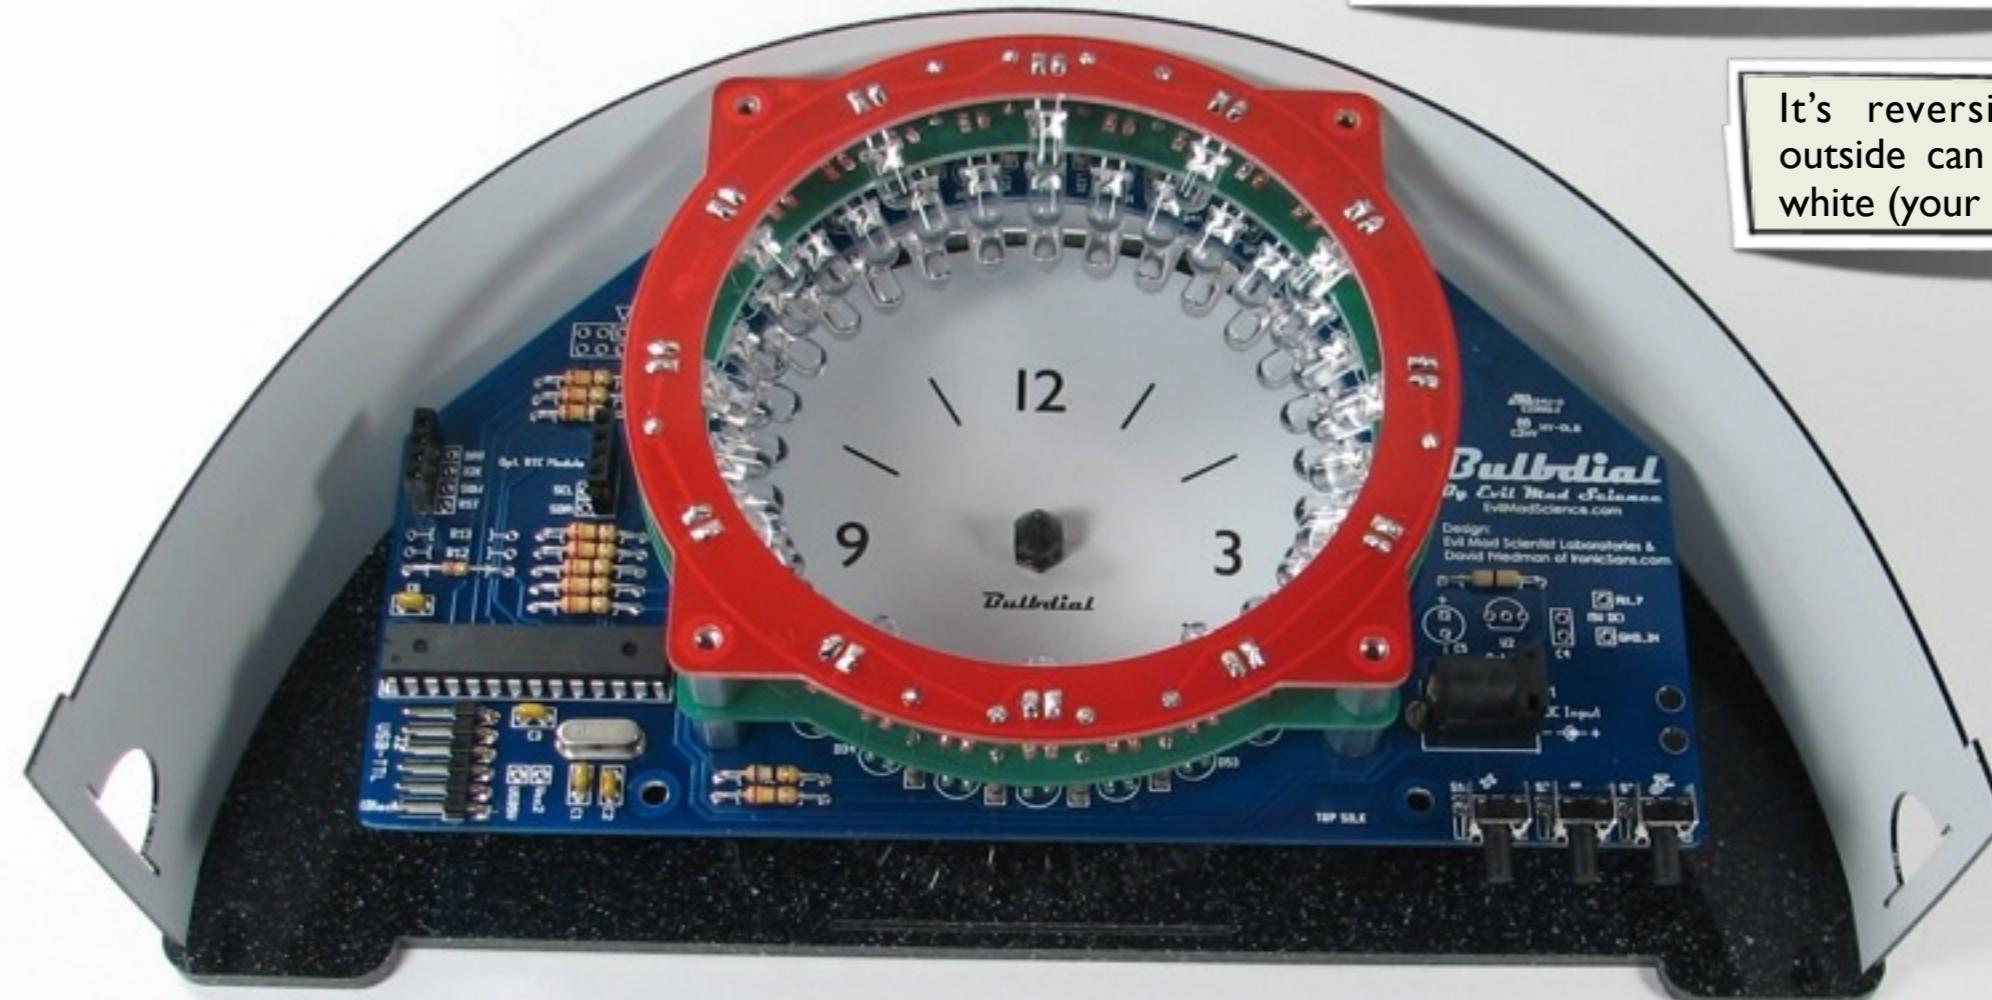


The arch cover has the principal function of providing shade for the clock face. It is held in place by tabs at each end, that index into the front and back faces.

It's reversible, so that the outside can be either black or white (your choice).



The base cover is held in place by tabs in the middle that go into the faces, plus tabs at the end that go into the arch cover.

Case 7: Installing the case, continued:: Base cover

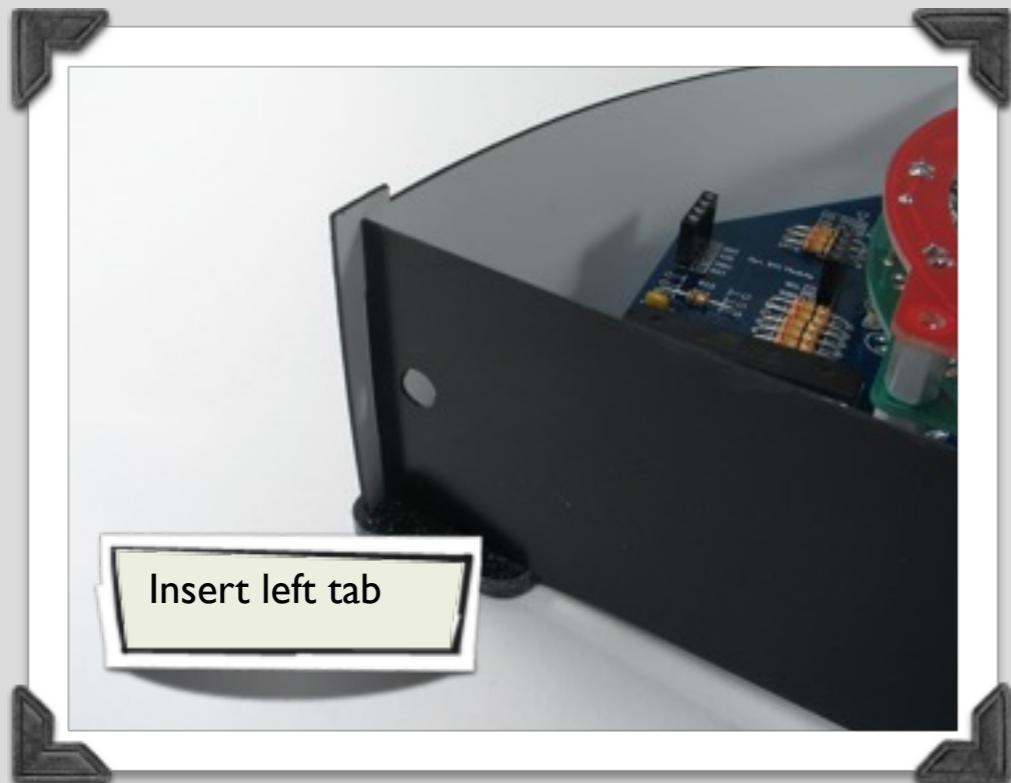

Case 8: Add power cord & place nylon washers x4

Place the four washers over the holes. Then, we're ready to guide the front face on. Watch all the tabs and take care not to bump the washers.



Neat trick: To prevent the washers from sliding out while you install the front faceplate, you can place a toothpick (or a clipped LED lead) in each of the four holes.

Case 9: Install front face plate & screws

As usual, be careful not to over-tighten the screws-- finger tight is tight enough.



Case 10: Check arch cover

Finally, make sure that the arch cover has formed a nice arch between the front and back covers.




Normal operation, and setting the time on the bulbdial clock

Time display mode

The default mode of the Bulbdial clock is *time display mode*, where it just displays the time, like a regular clock.

- The + and – buttons control brightness over seven levels with wraparound.
- The **Z** button toggles the LED display on and off. (**Z** stands for sleep mode.)
- If you get stuck in any funny mode of the clock, hold the **Z** button for 3 s to return to time display mode.
- At power-on, the clock comes up in time display mode. If it does not know what time it is, it will flash until a button is pressed.

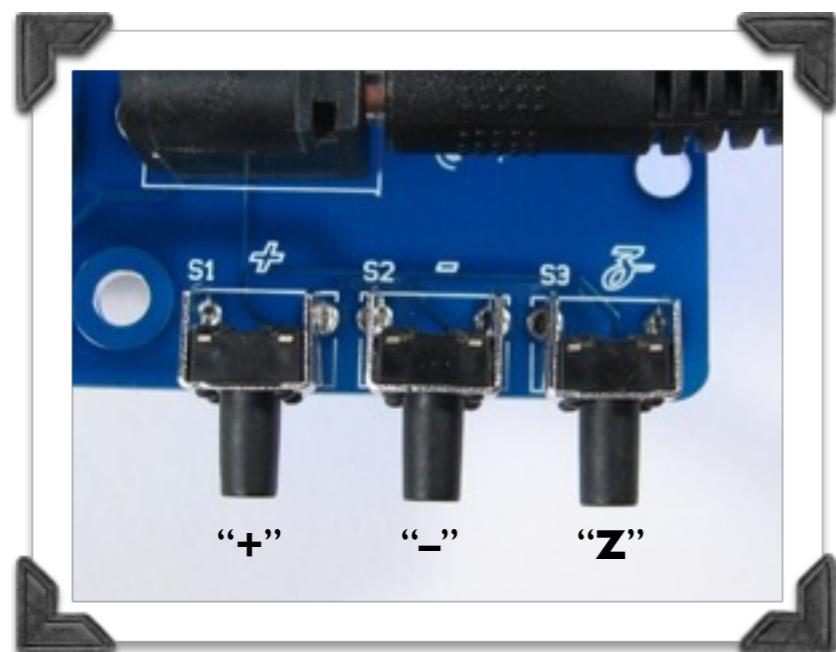

Time setting mode

Hold the **Z** button for 3 s to enter time setting mode.

- While in time setting mode, there are three distinct sub-modes:

1. Hour Adjust
2. Minute Adjust
3. Second Adjust

- Press the **Z** button to toggle between these three modes.
- While in (for example) Minute Adjust mode, the actual time will be displayed, but the Minute hand will be highlighted.
The + and – buttons can be used to change the clock's time, up or down, one minute at a time. Hour and second adjust are similar.
- Exit time setting mode and save the time by holding down the **Z** button for three seconds.

Alignment mode and optional configuration modes

Alignment mode

Hold the **+** and **-** buttons for 3 s to enter alignment mode.

In alignment mode, one LED is lit at a time.

- There are six sub-modes within alignment mode. You can cycle between them by hitting the **Z** button:

1. Blue (lower) ring: Auto advance
2. Blue (lower) ring: Manual advance
3. Green (middle) ring: Auto advance
4. Green (middle) ring: Manual advance
5. Red (upper) ring: Auto advance
6. Red (upper) ring: Manual advance

- In auto-advance mode, the lit LED advances on its own. The rate of advance, and the direction, is controlled by the **+** and **-** buttons.
- In manual advance mode, the lit LED stays put until you press the **+** or **-** button, which advances the lit LED clockwise or counterclockwise by one position.
- To exit alignment mode, hold the **Z** button for three seconds or cycle power to the clock.

Optional configuration mode

Hold the **+** and **Z** buttons for 3 s to enter option mode.

- There are five sub-modes within alignment mode. You can cycle between them by hitting the **Z** button:

1. White balance: Red Ring (upper ring)
2. White balance: Green Ring (middle ring)
3. White balance: Blue Ring (lower ring)
4. Time Direction: CW/CCW
5. Fading: On or Off

- The three “white balance” modes can be used for literal white balancing or for otherwise adjusting the relative brightness of the shadows.

When entering one of these modes, the ring in question will circulate for a moment to indicate which ring is going to be adjustable. After that, the time is displayed. Each of the three components can be adjusted to 32 different levels (including off) by using the **+** or **-** buttons. This can be used to turn off the second hand if desired.

- Time direction allows the clock to be set to run counterclockwise, for rear-projection use.

- The fading option (default: on) specifies whether or not the clock fades between subsequent times displayed.

- To exit option mode and save changes, hold the **Z** button for three seconds.


Restoring “factory defaults”

Restoring defaults

Sometimes you just want to reset everything back to normal. For example, it is possible to use the options to set all of the LEDs to be off, all the time. To avoid having a Bulbdial Brick, you can restore your clock to defaults.

To restore defaults, hold down the + and – buttons for 5 s after cycling power to the clock.

Hooking up to a computer

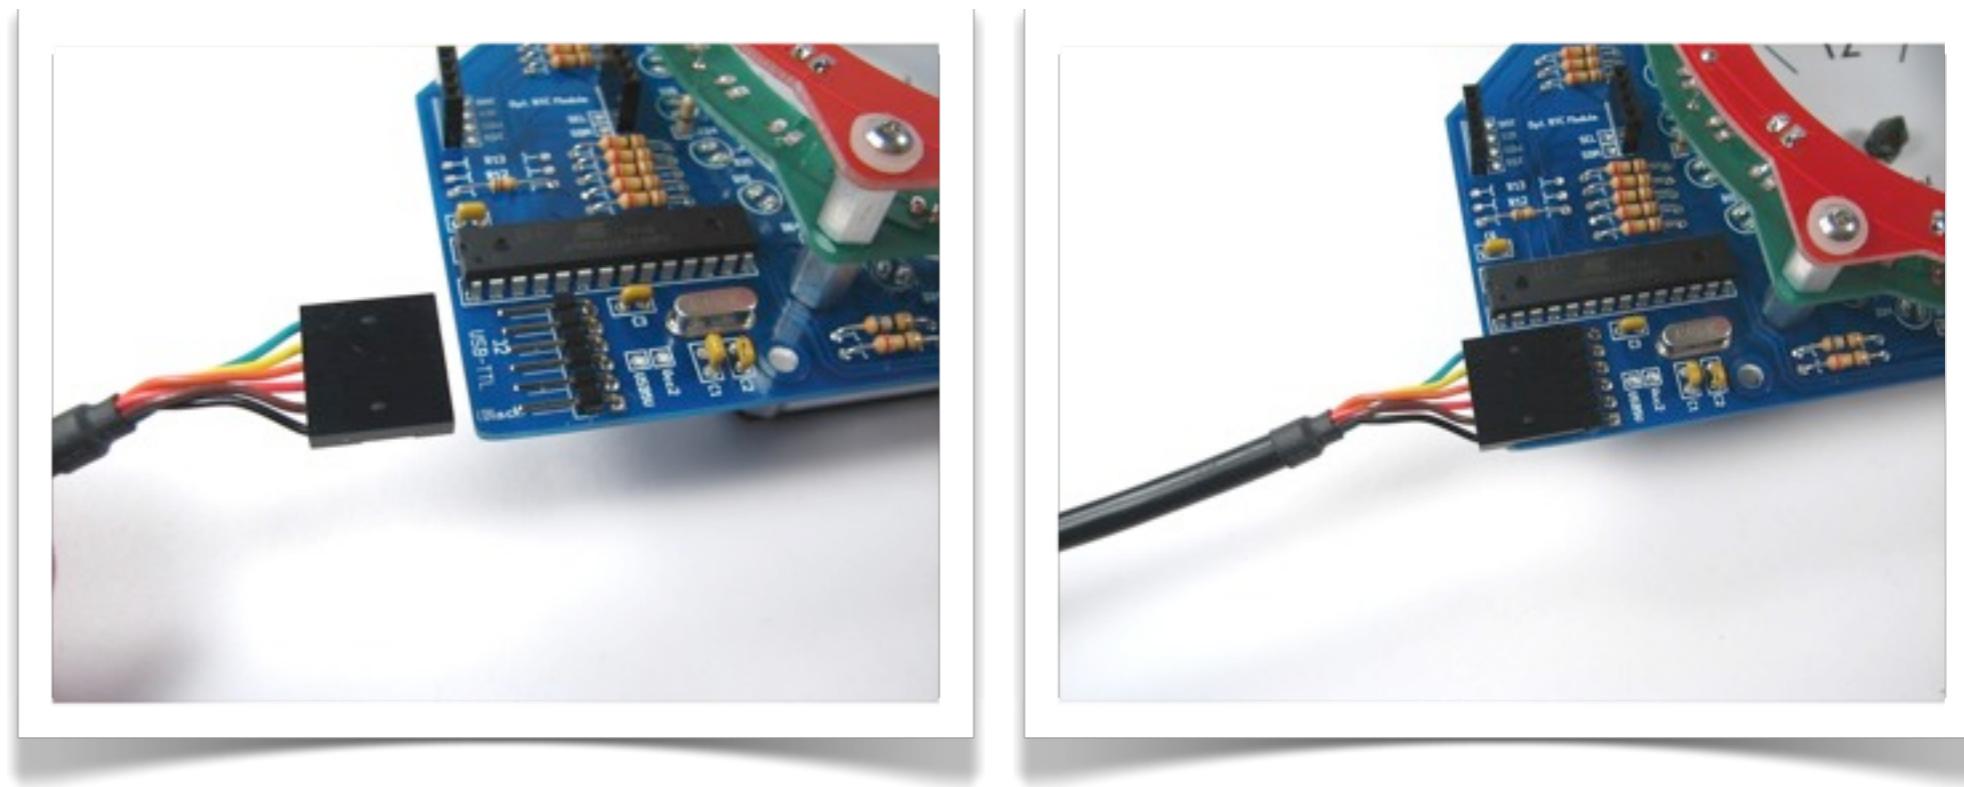

J2 is a 6-pin header for connecting to an FTDI model TTL-232R USB-serial interface cable. The cable end has six colored wires. The end with the black wire goes towards the location on the circuit board marked "(Black.)"

The Bulbdial kit is Arduino compatible. If programming it through the Arduino IDE, select board type: Diecimila with ATmega168.



Any time that you connect the computer to the clock, the clock is likely to restart. However, you can use the computer to set the time on the Bulbdial clock.

The sync program is called "SetArduinoClock.pde", and it's part of the Arduino DateTime library download:

<http://www.arduino.cc/playground/Code/DateTime>

(SetArduinoClock.pde is a processing sketch. To run it, you'll also need Processing 1.0 from <http://processing.org/>)

USB Power

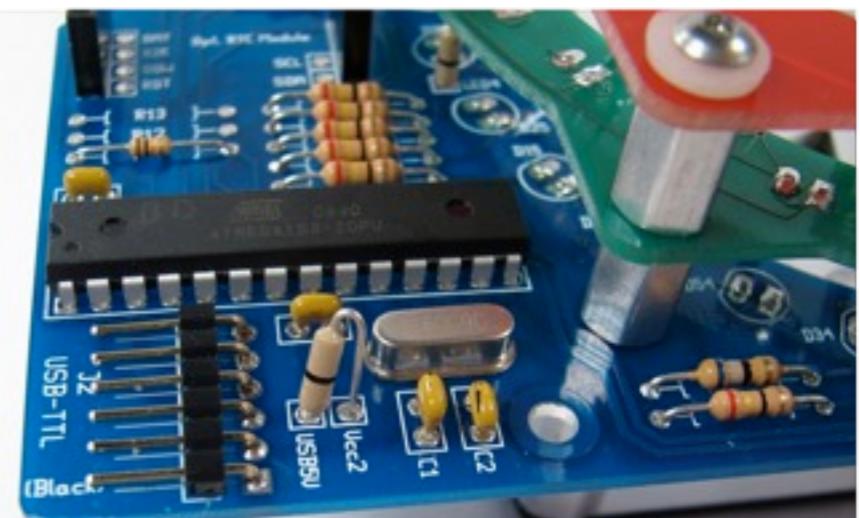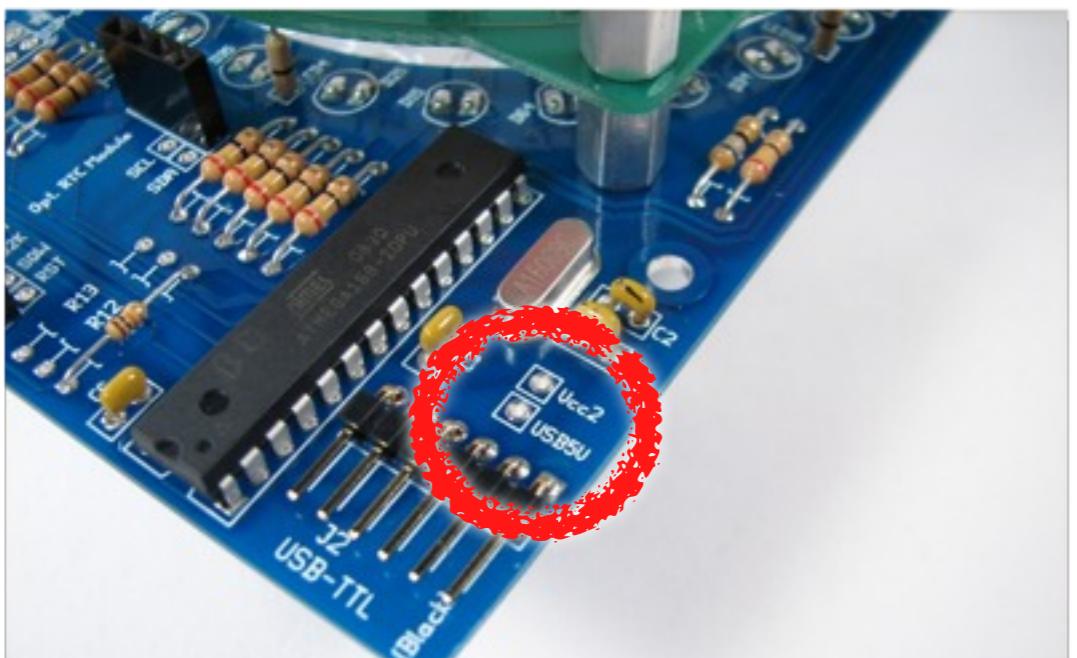

If you have the 5V version of the USB-TTL cable, the TTL-232R-5V, you can optionally configure the kit to get power from USB. To do so, add a jumper between locations “Vcc2” and “USB5V” on the board.

Caution! If you make this modification, hooking up to a USB connector will provide power to the board. So, you *must not* hook up both the regular power supply and the USB-TTL cable at the same time. (One will win; damage to your power supply, clock, or computer is likely to result. So don't do it.)

the end

THE END.

If you liked this project, you may find many others that you like at Evil Mad Scientist Laboratories, www.evilmadscientist.com, we invite you to visit and take a look around.