GitHub Repository: https://github.com/dharshan2004217-hub/CNRoutingAssignment

by DHARSHAN DHARSHAN

Std id: 39249

Router0

Physical Config CLI Attributes

IOS Command Line Interface

```
colombNSBM_39249(config)#
colombNSBM_39249(config)#no router rip
colombNSBM_39249(config)#
colombNSBM_39249(config)#end
colombNSBM_39249#wr
%SYS-5-CONFIG_I: Configured from console by console

Building configuration...
[OK]
colombNSBM_39249#enable
colombNSBM_39249#conf t
Enter configuration commands, one per line.  End with CNTL/Z.
colombNSBM_39249(config)#
colombNSBM_39249(config)#router eigrp 100
colombNSBM_39249(config-router)#no auto-summary
colombNSBM_39249(config-router)#network 192.168.1.0 0.0.0.255
colombNSBM_39249(config-router)#network 10.0.0.0 0.0.0.255
colombNSBM_39249(config-router)#
colombNSBM_39249(config-router)#end
colombNSBM_39249#wr
%SYS-5-CONFIG_I: Configured from console by console

Building configuration...
[OK]
colombNSBM_39249#show ip route
Codes: L - local, C - connected, S - static, R - RIP, M - mobile, B - BGP
       D - EIGRP, EX - EIGRP external, O - OSPF, IA - OSPF inter area
       N1 - OSPF NSSA external type 1, N2 - OSPF NSSA external type 2
       E1 - OSPF external type 1, E2 - OSPF external type 2, E - EGP
       i - IS-IS, L1 - IS-IS level-1, L2 - IS-IS level-2, ia - IS-IS inter area
       * - candidate default, U - per-user static route, o - ODR
       P - periodic downloaded static route

Gateway of last resort is not set

     10.0.0.0/8 is variably subnetted, 2 subnets, 2 masks
C       10.0.0.0/24 is directly connected, Serial0/1/0
L       10.0.0.1/32 is directly connected, Serial0/1/0
     192.168.1.0/24 is variably subnetted, 2 subnets, 2 masks
C       192.168.1.0/24 is directly connected, FastEthernet0/0
L       192.168.1.1/32 is directly connected, FastEthernet0/0
S    192.168.2.0/24 [1/0] via 10.0.0.2
S    192.168.3.0/24 [1/0] via 10.0.0.2
```

Copy Paste

Top

Router2

Physical Config CLI Attributes

IOS Command Line Interface

```
Router#wr
%SYS-5-CONFIG_I: Configured from console by console

Building configuration...
[OK]
Router#enable
Router#conf t
Enter configuration commands, one per line.  End with CNTL/Z.
Router(config)#
Router(config)#router eigrp 100
Router(config-router)#no auto-summary
Router(config-router)#network 10.0.0.0 0.0.0.255
Router(config-router)#network 20.0.0.0 0.0.0.255
Router(config-router)#network 192.168.2.0 0.0.0.255
Router(config-router)#
Router(config-router)#end
Router#wr
%SYS-5-CONFIG_I: Configured from console by console

Building configuration...
[OK]
Router#




Router con0 is now available




Press RETURN to get started.
```

Copy Paste

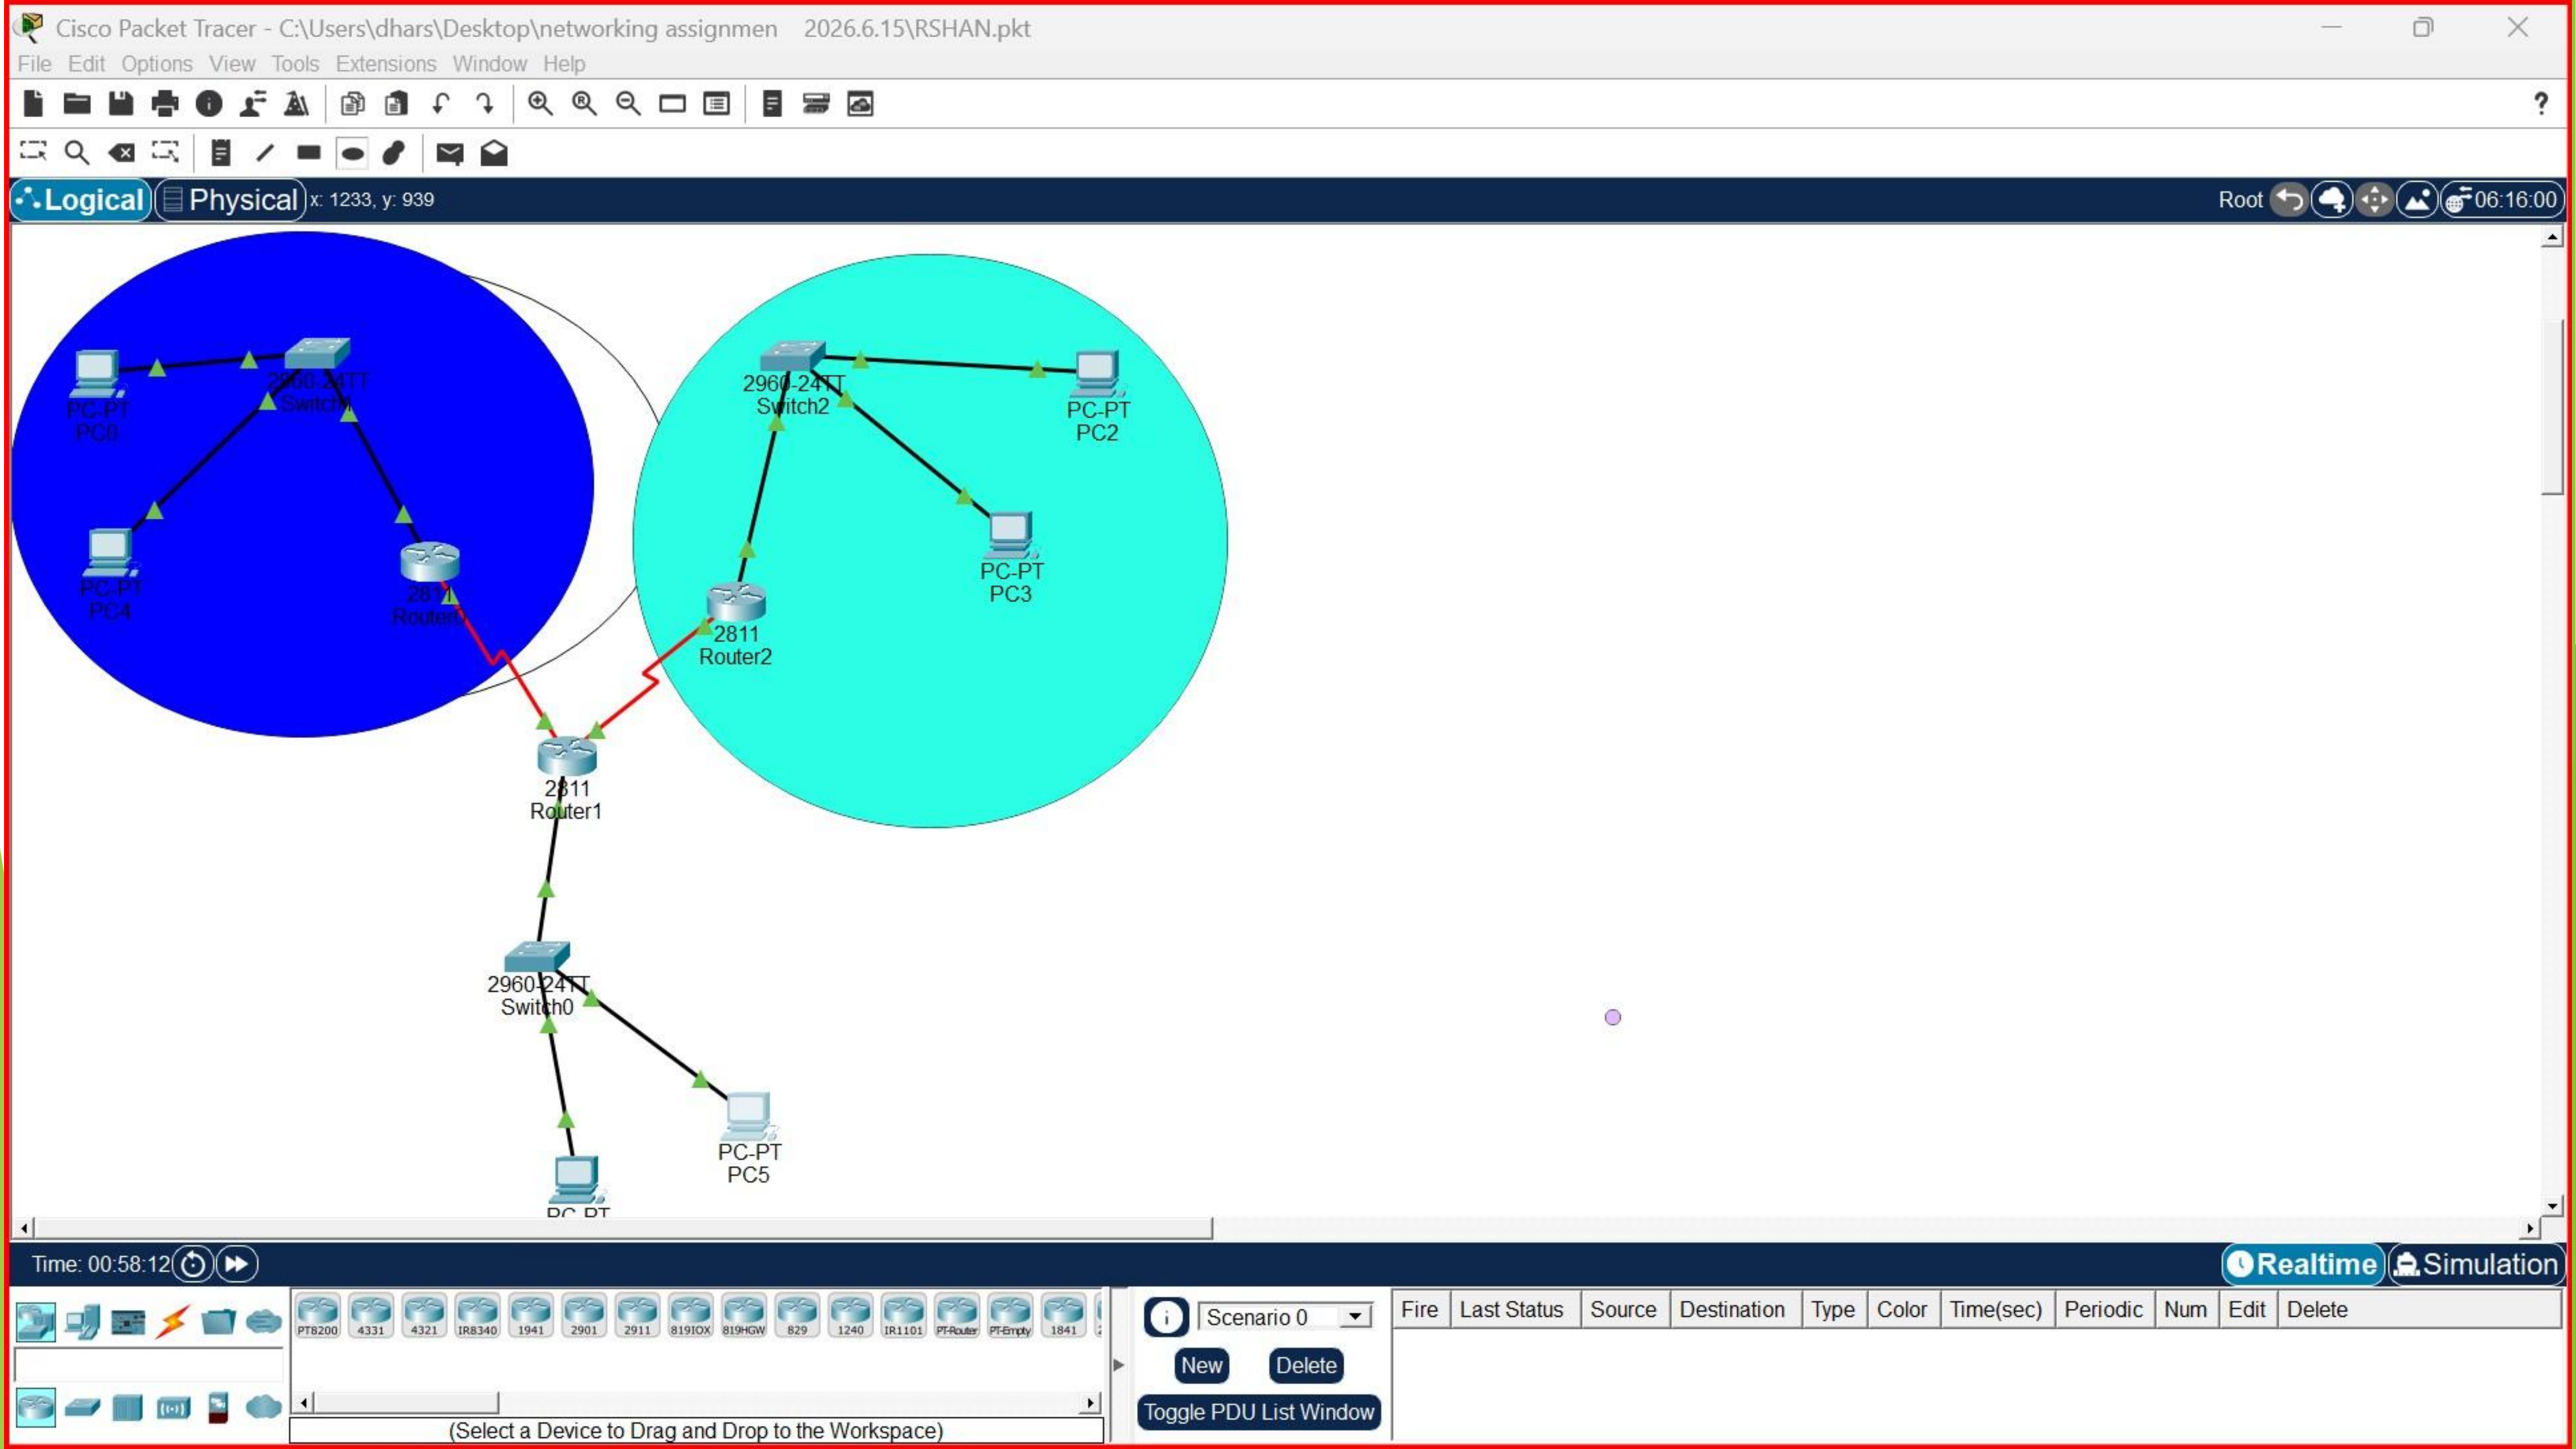
Cisco Packet Tracer - C:\Users\dhars\Desktop\networking assignmen 2026.6.15\RSHAN.pkt
File Edit Options View Tools Extensions Window Help
Logical
Physical
x: 1233, y: 939
Root
06:16:00
2960-24TT
Switch1
PC-PT
PC0
PC-PT
PC4
2811
Router0
2960-24TT
Switch2
PC-PT
PC2
PC-PT
PC3
2811
Router2
2811
Router1
2960-24TT
Switch0
PC-PT
PC5
PC-PT
Time: 00:58:12
Realtime
Simulation
PT8200
4331
4321
IR8340
1941
2901
2911
819IOX
819HGW
829
1240
IR1101
PT-Router
PT-Empty
1841
Scenario 0
New
Delete
Toggle PDU List Window
Fire
Last Status
Source
Destination
Type
Color
Time(sec)
Periodic
Num
Edit
Delete
(Select a Device to Drag and Drop to the Workspace)

PC0

Physical Config Desktop Programming Attributes

Command Prompt X

```
Approximate round trip times in milli-seconds:
    Minimum = 11ms, Maximum = 17ms, Average = 13ms

C:\>ping 192.168.2.2

Pinging 192.168.2.2 with 32 bytes of data:

Request timed out.
Reply from 192.168.2.2: bytes=32 time=11ms TTL=125
Reply from 192.168.2.2: bytes=32 time=2ms TTL=125
Reply from 192.168.2.2: bytes=32 time=25ms TTL=125

Ping statistics for 192.168.2.2:
    Packets: Sent = 4, Received = 3, Lost = 1 (25% loss),
Approximate round trip times in milli-seconds:
    Minimum = 2ms, Maximum = 25ms, Average = 12ms

C:\>ping 192.168.3.2

Pinging 192.168.3.2 with 32 bytes of data:

Reply from 192.168.3.2: bytes=32 time=32ms TTL=126
Reply from 192.168.3.2: bytes=32 time=2ms TTL=126
Reply from 192.168.3.2: bytes=32 time=10ms TTL=126
Reply from 192.168.3.2: bytes=32 time=1ms TTL=126

Ping statistics for 192.168.3.2:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
Approximate round trip times in milli-seconds:
    Minimum = 1ms, Maximum = 32ms, Average = 11ms

C:\>ping 192.168.2.2

Pinging 192.168.2.2 with 32 bytes of data:

Reply from 192.168.2.2: bytes=32 time=91ms TTL=125
Reply from 192.168.2.2: bytes=32 time=25ms TTL=125
Reply from 192.168.2.2: bytes=32 time=2ms TTL=125
Reply from 192.168.2.2: bytes=32 time=24ms TTL=125

Ping statistics for 192.168.2.2:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
Approximate round trip times in milli-seconds:
    Minimum = 2ms, Maximum = 91ms, Average = 35ms

C:\>
```

Top

PC2

Physical Config Desktop Programming Attributes

Command Prompt X

```
Cisco Packet Tracer PC Command Line 1.0
C:\>ping 192.168.1.2

Pinging 192.168.1.2 with 32 bytes of data:

Request timed out.
Reply from 192.168.1.2: bytes=32 time=24ms TTL=125
Reply from 192.168.1.2: bytes=32 time=28ms TTL=125
Reply from 192.168.1.2: bytes=32 time=70ms TTL=125

Ping statistics for 192.168.1.2:
    Packets: Sent = 4, Received = 3, Lost = 1 (25% loss),
Approximate round trip times in milli-seconds:
    Minimum = 24ms, Maximum = 70ms, Average = 40ms

C:\>ping 192.168.3.2

Pinging 192.168.3.2 with 32 bytes of data:

Reply from 192.168.3.2: bytes=32 time=1ms TTL=126
Reply from 192.168.3.2: bytes=32 time=3ms TTL=126
Reply from 192.168.3.2: bytes=32 time=10ms TTL=126
Reply from 192.168.3.2: bytes=32 time=30ms TTL=126

Ping statistics for 192.168.3.2:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
Approximate round trip times in milli-seconds:
    Minimum = 1ms, Maximum = 30ms, Average = 11ms

C:\>
```

Top

PC5

Physical | Config | Desktop | Programming | Attributes

Command Prompt

```
Cisco Packet Tracer PC Command Line 1.0
C:\>ping 192.168.1.2

Pinging 192.168.1.2 with 32 bytes of data:

Reply from 192.168.1.2: bytes=32 time=11ms TTL=126
Reply from 192.168.1.2: bytes=32 time=10ms TTL=126
Reply from 192.168.1.2: bytes=32 time=1ms TTL=126
Reply from 192.168.1.2: bytes=32 time=27ms TTL=126

Ping statistics for 192.168.1.2:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
Approximate round trip times in milli-seconds:
    Minimum = 1ms, Maximum = 27ms, Average = 12ms

C:\>ping 192.168.2.2

Pinging 192.168.2.2 with 32 bytes of data:

Reply from 192.168.2.2: bytes=32 time=1ms TTL=126
Reply from 192.168.2.2: bytes=32 time=10ms TTL=126
Reply from 192.168.2.2: bytes=32 time=14ms TTL=126
Reply from 192.168.2.2: bytes=32 time=11ms TTL=126

Ping statistics for 192.168.2.2:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
Approximate round trip times in milli-seconds:
    Minimum = 1ms, Maximum = 14ms, Average = 9ms

C:\>
```

Top

PC0

Physical Config Desktop Programming Attributes

Command Prompt X

```
   IPv6 Address....................: ::
   IPv4 Address....................: 192.168.1.10
   Subnet Mask.....................: 255.255.255.0
   Default Gateway.................: ::
                                     192.168.1.1

Bluetooth Connection:

   Connection-specific DNS Suffix..:
   Link-local IPv6 Address.........: ::
   IPv6 Address....................: ::
   IPv4 Address....................: 0.0.0.0
   Subnet Mask.....................: 0.0.0.0
   Default Gateway.................: ::
                                     0.0.0.0

C:\>192.168.1.1
Invalid Command.

C:\>PING 192.168.1.1

Pinging 192.168.1.1 with 32 bytes of data:

Reply from 192.168.1.1: bytes=32 time=60ms TTL=255
Reply from 192.168.1.1: bytes=32 time=11ms TTL=255
Reply from 192.168.1.1: bytes=32 time=12ms TTL=255
Reply from 192.168.1.1: bytes=32 time=10ms TTL=255

Ping statistics for 192.168.1.1:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
Approximate round trip times in milli-seconds:
    Minimum = 10ms, Maximum = 60ms, Average = 23ms

C:\>1192.168.2.10
Invalid Command.

C:\>PING 192.168.2.10

Pinging 192.168.2.10 with 32 bytes of data:

Reply from 192.168.2.10: bytes=32 time=126ms TTL=125
Reply from 192.168.2.10: bytes=32 time=23ms TTL=125
Reply from 192.168.2.10: bytes=32 time=2ms TTL=125
Reply from 192.168.2.10: bytes=32 time=15ms TTL=125

Ping statistics for 192.168.2.10:
```

Router0

Physical | Config | CLI | Attributes

IOS Command Line Interface

```
colombNSBM_39249 con0 is now available






Press RETURN to get started.














User Access Verification

Password:
Password:

colombNSBM_39249>enable
colombNSBM_39249#conf t
Enter configuration commands, one per line.  End with CNTL/Z.
colombNSBM_39249(config)#
colombNSBM_39249(config)#no router rip
colombNSBM_39249(config)#
colombNSBM_39249(config)#end
colombNSBM_39249#wr
%SYS-5-CONFIG_I: Configured from console by console

Building configuration...
[OK]
colombNSBM_39249#
```

Copy | Paste

Top

Router0

Physical Config CLI Attributes

IOS Command Line Interface

```
Press RETURN to get started.




User Access Verification

Password:

colombNSBM_39249>ENABLE
colombNSBM_39249#SHOW IP ROUTE
Codes: L - local, C - connected, S - static, R - RIP, M - mobile, B - BGP
       D - EIGRP, EX - EIGRP external, O - OSPF, IA - OSPF inter area
       N1 - OSPF NSSA external type 1, N2 - OSPF NSSA external type 2
       E1 - OSPF external type 1, E2 - OSPF external type 2, E - EGP
       i - IS-IS, L1 - IS-IS level-1, L2 - IS-IS level-2, ia - IS-IS inter area
       * - candidate default, U - per-user static route, o - ODR
       P - periodic downloaded static route

Gateway of last resort is not set

     10.0.0.0/8 is variably subnetted, 2 subnets, 2 masks
C       10.0.0.0/24 is directly connected, Serial0/1/0
L       10.0.0.1/32 is directly connected, Serial0/1/0
     192.168.1.0/24 is variably subnetted, 2 subnets, 2 masks
C       192.168.1.0/24 is directly connected, FastEthernet0/0
L       192.168.1.1/32 is directly connected, FastEthernet0/0
S    192.168.2.0/24 [1/0] via 10.0.0.2
S    192.168.3.0/24 [1/0] via 10.0.0.2

colombNSBM_39249#
```

Copy Paste

Top

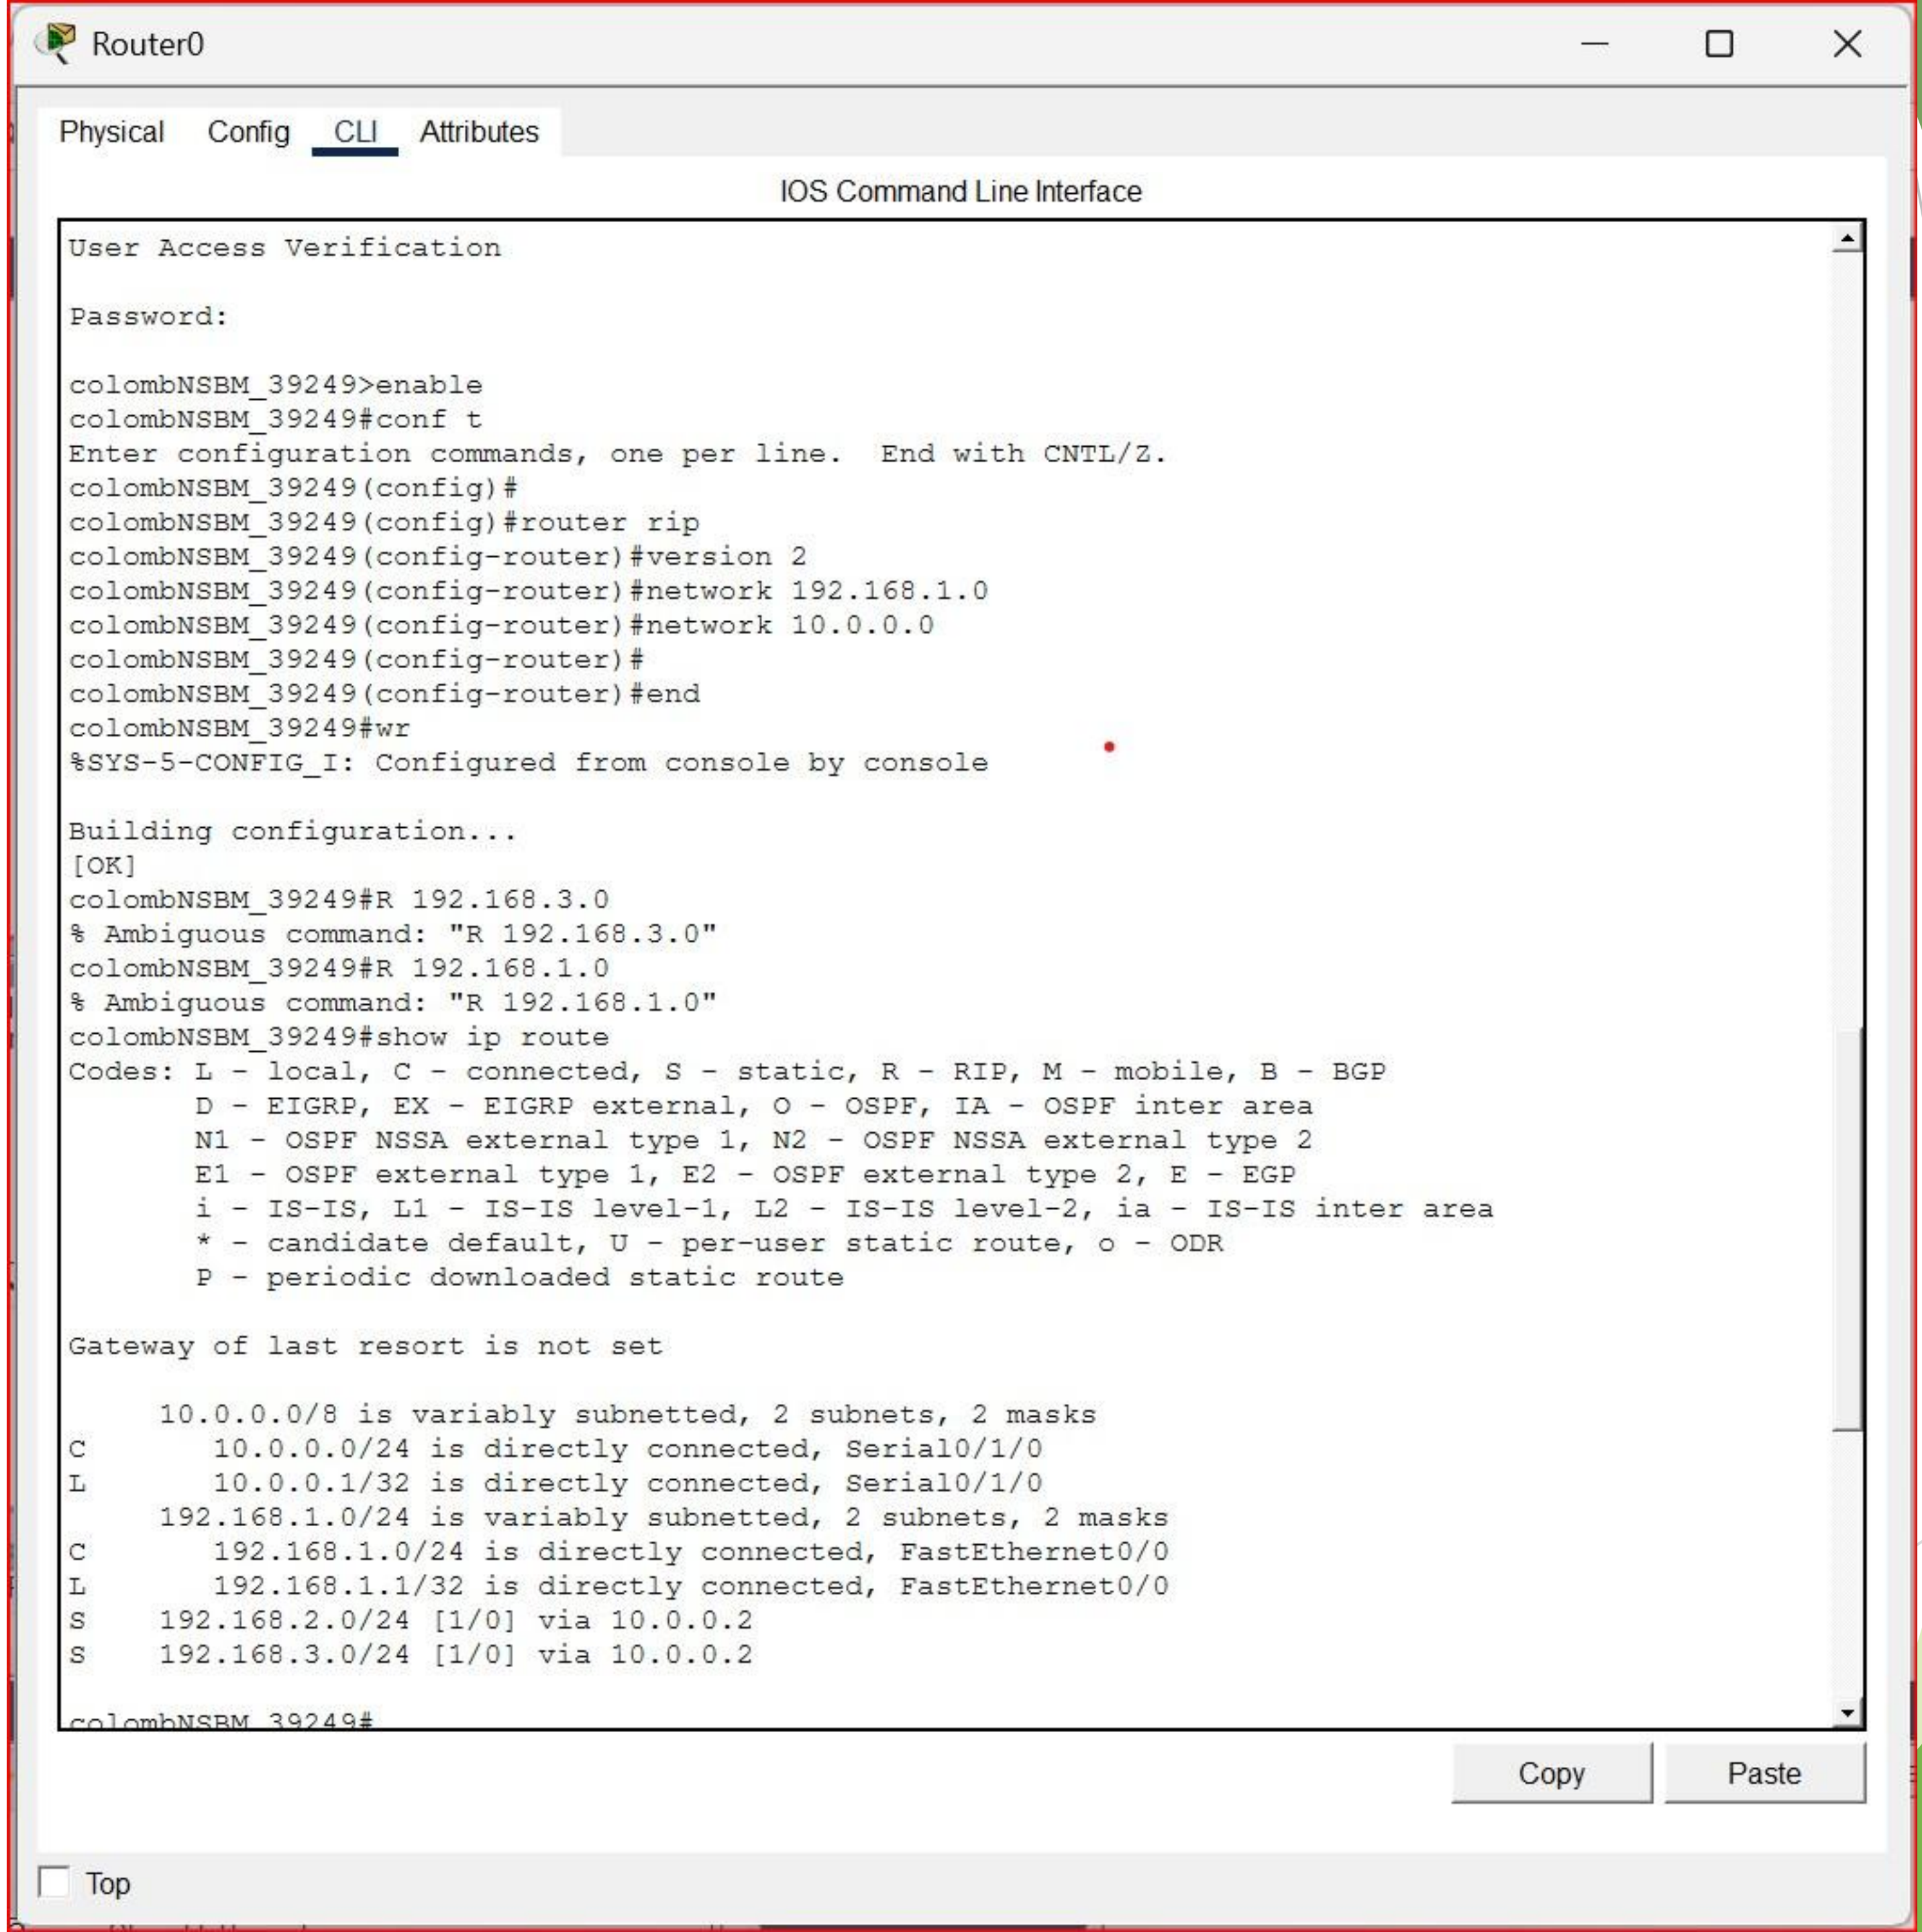


```
User Access Verification

Password:

colombNSBM_39249>enable
colombNSBM_39249#conf t
Enter configuration commands, one per line.  End with CNTL/Z.
colombNSBM_39249(config)#
colombNSBM_39249(config)#router rip
colombNSBM_39249(config-router)#version 2
colombNSBM_39249(config-router)#network 192.168.1.0
colombNSBM_39249(config-router)#network 10.0.0.0
colombNSBM_39249(config-router)#
colombNSBM_39249(config-router)#end
colombNSBM_39249#wr
%SYS-5-CONFIG_I: Configured from console by console

Building configuration...
[OK]
colombNSBM_39249#R 192.168.3.0
% Ambiguous command: "R 192.168.3.0"
colombNSBM_39249#R 192.168.1.0
% Ambiguous command: "R 192.168.1.0"
colombNSBM_39249#show ip route
Codes: L - local, C - connected, S - static, R - RIP, M - mobile, B - BGP
       D - EIGRP, EX - EIGRP external, O - OSPF, IA - OSPF inter area
       N1 - OSPF NSSA external type 1, N2 - OSPF NSSA external type 2
       E1 - OSPF external type 1, E2 - OSPF external type 2, E - EGP
       i - IS-IS, L1 - IS-IS level-1, L2 - IS-IS level-2, ia - IS-IS inter area
       * - candidate default, U - per-user static route, o - ODR
       P - periodic downloaded static route

Gateway of last resort is not set

     10.0.0.0/8 is variably subnetted, 2 subnets, 2 masks
C       10.0.0.0/24 is directly connected, Serial0/1/0
L       10.0.0.1/32 is directly connected, Serial0/1/0
     192.168.1.0/24 is variably subnetted, 2 subnets, 2 masks
C       192.168.1.0/24 is directly connected, FastEthernet0/0
L       192.168.1.1/32 is directly connected, FastEthernet0/0
S    192.168.2.0/24 [1/0] via 10.0.0.2
S    192.168.3.0/24 [1/0] via 10.0.0.2

colombNSBM_39249#
```

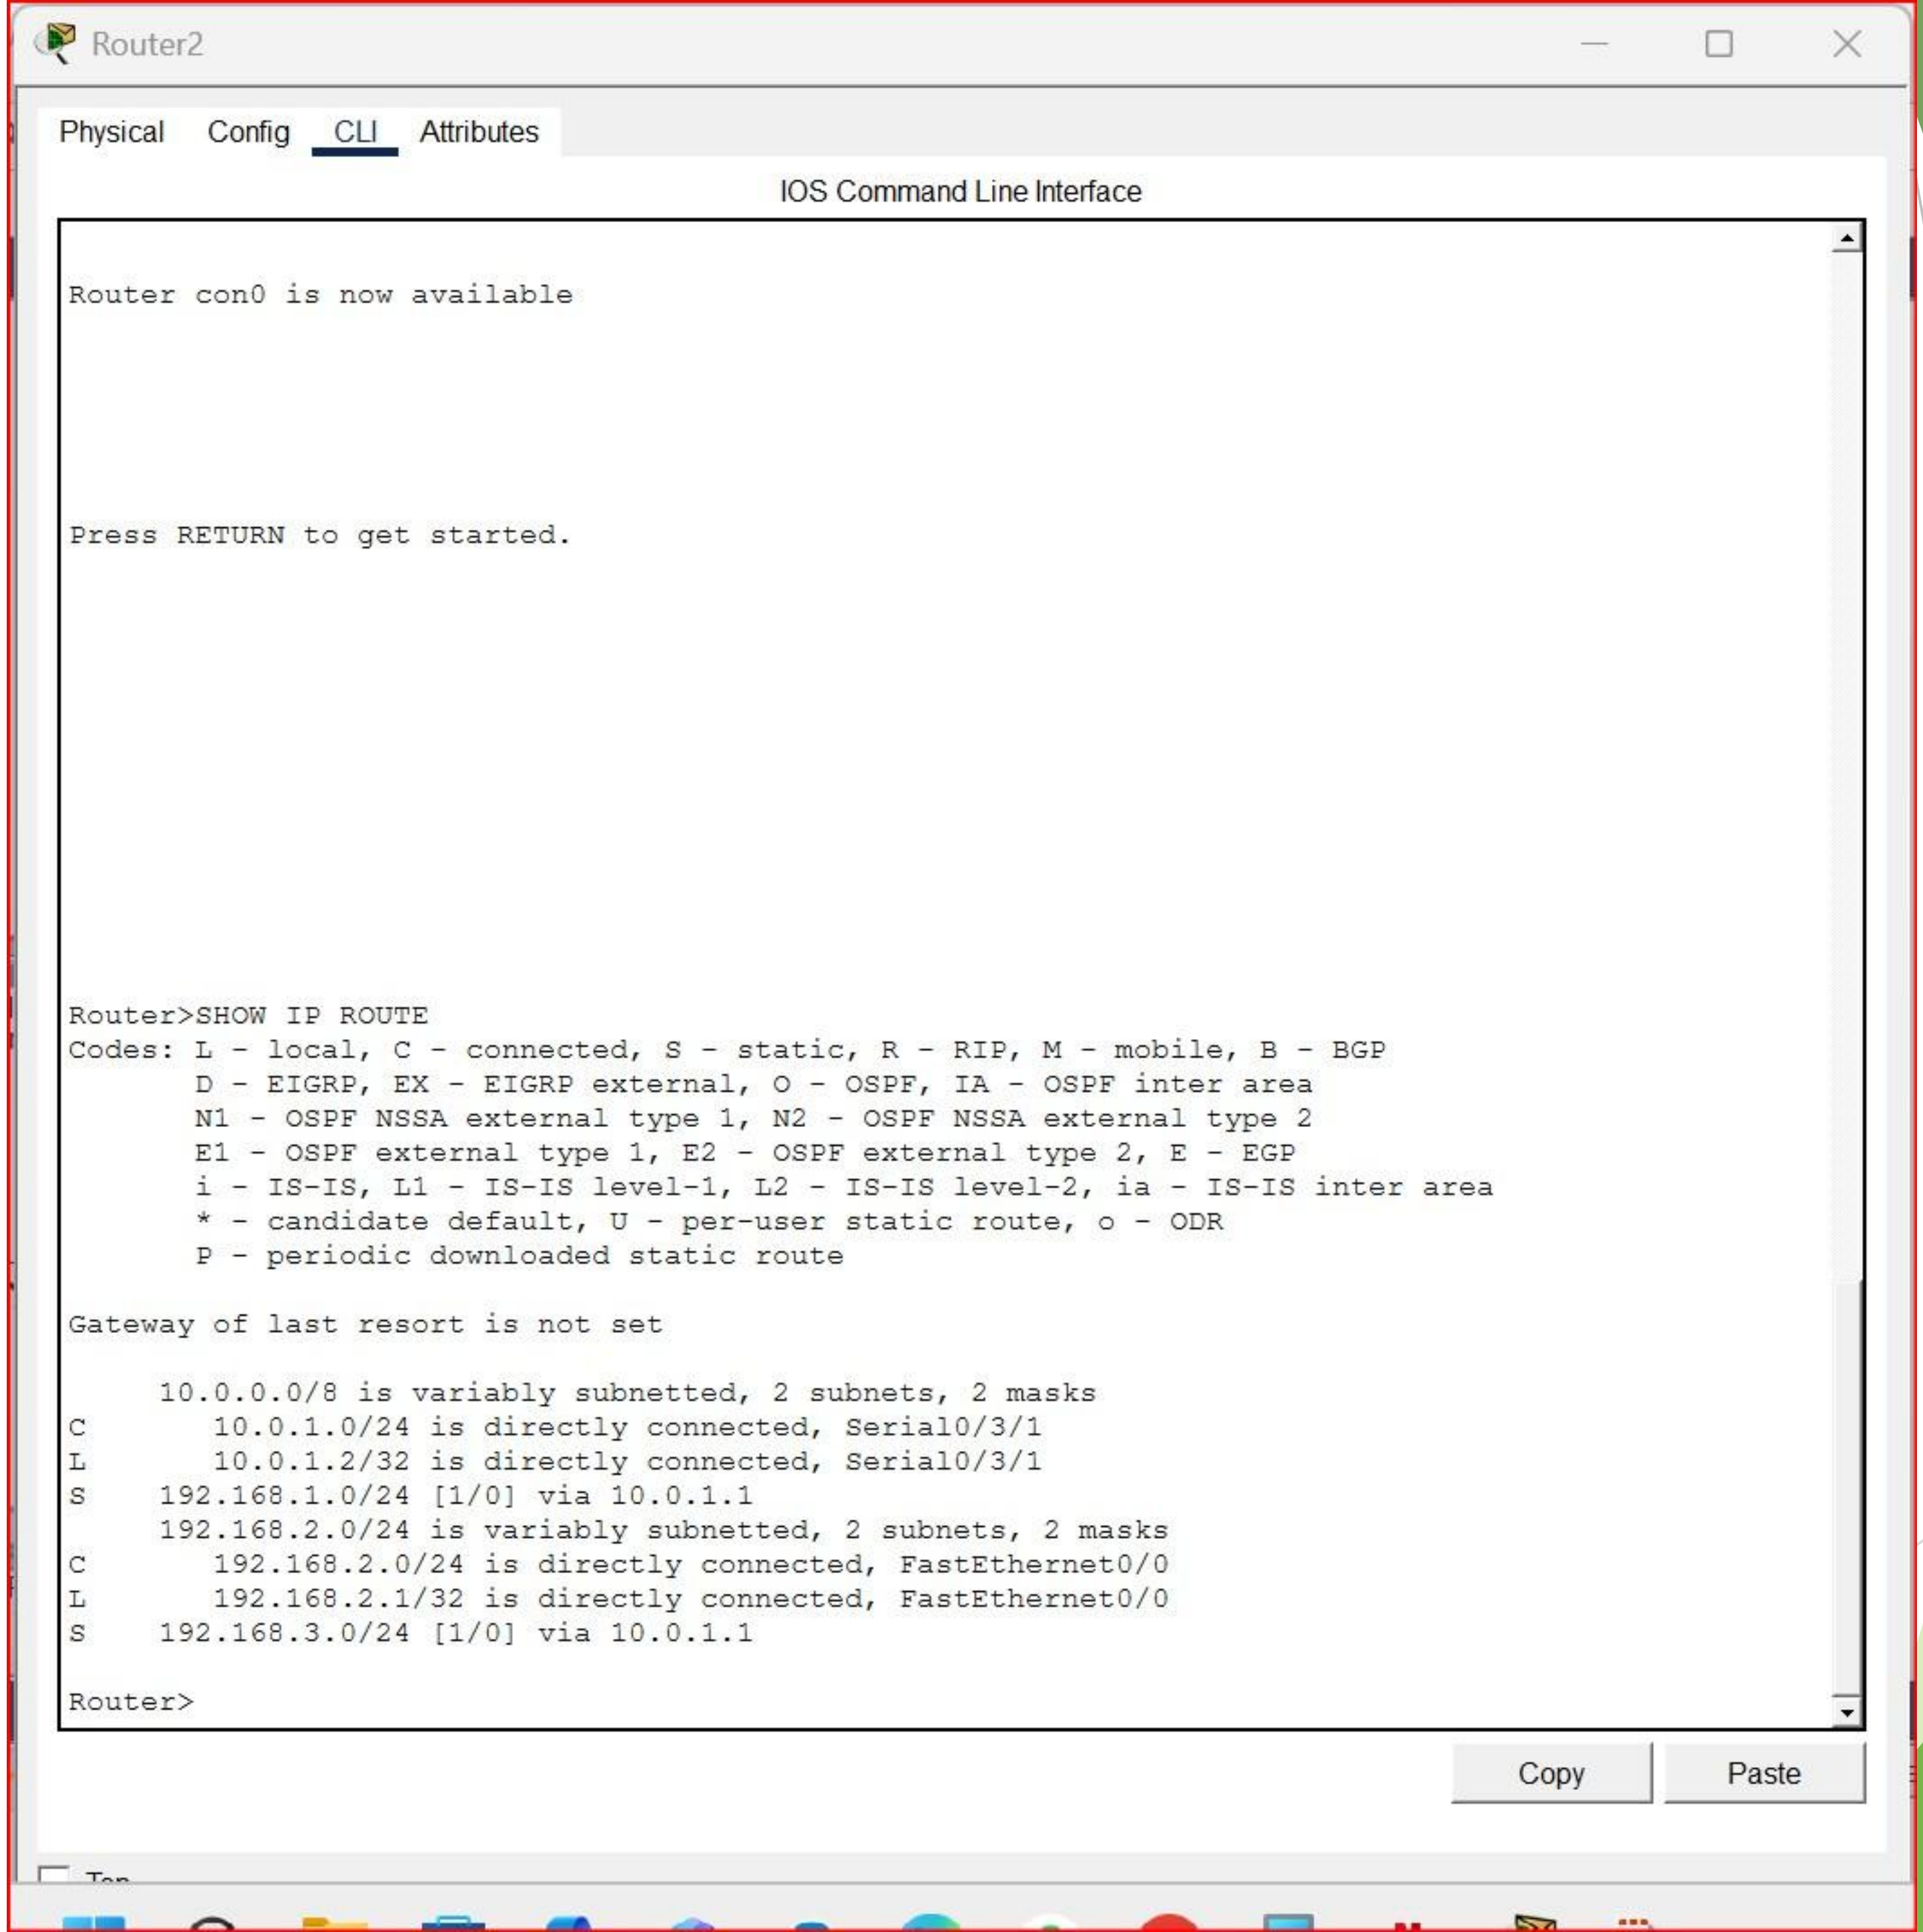
Router2
Physical
Config
CLI
Attributes
IOS Command Line Interface
Router con0 is now available
Press RETURN to get started.
Router>SHOW IP ROUTE
Codes: L - local, C - connected, S - static, R - RIP, M - mobile, B - BGP
D - EIGRP, EX - EIGRP external, O - OSPF, IA - OSPF inter area
N1 - OSPF NSSA external type 1, N2 - OSPF NSSA external type 2
E1 - OSPF external type 1, E2 - OSPF external type 2, E - EGP
i - IS-IS, L1 - IS-IS level-1, L2 - IS-IS level-2, ia - IS-IS inter area
* - candidate default, U - per-user static route, o - ODR
P - periodic downloaded static route
Gateway of last resort is not set
10.0.0.0/8 is variably subnetted, 2 subnets, 2 masks
C 10.0.1.0/24 is directly connected, Serial0/3/1
L 10.0.1.2/32 is directly connected, Serial0/3/1
S 192.168.1.0/24 [1/0] via 10.0.1.1
192.168.2.0/24 is variably subnetted, 2 subnets, 2 masks
C 192.168.2.0/24 is directly connected, FastEthernet0/0
L 192.168.2.1/32 is directly connected, FastEthernet0/0
S 192.168.3.0/24 [1/0] via 10.0.1.1
Router>
Copy
Paste

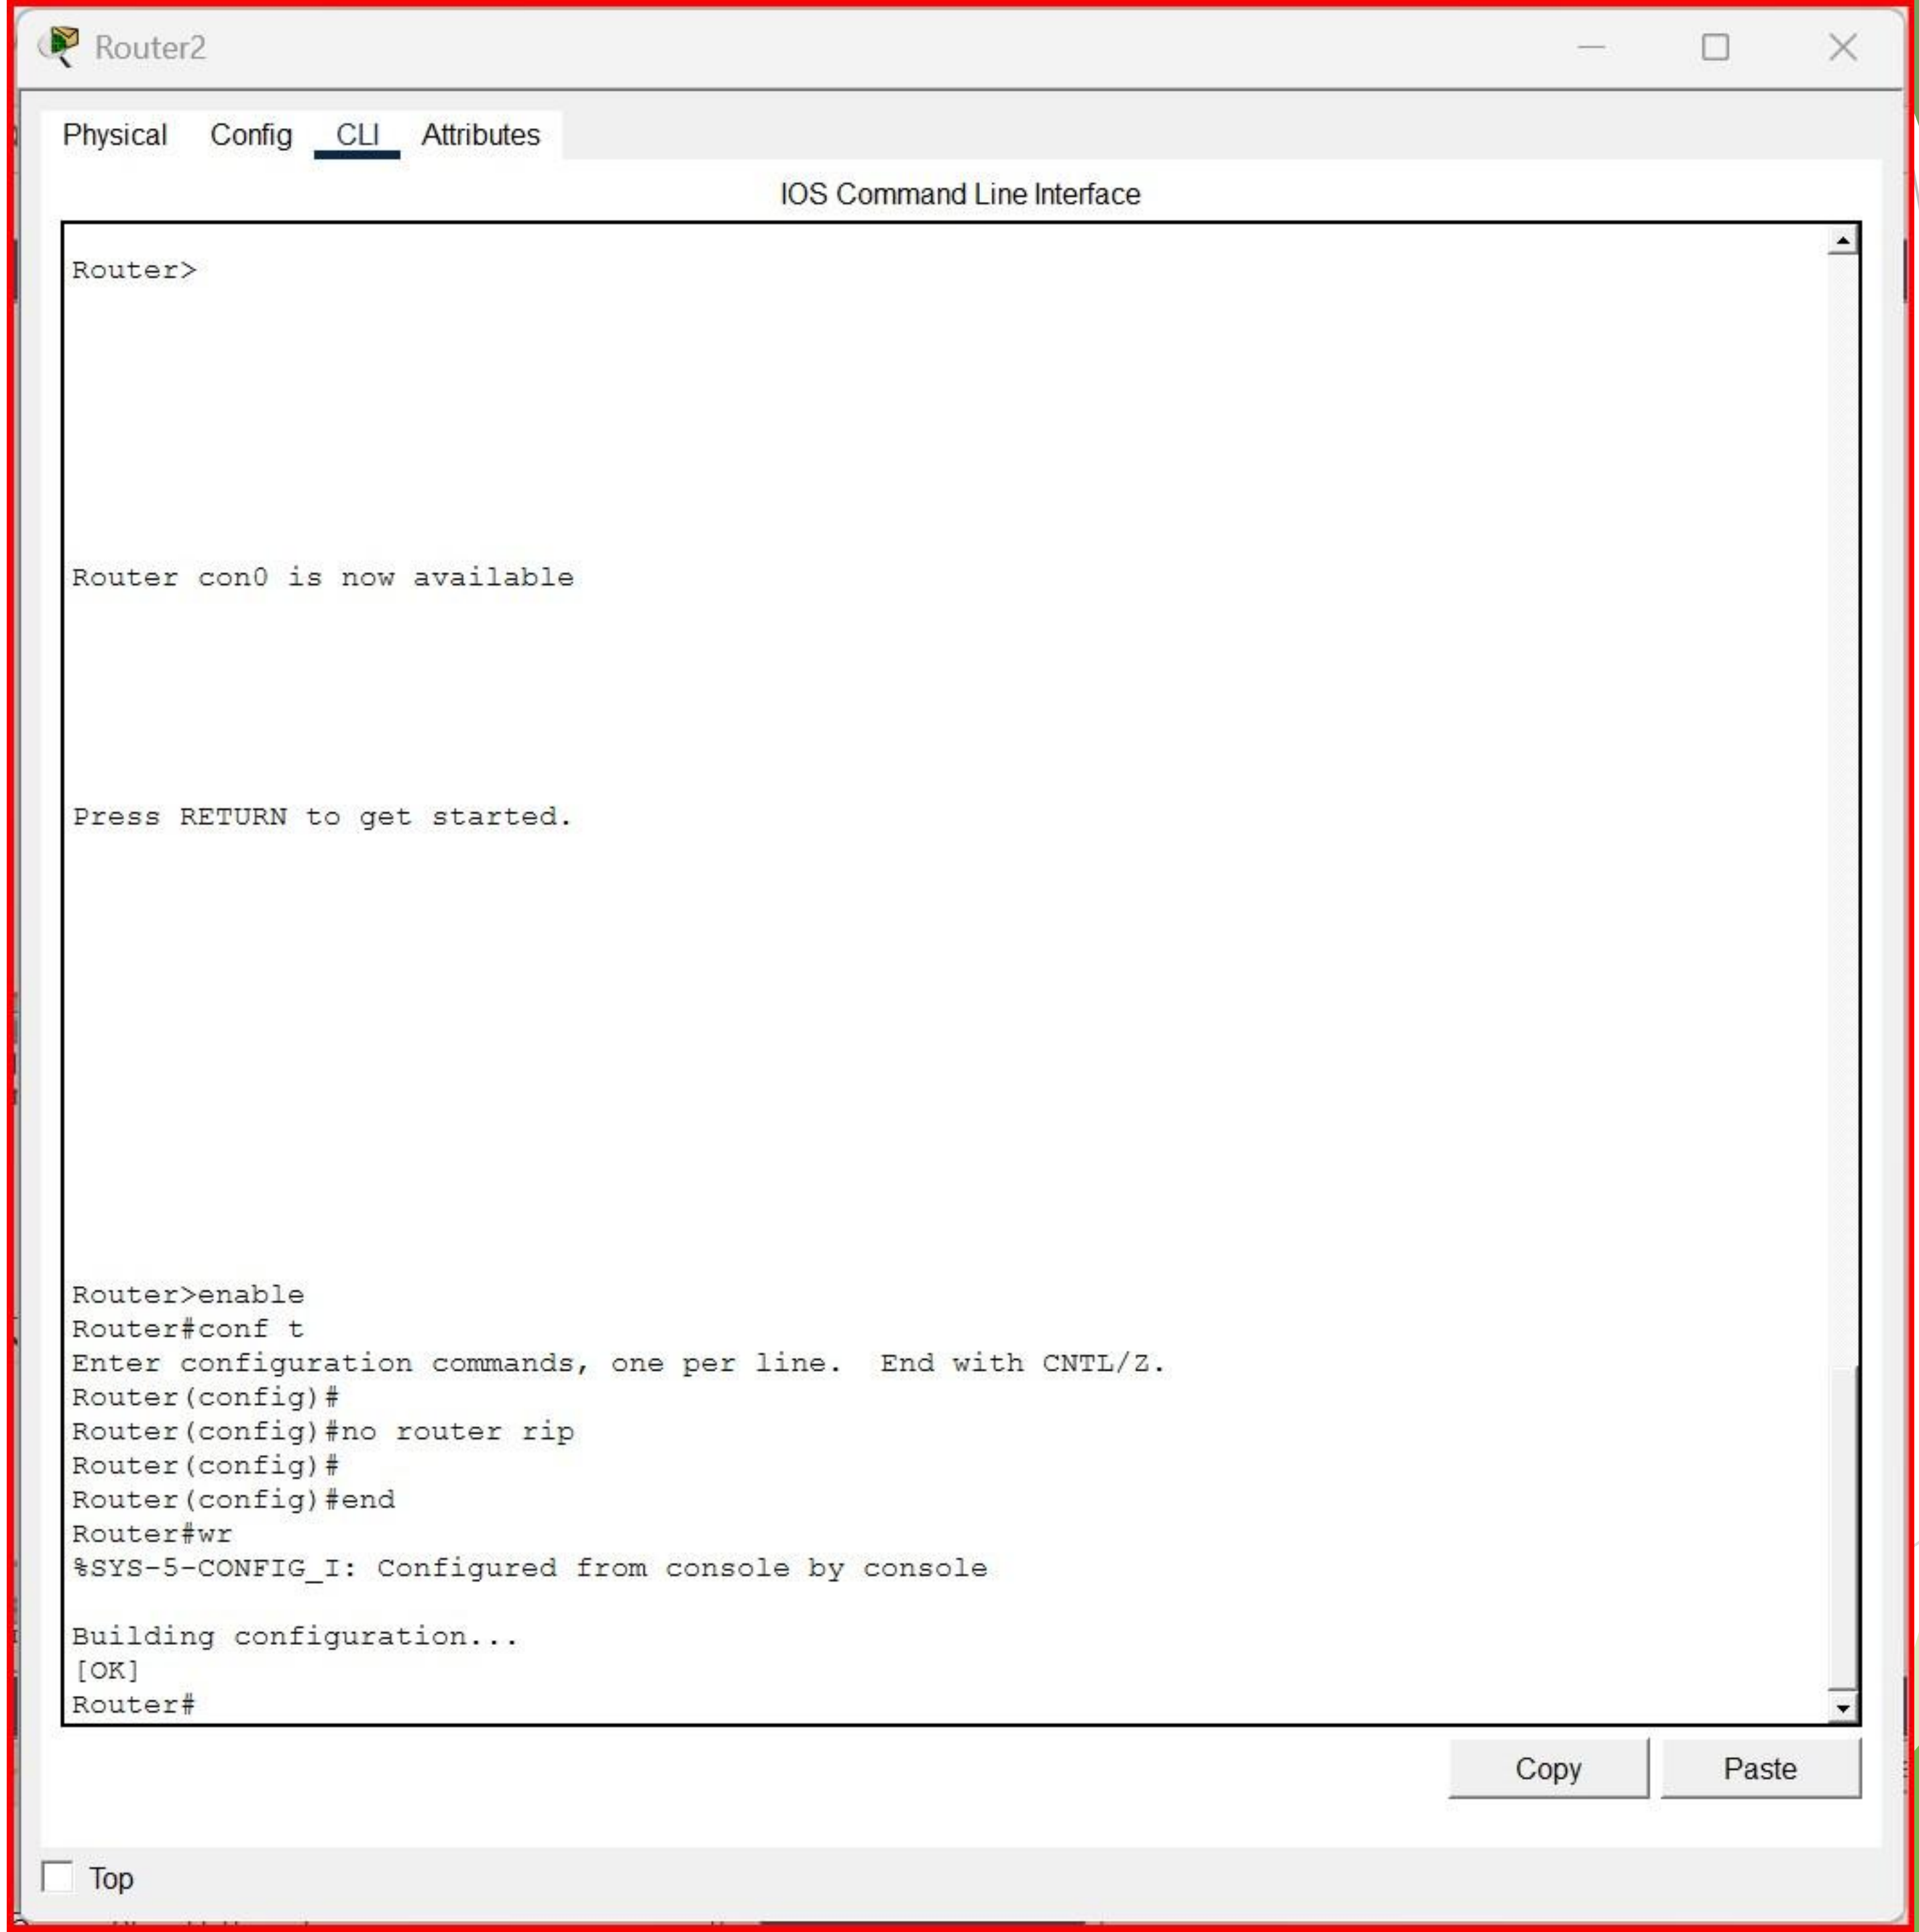


```
Router>




Router con0 is now available



Press RETURN to get started.







Router>enable
Router#conf t
Enter configuration commands, one per line.  End with CNTL/Z.
Router(config)#
Router(config)#no router rip
Router(config)#
Router(config)#end
Router#wr
%SYS-5-CONFIG_I: Configured from console by console

Building configuration...
[OK]
Router#
```

Router2

Physical | Config | CLI | Attributes

IOS Command Line Interface

```
A summary of U.S. laws governing Cisco cryptographic products may be found at:
http://www.cisco.com/wwl/export/crypto/tool/stqrg.html

If you require further assistance please contact us by sending email to
export@cisco.com.

cisco 2811 (MPC860) processor (revision 0x200) with 60416K/5120K bytes of memory
Processor board ID JAD05190MTZ (4292891495)
2 FastEthernet interface(s)
2 Low-speed serial(sync/async) network interface(s)
DRAM configuration is 64 bits wide with parity disabled.
255K bytes of non-volatile configuration memory.
249856K bytes of ATA System CompactFlash 0 (Read/Write)

Press RETURN to get started!


%LINK-5-CHANGED: Interface Serial0/3/1, changed state to up

%LINEPROTO-5-UPDOWN: Line protocol on Interface FastEthernet0/0, changed state to up

%LINEPROTO-5-UPDOWN: Line protocol on Interface Serial0/3/1, changed state to up


Router>enable
Router#conf t
Enter configuration commands, one per line.  End with CNTL/Z.
Router(config)#
Router(config)#router rip
Router(config-router)#version 2
Router(config-router)#network 10.0.0.0
Router(config-router)#network 20.0.0.0
Router(config-router)#network 192.168.2.0
Router(config-router)#
Router(config-router)#end
Router#wr
%SYS-5-CONFIG_I: Configured from console by console

Building configuration...
[OK]
Router#
```

Copy | Paste

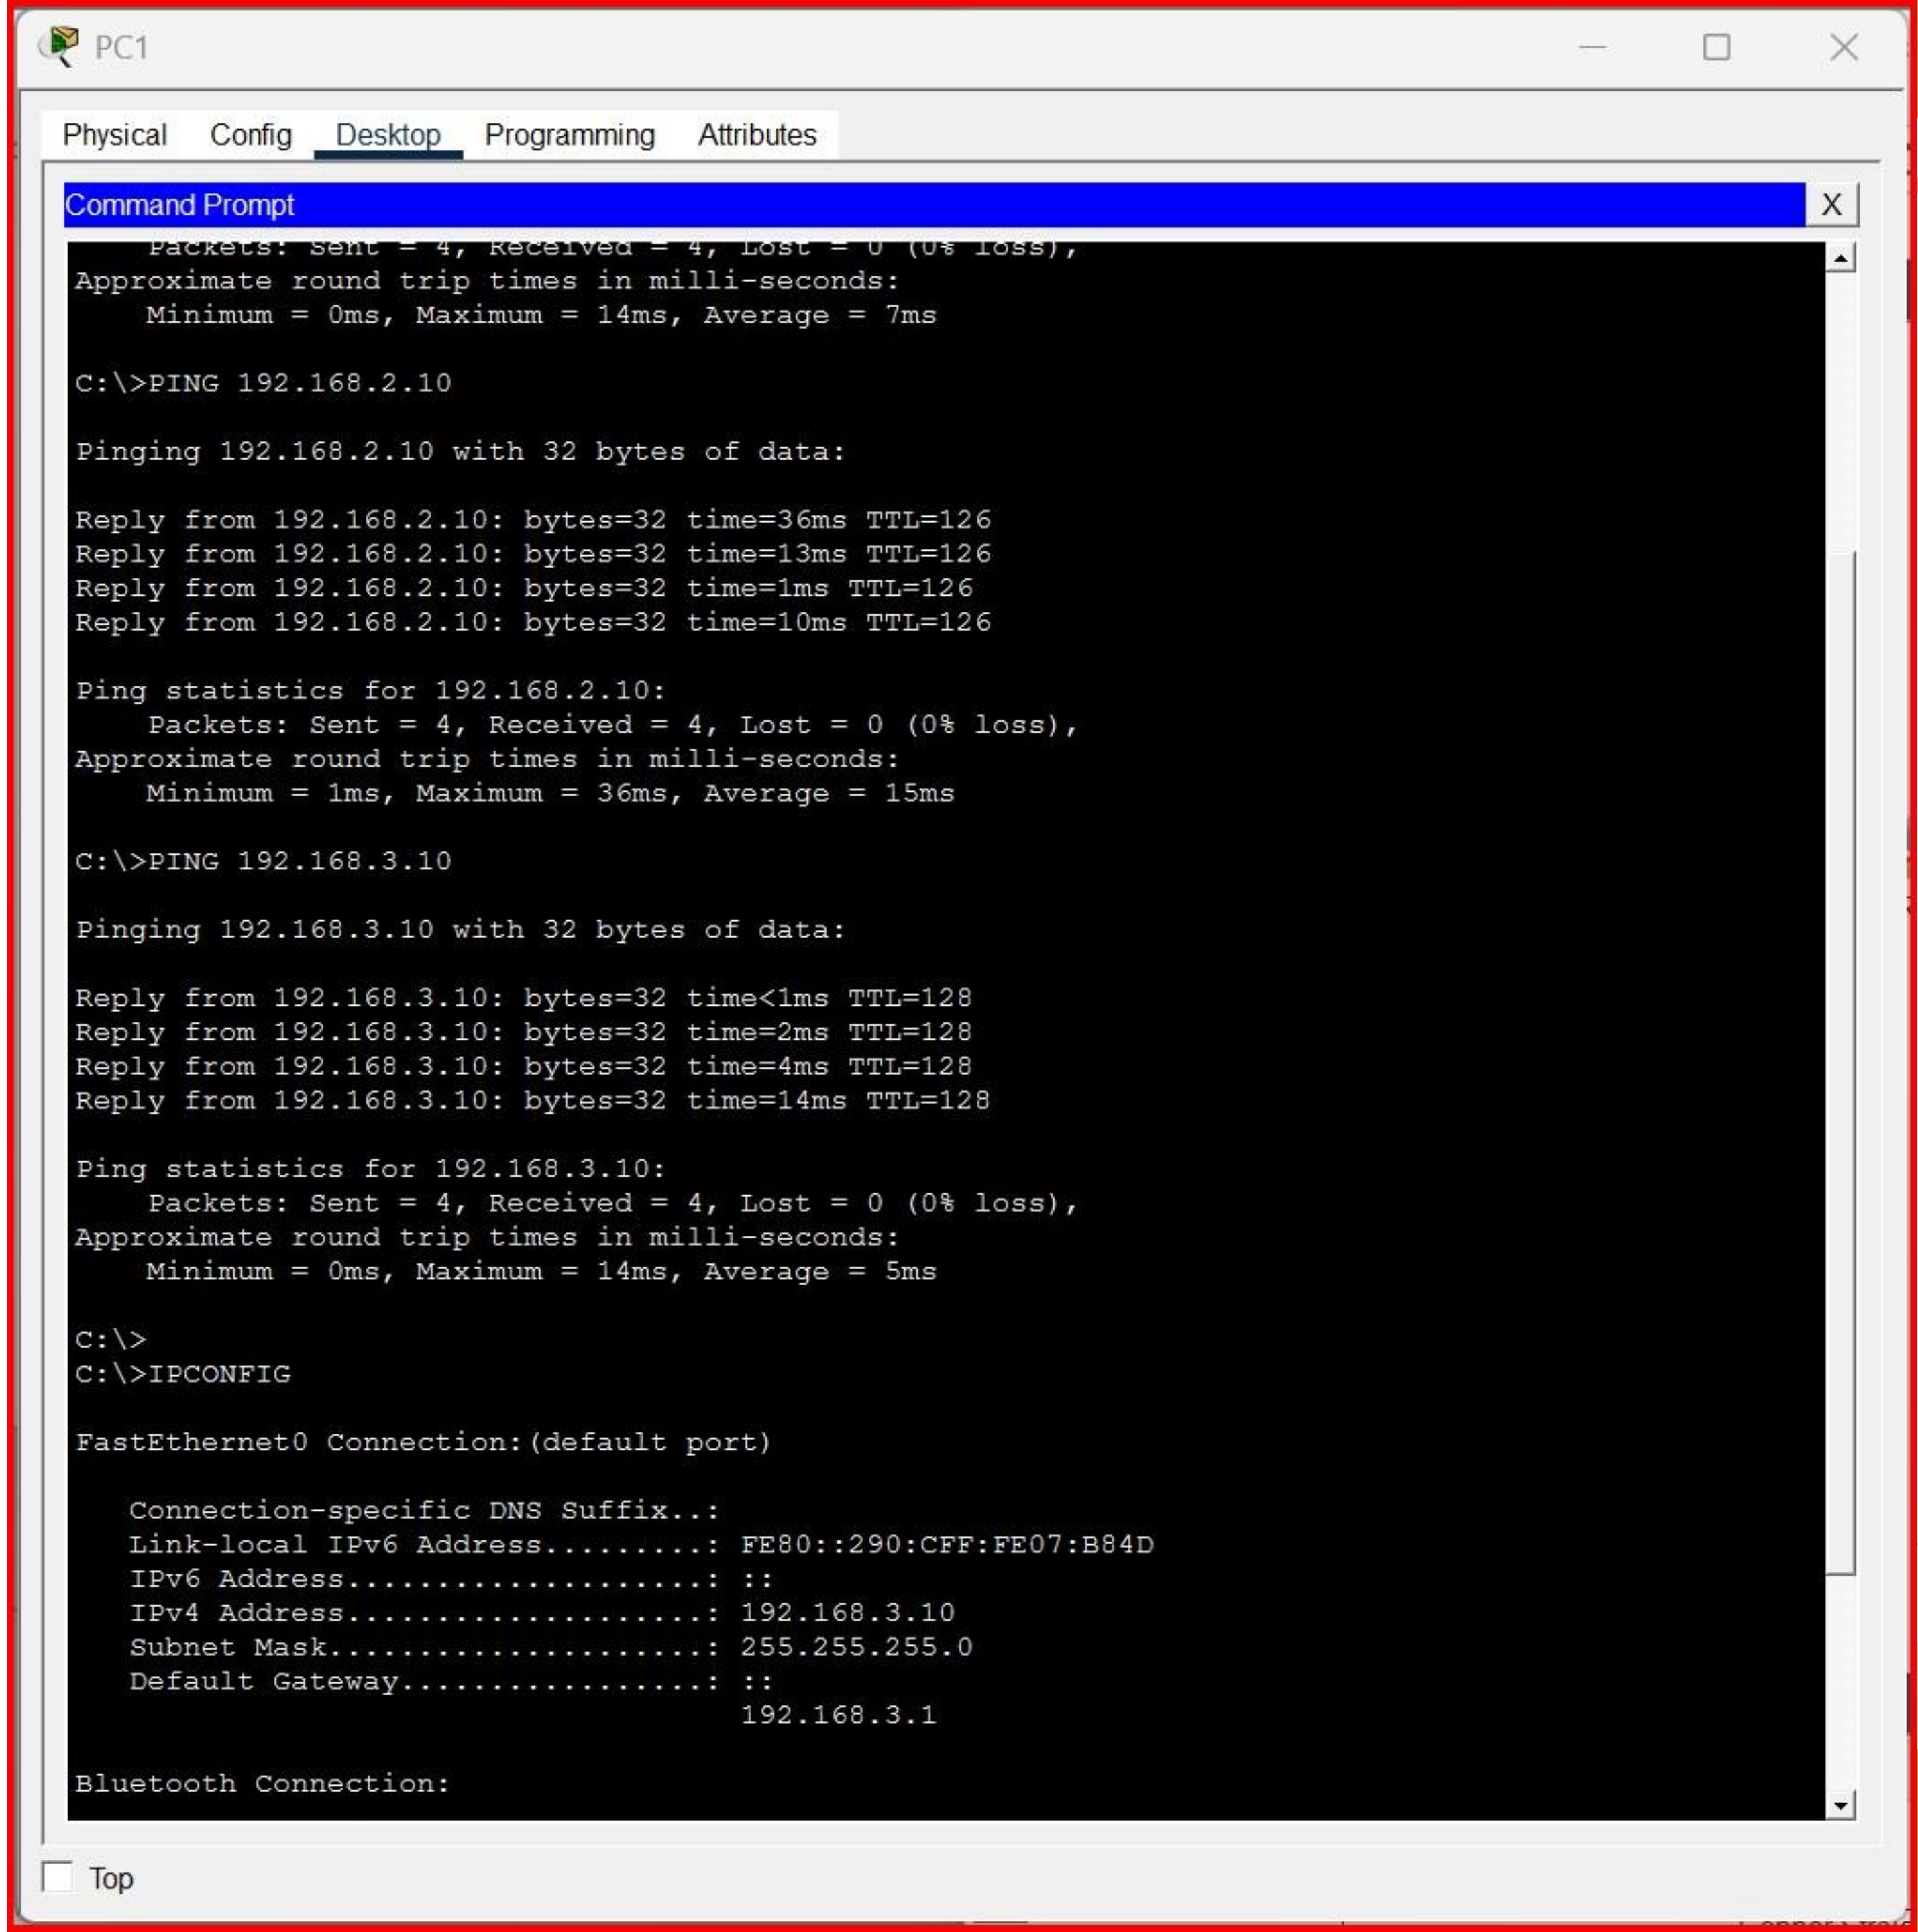

PC1
Physical
Config
Desktop
Programming
Attributes
Command Prompt
X
Approximate round trip times in milli-seconds:
Minimum = 0ms, Maximum = 14ms, Average = 7ms
C:\>PING 192.168.2.10
Pinging 192.168.2.10 with 32 bytes of data:
Reply from 192.168.2.10: bytes=32 time=36ms TTL=126
Reply from 192.168.2.10: bytes=32 time=13ms TTL=126
Reply from 192.168.2.10: bytes=32 time=1ms TTL=126
Reply from 192.168.2.10: bytes=32 time=10ms TTL=126
Ping statistics for 192.168.2.10:
Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
Approximate round trip times in milli-seconds:
Minimum = 1ms, Maximum = 36ms, Average = 15ms
C:\>PING 192.168.3.10
Pinging 192.168.3.10 with 32 bytes of data:
Reply from 192.168.3.10: bytes=32 time<1ms TTL=128
Reply from 192.168.3.10: bytes=32 time=2ms TTL=128
Reply from 192.168.3.10: bytes=32 time=4ms TTL=128
Reply from 192.168.3.10: bytes=32 time=14ms TTL=128
Ping statistics for 192.168.3.10:
Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
Approximate round trip times in milli-seconds:
Minimum = 0ms, Maximum = 14ms, Average = 5ms
C:\>
C:\>IPCONFIG
FastEthernet0 Connection:(default port)
Connection-specific DNS Suffix..:
Link-local IPv6 Address.........: FE80::290:CFF:FE07:B84D
IPv6 Address....................: ::
IPv4 Address....................: 192.168.3.10
Subnet Mask.....................: 255.255.255.0
Default Gateway.................: ::
192.168.3.1
Bluetooth Connection:
Top

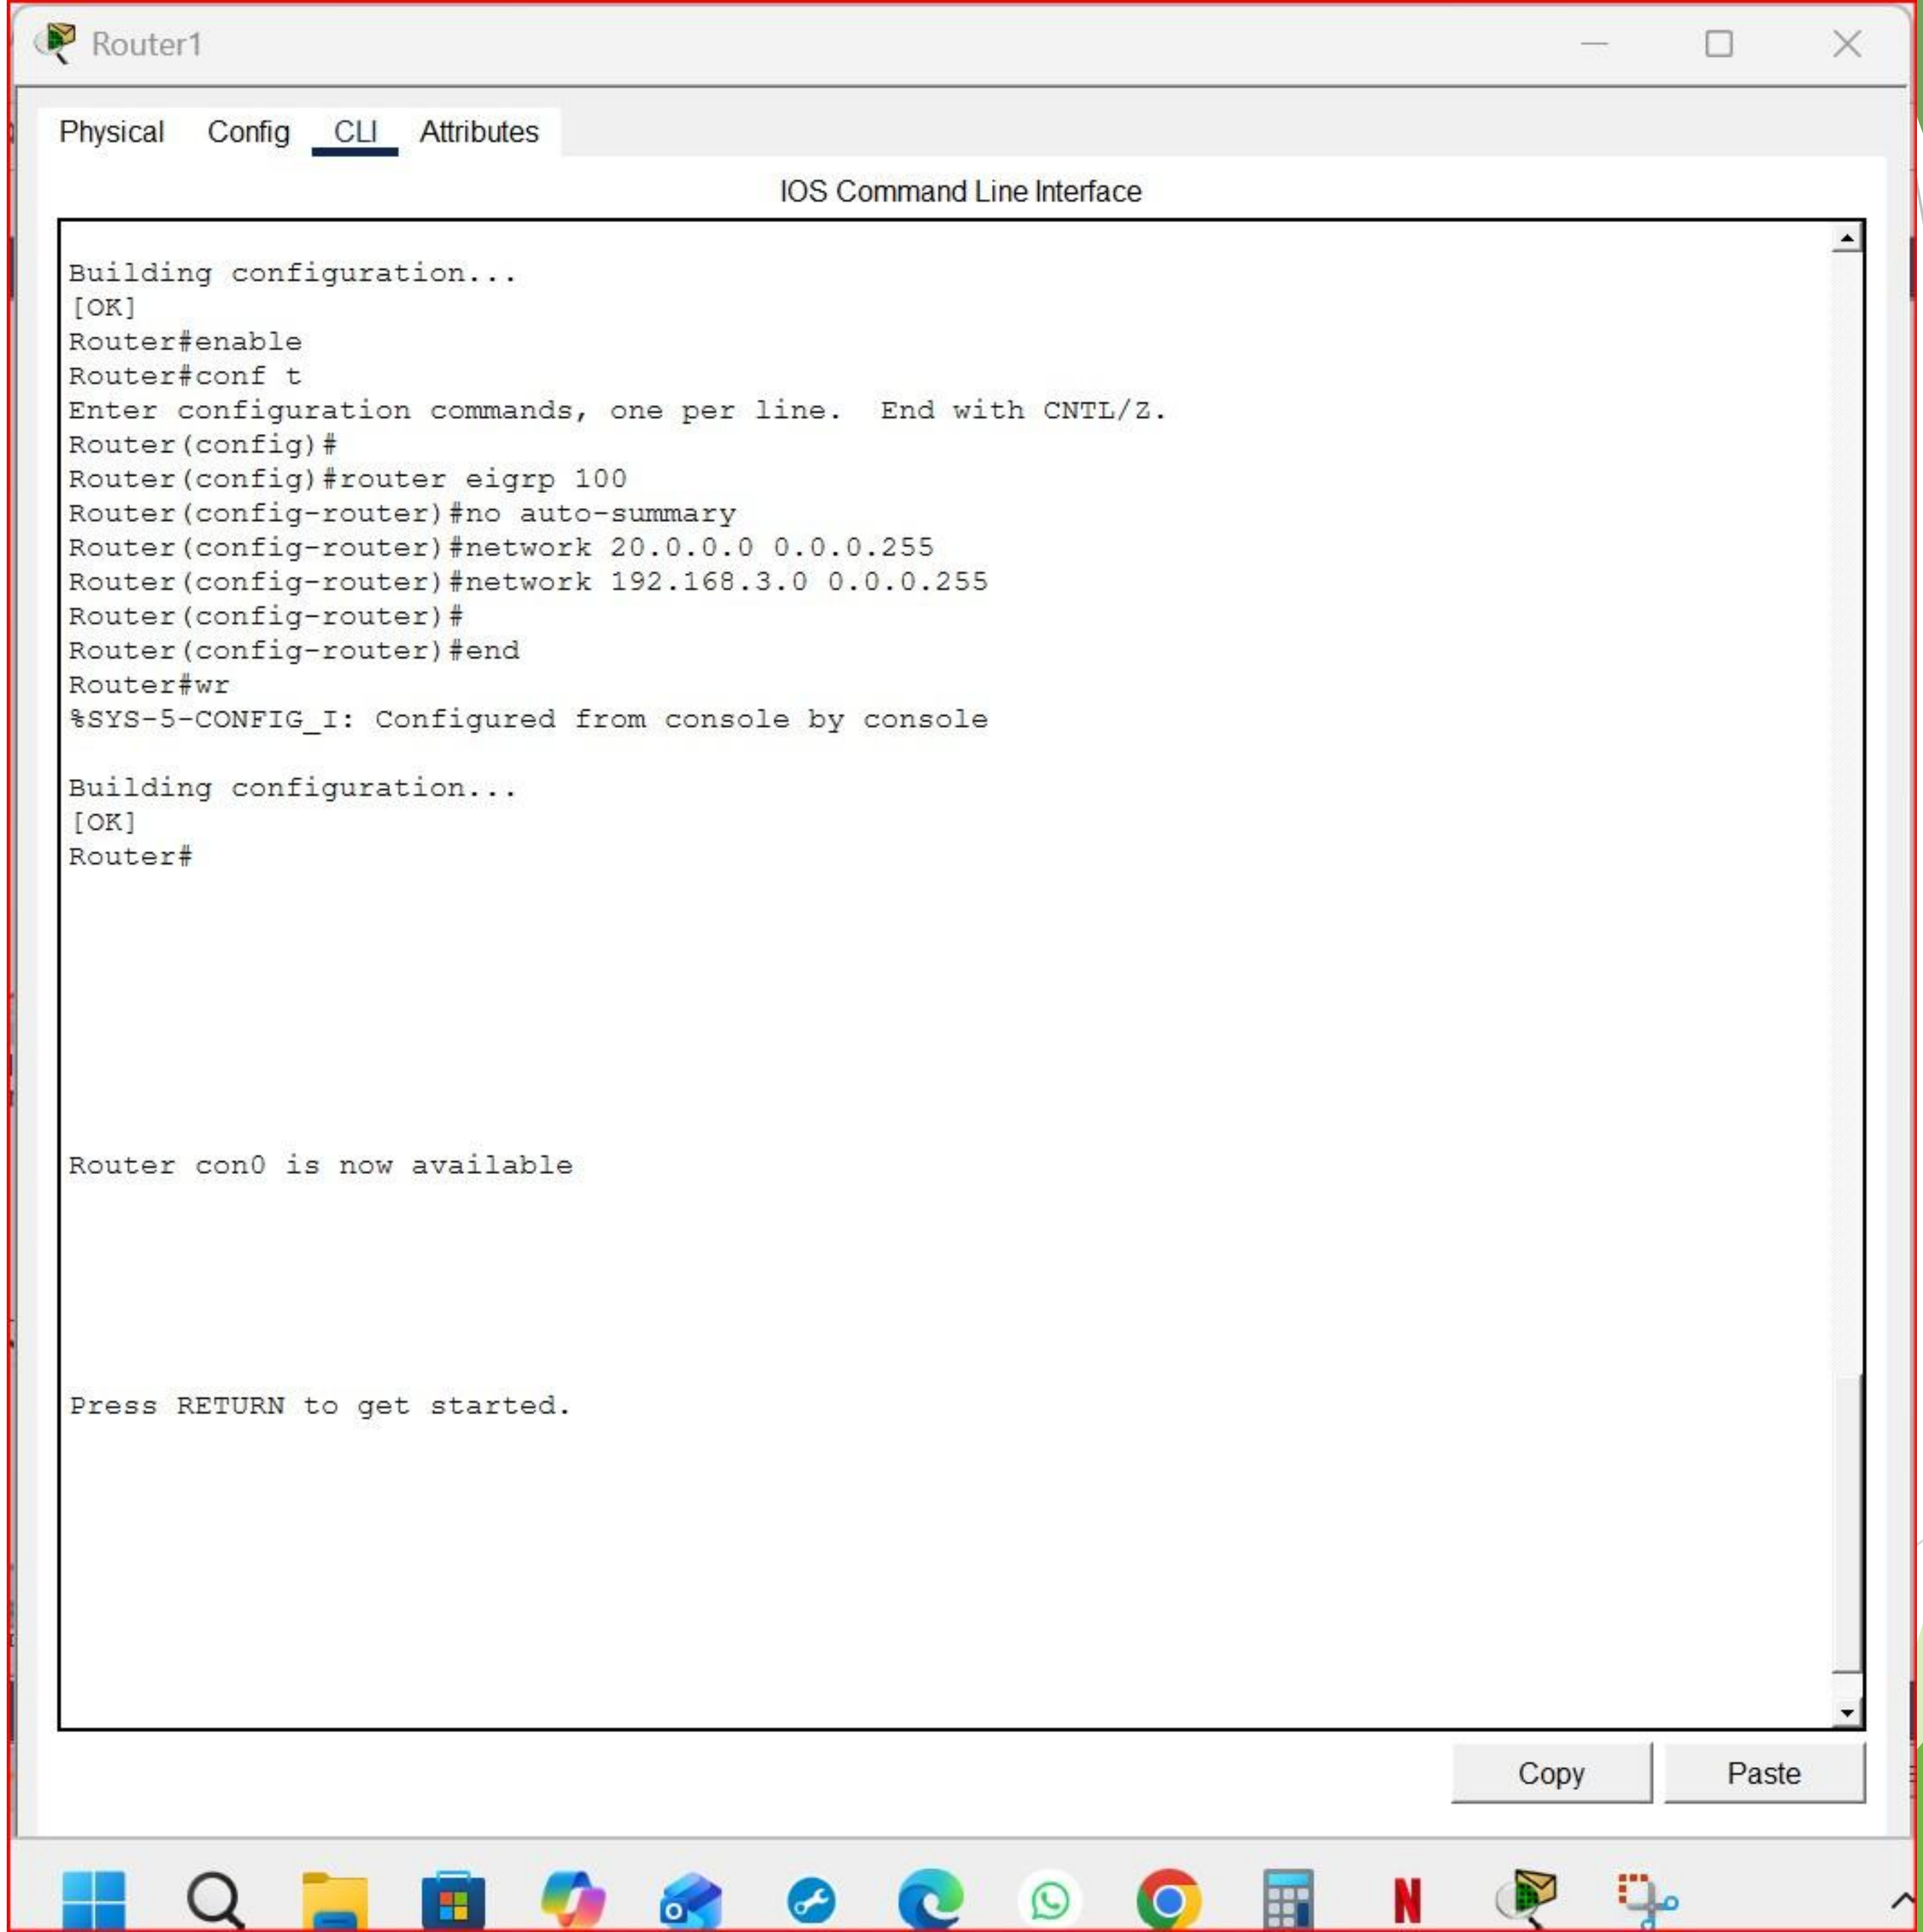
Router1
Physical
Config
CLI
Attributes
IOS Command Line Interface
Building configuration...
[OK]
Router#enable
Router#conf t
Enter configuration commands, one per line. End with CNTL/Z.
Router(config)#
Router(config)#router eigrp 100
Router(config-router)#no auto-summary
Router(config-router)#network 20.0.0.0 0.0.0.255
Router(config-router)#network 192.168.3.0 0.0.0.255
Router(config-router)#
Router(config-router)#end
Router#wr
%SYS-5-CONFIG_I: Configured from console by console
Building configuration...
[OK]
Router#
Router con0 is now available
Press RETURN to get started.
Copy
Paste

Router1

Physical Config CLI Attributes

IOS Command Line Interface

```
Router con0 is now available




Press RETURN to get started.














Router>SHOW IP ROUTE
Codes: L - local, C - connected, S - static, R - RIP, M - mobile, B - BGP
       D - EIGRP, EX - EIGRP external, O - OSPF, IA - OSPF inter area
       N1 - OSPF NSSA external type 1, N2 - OSPF NSSA external type 2
       E1 - OSPF external type 1, E2 - OSPF external type 2, E - EGP
       i - IS-IS, L1 - IS-IS level-1, L2 - IS-IS level-2, ia - IS-IS inter area
       * - candidate default, U - per-user static route, o - ODR
       P - periodic downloaded static route

Gateway of last resort is not set

     10.0.0.0/8 is variably subnetted, 4 subnets, 2 masks
C       10.0.0.0/24 is directly connected, Serial0/1/0
L       10.0.0.2/32 is directly connected, Serial0/1/0
C       10.0.1.0/24 is directly connected, Serial0/1/1
L       10.0.1.1/32 is directly connected, Serial0/1/1
S    192.168.1.0/24 [1/0] via 10.0.0.1
S    192.168.2.0/24 [1/0] via 10.0.1.2
     192.168.3.0/24 is variably subnetted, 2 subnets, 2 masks
C       192.168.3.0/24 is directly connected, FastEthernet0/0
L       192.168.3.1/32 is directly connected, FastEthernet0/0

Router>
```

Copy Paste

Top

Router1

Physical Config CLI Attributes

IOS Command Line Interface

```
Router>SHOW IP ROUTE
Codes: L - local, C - connected, S - static, R - RIP, M - mobile, B - BGP
       D - EIGRP, EX - EIGRP external, O - OSPF, IA - OSPF inter area
       N1 - OSPF NSSA external type 1, N2 - OSPF NSSA external type 2
       E1 - OSPF external type 1, E2 - OSPF external type 2, E - EGP
       i - IS-IS, L1 - IS-IS level-1, L2 - IS-IS level-2, ia - IS-IS inter area
       * - candidate default, U - per-user static route, o - ODR
       P - periodic downloaded static route

Gateway of last resort is not set

     10.0.0.0/8 is variably subnetted, 4 subnets, 2 masks
C       10.0.0.0/24 is directly connected, Serial0/1/0
L       10.0.0.2/32 is directly connected, Serial0/1/0
C       10.0.1.0/24 is directly connected, Serial0/1/1
L       10.0.1.1/32 is directly connected, Serial0/1/1
S    192.168.1.0/24 [1/0] via 10.0.0.1
S    192.168.2.0/24 [1/0] via 10.0.1.2
     192.168.3.0/24 is variably subnetted, 2 subnets, 2 masks
C       192.168.3.0/24 is directly connected, FastEthernet0/0
L       192.168.3.1/32 is directly connected, FastEthernet0/0

Router>enable
Router#conf t
Enter configuration commands, one per line.  End with CNTL/Z.
Router(config)#
Router(config)#no router rip
Router(config)#
Router(config)#end
Router#wr
%SYS-5-CONFIG_I: Configured from console by console

Building configuration...
[OK]
Router#
```

Copy Paste

Top

Router1

Physical | Config | CLI | Attributes

IOS Command Line Interface

```
cisco 2811 (MPC860) processor (revision 0x200) with 60416K/5120K bytes of memory
Processor board ID JAD05190MTZ (4292891495)
2 FastEthernet interface(s)
2 Low-speed serial(sync/async) network interface(s)
DRAM configuration is 64 bits wide with parity disabled.
255K bytes of non-volatile configuration memory.
249856K bytes of ATA System CompactFlash 0 (Read/Write)

Press RETURN to get started!


%LINK-5-CHANGED: Interface Serial0/1/0, changed state to up

%LINK-5-CHANGED: Interface Serial0/1/1, changed state to up

%LINEPROTO-5-UPDOWN: Line protocol on Interface FastEthernet0/0, changed state to up

%LINEPROTO-5-UPDOWN: Line protocol on Interface Serial0/1/1, changed state to up

%LINEPROTO-5-UPDOWN: Line protocol on Interface Serial0/1/0, changed state to up


Router>enable
Router#conf t
Enter configuration commands, one per line.  End with CNTL/Z.
Router(config)#
Router(config)#router rip
Router(config-router)#version 2
Router(config-router)#network 20.0.0.0
Router(config-router)#network 192.168.3.0
Router(config-router)#
Router(config-router)#end
Router#wr
%SYS-5-CONFIG_I: Configured from console by console

Building configuration...
[OK]
Router#
```

Copy | Paste

Top

PC2

Physical Config Desktop Programming Attributes

Command Prompt

```
Reply from 192.168.1.10: bytes=32 time=15ms TTL=125
Reply from 192.168.1.10: bytes=32 time=14ms TTL=125
Reply from 192.168.1.10: bytes=32 time=27ms TTL=125

Ping statistics for 192.168.1.10:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
Approximate round trip times in milli-seconds:
    Minimum = 14ms, Maximum = 42ms, Average = 24ms

C:\>PING 192.168.3.10

Pinging 192.168.3.10 with 32 bytes of data:

Request timed out.
Reply from 192.168.3.10: bytes=32 time=15ms TTL=126
Reply from 192.168.3.10: bytes=32 time=14ms TTL=126
Reply from 192.168.3.10: bytes=32 time=14ms TTL=126

Ping statistics for 192.168.3.10:
    Packets: Sent = 4, Received = 3, Lost = 1 (25% loss),
Approximate round trip times in milli-seconds:
    Minimum = 14ms, Maximum = 15ms, Average = 14ms

C:\>IPCONFIG

FastEthernet0 Connection:(default port)

   Connection-specific DNS Suffix..:
   Link-local IPv6 Address.........: FE80::2E0:B0FF:FE78:66E0
   IPv6 Address....................: ::
   IPv4 Address....................: 192.168.2.10
   Subnet Mask.....................: 255.255.255.0
   Default Gateway.................: ::
                                     192.168.2.1

Bluetooth Connection:

   Connection-specific DNS Suffix..:
   Link-local IPv6 Address.........: ::
   IPv6 Address....................: ::
   IPv4 Address....................: 0.0.0.0
   Subnet Mask.....................: 0.0.0.0
   Default Gateway.................: ::
                                     0.0.0.0

C:\>
```

Top

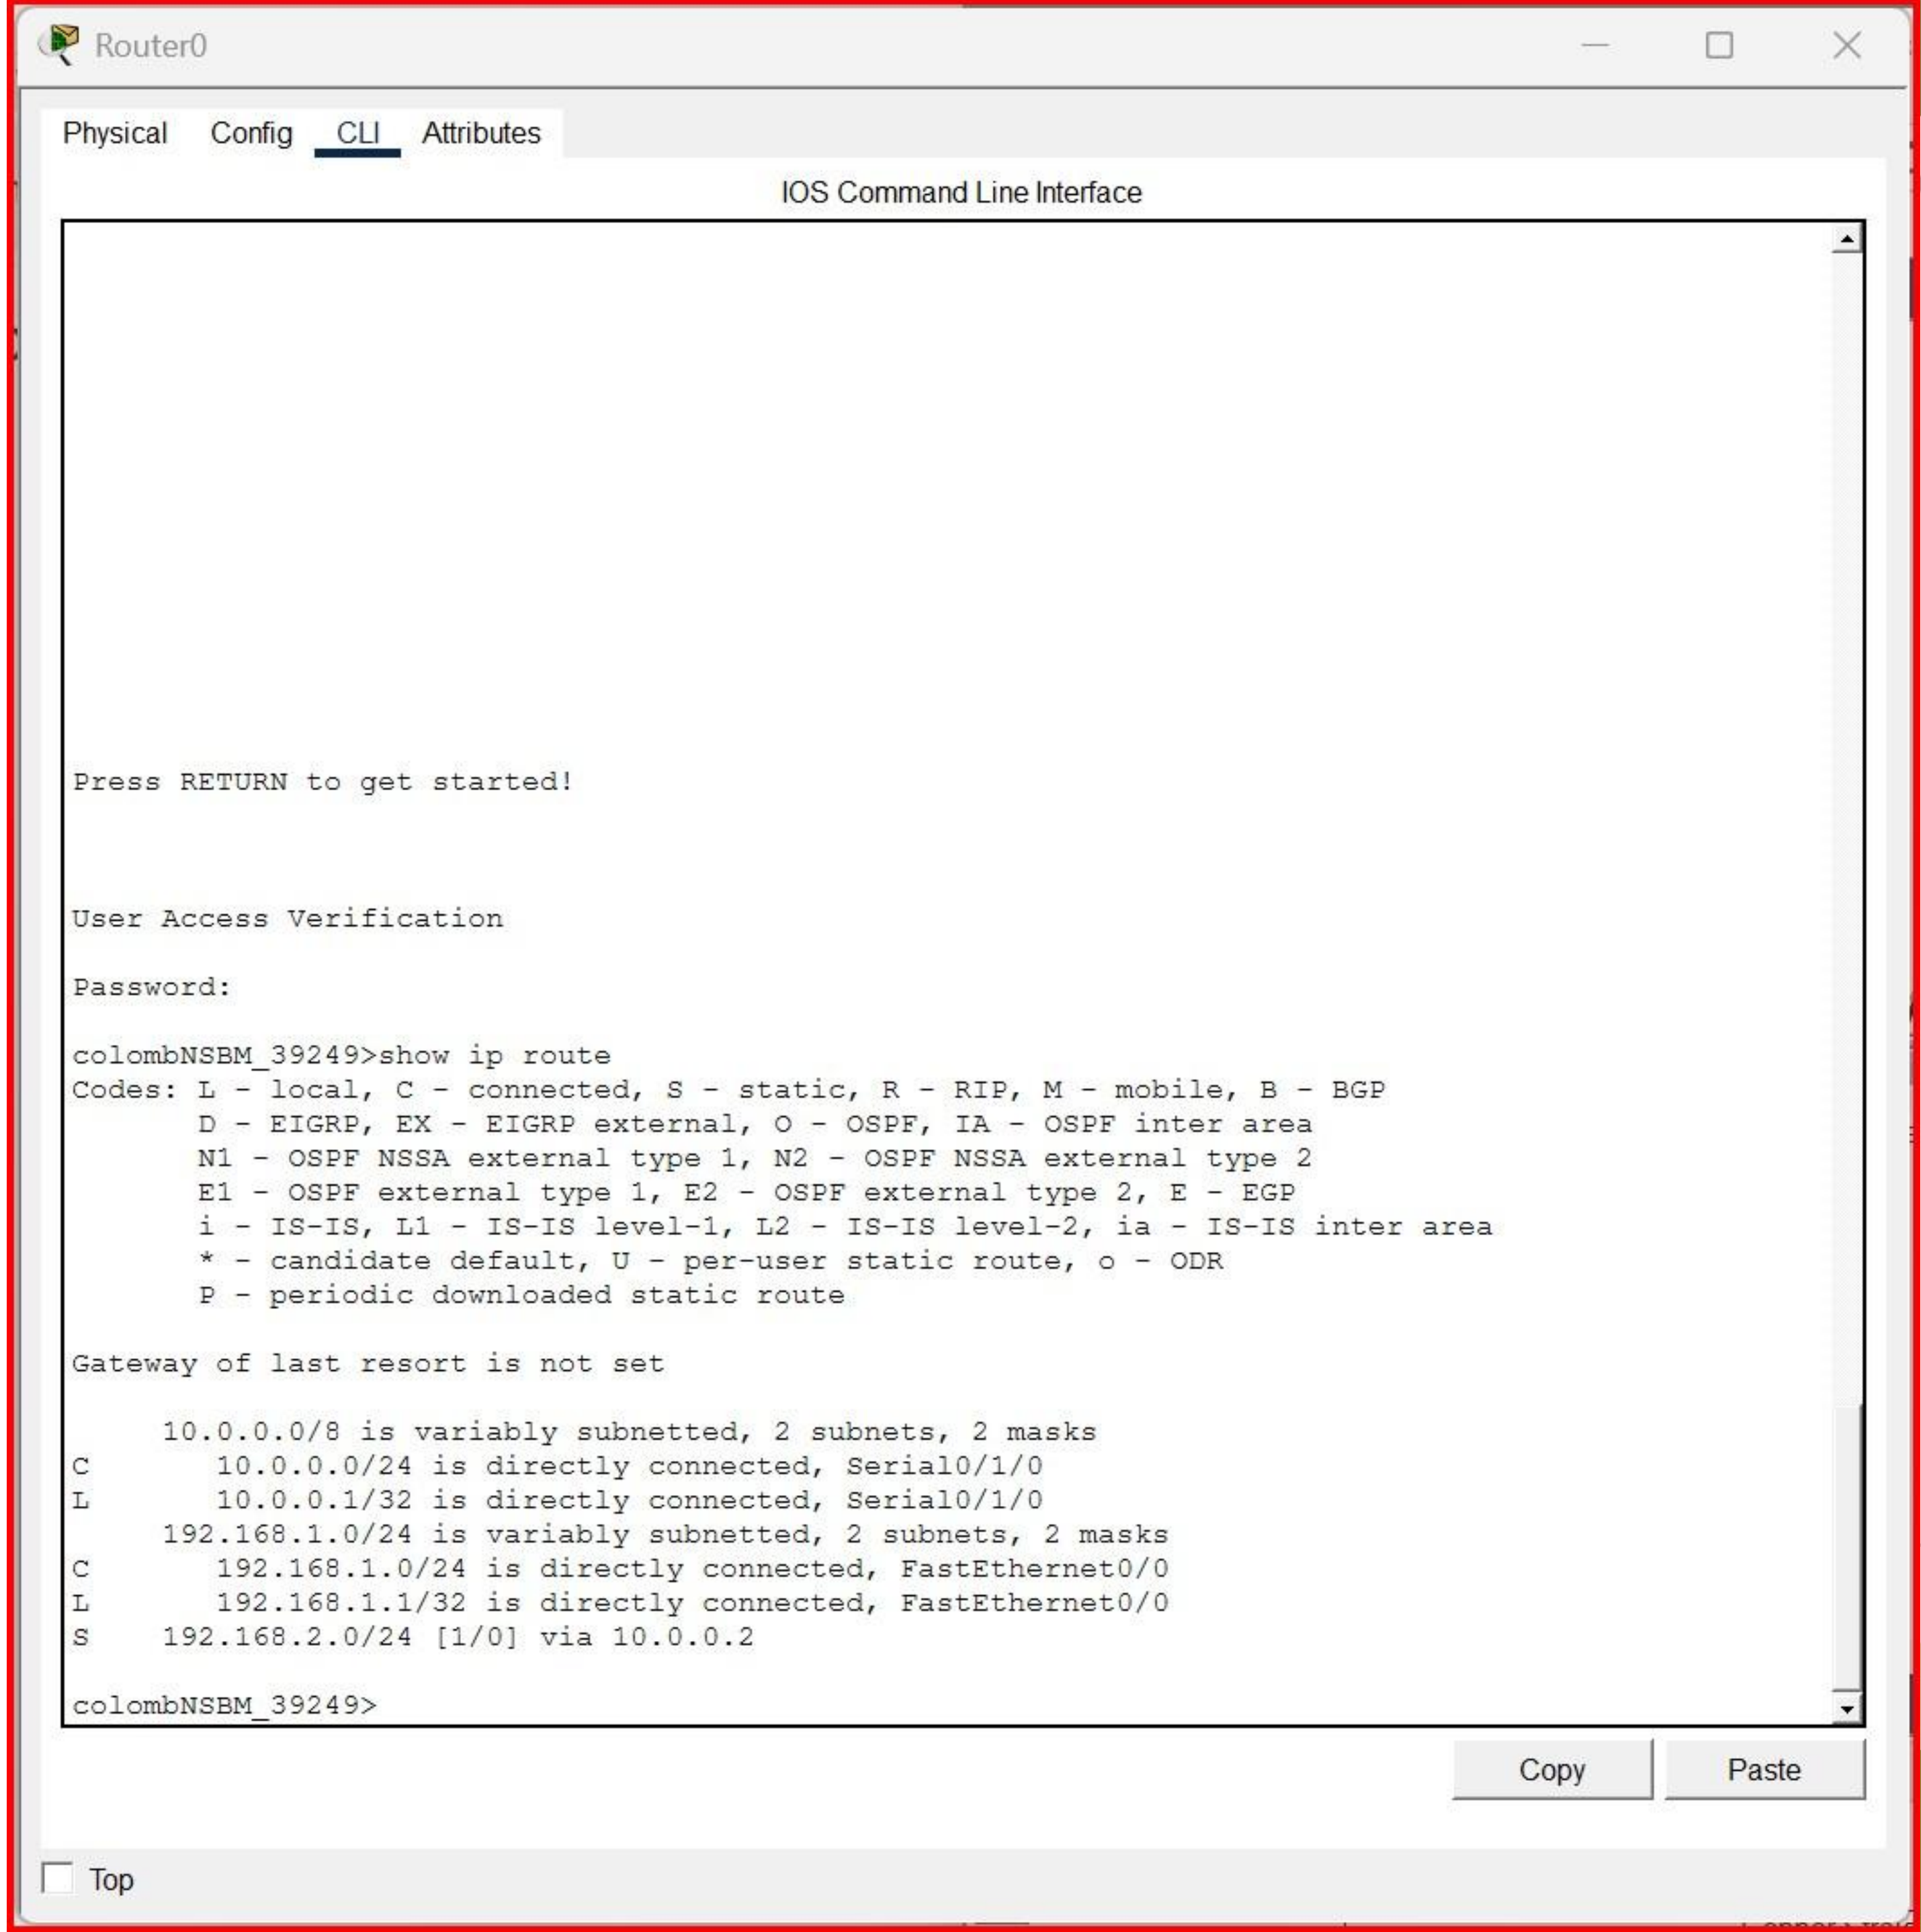
Router0
Physical
Config
CLI
Attributes
IOS Command Line Interface
Press RETURN to get started!
User Access Verification
Password:
colombNSBM_39249>show ip route
Codes: L - local, C - connected, S - static, R - RIP, M - mobile, B - BGP
D - EIGRP, EX - EIGRP external, O - OSPF, IA - OSPF inter area
N1 - OSPF NSSA external type 1, N2 - OSPF NSSA external type 2
E1 - OSPF external type 1, E2 - OSPF external type 2, E - EGP
i - IS-IS, L1 - IS-IS level-1, L2 - IS-IS level-2, ia - IS-IS inter area
* - candidate default, U - per-user static route, o - ODR
P - periodic downloaded static route
Gateway of last resort is not set
10.0.0.0/8 is variably subnetted, 2 subnets, 2 masks
C 10.0.0.0/24 is directly connected, Serial0/1/0
L 10.0.0.1/32 is directly connected, Serial0/1/0
192.168.1.0/24 is variably subnetted, 2 subnets, 2 masks
C 192.168.1.0/24 is directly connected, FastEthernet0/0
L 192.168.1.1/32 is directly connected, FastEthernet0/0
S 192.168.2.0/24 [1/0] via 10.0.0.2
colombNSBM_39249>
Copy
Paste
Top

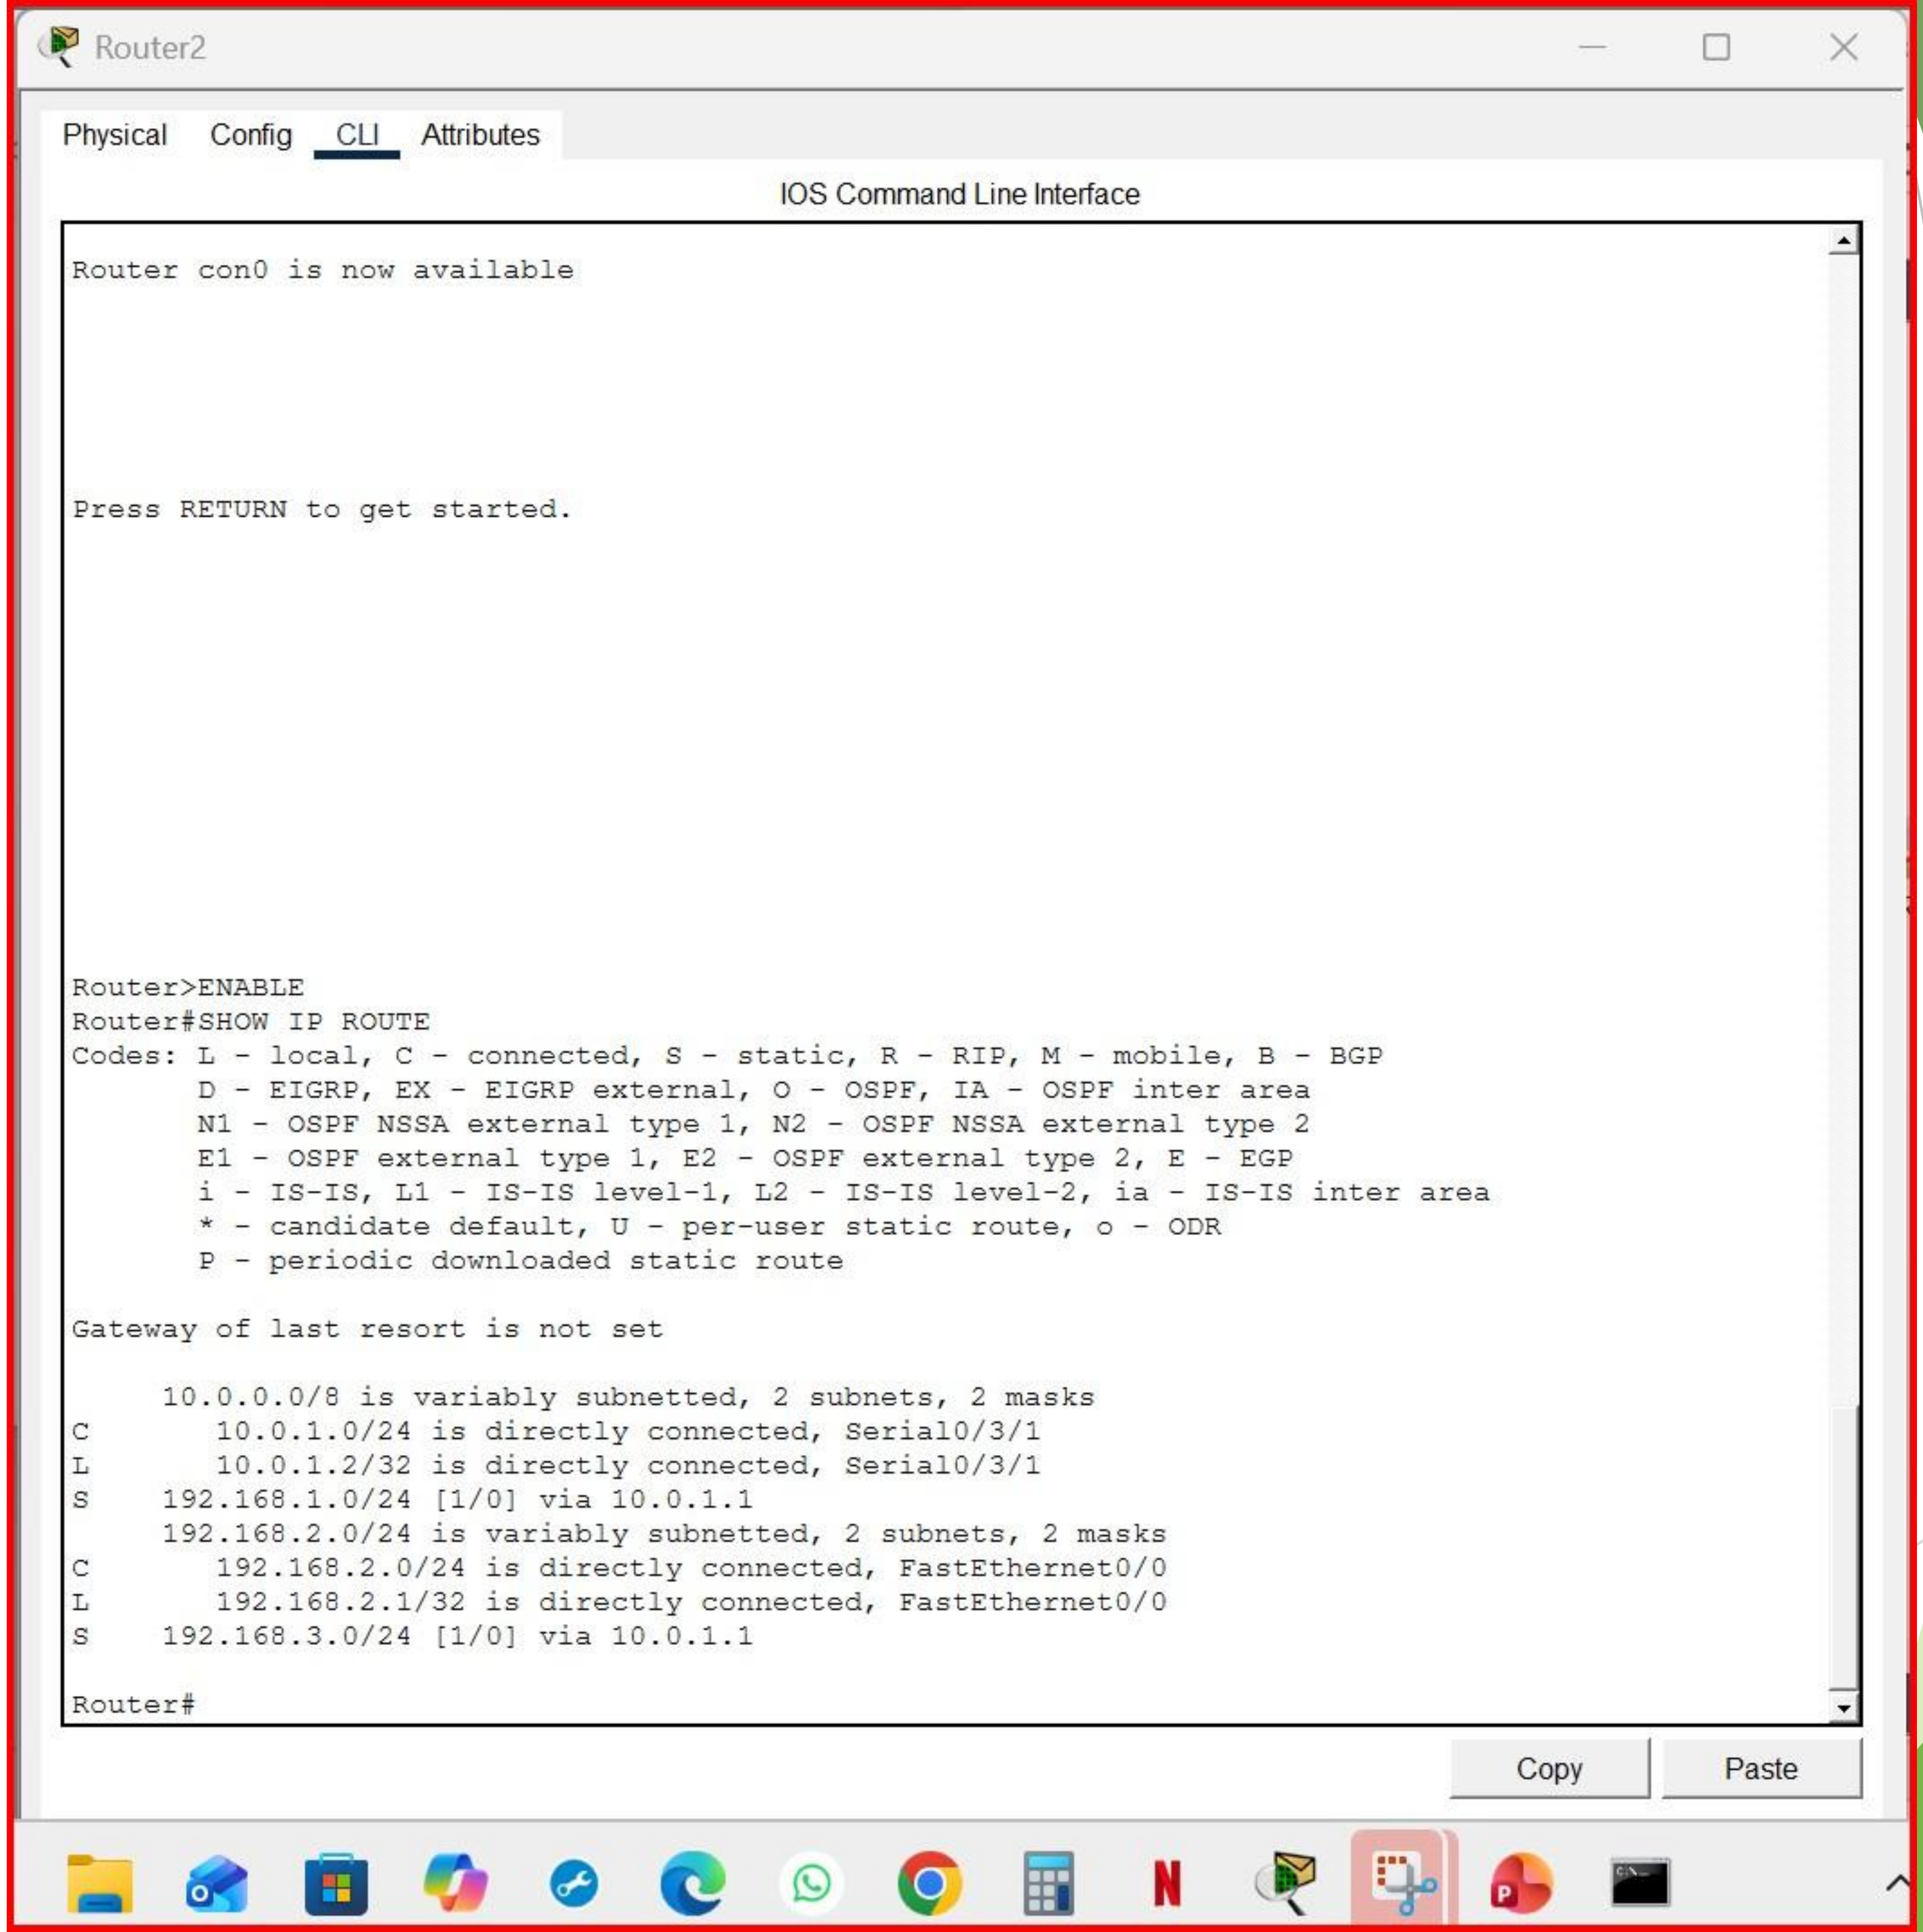
Router2
Physical
Config
CLI
Attributes
IOS Command Line Interface
Router con0 is now available
Press RETURN to get started.
Router>ENABLE
Router#SHOW IP ROUTE
Codes: L - local, C - connected, S - static, R - RIP, M - mobile, B - BGP
D - EIGRP, EX - EIGRP external, O - OSPF, IA - OSPF inter area
N1 - OSPF NSSA external type 1, N2 - OSPF NSSA external type 2
E1 - OSPF external type 1, E2 - OSPF external type 2, E - EGP
i - IS-IS, L1 - IS-IS level-1, L2 - IS-IS level-2, ia - IS-IS inter area
* - candidate default, U - per-user static route, o - ODR
P - periodic downloaded static route
Gateway of last resort is not set
10.0.0.0/8 is variably subnetted, 2 subnets, 2 masks
C 10.0.1.0/24 is directly connected, Serial0/3/1
L 10.0.1.2/32 is directly connected, Serial0/3/1
S 192.168.1.0/24 [1/0] via 10.0.1.1
192.168.2.0/24 is variably subnetted, 2 subnets, 2 masks
C 192.168.2.0/24 is directly connected, FastEthernet0/0
L 192.168.2.1/32 is directly connected, FastEthernet0/0
S 192.168.3.0/24 [1/0] via 10.0.1.1
Router#
Copy
Paste

Router1

Physical | Config | CLI | Attributes

IOS Command Line Interface

```
Codes: L - local, C - connected, S - static, R - RIP, M - mobile, B - BGP
       D - EIGRP, EX - EIGRP external, O - OSPF, IA - OSPF inter area
       N1 - OSPF NSSA external type 1, N2 - OSPF NSSA external type 2
       E1 - OSPF external type 1, E2 - OSPF external type 2, E - EGP
       i - IS-IS, L1 - IS-IS level-1, L2 - IS-IS level-2, ia - IS-IS inter area
       * - candidate default, U - per-user static route, o - ODR
       P - periodic downloaded static route

Gateway of last resort is not set

     10.0.0.0/8 is variably subnetted, 4 subnets, 2 masks
C       10.0.0.0/24 is directly connected, Serial0/1/0
L       10.0.0.2/32 is directly connected, Serial0/1/0
C       10.0.1.0/24 is directly connected, Serial0/1/1
L       10.0.1.1/32 is directly connected, Serial0/1/1
S    192.168.1.0/24 [1/0] via 10.0.0.1
S    192.168.2.0/24 [1/0] via 10.0.1.2
     192.168.3.0/24 is variably subnetted, 2 subnets, 2 masks
C       192.168.3.0/24 is directly connected, FastEthernet0/0
L       192.168.3.1/32 is directly connected, FastEthernet0/0

Router>show ip route
Codes: L - local, C - connected, S - static, R - RIP, M - mobile, B - BGP
       D - EIGRP, EX - EIGRP external, O - OSPF, IA - OSPF inter area
       N1 - OSPF NSSA external type 1, N2 - OSPF NSSA external type 2
       E1 - OSPF external type 1, E2 - OSPF external type 2, E - EGP
       i - IS-IS, L1 - IS-IS level-1, L2 - IS-IS level-2, ia - IS-IS inter area
       * - candidate default, U - per-user static route, o - ODR
       P - periodic downloaded static route

Gateway of last resort is not set

     10.0.0.0/8 is variably subnetted, 4 subnets, 2 masks
C       10.0.0.0/24 is directly connected, Serial0/1/0
L       10.0.0.2/32 is directly connected, Serial0/1/0
C       10.0.1.0/24 is directly connected, Serial0/1/1
L       10.0.1.1/32 is directly connected, Serial0/1/1
S    192.168.1.0/24 [1/0] via 10.0.0.1
S    192.168.2.0/24 [1/0] via 10.0.1.2
     192.168.3.0/24 is variably subnetted, 2 subnets, 2 masks
C       192.168.3.0/24 is directly connected, FastEthernet0/0
L       192.168.3.1/32 is directly connected, FastEthernet0/0

Router>
```

Copy | Paste

Router1

Physical Config CLI Attributes

IOS Command Line Interface

```
Codes: L - local, C - connected, S - static, R - RIP, M - mobile, B - BGP
       D - EIGRP, EX - EIGRP external, O - OSPF, IA - OSPF inter area
       N1 - OSPF NSSA external type 1, N2 - OSPF NSSA external type 2
       E1 - OSPF external type 1, E2 - OSPF external type 2, E - EGP
       i - IS-IS, L1 - IS-IS level-1, L2 - IS-IS level-2, ia - IS-IS inter area
       * - candidate default, U - per-user static route, o - ODR
       P - periodic downloaded static route

Gateway of last resort is not set

     10.0.0.0/8 is variably subnetted, 4 subnets, 2 masks
C       10.0.0.0/24 is directly connected, Serial0/1/0
L       10.0.0.2/32 is directly connected, Serial0/1/0
C       10.0.1.0/24 is directly connected, Serial0/1/1
L       10.0.1.1/32 is directly connected, Serial0/1/1
S    192.168.1.0/24 [1/0] via 10.0.0.1
S    192.168.2.0/24 [1/0] via 10.0.1.2
     192.168.3.0/24 is variably subnetted, 2 subnets, 2 masks
C       192.168.3.0/24 is directly connected, FastEthernet0/0
L       192.168.3.1/32 is directly connected, FastEthernet0/0

Router>show ip route
Codes: L - local, C - connected, S - static, R - RIP, M - mobile, B - BGP
       D - EIGRP, EX - EIGRP external, O - OSPF, IA - OSPF inter area
       N1 - OSPF NSSA external type 1, N2 - OSPF NSSA external type 2
       E1 - OSPF external type 1, E2 - OSPF external type 2, E - EGP
       i - IS-IS, L1 - IS-IS level-1, L2 - IS-IS level-2, ia - IS-IS inter area
       * - candidate default, U - per-user static route, o - ODR
       P - periodic downloaded static route

Gateway of last resort is not set

     10.0.0.0/8 is variably subnetted, 4 subnets, 2 masks
C       10.0.0.0/24 is directly connected, Serial0/1/0
L       10.0.0.2/32 is directly connected, Serial0/1/0
C       10.0.1.0/24 is directly connected, Serial0/1/1
L       10.0.1.1/32 is directly connected, Serial0/1/1
S    192.168.1.0/24 [1/0] via 10.0.0.1
S    192.168.2.0/24 [1/0] via 10.0.1.2
     192.168.3.0/24 is variably subnetted, 2 subnets, 2 masks
C       192.168.3.0/24 is directly connected, FastEthernet0/0
L       192.168.3.1/32 is directly connected, FastEthernet0/0

Router>
```

Copy Paste

PC0

Physical Config Desktop Programming Attributes

Command Prompt

```
Invalid Command.

C:\>ping 192.168.2.2

Pinging 192.168.2.2 with 32 bytes of data:

Request timed out.
Request timed out.
Request timed out.
Request timed out.

Ping statistics for 192.168.2.2:
    Packets: Sent = 4, Received = 0, Lost = 4 (100% loss),

C:\>ping ping 192.168.3.2
Invalid Command.

C:\>ping 192.168.3.2

Pinging 192.168.3.2 with 32 bytes of data:

Request timed out.
Reply from 192.168.3.2: bytes=32 time=11ms TTL=126
Reply from 192.168.3.2: bytes=32 time=17ms TTL=126
Reply from 192.168.3.2: bytes=32 time=11ms TTL=126

Ping statistics for 192.168.3.2:
    Packets: Sent = 4, Received = 3, Lost = 1 (25% loss),
Approximate round trip times in milli-seconds:
    Minimum = 11ms, Maximum = 17ms, Average = 13ms

C:\>ping 192.168.2.2

Pinging 192.168.2.2 with 32 bytes of data:

Request timed out.
Reply from 192.168.2.2: bytes=32 time=11ms TTL=125
Reply from 192.168.2.2: bytes=32 time=2ms TTL=125
Reply from 192.168.2.2: bytes=32 time=25ms TTL=125

Ping statistics for 192.168.2.2:
    Packets: Sent = 4, Received = 3, Lost = 1 (25% loss),
Approximate round trip times in milli-seconds:
    Minimum = 2ms, Maximum = 25ms, Average = 12ms

C:\>
```

Top

Router0

Physical Config CLI Attributes

IOS Command Line Interface

```
!
!
!
interface FastEthernet0/0
 no ip address
 duplex auto
 speed auto
 shutdown
!
interface FastEthernet0/1
 no ip address
 duplex auto
 speed auto
 shutdown
!
interface Vlan1
 no ip address
 shutdown
!
ip classless
!
ip flow-export version 9
!
!
!
!
!
!
!
line con 0
 password NSBM
 login
!
line aux 0
!
line vty 0 4
 login
!
!
!
end


colombNSBM_39249#
```

Copy Paste

Top

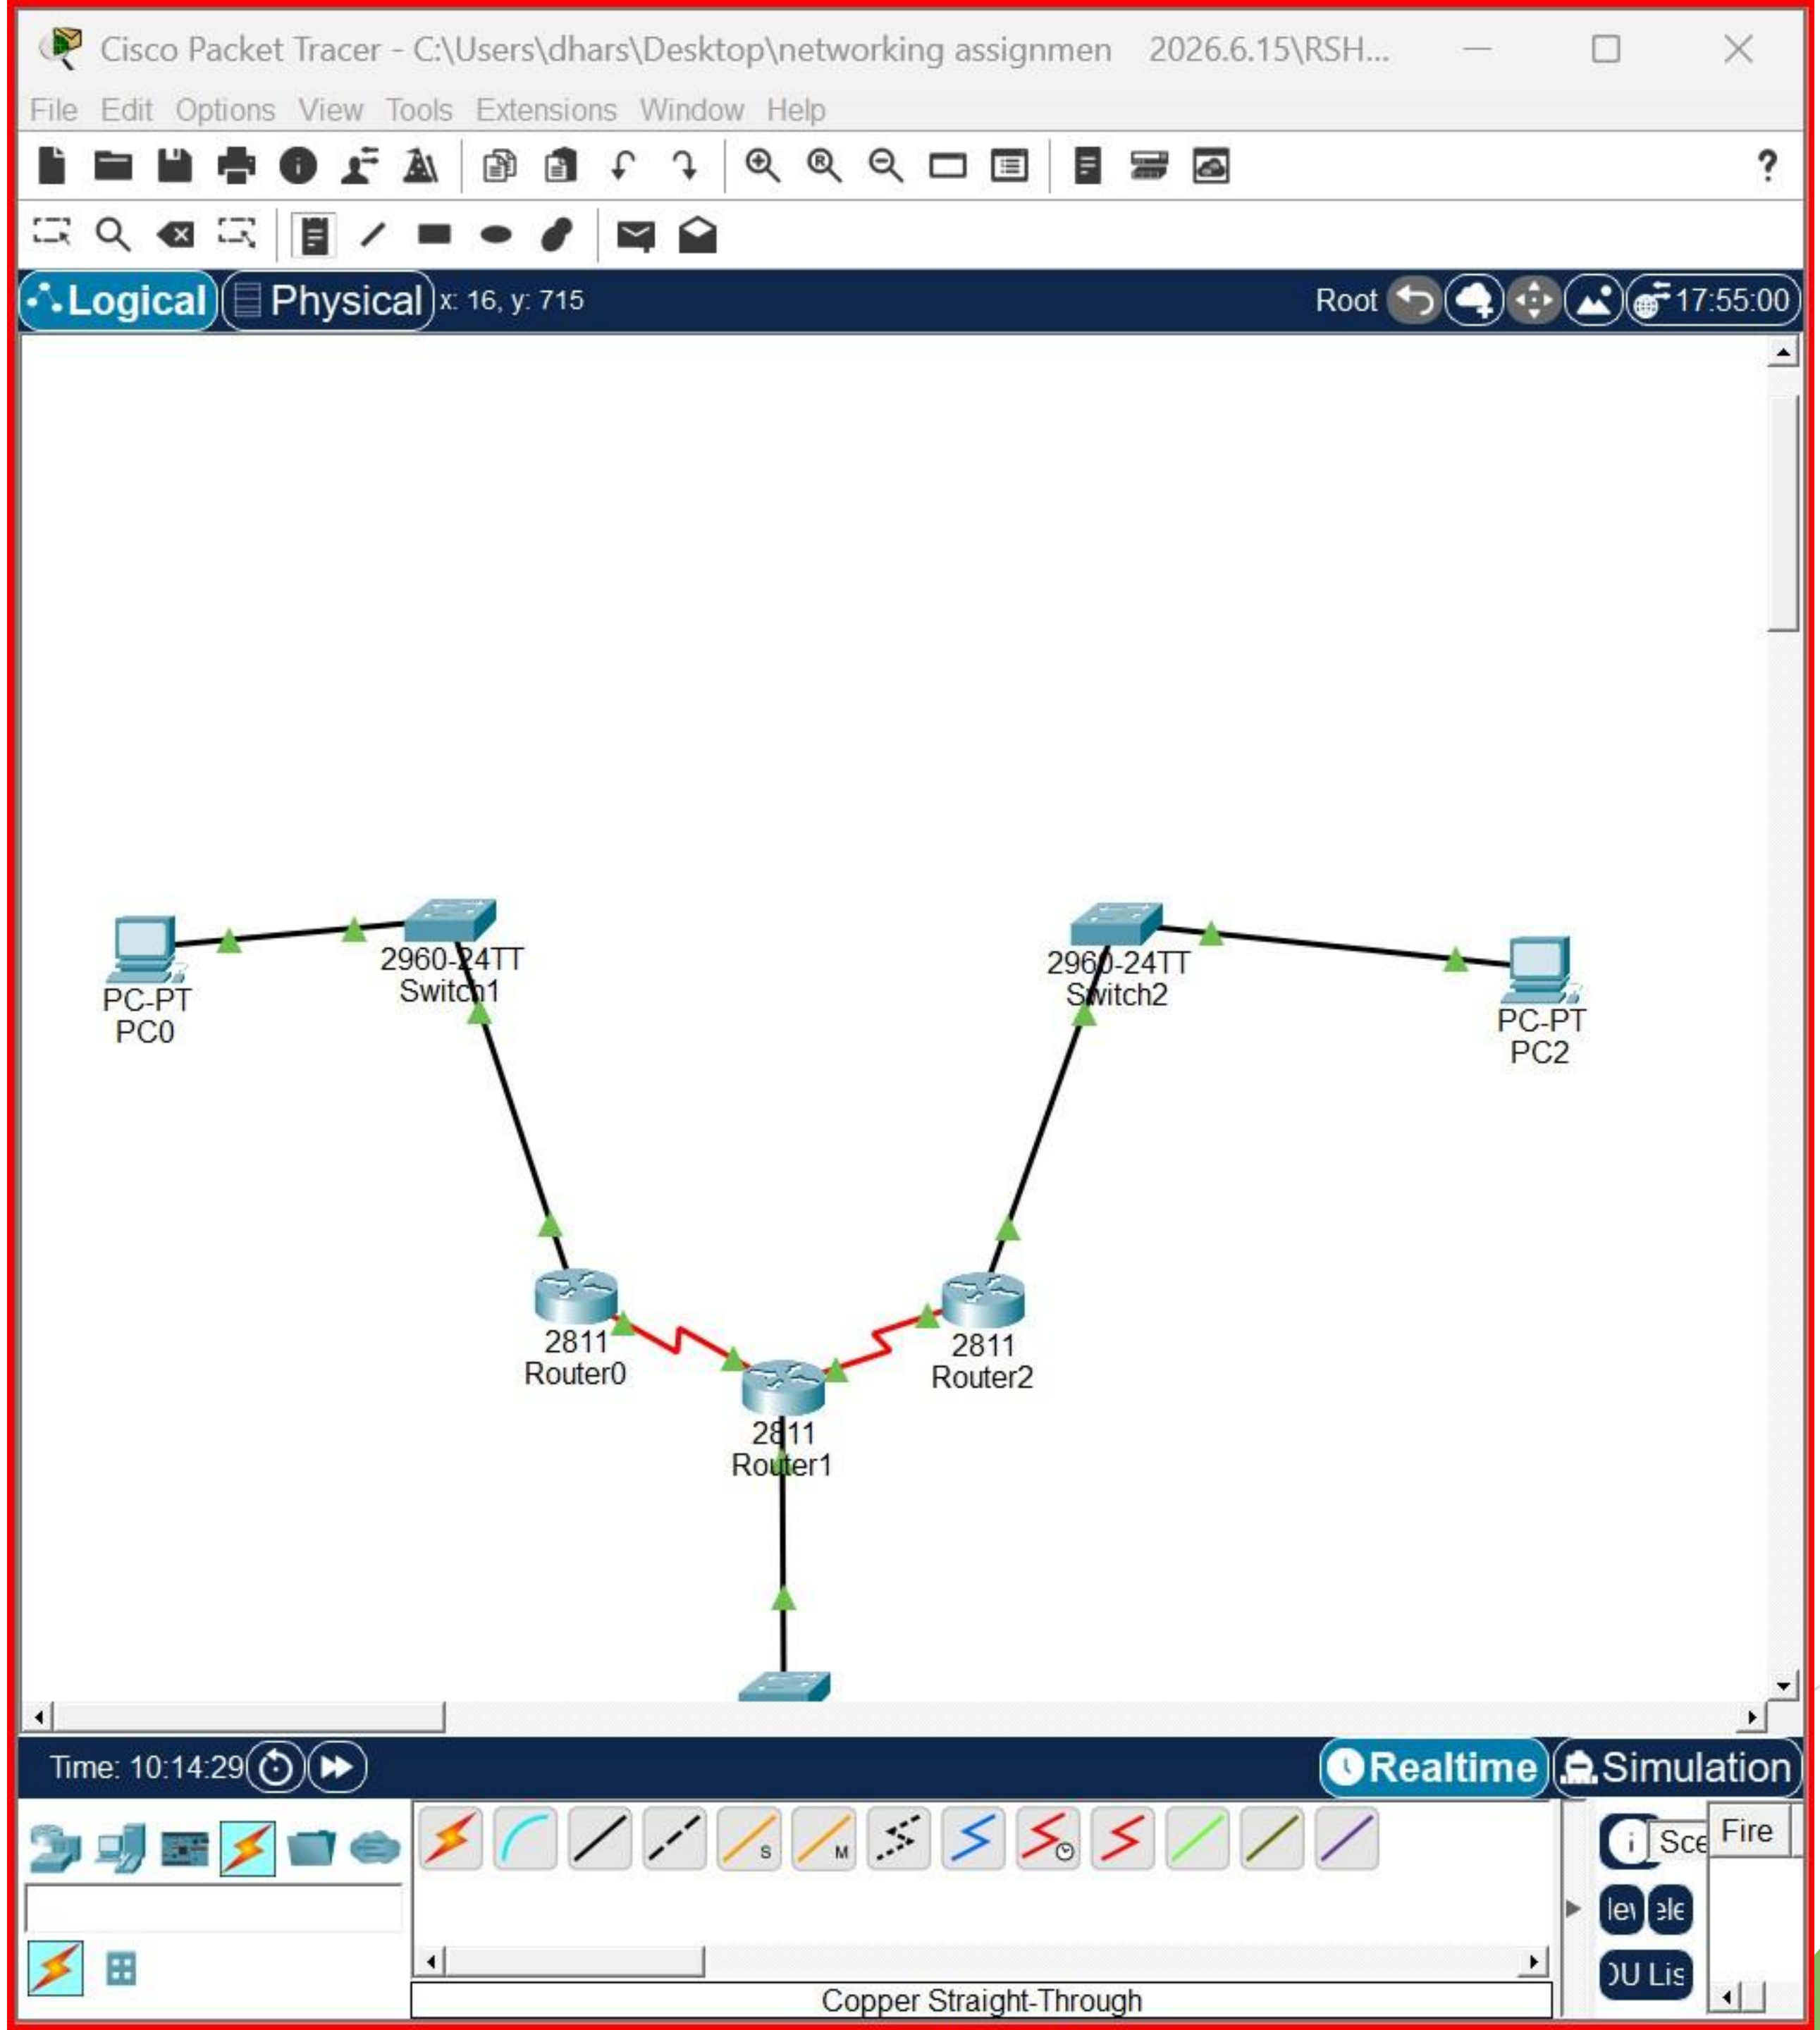

Cisco Packet Tracer - C:\Users\dhars\Desktop\networking assignmen 2026.6.15\RSH...
File Edit Options View Tools Extensions Window Help
Logical
Physical
x: 16, y: 715
Root
17:55:00
PC-PT
PC0
2960-24TT
Switch1
2960-24TT
Switch2
PC-PT
PC2
2811
Router0
2811
Router1
2811
Router2
Time: 10:14:29
Realtime
Simulation
Copper Straight-Through

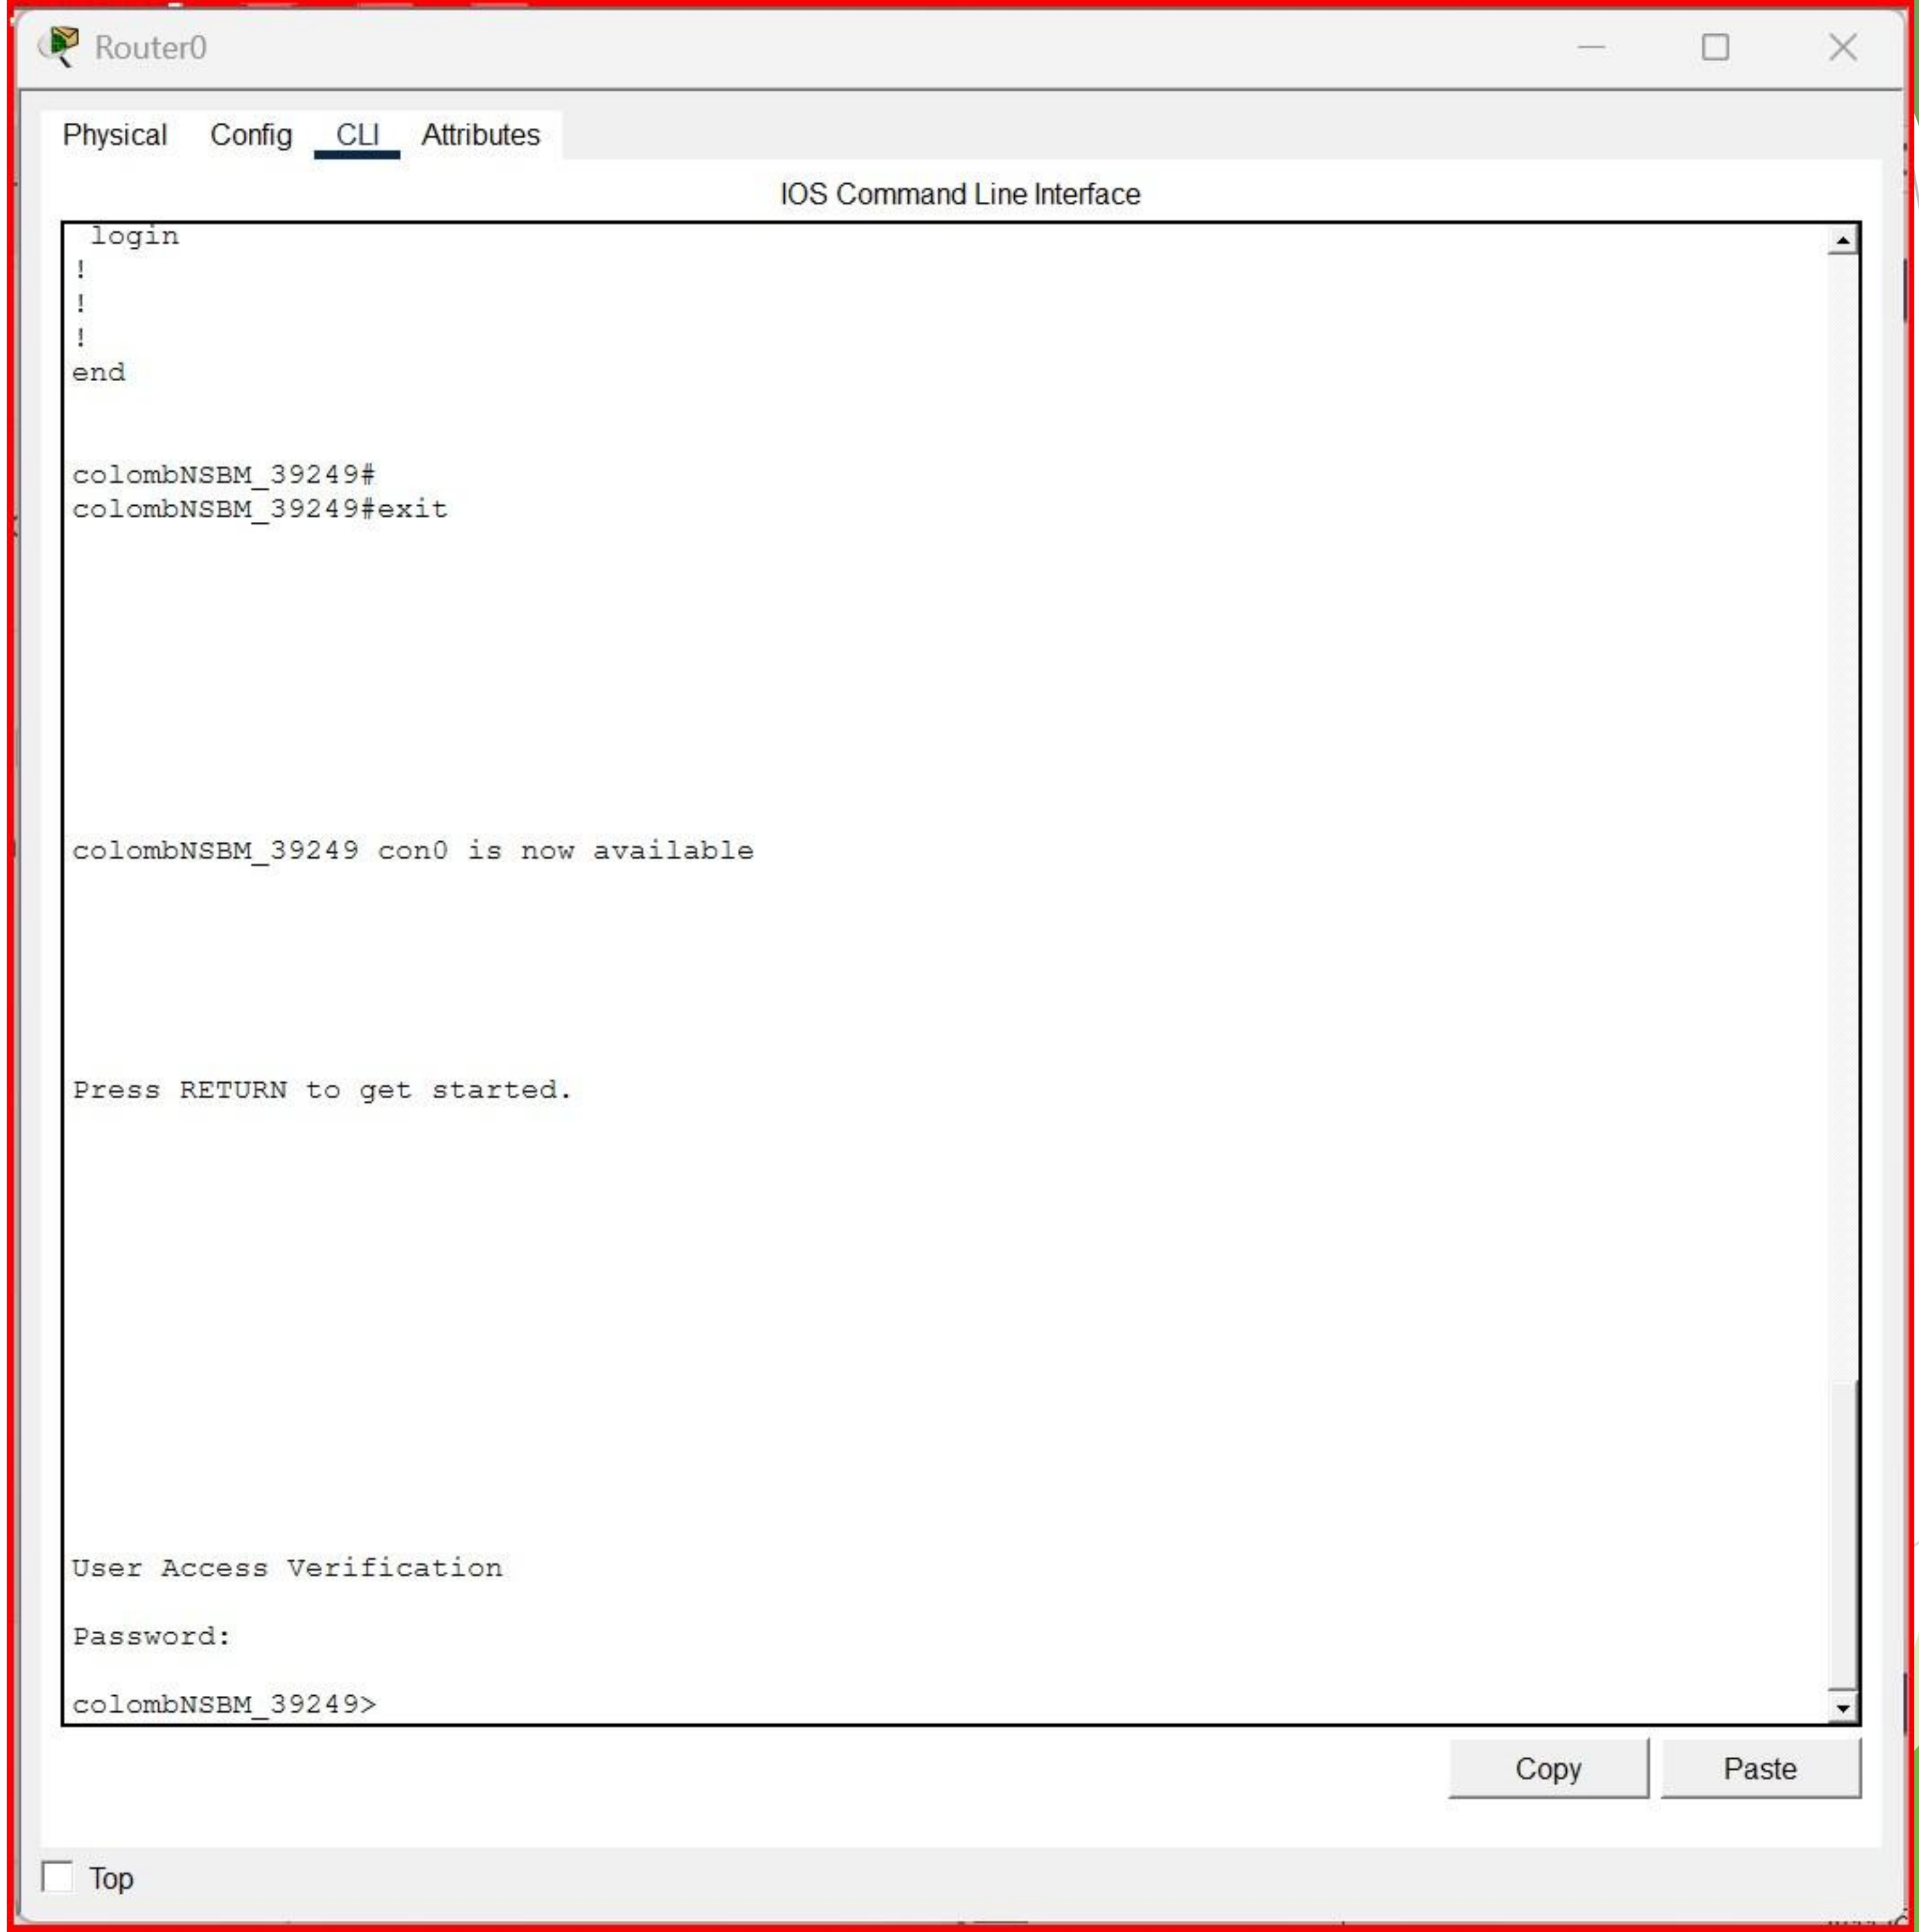
Router0
Physical
Config
CLI
Attributes
IOS Command Line Interface
login
!
!
!
end
colombNSBM_39249#
colombNSBM_39249#exit
colombNSBM_39249 con0 is now available
Press RETURN to get started.
User Access Verification
Password:
colombNSBM_39249>
Copy
Paste
Top

Router2

Physical Config CLI Attributes

IOS Command Line Interface

```
Press RETURN to get started.




Router>show ip protocols

Routing Protocol is "eigrp  100 "
  Outgoing update filter list for all interfaces is not set
  Incoming update filter list for all interfaces is not set
  Default networks flagged in outgoing updates
  Default networks accepted from incoming updates
  Redistributing: eigrp 100
  EIGRP-IPv4 Protocol for AS(100)
    Metric weight K1=1, K2=0, K3=1, K4=0, K5=0
    NSF-aware route hold timer is 240
    Router-ID: 10.0.1.2
    Topology : 0 (base)
      Active Timer: 3 min
      Distance: internal 90 external 170
      Maximum path: 4
      Maximum hopcount 100
      Maximum metric variance 1

  Automatic Summarization: disabled
  Automatic address summarization:
  Maximum path: 4
  Routing for Networks:
 --More--
```

Copy Paste

Top

Router0

Physical Config CLI Attributes

IOS Command Line Interface

```
colombNSBM_39249#
colombNSBM_39249#show ip protocols

Routing Protocol is "eigrp  100 "
  Outgoing update filter list for all interfaces is not set
  Incoming update filter list for all interfaces is not set
  Default networks flagged in outgoing updates
  Default networks accepted from incoming updates
  Redistributing: eigrp 100
  EIGRP-IPv4 Protocol for AS(100)
    Metric weight K1=1, K2=0, K3=1, K4=0, K5=0
    NSF-aware route hold timer is 240
    Router-ID: 10.0.0.1
    Topology : 0 (base)
      Active Timer: 3 min
      Distance: internal 90 external 170
      Maximum path: 4
      Maximum hopcount 100
      Maximum metric variance 1

  Automatic Summarization: disabled
  Automatic address summarization:
  Maximum path: 4
  Routing for Networks:
 --More--



colombNSBM_39249 con0 is now available



Press RETURN to get started.
```

Copy Paste

Top

Router1

Physical Config CLI Attributes

IOS Command Line Interface

```
Press RETURN to get started.


Router>SHOW IP ROUTER
                    ^
% Invalid input detected at '^' marker.

Router>show ip protocols

Routing Protocol is "eigrp  100 "
  Outgoing update filter list for all interfaces is not set
  Incoming update filter list for all interfaces is not set
  Default networks flagged in outgoing updates
  Default networks accepted from incoming updates
  Redistributing: eigrp 100
  EIGRP-IPv4 Protocol for AS(100)
    Metric weight K1=1, K2=0, K3=1, K4=0, K5=0
    NSF-aware route hold timer is 240
    Router-ID: 10.0.0.2
    Topology : 0 (base)
      Active Timer: 3 min
      Distance: internal 90 external 170
      Maximum path: 4
      Maximum hopcount 100
      Maximum metric variance 1

  Automatic Summarization: disabled
  Automatic address summarization:
  Maximum path: 4
  Routing for Networks:
 --More--
```

Copy Paste

Top