
OU5070

Retro-reflective sensor

OUR-HPKG/US-100-DPO

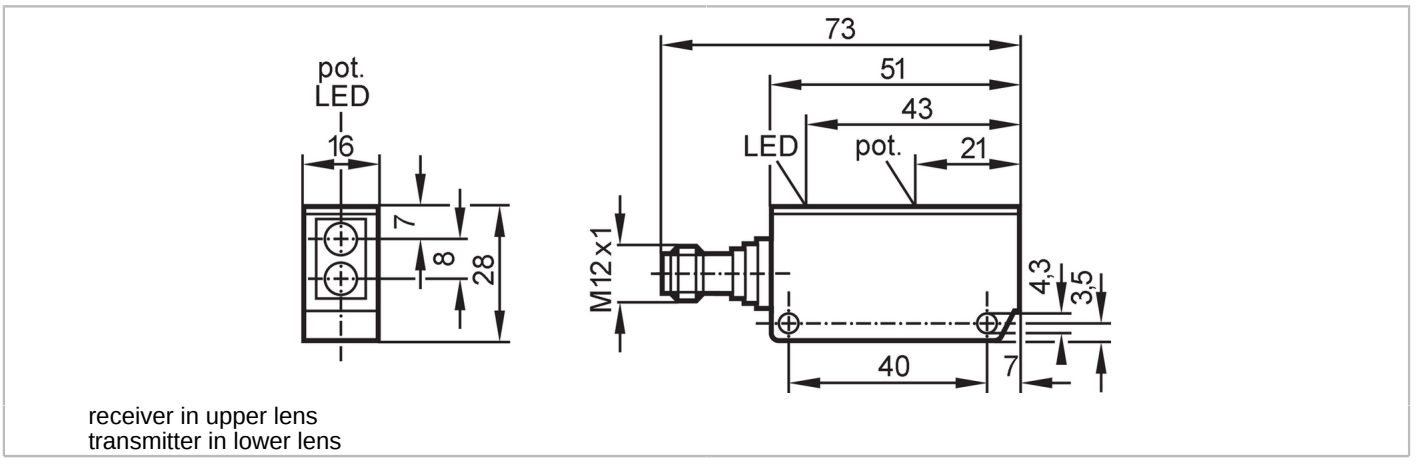

receiver in upper lens
transmitter in lower lens

Product characteristics		
Type of light		infrared light
Housing		rectangular
Application		
Function principle		Retro-reflective sensor
Application		Industrial applications / factory automation
Electrical data		
Operating voltage	[V]	10...55 DC; ("supply class 2" to cULus)
Current consumption	[mA]	< 35
Protection class		III
Reverse polarity protection		yes
Type of light		infrared light
Wave length	[nm]	880
Outputs		
Electrical design		PNP
Output function		light-on mode
Max. voltage drop switching output DC	[V]	2.5
Permanent current rating of switching output DC	[mA]	250
Switching frequency DC	[Hz]	160
Short-circuit protection		yes
Type of short-circuit protection		pulsed
Overload protection		yes
Detection zone		
Range referred to prismatic reflector	[m]	0.15...3; (Prismatic reflector Ø 80 E20005)
Range adjustable		yes
Max. light spot diameter	[mm]	262
Light spot dimensions refer to		at maximum range

OU5070


Retro-reflective sensor

OUR-HPKG/US-100-DPO


Operating conditions			
Ambient temperature	[°C]	-25...80	
Protection		IP 67	
Tests / approvals			
EMC		EN 60947-5-2	
		EN 55011	class B
MTTF	[years]	685	
UL approval		Ta	< 40 °C
		Enclosure type	Type 1
		voltage supply	Class 2
		UL approval no.	E032
		File number UL	E174191
Mechanical data			
Weight	[g]	74.5	
Housing		rectangular	
Dimensions	[mm]	28 x 16 x 51	
Number of channels		1	
Materials		housing: PPO modified	
Lens material		front pane:glass	
Displays / operating elements			
Display		switching status	1 x LED, yellow
Accessories			
Items supplied		Angle bracket: 1, E20211	
Remarks			
Pack quantity		1 pcs.	

Electrical connection

Connector: 1 x M12; coding: A; Contacts: 4



Connection

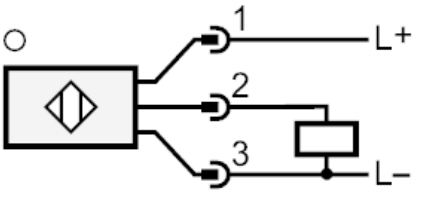

OU5070

Retro-reflective sensor

OUR-HPKG/US-100-DPO

Diagrams and graphs

excess gain graph

