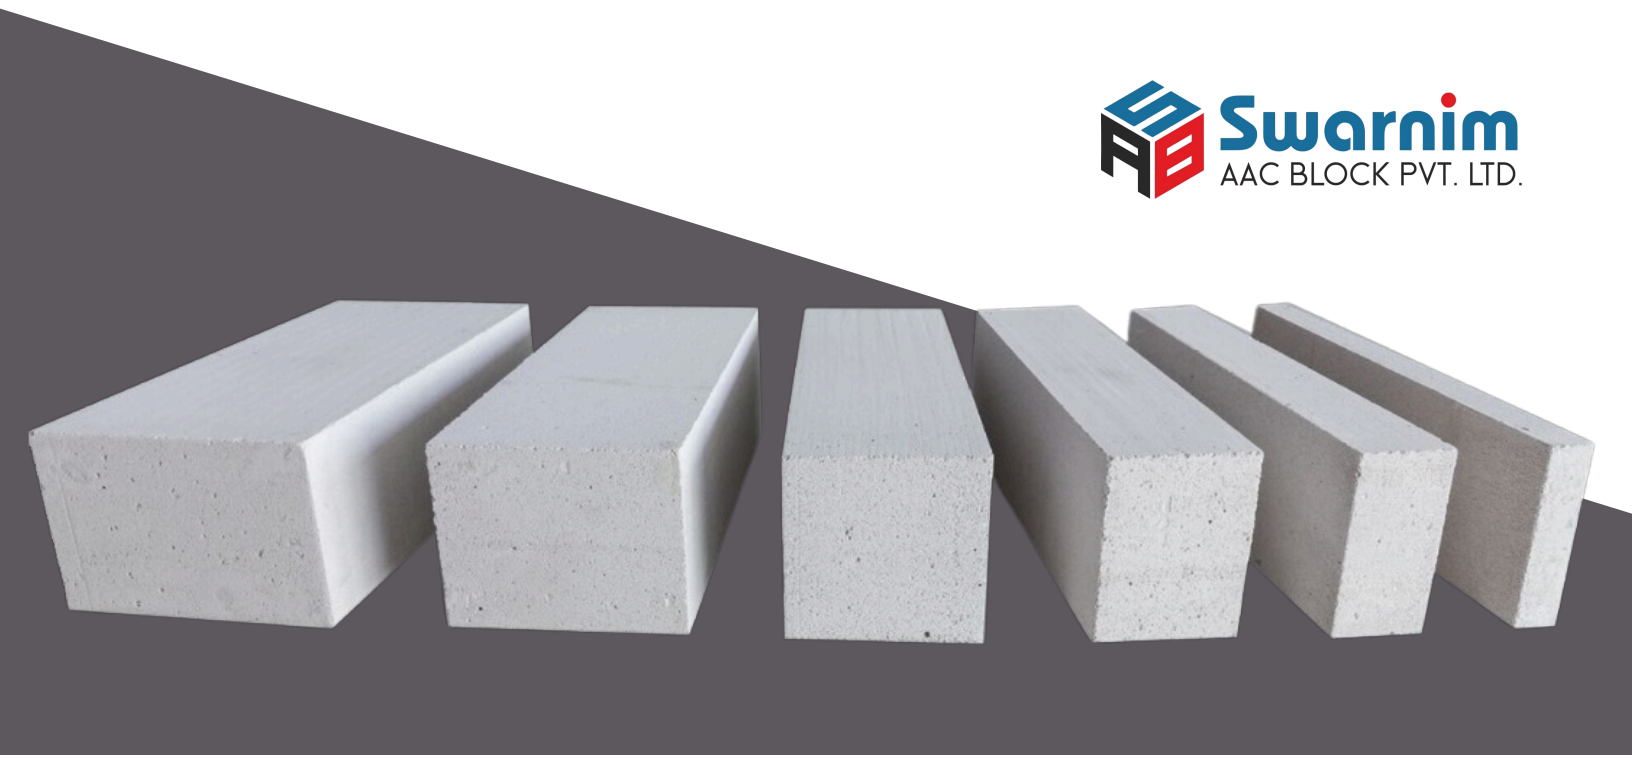
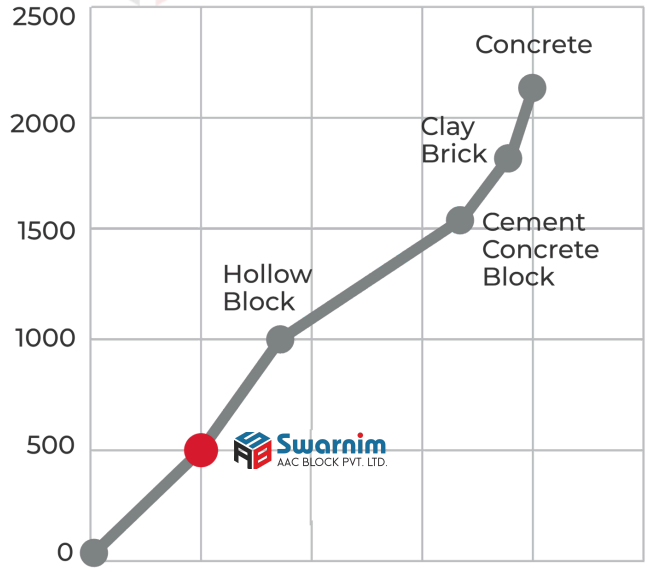

Swarnim
AAC BLOCK PVT. LTD.
Swarnim
Swarnim
Swarnim
Lightweight, High-Strength AAC BLOCK

Swarnim
AAC BLOCK PVT. LTD.



230*200*600(in MM)	200*200*600(In MM)	150*200*600(In MM)
125*200*600(In MM)	100*200*600 (in MM)	75*200*600(In MM)

M³ CALCULATIONS



24 Inch (600mm) AAC Block

Size	Length	Height	Width	No.of Block/M ³
4 Inch (4")	600mm	200mm	100mm	83
6 Inch (6")	600mm	200mm	150mm	55
8 Inch (8")	600mm	200mm	200mm	42
9 Inch (9")	600mm	200mm	225mm	37

20 Inch (500mm) AAC Block

Size	Length	Height	Width	No.of Block/M ³
4 Inch (4")	500mm	200mm	100mm	100
6 Inch (6")	500mm	200mm	150mm	67
8 Inch (8")	500mm	200mm	200mm	50
9 Inch (9")	500mm	200mm	225mm	44

18 Inch (450mm) AAC Block

Size	Length	Height	Width	No.of Block/M ³
4 Inch (4")	450mm	200mm	100mm	111
6 Inch (6")	450mm	200mm	150mm	74
8 Inch (8")	450mm	200mm	200mm	56
9 Inch (9")	450mm	200mm	225mm	49



Moisture Proof

Sound Proof

Structural Saving

Disaster Resistant

AAC BLOCKS ADVANTAGES

- **Autoclaved Aerated Concrete (AAC)** blocks are modern, low-maintenance building materials known for their durability and excellent heat insulation. These smart blocks help maintain a comfortable indoor temperature by keeping heat out in summer and retaining warmth in winter — resulting in lower energy and air-conditioning costs.
- **AAC blocks** are not just affordable but also environmentally friendly, making them a sustainable choice for today's builders.
- Millions of tiny air bubbles inside each block make them lightweight, easy to handle, and simple to install. With advanced production technology, they also offer higher strength than traditional clay bricks.
- These blocks help reduce external noise and heat, creating a peaceful and comfortable living environment.
  Swarnim AAC Blocks are also earthquake and fire resistant, ensuring greater safety and stability for your building structure.

Swarnim AAC BLOCK PVT. LTD.

TECHNICAL SPECIFICATION

PARAMETER	VALUE
Compressive Strength	4N/MM2 (MPA)
Dry Dentist	550-650 KG/M3
Water Absorption (at Equilibrium)	8%
Fire Resistance	4 HRS. (FOR 150 MM WALL)
Thermal Conductivity	0.16 W/MOK
Coefficient Of Thermal Expansion	8.1 X 10-6 K-1
Drying Shrinkage	0.04%
Sound Transmission Class Rating	43DB FOR 100MM WALL
Modulus Of Elasticity	2040 MPA



BLOCK JOINTING MORTOR



KEY ADVANTAGES

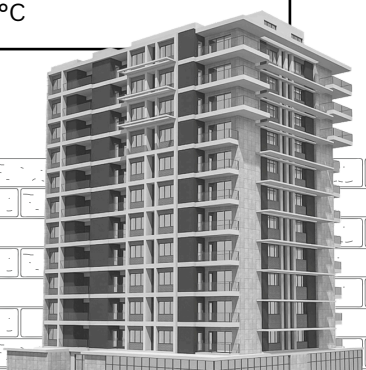
- Ready-to-use; just add water
- Stronger bond than conventional cement mortar
- Uniform quality with no shrinkage cracks
- Shock & impact resistant
- Thin jointing, high adhesion → supports masonry load bearing
- Allows subsequent work within 24 hours
- Faster installation → cost savings
- Self-curing, no extra curing needed

LIMITATIONS

- Do not add excess water
- Apply only on properly prepared, sound surfaces



Property	Value/Range
Bulk Density	1200 – 1300 kg/cum
Water to Powder Ratio	25 – 35% by weight
Pot Life (@ 27°C)	1 hour
Workable Time After Application	~1 hour
Tensile Adhesion Strength (28d)	0.8 N/sq.mm
Splitting Tensile Strength (28d)	0.50 – 0.60 N/sq.mm
Compressive Strength (28d)	7 – 8 N/sq.mm
Application Temperature	5°C – 35°C



ABOUT US

- Welcome to Swarnim AAC Block, your trusted partner in eco-friendly and durable building solutions.
- We manufacture lightweight, high-strength AAC blocks that make construction faster, safer, and more sustainable. Our products are designed to reduce building time by up to 40%, offering excellent thermal insulation and soundproofing for homes, offices, and industrial projects.
- At Swarnim AAC Block, we use fly ash and advanced technology to create environmentally friendly AAC blocks with minimal waste and emissions. Each block is crafted for quality, strength, and precision — ensuring long-lasting performance at an affordable price.

ADVANTAGES

Ready Mix Plaster is designed with polymers and controlled silt content to achieve excellent strength and crack-free surfaces. It sets quicker than traditional plaster, ensuring better durability and reduced shrinkage.

DIRECTIONS TO USE :

- Clean the plastering surface by removing dust, grease, or loose particles to ensure good adhesion.
- Pre-wet the surface lightly with clean water.
- Mix 40 kg of product with 6.5–7 litres of clean water.
- Stir continuously for 5–10 minutes using a mechanical mixer or by hand until uniform.
- Allow the mix to rest for 10 minutes for proper additive activation.
- Remix for about 5 minutes before application.
- For concrete surfaces, apply a spatter coat or chemical primer for improved bonding.
- Use the prepared mix within 90 minutes of mixing.
- After plastering, cure the surface 2–3 times daily for 7 days to achieve optimum strength.

SWARNIM AAC BLOCK PRIVATE LIMITED

OFFICE

Office No. 615, D-6th Floor, Ganesh Glory 11
Jagatpur–Chenpur Road, Ahmedabad, Gujarat

Navalbhai Patel +91 7698787476
Bhargavbhai Dholu +91 9904966385

FACTORY

166 p2/p2, Khakhriya-1 Village, Vadol.
Kapdwanj Dist-Kheda 387620

Vipul Bhai +91 9998100167