


Assignment – 3.3

Q - 1. Log in to your home Wi-Fi router's admin panel using its default IP address (usually 192.168.0.1 or 192.168.1.1) and take a screenshot of the login page. Hint: If you don't know your router's IP, open Command Prompt and run 'ipconfig' — look for 'Default Gateway'.

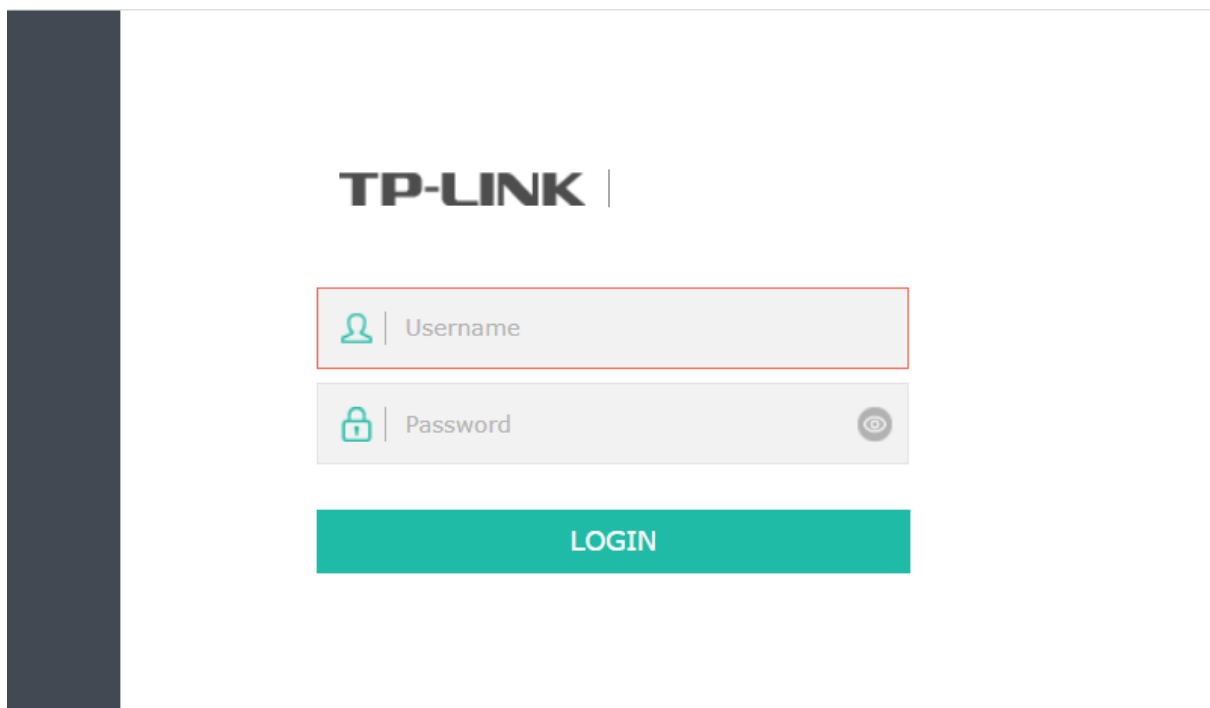

Q - 2. Find and note down the current IP address, subnet mask, and default gateway assigned to your laptop or mobile device when connected to your Wi-Fi network.

```
Wireless LAN adapter Wi-Fi:

    Connection-specific DNS Suffix  . : 
    IPv6 Address. . . . . : 2405:201:2030:b872:ed2e:bb69:7572:4f89
    Temporary IPv6 Address. . . . . : 2405:201:2030:b872:70ec:fc5b:2c9b:ad66
    Link-local IPv6 Address . . . . . : fe80::5cda:a507:9c31:8584%18
    IPv4 Address. . . . . : 192.168.29.138
    Subnet Mask . . . . . : 255.255.255.0
    Default Gateway . . . . . : fe80::f2ed:b8ff:fe4e:2a93%18
                               192.168.29.1

Wireless LAN adapter Wi-Fi 3:

    Connection-specific DNS Suffix  . : 
    IPv6 Address. . . . . : 2405:201:2030:b872:73f3:1bb4:23c1:e8be
    Temporary IPv6 Address. . . . . : 2405:201:2030:b872:cea:e4a6:723e:d15
    Link-local IPv6 Address . . . . . : fe80::2baa:561f:9696:4cc9%39
    IPv4 Address. . . . . : 192.168.29.117
    Subnet Mask . . . . . : 255.255.255.0
    Default Gateway . . . . . : fe80::f2ed:b8ff:fe4e:2a93%39
                               192.168.29.1

Ethernet adapter Ethernet:

    Media State . . . . . : Media disconnected
    Connection-specific DNS Suffix  . : 

C:\Users\DHAVAL>
```


Network Information	Value
IPv4 Address	192.168.29.117
Subnet Mask	255.255.255.0
Default Gateway	192.168.29.1

Q - 3. Change your device's IP address from 'Obtain IP automatically' (DHCP) to a static IP in the same range as your router (for example, set it to 192.168.1.50 if your router is 192.168.1.1), and test if you still have internet access.

Constraint: Remember to revert to automatic/DHCP after testing to avoid network issues.


1 Open Network Settings

Click Start menu → Settings → Network & Internet → Wi-Fi (or your connected network).

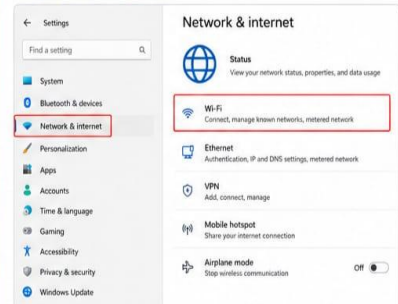


2 Open Network Properties

Click your connected Wi-Fi network (e.g., HomeWiFi) and then click Properties.

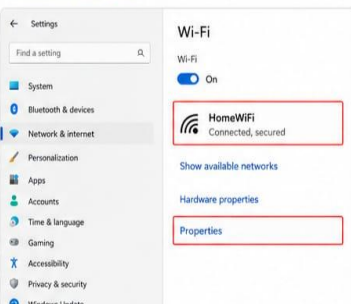

3 Change to Static IP

In the Wi-Fi Properties window, find IP assignment. Click Edit, then change from Automatic (DHCP) to Manual.

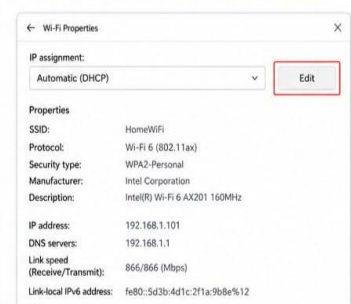


4 Enter Static IP Details

Select Manual, turn on IPv4, and enter the following (use values in the same range as your router).


Example (Your network)	
IP address	192.168.1.50
Subnet mask	255.255.255.0
Default gateway	192.168.1.1
Preferred DNS	8.8.8.8
Alternate DNS	8.8.4.4

Use an IP in the same range as your router (e.g., 192.168.1.x).
Make sure the IP is not used by any other device.

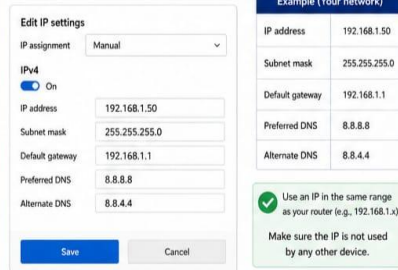


5 Test Internet Access

Open a web browser and visit a website (e.g., google.com) to check if you have internet.

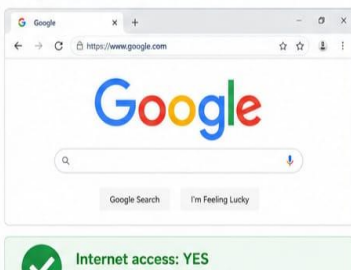

6 Revert to Automatic (DHCP) After Testing


Go back to the same settings (IP assignment) and change it back to Automatic (DHCP).

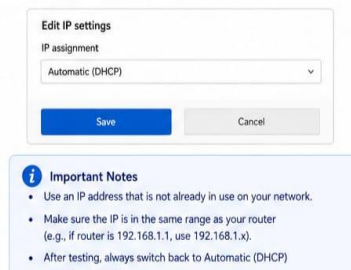

Important Notes

- Use an IP address that is not already in use on your network.
- Make sure the IP is in the same range as your router (e.g., if router is 192.168.1.1, use 192.168.1.x).
- After testing, always switch back to Automatic (DHCP) to avoid network issues.

Q - 4. In your router's admin panel, locate the section where you can view or change the DHCP range. Write down the current range, and explain in 2-3 lines what would happen if two devices are assigned the same IP address in this range.

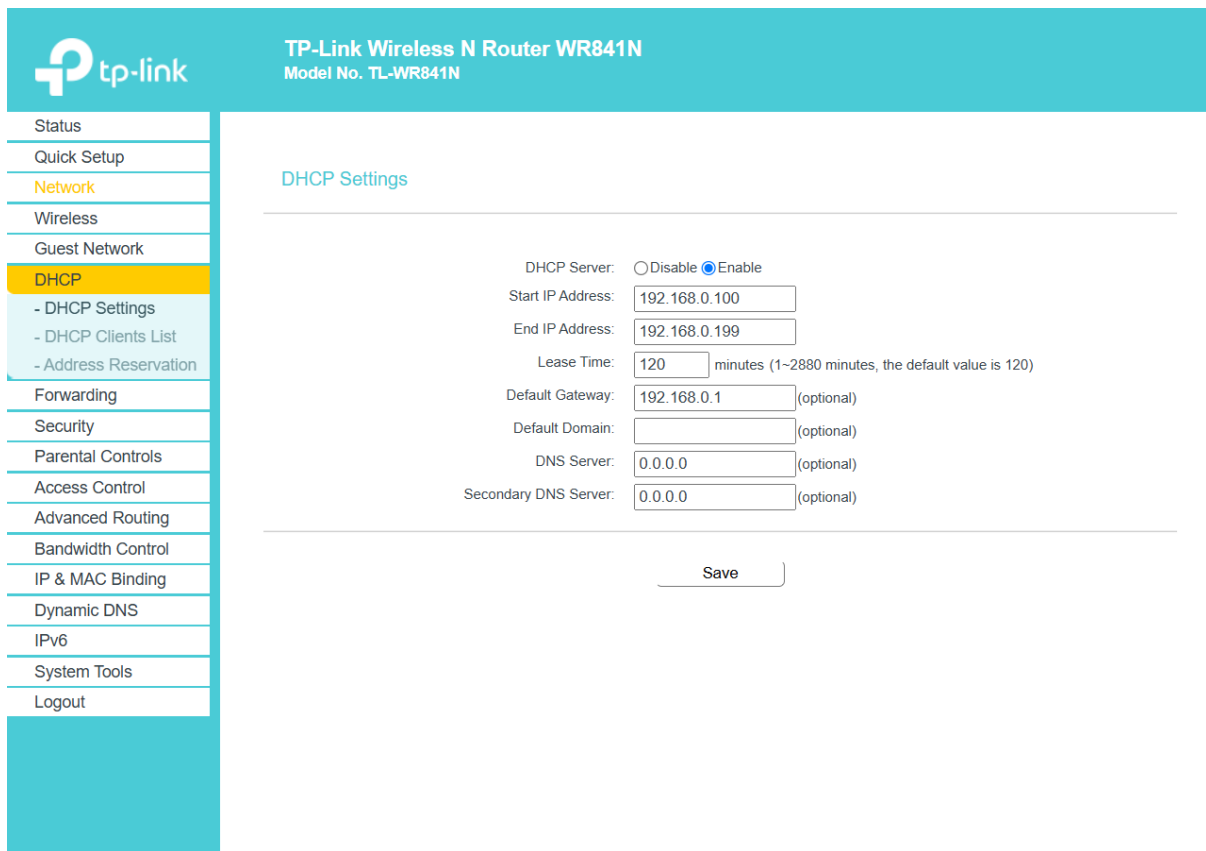

TP-Link Wireless N Router WR841N
Model No. TL-WR841N

Network

DHCP

DHCP Settings

DHCP Server: ☐ Disable ☒ Enable

Start IP Address:

End IP Address:

Lease Time: minutes (1~2880 minutes, the default value is 120)

Default Gateway: (optional)

Default Domain: (optional)

DNS Server: (optional)

Secondary DNS Server: (optional)

Save

Current DHCP Range: 192.168.0.100 – 192.168.0.199

What happens if two devices have the same IP?

- If two devices get the same IP address, an IP conflict happens. Both devices may have problems connecting to the internet or communicating with other devices.