



NOTE:


1. The valve (BA506) located in P/R D/B to be local-hydraulically operated.
 See page 32/48 for the detail.

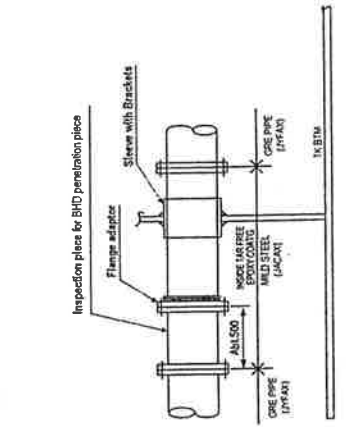

TYP. DETAIL OF BHD PENETRATION

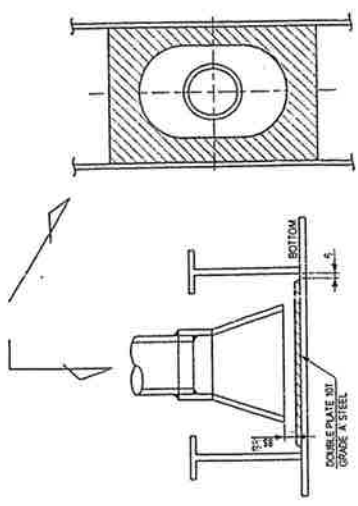

450A SUCTION BELLMOUTH
 (EXCEPT F.P. TK & A.P. TK)

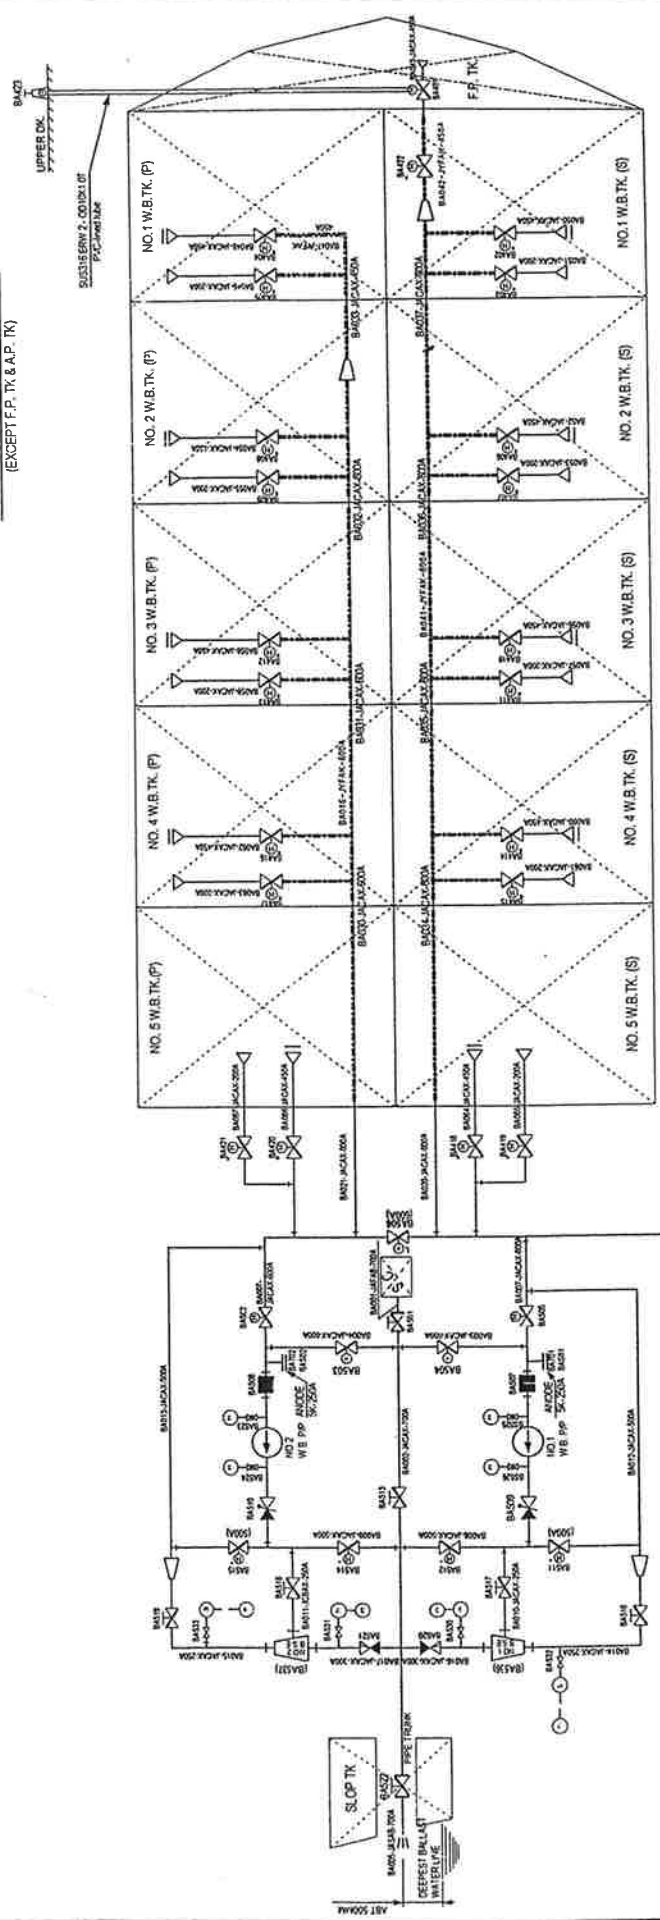

NOTE: : GRPP PIPE

SEE PAGE 7/10
 TO CARGO SYSTEM
 FOR CARGO DEBALLASTING