



## Practical no 6

Aim: Configure IPsec on network devices to provide secure communication and protect against unauthorized access and attacks.


### 1-Network Topology:

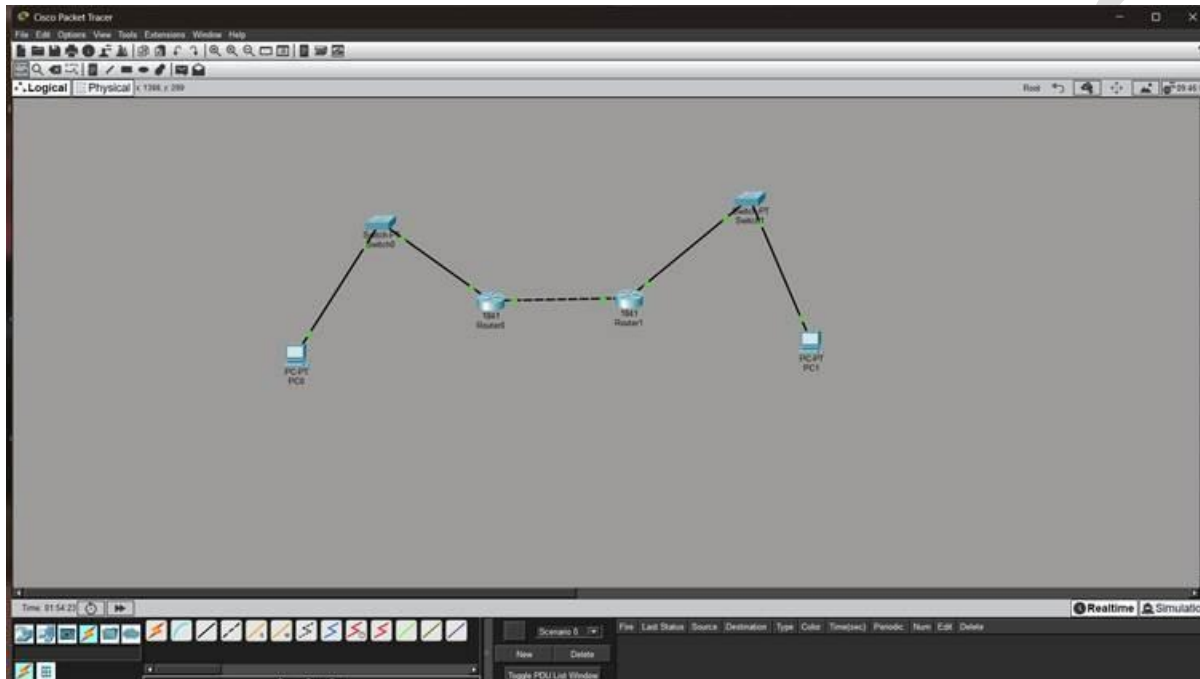

### 2: IP Configuration of PC0

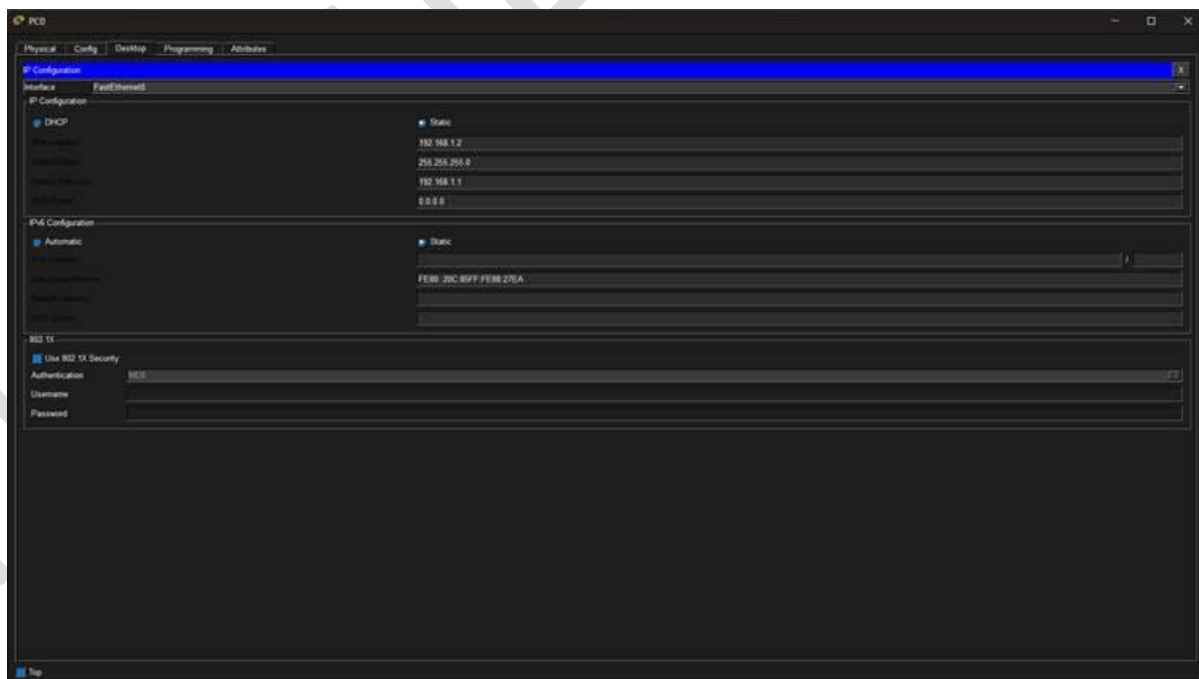

### 3: IP Configuration of PC1

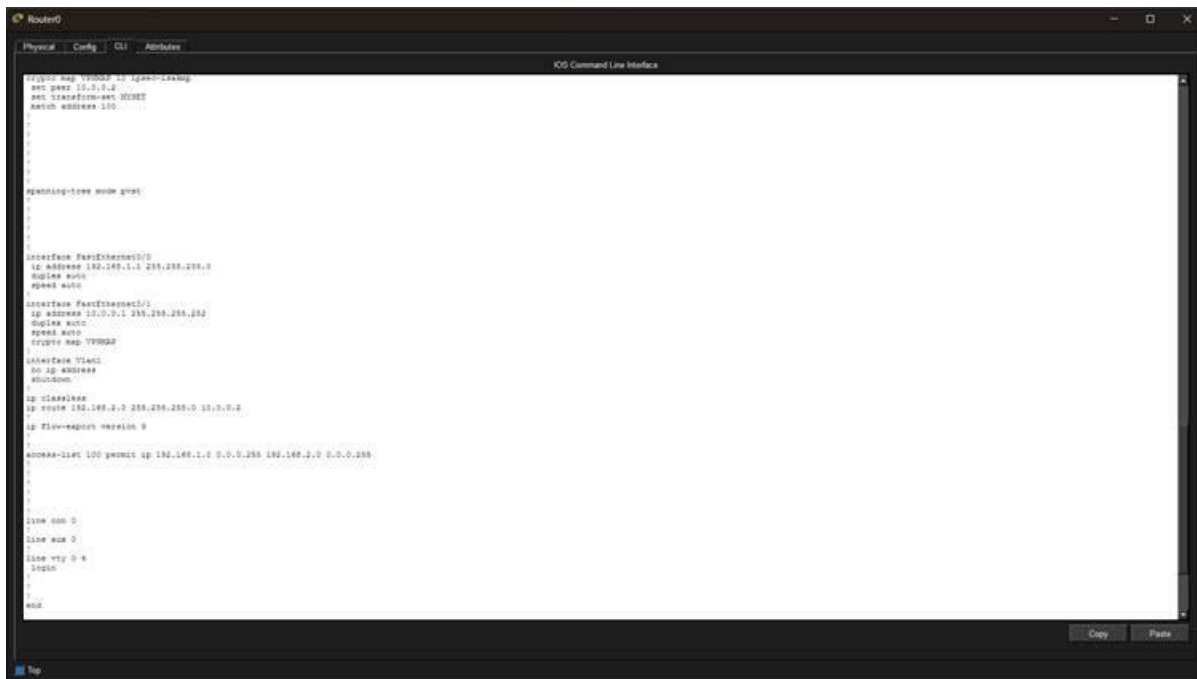

```
Router0
Physical Config CLI Attributes
IOS Command Line Interface

crypto key pubkey rsa 1000000000
set pubkey 10.0.0.0
set transcon-ent M0000
set transcon-ent M0000
set transcon-ent M0000

spanning-tree mode pve

interface FastEthernet0/0
ip address 192.168.1.1 255.255.255.0
duplex auto
speed auto

interface FastEthernet0/1
ip address 10.0.0.1 255.255.255.0
duplex auto
speed auto
crypto key pubkey rsa 1000000000


interface Vlan1
no ip address
shutdown

ip classless
ip route 192.168.2.0 255.255.255.0 10.0.0.2
ip flow-export version 9

no aaa-act 100 permit ip 192.168.1.0 0.0.0.255 192.168.2.0 0.0.0.255

line con 0
line aux 0
line vty 0 4
login
exit
```

## 5: Router1 Configuration

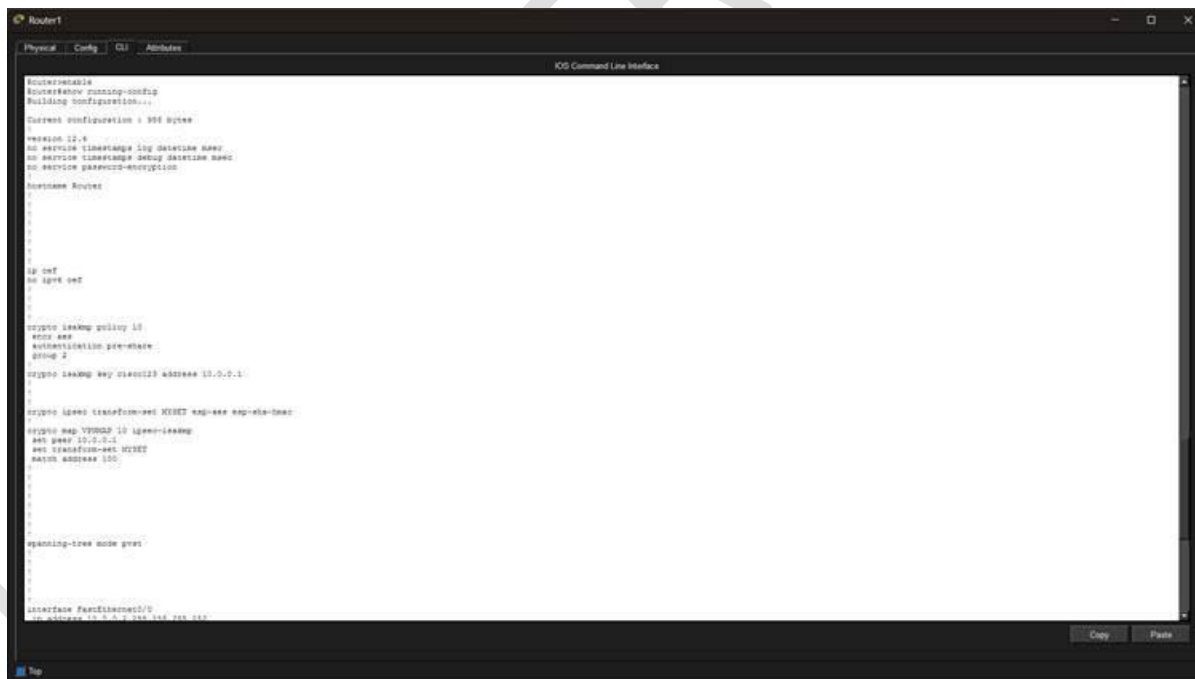

```
Router1
Physical Config CLI Attributes
IOS Command Line Interface

Router1#enable
Router1#show running-config
Building configuration...

Current configuration: 395 bytes

version 12.4
no service timestamps log datetime msec
no service timestamps debug datetime msec
no service password-encryption
!
hostname Router1

!
ip nat
no ip nat

!
crypto key pubkey rsa 1000000000
set pubkey 10.0.0.0
set transcon-ent M0000
set transcon-ent M0000
set transcon-ent M0000

spanning-tree mode pve

interface FastEthernet0/0
ip address 10.0.0.2 255.255.255.0
```

