
TRANSRAIL

POLE AND STRUCTURE





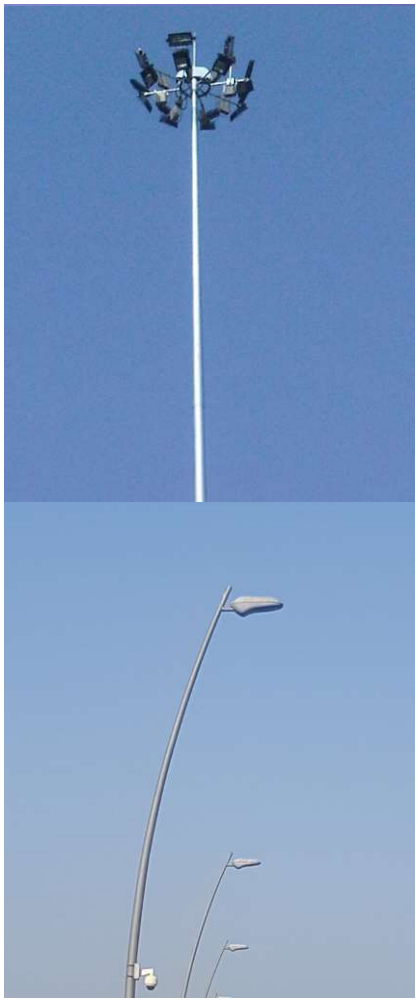

Integrated Power Transmission Lighting and Solar Solutions

About TRANSRAIL

Transrail Lighting Limited is an integrated company offering turnkey solutions in the field of Power Transmission, Distribution, Rural Electrification, Electrical Sub Station, Overhead Railway Electrification, Solar System and Lighting Solution. An active player in EPC and Turnkey projects having presence in INDIA and global presence in over 35 countries.


At its core, we are a company driven by passion for quality, innovation and excellence.

Having multi location manufacturing and supply facilities within INDIA for galvanised T&D structures, monopoles, high masts, stadium masts, street light poles, flag mast, LED and HID Luminaires and solar lighting systems to cater the needs of our customers.

All our operation are certified for ISO 9001, ISO 14000, OHSAS certification.



- Octagonal and Conical Poles
- Decorative Poles and Brackets
- High Masts
- Stadium Lighting Masts
- Flag Masts
- Railway & Metro over head line Structures
- T&D Monopoles
- Traffic and Antenna, CCTV Poles
- Signage Gantries
- GI Engineered Structures
- Sundry Galvanization

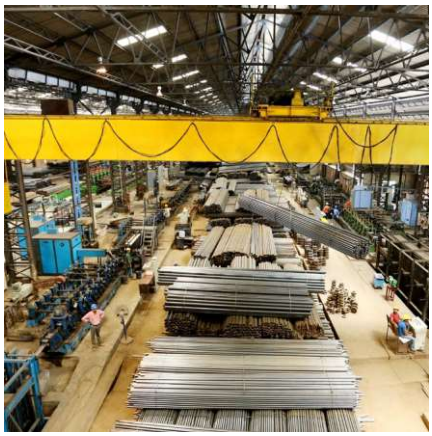

OUR IN-HOUSE CAPABILITIES:

- Design
- Development
- Manufacturing
- Testing
- Supply and EPC Civil, T&D, Electrical and Projects


DESIGN, DEVELOPMENT & QUALITY

Over the years, TRANSRAIL DD & Q wing have invested and developed in house capabilities in Quality design, Innovation, and manufacture of project specific, customized products, solutions and services from concept design to engineering and manufacture of T & D Structures, Monopole, High Masts, Sports Lighting Masts, Lighting Poles, Lighting and many such products used widely in todays Urban and Rural infrastructure projects.

TRANSRAIL Structural design team use globally accepted design Softwares viz. PLS_Pole, PLS_CADD, STAAD PRO CE and inhouse developed calculation and validation tools adopting design procedure to CEI/IEC 60826, ASCE 48-11, other national and international codes and Calculation of wind pressure IS 802 Part 3-1987 and other related international standards





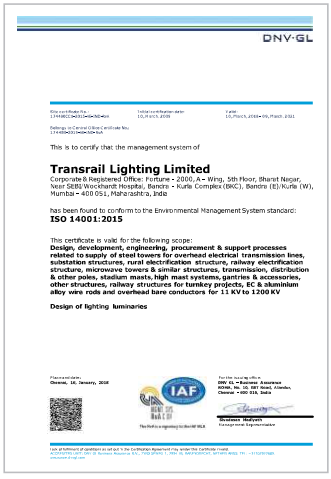

DNV·GL

This is to certify that the management system of


Transrail Lighting Limited

Corporate & Registered Office: Fortune - 2000, A - Wing, 5th Floor, Bharat Nagar, Near SEBI/Wockhardt Hospital, Bandra - Kurla Complex (BKC), Bandra (E)/Kurla (W), Mumbai - 400 051, Maharashtra, India

has been found to conform to the Environmental Management System standard:
ISO 14001:2015

This certificate is valid for the following scope:
Design, development, engineering, procurement & support processes related to supply of steel towers for overhead electrical transmission lines, substation structures, rural electrification structure, railway electrification structure, microwave towers & similar structures, transmission, distribution & other poles, stadium masts, high mast systems, gantries & accessories, other structures, railway structures for turnkey projects, EC & aluminium alloy wire rods and overhead bare conductors for 11 KV to 1200 KV

Design of lighting luminaries

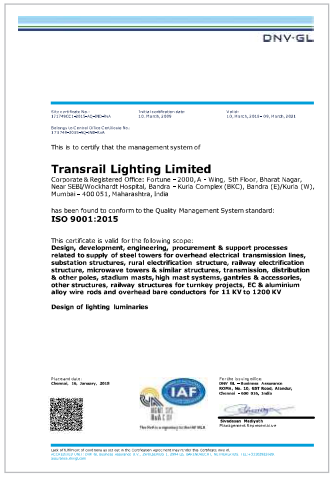
DNV·GL

This is to certify that the management system of


Transrail Lighting Limited

Corporate & Registered Office: Fortune - 2000, A - Wing, 5th Floor, Bharat Nagar, Near SEBI/Wockhardt Hospital, Bandra - Kurla Complex (BKC), Bandra (E)/Kurla (W), Mumbai - 400 051, Maharashtra, India

has been found to conform to the Quality Management System standard:
ISO 9001:2015

This certificate is valid for the following scope:
Design, development, engineering, procurement & support processes related to supply of steel towers for overhead electrical transmission lines, substation structures, rural electrification structure, railway electrification structure, microwave towers & similar structures, transmission, distribution & other poles, stadium masts, high mast systems, gantries & accessories, other structures, railway structures for turnkey projects, EC & aluminium alloy wire rods and overhead bare conductors for 11 KV to 1200 KV

Design of lighting luminaries

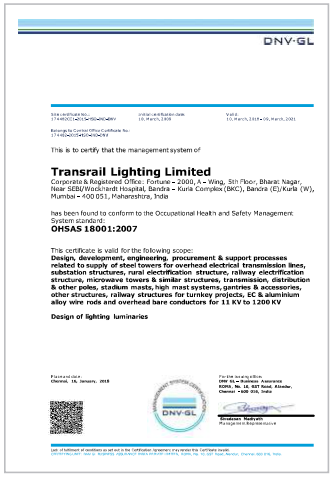
DNV·GL

This is to certify that the management system of

Transrail Lighting Limited

Corporate & Registered Office: Fortune - 2000, A - Wing, 5th Floor, Bharat Nagar, Near SEBI/Wockhardt Hospital, Bandra - Kurla Complex (BKC), Bandra (E)/Kurla (W), Mumbai - 400 051, Maharashtra, India

has been found to conform to the Occupational Health and Safety Management System standard:
OHSAS 18001:2007

This certificate is valid for the following scope:
Design, development, engineering, procurement & support processes related to supply of steel towers for overhead electrical transmission lines, substation structures, rural electrification structure, railway electrification structure, microwave towers & similar structures, transmission, distribution & other poles, stadium masts, high mast systems, gantries & accessories, other structures, railway structures for turnkey projects, EC & aluminium alloy wire rods and overhead bare conductors for 11 KV to 1200 KV

Design of lighting luminaries


DNV·GL

MANAGEMENT SYSTEM CERTIFICATE

This is to certify that the management system of

Transrail Lighting Limited

Survey No. 227/1/1/1/1, 228/3, 228/3, 228/4, 228/5, Khanvel Khordi Road, Khordi Village, Silvassa – 396 230, Union Territory of Dadra & Nagar Haveli, India

has been found to conform to the Environmental Management System standard:
ISO 14001:2015

This certificate is valid for the following scope:
Manufacture and supply of transmission, distribution & other poles, stadium masts, high mast systems, gantries & accessories, other structures, railway structures, supply of lighting luminaries

GALVANIZED OCTAGONAL AND CONICAL STREET LIGHTING POLES

- TRANSRAIL designs and manufactures wide range of flanged mounted type hot dip Galvanized Octagonal, Conical and Swaged poles in its modern plant
- Manufactured using HR Coils of Steel Grade conforming to BS EN 10025, Cold cut and sheared by CNC machines ensuring accurate sizes, dimensions and thickness from 3mm to 6mm
- Automated Fabrication, SAW deformity free welding for sleek and aesthetic appearance and finish
- Single Section Construction up to **14m** of varying thickness, conacity and cross section
- Hot dip Galvanized with pre treatment of 7 tank process confirming to BS EN ISO 1461
- Poles are provided with Vandal resistant and weather proof doors to facilitate easy access of junction box for maintenance







DECORATIVE STREET LIGHTING POLES

- TRANSRAIL have developed special designs for Tubular and Conical curved poles to meet the requirements of today's Contemporary and modern road designs and blend with Urban city scape, Architectural forms and designs as per project needs to satisfy and Smart City requirements
- Manufactured using HR Coils, Seamless tubes, sheared by CNC, Plasma cutting and bending machines ensuring accurate forms, sizes, dimensions and thickness from 3mm to 6mm
- Multi section, Single and Twin arms for Decorative and functional street lights up to **14m**
- Hot dip Galvanized with pre treatment of 7 tank process confirming to BS EN ISO 1461
- Surface final finish of PU Painted or Powder Coated with wide range of Colour and finish options to meet project requirements





DECORATIVE BRACKETS


- To complement TRANSRAIL make Octogonal, Conical, Decorative Curved and Bent Poles wide range of creative design cum functional decorative brackets with Single and Twin arms of varying lengths and sizes producted to match the project needs



TLB5



TLB6



TLB10



TLB12



TLB9



TLB11



TLB4



TLB13



TLB3



TLB8



TLB14



TLB1



TLB15



TLB16




TLB7




TLB2


HIGH MAST LIGHTING SYSTEMS

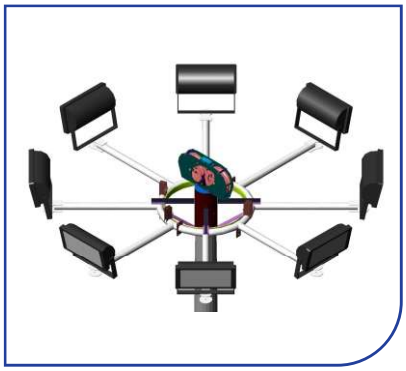

- TRANSRAIL designs and manufacture BEST in class HIGH MAST lighting Systems from **10m to 50m** for India and Global markets widely used in exterior lighting applications in Cities, Industries, Highways, Ports, etc
- Fabricated Masts sections are continuously tapered 16/18/20 sided cross sections for dove-tailed assembly conforming to BS EN 10025, customer specifications and design as per IS 875 pt III 2015, TR7, PLG 07 and other international design standards. WIND TUNNEL tested design and type tested 30m High Mast for full scale loading
- HR Coils are uncoiled, cold cut and sheared by CNC machines for accuracy and no stress in the plate
- Fabricated mast sections are single dip hot dip galvanized in a 14.3m galvanizing bath for galvanization thickness as per BS EN ISO 1461 or customer specification

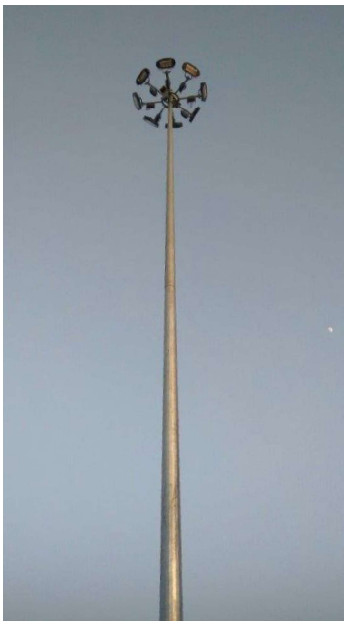

- Head frame Capping section houses pulley arrangement with guides and stops for safe operation of wire-ropes
- Hot dip galvanized Tubes and MS Channel are used for Lantern carriage designs as per Flood lights quantities and arrangements
- The bottom segment have designed base plates and strengthening gussets as per IS 2062 and IS 226
- Vandal resistant, weather proof lockable access door at the mast base for parts like Winch, electrical Motor, internal Trailing Cable, Control Switch
- LM6 alloy pulley system with special self-lubricated bush-bearings on SS shafts
- Wire-ropes (GI or SS) of required lengths are with copper alloy talurits and steel thimbles for ease of assembly
- Heavy duty single/double drum WINCH, powered ELECTRIC MOTOR
- EPR/PCP sheathed copper trailing cable with plug-socket arrangement designed (Optional Telecom and Power Cable combination and arrangement available)

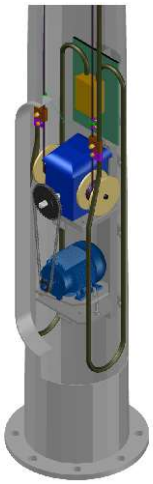

- Quality accessories viz. Foundation bolts, anchor plates, etc by TRANSRAIL ensures safe installation
- Specially designed additional accessories used to avoid entanglement between wire ropes and cables

Applications:

- Exterior Areas
- Security Lighting
- Airport Apron Lighting
- Sea Port Lighting
- Container & Railway Yards,
- METRO Depots, CAR Parking
- City Junctions & Flyovers on
- Highways & Expressways, etc

LATCHING SYSTEM FEATURES

- Docking and self locking system of Lantern Carriage with Flood lights on HIGH MAST TOP
- Centering System ensures smooth raising and lowering of Flood light Lantern Carriage assembly without jerks, elimination of hanging of Lantern Carriage with Flood lights on HIGH MAST TOP and slippage/snapping of wire ropes post installation
- NO sway and other movements of Flood light Lantern Carriage post installation due to WIND
- Increased performance life of mechanical parts i.e WIRE ROPES and WINCH due to lower material fatigue, wear and tear
- Lower and reduced need for maintenance cost for installed High Mast lighting system



NON INTEGRAL POWER TOOL

- Motorized hand held or trolley mounted power tool for raising and lowering of HIGH MAST lantern carriage
- Elimination of individual electric Motors inside each HIGH MASTS
- Ideally suited for installations having large number of HIGH MASTS like Ports, Airports, Tank farms and other large open area lighting




STADIUM LIGHTING MASTS

TRANSRAIL Structural and Design teams have domain knowledge, expertise and decades professional experience for Standard Monopole SPORTS LIGHTING MASTS and custom designs to integrate with Stadium Architecture is the hall mark of TRANSRAIL SPORTS LIGHTING HIGH MAST systems for Small, Medium size Sports field and Professional Sports Stadium and Complexes



FEATURES

- Mast sections-heavy duty type, Polygonal hot dip galvanized, with stress fit or flange plate design up to **65m**
- Masts are fabricated from the best quality HR Coils conforming to BS EN 10025 and customer specifications and structural design meeting IS 875 pt III 2015, Tr7, PLG 07 and International design standards
- HR Coils are uncoiled, cold cut and sheared by CNC machines for accuracy and no stress in the plate
- Fabricated mast sections are single dip hot dip galvanized in a 14.3m galvanizing bath for galvanization thickness as per BS EN ISO 1461 or customer specification

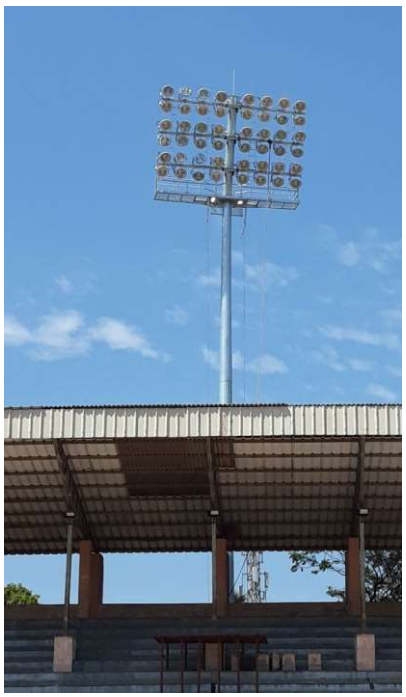

HEAD FRAME

- Raising lowering, fixed straight/tilted with operator platform for Sports Light installations as per Lighting design

MAINTENANCE ACCESS OPTIONS

- Step bolt arrangement for Mast heights up to 15m
- Monkey ladders with safety cage up to 30m
- Motorized Man rider carriage lift Indian and Imported design up to 70m





Contact TRANSRAIL representative for technical design and project support

FLAG MAST

- Flag masts are sign of national pride and identity and TRANSRAIL has a complete system offering up to 70m (higher heights on request)
- Typical flag mast consists of Mast, raising and lowering arrangement, National Flag, LED flood lights for night time flag Illumination
- Flag mast can be installed on standard foundation or Concrete piles to ensure shorter installation time and enable easier restoration of the area
- Structural design comply to PLG 07/ANSI/NAAMM FP1001-07/IS 800/ IS 875 and customized to projects specifications and requirements







RAILWAY & METRO OVER HEAD LINE STRUCTURES

- TRANSRAIL inhouse capabilties and expertise in developing pre-engineered and fabricated hot dip galvanized customized railway power line Structures and Portals is a good replacement of imported systems



- Use globally accepted design Softwares viz. PLS_Pole, PLS_CADD, STAAD PRO CE and inhouse developed calculation and validation tools adopting design procedure to RDSO compliant, BSEN 50119, other national and international codes and Calculation of wind pressure IS 875 Part 3 and other related international standards

METRO PORTALS

- Conical tubular Portal structures are Sleek in appearance, aerodynamic in design with no human reach on TOP of the PORTALS, Resting and nesting of Birds not possible



- Small footprint of conical Tubular portals w.r.t LATTICE design ideal for BRIDGES and ELEVATED Railway/METRO lines

- Vertical Conical Pole (Mast) manufactured using high tensile sheets of ASTM A572-Gr.65 or Equivalent material grade (Yield Strength-450MPa) having single longitudinal weld using specially developed in house fabrication techniques



- Precision design and engineering for Boom of Portal manufacture of sufficient material thickness ensure perfect fitment, meeting critical design loads and other project requirements of Railway / Metro over head line requirements


RAILWAY OVER HEAD LINE STRUCTURES

- Standard LATTICE GIRDER Designs as per IS 800:2007 for Angles and Bracing with material specifications as per IS 2062, hot dip Galvanized of required heights and booms are fabricated to meet users and project requirements



TRANSMISSION & DISTRIBUTION MONOPOLES

Product range includes Low voltage, Medium voltage upto 33kV and High voltage up to 220kV (higher ratings on request)

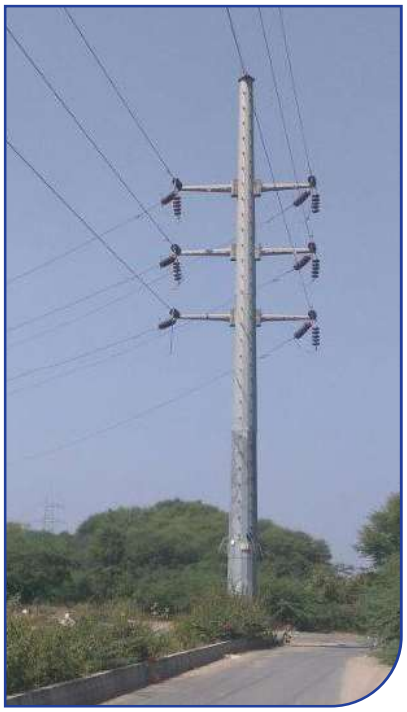

FEATURES AND ADVANTAGES

- Consists of hot dip galvanized Polygonal continuously tapered cross sections having polygonal cross arms, with Longitudinal welding
- Structures fabricated in Polygonal cross sections continuously tapered available in many sections upto 55m. Section assembly by means of stress fit telescopic joints or flanged plate arrangement.
- Designs achieved with reduced and lower base makes it ideal for power transmission in URBAN and INDUSTRIAL applications with improved flexibility in power line routing
- Quick and easy installation at site
- TRANSRAIL Structural design team use globally accepted design Softwares viz. PLS_Pole, PLS_CADD, STAAD PRO CE and inhouse developed calculation and validation tools adopting Design procedure to CEI/IEC 60826, ASCE 48-11, other national and international codes and Calculation of wind pressure IS 802 Part 3 – 1987 and other related international standards

In house Structural Design and NABL certified Testing facility

TELECOM ANTENNA MONOPOLES

- Telecommunications hot dip galvanized monopoles are alternative to conventional telecom towers and widely aodpted and used in GSM/Microwave communication antenna
- Structural design comply to ANSI/TIA -222-G and customized to projects specifications and requirements



TRAFFIC SIGNAL POLES

- Hot dip galvanized poles in round, octagonal, 16 to 20 sided cross sections with extended bracket or Cantilever design arms to accommodate needs of junctions, intersections and through traffic on Minor, Major and Highways roads are ideal choice for meetings today's ever growing traffic needs
- Manufactured and built to the exact specifications of local bodies and traffic department needs, easy to install SIGNAL LIGHTS with optional provision for IOT and Smart City devices
- Structural design comply to AASHTO/IS 800/IS 875 and customized to projects specifications and requirements



SIGNAGE GANTRIES

- Gantries and cantilever structures for signages can be designed, fabricated & installed as per the requirement of the client. These structures are designed by our structural engineer and made of flanged, high tensile galvanized polygonal pole sections bolted together giving a high quality aesthetic view and very high durability over other type of structures. TRANSRAIL LIGHTING has designed, manufactured, supplied and installed one of the largest gantry (110 m) in India.
- Structural design comply to AASHTO/IS 800/IS 875 and customized to projects specifications and requirements





SURVEILLANCE/CCTV POLES

- Security and surveillance poles are precisely designed and fabricated poles meeting stringent standards as performance of Cameras and other surveillance depends on the deflection criteria and flexibility provided on these poles. They are generally used in areas that require safety and monitoring of a certain location or position. Standard pole heights are 4.0m to 15.0m depending on customer's requirements.
- TRANSRAIL capabilities also exists in special designs for Security lights and Defense installations
- Structural design comply to PLG 07/IS 800/IS 875 and customized to projects specifications and requirements



GI ENGINEERED STRUCTURES

- Our structural engineered welding line is capable of taking up custom made jobs which require accurate engineering, high quality galvanization and testing. GI structures like flare stacks, solar-panel structures etc. can be undertaken by our capable team on a design, engineering, manufacturing and supply basis. Our sales representatives will be happy to contact you for any enquiries.



SUNDRY GALVANISATION

- Our world class galvanization plant has 14.3m galvanising bath with automated PID temperature controllers, fluxing control and high velocity burners. Quenching operation is done at automatically controlled temperatures with special dichromatic solution. Pretreatment is done in 7 (+3) tanks of 14.3m length with automated maintenance of ph levels. Specialised forced cooled drying oven is used to ensure good finish.







CUSTOMERS-INFRA, EPC, O&G, UTILITIES, RAILWAYS, INDUSTRIES, PORTS, SPORTS











CORPORATE OFFICE

Transrail Lighting Limited
501 A, B, C, E Fortune 2000, Block G, Bandra Kurla Complex, Bandra East, Mumbai - 400 051, India.
Tel: +91-22-6197 9600 | Fax: +91-22-6197 9666 | Email: enquiry@transraillighting.com | Web: www.transrail.in


MANUFACTURING UNIT

Silvassa Plant (Poles)
Survey No. 227/1, 227/2, 227/3, 227/4, 227/5, Khanvel, Talasari Road, Opp HPCL,
Kherdi Village, Silvassa - 396 230 .
Tel: +91-260 2641 666 | Fax: +91-260 2631 666


Disclaimer: every endeavor have been made in compilation of the technical details in this catalogue for correctness. Product installation and other images are for reference and representation purpose. Due to continuous improvements in Technology, Standards, and specifications; content are subject to change without prior notice. Contact nearest TRANSRAIL office or its representative for latest update and information. Copying, reproducing and sharing of the details in part or full is subject to prior consent and approval of TRANSRAIL

TRANSRAIL

LUMINAIRES

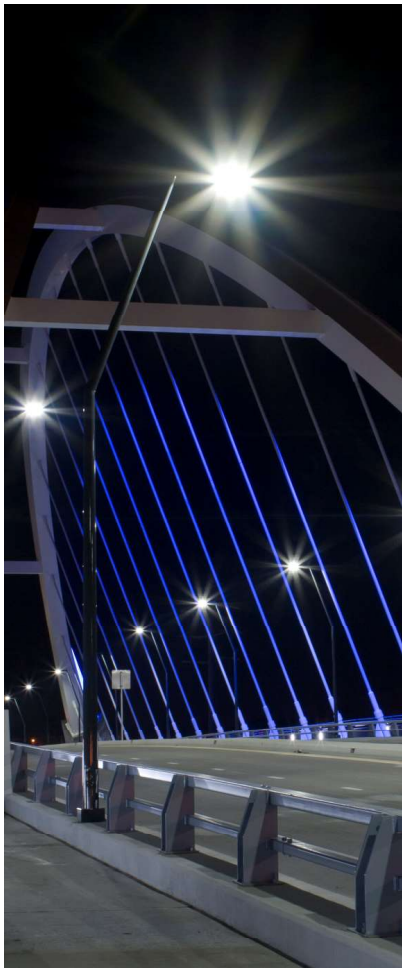



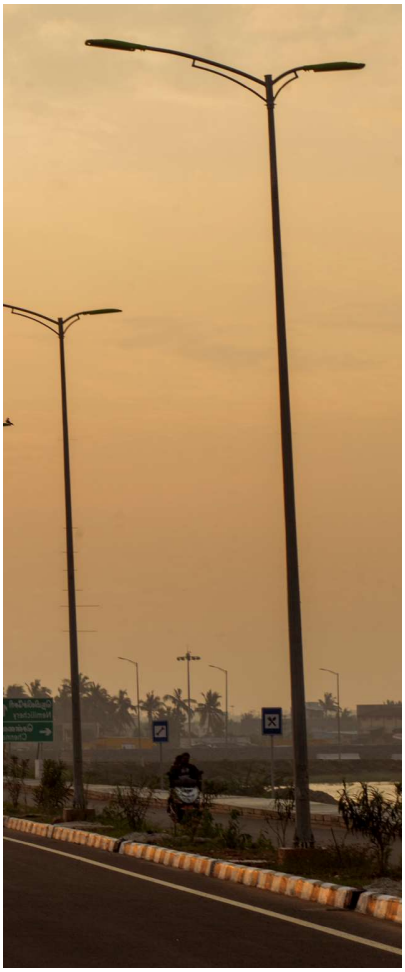

Integrated Power Transmission Lighting and Solar Solutions

About TRANSRAIL

Transrail Lighting Limited is an integrated company offering turnkey solutions in the field of Power Transmission, Distribution, Rural Electrification, Electrical Sub Station, Overhead Railway Electrification, Solar System and Lighting Solution. An active player in EPC and Turnkey projects having presence in INDIA and global presence in over 35 countries.


At its core, we are a company driven by passion for quality, innovation and excellence.

Having multi location manufacturing and supply facilities within INDIA for galvanised T&D structures, monopoles, high masts, stadium masts, street light poles, flag mast, LED and HID Luminaires and solar lighting systems to cater the needs of our customers.

All our operation are certified for ISO 9001, ISO 14000, OHSAS certification.





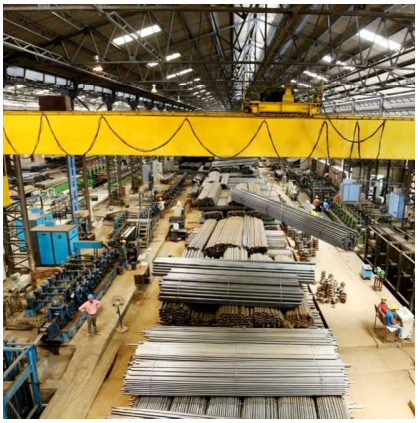

OUR IN-HOUSE CAPABILITIES:

- Design
- Development
- Manufacturing
- Testing
- Supply and EPC Civil, T&D, Electrical and Projects

STREET LIGHT HPSV/MH 70 W - 400 W


High performance HPSV/MH range of HID street light suitable for lighting of light density pedestrian/vehicular traffic in internal cities, townships, industry roads, etc.



PRODUCT DESCRIPTION

Floodlight housing	Corrosion resistant die-cast aluminium housing
Reflector	Aluminium anodized high polish reflector
Cover glass	Heat resistant toughened clear glass clamping by stainless steel toggles
Colour and finish	Epoxy powder coated grey finish
Relamping	Side arrangement for easy maintenance
Gasket	Anti-ageing rubber gasket in the housing for ingress protection
Ingress protection and Safety class	IP66 and electrical safety class I
Control gear	Copper ballast, p.f correction capacitor and rated ignitor suitable for HPSV and MH lamp



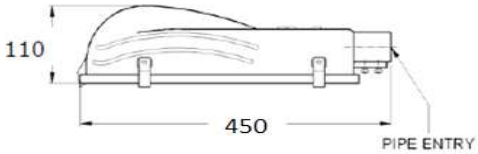

NOMINAL DIMENSIONS IN mm Tolerance +/-5

ELECTRICAL DATA (NOMINAL)

CAT. REF.	INPUT VOLTAGE (V) AC 50 HZ	MAINS CURRENT (A)	RATED WATTAGE (W)	p.f	LAMP TYPE
STLT 70W	220/240	0.4	70	10 mfd ≥ 0.85	HPSV/MH T
STLT 100W	220/240	0.4	100	10 mfd ≥ 0.85	HPSV/MH T
STLT 150W	220/240	0.8	150	20 mfd ≥ 0.85	HPSV/MH T
STLT 150W	220/240	0.8	150	20 mfd ≥ 0.85	HPSV/MH T
STLT 250W	220/240	1.3	250	30 mfd ≥ 0.85	HPSV/MH T
STLT 400W	220/240	2.1	400	42 mfd ≥ 0.85	HPSV/MH T


FLOOD LIGHT HPSV/MH 2X250W/400 W

High performance range of weather and corrosion proof heavy duty type floodlight HID lamps HPSV/MH for lighting of exterior large area applications like high mast located at city and highway junction lighting, large open areas, industrial exteriors, storage containers, railway yards, air & sea ports, etc.



PRODUCT DESCRIPTION

Floodlight housing	Corrosion resistant die-cast aluminium housing with heat dissipating fins design
Reflector	Aluminium anodized high polish reflector
Cover glass	Heat resistant toughened clear glass clamping by stainless steel toggles with the flood light housing
Colour and finish	Epoxy powder coated grey finish
Relamping	Side arrangement for easy maintenance
Mounting bracket	Cradle bracket MS powder coated suitable for pole and high mast bracket installations with graduated aiming disc for aiming
Gasket	Anti-ageing rubber gasket in the housing for ingress protection
Ingress protection and Safety class	IP 65 and electrical safety class I
Control gear	Use in conjunction with remote control gear box for suitable wattage of HID lamps

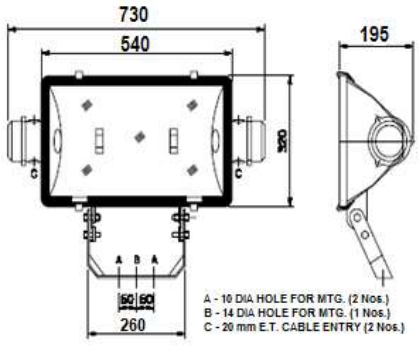

Nominal Dimensions mm (Tolerance +/-5 mm)

ELECTRICAL DATA (NOMINAL)

CAT. REF.	INPUT VOLTAGE (V) AC	LAMP TYPE	LAMP BASE
AFL HID 2X250W SV/MH	220/240	Tubular clear HPSV/MH T 250W	E40
AFL HID 2X400W SV/MH	220/240	Tubular clear HPSV/MH T 400W	E40


CONTROL GEAR BOX

Weather and corrossion proof range heavy duty type of die-cast aluminium Control Gear Box suitable for HID lamps HPSV and MH 250W and 400W

PRODUCT DESCRIPTION

Housing and cover	Corrosion resistant, weather proof die-cast aluminium housing and cover construction for 2 nos. HID (SV/MH) lamps of 250W/400W lamps ballast and other electrical components of the HID control gear
Colour and finish	Epoxy powder coated grey finish
Electrical components	Copper ballast, p.f improvement capacitor, electronic ignitor, fuse cutout and earthing terminals prewired with silicon coated copper wires upto terminal block
Cable entry	4 nos with loop in, loop out facility
Gasket	Anti-ageing rubber gasket in the housing for ingress protection
Ingress protection	IP55



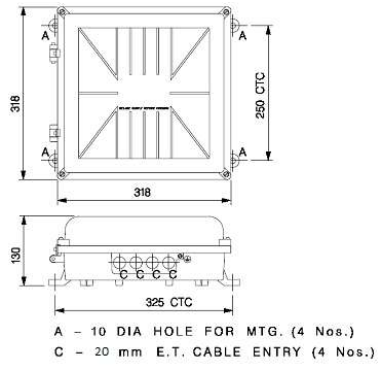

NOMINAL DIMENSIONS IN mm Tolerance +/-5

ELECTRICAL DATA (NOMINAL)

CAT. REF.	INPUT VOLTAGE (V) AC	LAMP TYPE/WATTAGE (W)	LAMP CURRENT NOMINAL ~	p.f
CGBCA 2x250W	220/240	SV/MH T 250W	1.3	2x30 mfd ≥ 0.85
CGBCA 2x400W	220/240	SV/MH T 400W	4.2	2x42 mfd ≥ 0.85

UNDER CANOPY LED 80 W - 100W


Technical range of LED Under Canopy light fitting suitable for general and task lighting applications at low to moderate heights and ideally suited for Canopy of Petrol Stations, Toll Plazas, Loading bays and other industrial and Commercial applications



PRODUCT DESCRIPTION

Housing and frame	Made of die-cast corrosion resistant aluminium alloy with heat dissipating fins design for excellent thermal management
Cover glass	Heat resistant toughened clear glass
Colour and finish	Epoxy powder coated grey finish
Light source	High power LED SMD type Color temp. White light 5700°K ±300°K and CRI > 70, MCPCB Construction, LPW > 100, 120 or above on request
Optical lens	Polycarbonate high performance Secondary Lens suited for variety of Lighting applications medium, Wide and Asymmetrical lighting applications
Driver compartment	Pressure die cast aluminium housing and top cover
Driver details	Input voltage range 120-270V AC/50Hz with Over voltage & Short circuit protection features
Mounting piece	Side entry suitable for variety of Pole Brackets types and sizes
Ingress protection	IP 65 for diffuser and IP 66 for Driver enclosure
External hardware	Corrossion resistant Stainless Steel



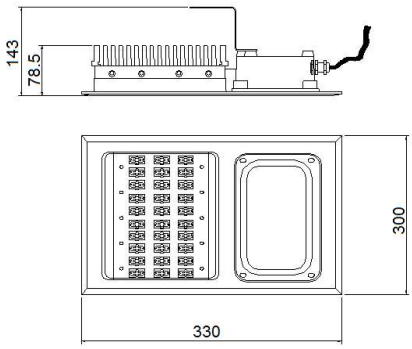

Nominal Dimensions mm (Tolerance +/-5 mm)

ELECTRICAL DATA (NOMINAL)

CAT. REF.	INPUT VOLTAGE (V) AC	SYSTEM CURRENT (A) @240V AC	SYSTEM WATTAGE (W) ~	p.f	THD
CLK80W	240	0.34	100	>0.95	<10%
CLK100W	240	0.42	120	>0.95	<10%

Certifications: LM 79, LM80,IS:10322 (pt5/sec.5)-1987/IEC 60598, BIS, IP certification and reports available on request

BAY LIGHTS LED 150 - 220 W


Technical range of LED Medium and High Wattage LED light suitable for lighting of Light, Medium and Heavy Industries general lighting applications



PRODUCT DESCRIPTION

Housing and frame	Made of die-cast corrosion resistant aluminium alloy with heat dissipating fins design for excellent thermal management
Cover glass	Heat resistant toughened clear glass
Colour and finish	Epoxy powder coated grey finish
Light source	High power LED SMD type Color temp. White light 5700°K ±300°K and CRI > 70, MCPCB Construction, LPW > 100, 120 or above on request
Optical lens	Polycarbonate high performance type
Driver compartment	Pressure die cast aluminium housing installed at the rear side of the housing isolated for effective thermal management
Driver details	Input voltage range 120-270V AC/50Hz with Over voltage & Short circuit protection features
Mounting piece	Cradle Bracket MS powder coated suitable for Pole and High Mast bracket installations
Ingress protection	Flood light IP 66, Driver enclosure Ip 65
External hardware	Corrossion resistant Stainless Steel



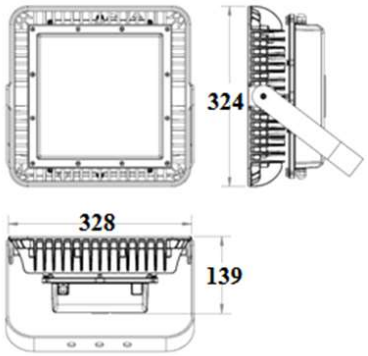

NOMINAL DIMENSIONS IN mm Tolerance +/-5

ELECTRICAL DATA (NOMINAL)

CAT. REF.	INPUT VOLTAGE (V) AC	SYSTEM CURRENT (A) @240V AC	SYSTEM WATTAGE (W) ~	p.f	THD
MHBL150	240	0.63	150	>0.95	<10%
MHBL180	240	0.8	180	>0.95	<10%
MHBL200	240	0.84	200	>0.95	<10%

Certifications: LM 79, LM80,IS:10322 (pt5/sec.5)-1987/IEC 60598, BIS, IP certification and reports available on request

STREET LIGHT LED 70 W - 250W


Technical range of LED Street light suitable for lighting of high density vehicular traffic on Major, Minor City and Town Roads, Bridges, Industry Roads, etc.



PRODUCT DESCRIPTION

Housing and frame	Made of die-cast corrosion resistant aluminium alloy with heat dissipating fins design for excellent thermal management
Cover glass	Heat resistant toughened clear glass
Colour and finish	Epoxy powder coated grey finish
Light source	High power LED SMD type Color temp. White light 5700°K ±300°K and CRI > 70, MCPCB Construction, LPW > 100, 120 or above on request
Optical lens	Polycarbonate high performance Street Light distribution for multiple road categories
Driver compartment	Pressure die cast aluminium housing and top cover
Driver details	Input voltage range 120-270V AC/50Hz with Over voltage & Short circuit protection features
Mounting piece	Side entry suitable for variety of Pole Brackets types and sizes
Ingress protection	IP 66
External hardware	Corrossion resistant Stainless Steel



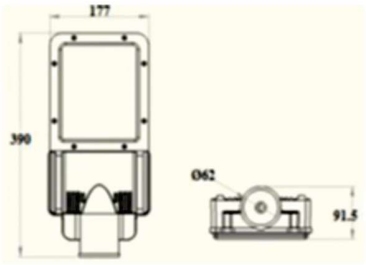

Nominal Dimensions mm (Tolerance +/-5 mm)

ELECTRICAL DATA (NOMINAL)

CAT. REF.	INPUT VOLTAGE (V) AC	SYSTEM CURRENT (A) @240V AC	SYSTEM WATTAGE (W) ~	p.f	THD
SLK70W	240	0.34	70	>0.95	<10%
SLK90W	240	0.38	90	>0.95	<10%
SLK100W	240	0.43	100	>0.95	<10%
SLK120W	240	0.50	120	>0.95	<10%
SLK150W	240	0.63	150	>0.95	<10%
SLK180W	240	0.76	180	>0.95	<10%
SLK200W	240	0.84	200	>0.95	<10%
SLK220W	240	0.92	220	>0.95	<10%
SLK220W (HT)	240	0.92	220	>0.95	<10%
SLK 250W	240	1.06	250	>0.95	<10%

Certifications: LM 79, LM80,IS:10322 (pt5/sec.5)-1987/IEC 60598, BIS, IP certification and reports available on request

FLOOD LIGHT LED 120 - 250 W


Technical range of LED Flood light suitable for lighting of Interior and Exterior Area applications on Poles/Structures, High Mast located at City and High way Junction Lighting, Large Open Areas, Industrial Interior and exteriors, Construction sites, Storage Container and Railway Yards, Air & Sea Ports, etc.



PRODUCT DESCRIPTION

Housing and frame	Made of pressure die-cast corrosion resistant aluminium alloy with heat dissipating fins design for excellent thermal management
Cover glass	Heat resistant toughened clear glass
Colour and finish	Epoxy powder coated grey finish
Light source	High power LED SMD type Color temp. White light 5700°K ±300°K and CRI > 70, MCPCB Construction, LPW > 100, 120 or above on request
Optical lens	Polycarbonate high performance type
Driver compartment	Pressure die cast aluminium housing installed at the rear side of the flood light isolated from the Main flood light housing for effective thermal management
Driver details	Input voltage range 120-270V AC/50Hz with Over voltage & Short circuit protection features
Mounting piece	Cradle Bracket MS powder coated suitable for Pole and High Mast bracket installations
Ingress protection	Flood light IP 66, Driver enclosure IP 65
External hardware	Corrossion resistant Stainless Steel





NOMINAL DIMENSIONS IN mm Tolerance +/-5


ELECTRICAL DATA (NOMINAL)

CAT. REF.	INPUT VOLTAGE (V) AC	SYSTEM CURRENT (A) @240V AC	SYSTEM WATTAGE (W) ~	p.f	THD
AFL120	240	0.50	120	>0.94	<10%
AFL150	240	0.63	150	>0.95	<10%
AFL180	240	0.80	180	>0.95	<10%
AFL200	240	0.84	200	>0.95	<10%
AFL250	240	1.2	250	>0.95	<10%

Certifications: LM 79, LM80,IS:10322 (pt5/sec.5)-1987/IEC 60598, BIS, IP certification and reports available on request

FLOOD LIGHT LED 300 - 550 W

Technical range of LED Flood light suitable for lighting of Interior and Exterior Area applications on Structures, High Mast located at City and High way Junction Lighting, Large Open Areas, Railway Yards, Air & Sea Ports, Container Yards, Sports Lighting applications,etc.

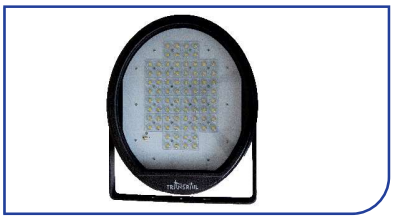


PRODUCT DESCRIPTION

Flood light housing and frame	Made of pressure die-cast corrosion resistant aluminium alloy with heat dissipating fins design for excellent thermal management
Cover glass	Heat resistant toughened clear glass
Colour and finish	Epoxy powder coated grey finish
Light source	High power LED SMD type Color temp. White light 5700°K ±300°K and CRI > 70, MCPCB Construction, LPW > 120, 120 or above on request
Optical lens	Polycarbonate high performance type narrow, medium, wide (other options as per project needs)
Driver compartment	Pressure die cast aluminium housing installed at the rear side of the flood light isolated from the Main flood light housing for effective thermal management
Driver details	Input voltage range 120-270V AC/50Hz with Over voltage & Short circuit protection features
Mounting piece	Cradle Bracket MS powder coated suitable for Pole and High Mast bracket installations
Ingress protection	Flood light IP66, Driver enclosure Ip 65
External hardware	Corrossion resistant Stainless Steel

Certifications: LM 79, LM80,IS:10322 (pt5/sec.5)-1987/IEC 60598, BIS, IP certification and reports available on request



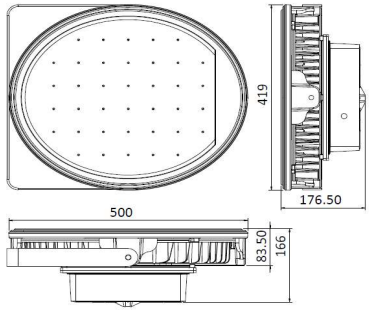

2 sizesNominal Dimensions 500 x 419 x 84mm and 595 x 514 x 84mm (Tolerance +/-5 mm)

ELECTRICAL DATA (NOMINAL)

CAT. REF.	INPUT VOLTAGE (V) AC	SYSTEM CURRENT (A) @240V AC	SYSTEM WATTAGE (W) ~	p.f	THD
AFL300	240	1.3	300	>0.95	<10%
AFL350	240	1.5	350	>0.95	<10%
AFL400	240	1.80	400	>0.95	<10%
AFL450	240	1.90	450	>0.95	<10%
AFL500	240	2.10	500	>0.95	<10%
AFL550	240	2.30	550	>0.95	<10%

CERTIFICATES

DNV·GL

Site certificate No.: 174480CC1-2015-AE-IND-RvA
Initial certification date: 10, March, 2009
Valid: 10, March, 2018 - 09, March, 2021

Belongs to Central Office Certificate No.: 174480-2015-AE-IND-RvA

This is to certify that the management system of

Transrail Lighting Limited
Corporate & Registered Office: Fortune - 2000, A - Wing, 5th Floor, Bharat Nagar, Near SEBI/Wockhardt Hospital, Bandra - Kurla Complex (BKC), Bandra (E)/Kurla (W), Mumbai - 400 051, Maharashtra, India

has been found to conform to the Environmental Management System standard:
ISO 14001:2015

This certificate is valid for the following scope:
Design, development, engineering, procurement & support processes related to supply of steel towers for overhead electrical transmission lines, substation structures, rural electrification structure, railway electrification structure, microwave towers & similar structures, transmission, distribution & other poles, stadium masts, high mast systems, gantries & accessories, other structures, railway structures for turnkey projects, EC & aluminium alloy wire rods and overhead bare conductors for 11 KV to 1200 KV

Design of lighting luminaries

Place and date:
Chennai, 16, January, 2018

The RvA is a signatory to the IAF MLA

For the issuing office:
DNV GL – Business Assurance
ROMA, No. 10, GST Road, Alandur, Chennai - 600 016, India

Sivadasan Madiyath
Management Representative

Lack of fulfilment of conditions as set out in the Certification Agreement may render this Certificate invalid.
ACCREDITED UNIT: DNV GL Business Assurance B.V., ZWOLSEWEG 1, 2994 LB, BARENDRECHT, NETHERLANDS. TEL: +31102922689.
assurance.dnvgl.com

DNV·GL

Site certificate No.: 171749CC1-2015-AQ-IND-RvA
Initial certification date: 10, March, 2009
Valid: 10, March, 2018 - 09, March, 2021

Belongs to Central Office Certificate No.: 171749-2015-AQ-IND-RvA

This is to certify that the management system of

Transrail Lighting Limited
Corporate & Registered Office: Fortune - 2000, A - Wing, 5th Floor, Bharat Nagar, Near SEBI/Wockhardt Hospital, Bandra - Kurla Complex (BKC), Bandra (E)/Kurla (W), Mumbai - 400 051, Maharashtra, India

has been found to conform to the Quality Management System standard:
ISO 9001:2015

This certificate is valid for the following scope:
Design, development, engineering, procurement & support processes related to supply of steel towers for overhead electrical transmission lines, substation structures, rural electrification structure, railway electrification structure, microwave towers & similar structures, transmission, distribution & other poles, stadium masts, high mast systems, gantries & accessories, other structures, railway structures for turnkey projects, EC & aluminium alloy wire rods and overhead bare conductors for 11 KV to 1200 KV

Design of lighting luminaries

Place and date:
Chennai, 16, January, 2018

The RvA is a signatory to the IAF MLA

For the issuing office:
DNV GL – Business Assurance
ROMA, No. 10, GST Road, Alandur, Chennai - 600 016, India

Sivadasan Madiyath
Management Representative

Lack of fulfilment of conditions as set out in the Certification Agreement may render this Certificate invalid.
ACCREDITED UNIT: DNV GL Business Assurance B.V., ZWOLSEWEG 1, 2994 LB, BARENDRECHT, NETHERLANDS. TEL: +31102922689.
assurance.dnvgl.com

DNV·GL

Site certificate No.: 174482CC1-2015-HSO-IND-DNV
Initial certification date: 10, March, 2009
Valid: 10, March, 2018 - 09, March, 2021

Belongs to Central Office Certificate No.: 174482-2015-HSO-IND-DNV

This is to certify that the management system of

Transrail Lighting Limited
Corporate & Registered Office: Fortune - 2000, A - Wing, 5th Floor, Bharat Nagar, Near SEBI/Wockhardt Hospital, Bandra - Kurla Complex (BKC), Bandra (E)/Kurla (W), Mumbai - 400 051, Maharashtra, India

has been found to conform to the Occupational Health and Safety Management System standard:
OHSAS 18001:2007

This certificate is valid for the following scope:
Design, development, engineering, procurement & support processes related to supply of steel towers for overhead electrical transmission lines, substation structures, rural electrification structure, railway electrification structure, microwave towers & similar structures, transmission, distribution & other poles, stadium masts, high mast systems, gantries & accessories, other structures, railway structures for turnkey projects, EC & aluminium alloy wire rods and overhead bare conductors for 11 KV to 1200 KV

Design of lighting luminaries

Place and date:
Chennai, 16, January, 2018

For the issuing office:
DNV GL – Business Assurance
ROMA, No. 10, GST Road, Alandur, Chennai - 600 016, India

Sivadasan Madiyath
Management Representative

Lack of fulfilment of conditions as set out in the Certification Agreement may render this Certificate invalid.
CERTIFYING UNIT: DNV GL BUSINESS ASSURANCE INDIA PRIVATE LIMITED. ROMA, No. 10, GST Road, Alandur, Chennai, 600 016, India.

DNV·GL

MANAGEMENT SYSTEM CERTIFICATE

Site certificate No.: 174480CC7-2015-AE-IND-RvA
Initial certification date: 10, March, 2009
Valid: 10, March, 2018 - 09, March, 2021

Belongs to Central Office Certificate No.: 174480-2015-AE-IND-RvA

This is to certify that the management system of

Transrail Lighting Limited
Survey No. 227/1/1/1/1/1, 228/2, 228/3, 228/4, 228/5, Khanvel Kherdi Road, Kherdi Village, Silvassa – 396 230, Union Territory of Dadra & Nagar Haveli, India

has been found to conform to the Environmental Management System standard:
ISO 14001:2015

This certificate is valid for the following scope:
Manufacture and supply of transmission, distribution & other poles, stadium masts, high mast systems, gantries & accessories, other structures, railway structures, supply of lighting luminaries

Place and date:
Chennai, 16, January, 2018


The RvA is a signatory to the IAF MLA

For the issuing office:
DNV GL – Business Assurance
ROMA, No. 10, GST Road, Alandur, Chennai - 600 016, India

Sivadasan Madiyath
Management Representative

Lack of fulfilment of conditions as set out in the Certification Agreement may render this Certificate invalid.
ACCREDITED UNIT: DNV GL Business Assurance B.V., ZWOLSEWEG 1, 2994 LB, BARENDRECHT, NETHERLANDS. TEL: +31102922689.
assurance.dnvgl.com



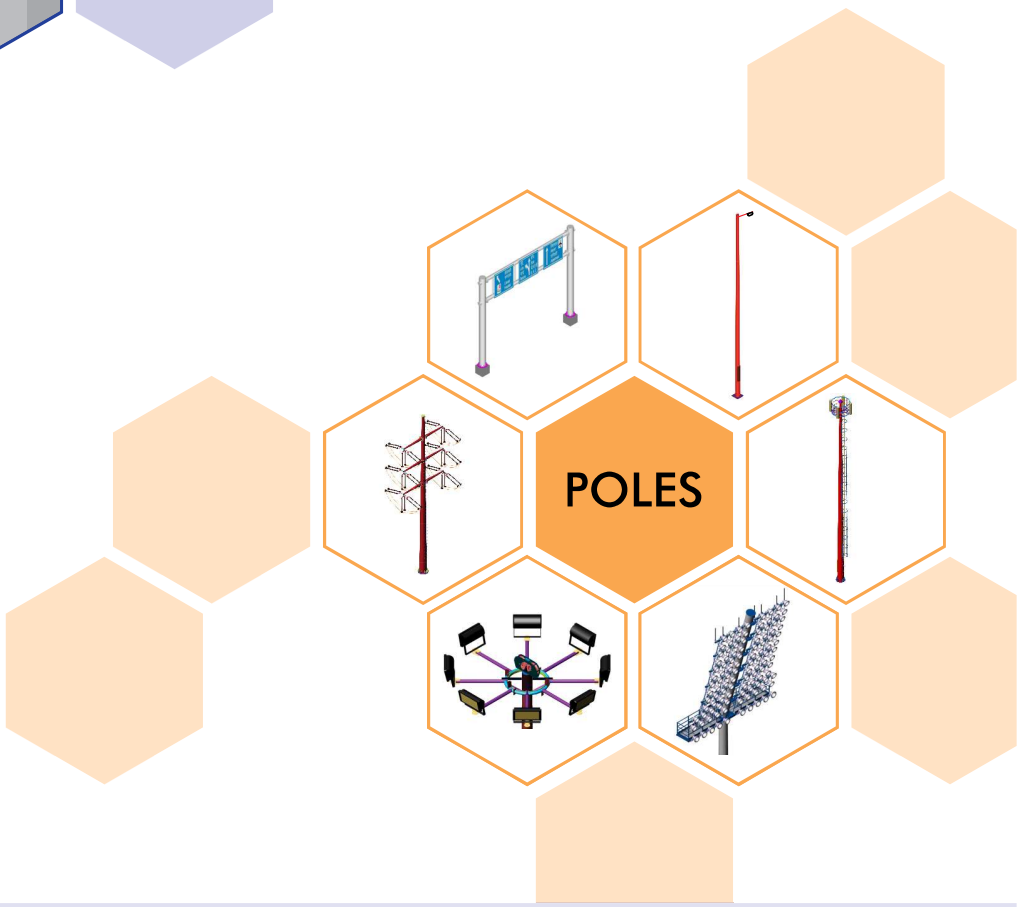

CORPORATE OFFICE

Transrail Lighting Limited
501 A, B, C, E Fortune 2000, Block G, Bandra Kurla Complex, Bandra East, Mumbai - 400 051, India.
Tel: +91-22-6197 9600 | Fax: +91-22-6197 9666 | Email: enquiry@transraillighting.com | Web: www.transrail.in


MANUFACTURING UNIT

Silvassa Plant (Poles)
Survey No. 227/1, 227/2, 227/3, 227/4, 227/5, Khanvel, Talasari Road, Opp HPCL,
Kherdi Village, Silvassa - 396 230 .
Tel: +91-260 2641 666 | Fax: +91-260 2631 666

Disclaimer: every endeavor have been made in compilation of the technical details in this catalogue for correctness. Product installation and other images are for reference and representation purpose. Due to continuous improvements in Technology, Standards, and specifications; content are subject to change without prior notice. Contact nearest TRANSRAIL office or its representative for latest update and information. Copying, reproducing and sharing of the details in part or full is subject to prior consent and approval of TRANSRAIL

TRANSRAIL

SOLAR

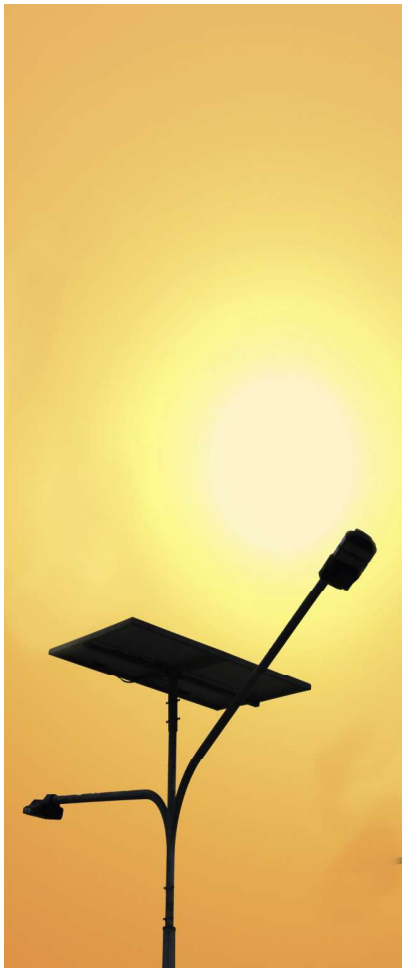







Integrated Power Transmission, Lighting and Solar Solutions

About TRANSRAIL

Transrail Lighting Limited is an integrated company offering turnkey solutions in the field of Power Transmission, Distribution, Rural Electrification, Electrical Sub Station, Overhead Railway Electrification, Solar System and Lighting Solution. An active player in EPC and Turnkey projects having presence in INDIA and global presence in over 35 countries.


At its core, we are a company driven by passion for quality, innovation and excellence.

Having multi location manufacturing and supply facilities within INDIA for galvanised T&D structures, monopoles, high masts, stadium masts, street light poles, flag mast, LED and HID Luminaires and solar lighting systems to cater the needs of our customers.

All our operation are certified for ISO 9001, ISO 14000, OHSAS certification.





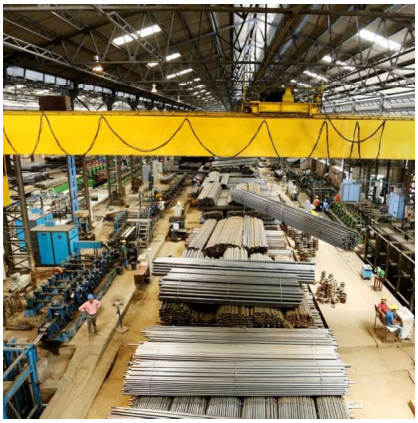

OUR IN-HOUSE CAPABILITIES:

- Design
- Development
- Manufacturing
- Testing
- Supply and EPC Civil, T&D, Electrical and Projects

SOLAR LED STREET LIGHT

FEATURES

- Inbuilt battery charge controller
- Affordable and easy to install
- LED chips with high lumen packages having longer life
- Easy installation & low maintenance
- Suitable for all types of battery
- Excellent performance
- Available in different capacities and battery voltage
- Specially designed optics with highest quality lens which will give good uniformity and wider coverage area



PRODUCT INFORMATION

Housing	Aluminium PDC, Single piece
Finish	Black Powder Coated
IP Rating	IP 66
Operating Temp	(-40 ^ c To 60 ^ c)
Input Voltage	12/24v
LED Rating	50,000 Hours L70
p.f.	>0.95
CCT	2700 - 6500 K
CRI	>70
THD	<10%
LED Luminious Flux	900 - 27500 Nominal Lumens
Mechanical Impact Resistance	IK08 (Body & Frame Only)

MODEL	WATTAGE [W]*	EFFICACY	LUMENS
TLL-MARS-SL	7W - 48W	>110	>700 - 5280
TLL-VENUS-SL	60W - 80W	>110	>6600 - 8800
TLL-VENUS-SL	100W - 250W	>110	>11000 - 27500



* Other wattages available on request

SOLAR LED FLOOD LIGHTS

FEATURES

- Inbuilt battery charge controller
- Affordable and easy to install
- LED chips with high lumen packages having longer life
- Easy installation & low maintenance
- Suitable for all types of battery
- Excellent performance
- Available in different capacities and battery voltage
- Specially designed optics with highest quality lens which will give good uniformity and wider coverage area



PRODUCT INFORMATION

Frame Colour	Black
IP Rating	IP 66
Operating Temp	(-40 ^ c To 60 ^ c)
Input Voltage	12/24v
LED Rating	50,000 Hours L70
p.f.	>0.95
CCT	2700 - 6500 K
CRI	>70
THD	<10%
LED Luminious Flux	900 - 27500 Nominal Lumens
Mechanical Impact Resistance	IK08 (Body & Frame Only)

LED FLOOD LIGHT

MODEL	WATTAGE [W]*	EFFICACY	LUMENS
TLL-PLUTO-FL	20W - 60W	>110	>2200 - 6600
TLL-PLUTO-FL	80W - 150W	>110	>8800 - 16500
TLL-PLUTO-FL	180W - 300W	>110	>19800 - 33000



* Other wattages available on request

SOLAR HYBRID LED STREET LIGHTS

FEATURES

- Inbuilt battery charge controller
- Working on both DC and AC input
- Prefers solar power
- Automatically switch from DC to AC when battery is fully discharged
- Affordable and easy to install
- Confirm IP 66
- Available with aluminium housing
- LED chips with high lumen packages having longer life
- Easy installation & low maintenance
- Suited for all battery types
- Excellent performance
- Available in different capacities and battery voltage
- Specially designed optics with highest quality lens which will give good uniformity and wider coverage area




PRODUCT INFORMATION

Frame Colour	Black Powder Coated
IP Rating	IP 66
Operating Temp	(-40 ^ c To 60 ^ c)
Input Voltage	24v/90-270v AC 50Hz
LED Rating	50,000 Hours L70
p.f.	>0.95
CCT	2700 - 6500 K
CRI	>70
THD	<10%
LED Luminious Flux	900 - 27500 Nominal Lumens
Mechanical Impact Resistance	IK08 (Body & Frame Only)

HYBRID LED STREET LIGHT

MODEL	WATTAGE [W]*	EFFICACY	LUMENS
TLL-EARTH-HSL	60W - 150W	>110	>6600 - 16500
TLL-VENUS-SL	180W - 250W	>110	>19800 - 27500

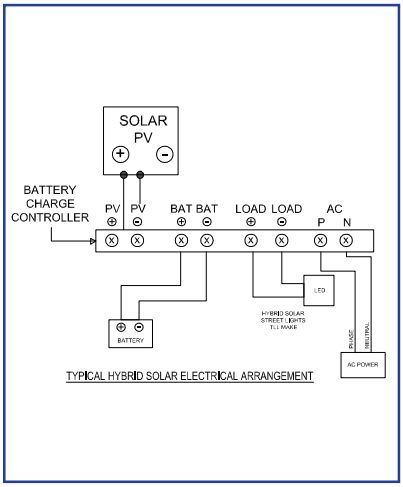

* Other wattages available on request

SOLAR HYBRID LED FLOOD LIGHTS

FEATURES

- Inbuilt battery charge controller
- Working on both DC and AC input
- Prefers solar power
- Automatically switch from DC to AC when battery is fully discharged
- Affordable and easy to install
- Confirm IP 66
- Available with aluminium housing
- LED chips with high lumen packages having longer life
- Easy installation & low maintenance
- Suited for all battery types
- Excellent performance
- Available in different capacities and battery voltage
- Specially designed optics with highest quality lens which will give good uniformity and wider coverage area




PRODUCT INFORMATION

Frame Colour	Black
IP Rating	IP 66
Operating Temp	(-40 ^ c To 60 ^ c)
Input Voltage	12/24v/90-270v AC 50Hz
LED Rating	50,000 Hours L70
p.f.	>0.95
CCT	2700 - 6500 K
CRI	>70
THD	<10%
LED Luminious Flux	900 - 27500 Nominal Lumens
Mechanical Impact Resistance	IK08 (Body & Frame Only)

SOLAR HYBRID LED FLOOD LIGHT

MODEL	WATTAGE [W]*	EFFICACY	LUMENS
TLL-SUN-HFL	20W - 60W	>110	>2200 - 6600
TLL-SUN-HFL	80W - 150W	>110	>8800 - 16500
TLL-SUN-HFL	180W - 300W	>110	>19800 - 33000

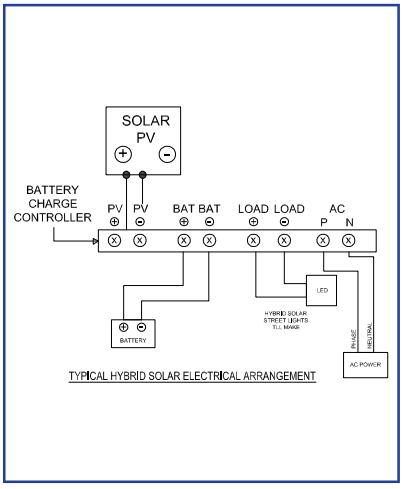

* Other wattages available on request

ALL IN ONE SOLAR STREET LIGHT



ALL in ONE



2 in 1



ALL in ONE

FEATURES

- Introducing a revolutionary new solar street light with all-in-one features designed to transform the segment forever and provide ideal solutions in street lighting.
- Transrail All-in-One offers high brightness, compact and aesthetic design with a long life, smart PIR sensors that modify lighting according to human presence. It truly is the light of future.
- Integrated design of solar panel, LED light and inbuilt battery having encompassing street light design.
- Application: Urban roads, residential layouts, parks, public gardens, industrial & commercial campuses, etc.

2 in 1 STREET LIGHT

MODEL	WATTAGE [W]*	EFFICACY	LUMENS	WEIGHT	DIMENSION
TLL-JUPITER-TIO	7W - 48W	>110	>2200 - 6600	1.3 KG	355X110X63
TLL-JUPITER-TIO	60W - 80W	>110	>8800 - 16500	1.3 KG	355X110X63
TLL-JUPITER-TIO	90W - 100W	>110	>19800 - 33000	1.3 KG	355X110X63



* Other wattages available on request

STAND ALONE SOLAR STREET LIGHT

FEATURES

- No trenching, cabling or wiring
- Storable and retrievable form of energy
- No pollution, environment friendly and less operational cost
- Does not require skilled manpower to operate
- Illuminates remote place where grid supply is not available
- Longer life with minimum maintenance
- More safe and easy to install
- Support for green initiative
- Solar wing of Transrail Lighting Ltd
- Qualified and experienced team of lighting engineers
- Exhaustive range of luminaries for all solar applications
- Network of branches spread across entire India
- Inbuilt charge controller



PRODUCT INFORMATION

Frame Colour	Black
IP Rating	IP 66
Operating Temp	(-40 ^ c To 60 ^ c)
Input Voltage	12/24v/90 To 270 V Ac 50 Hz
LED Rating	50,000 Hours L70
p.f.	>0.95
CCT	2700 - 6500 K
CRI	>70
THD	<10%
LED Luminious Flux	900 - 27500 Nominal Lumens
Mechanical Impact Resistance	IK08 (Body & Frame Only)

STANDALONE SOLAR LED STREET LIGHT

MODEL	WATTAGE [W]*	POLE HEIGHT	BATTERY TYPE	AUTONOMY
TLL-MERCURY-SA	7W - 48W	4 - 7m	DESIGN FOR ALL BATTERY TYPE	1 - 3 DAYS
TLL-MERCURY-SA	60W - 80W	6 - 8m	DESIGN FOR ALL BATTERY TYPE	1 - 2 DAYS
TLL-MERCURY-SA	100W - 250W	8 - 12m	DESIGN FOR ALL BATTERY TYPE	1 DAY




* Other wattages available on request

ROOF TOP


GRID TIED SOLAR POWER SYSTEMS

Smartest way to reduce electricity bills.
Grid Connected roof top systems consist of an array of the highest quality PV modules installed on rooftop. These panels are connected to a Bi-directional Utility Meter, enabling all excess power to be sold back to the Grid. This system eliminates the use of batteries thus providing an optimum power production. Grid connected Solar PV power systems range from small **1KW** systems to massive **1 MW** systems.

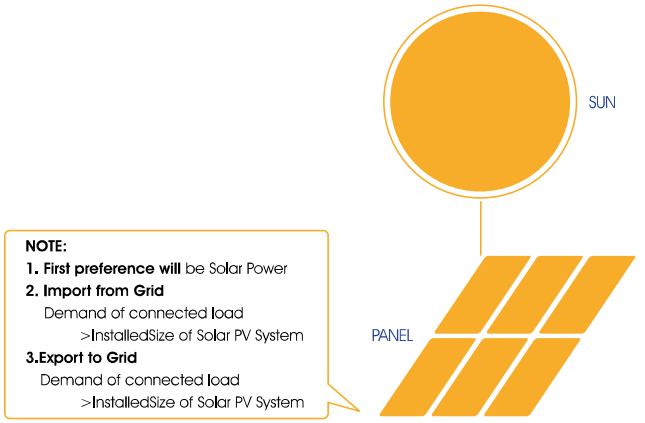

COMPLETELY INDEPENDENT SOLAR OFF GRID POWER SYSTEM


This consists of high quality PV Module, which stores Power in High Quality and fast charging batteries. This power from batteries is further drawn by load via Off Grid Inverter.
Off Grid Solar PV Power System Range:
⩾ 1kW

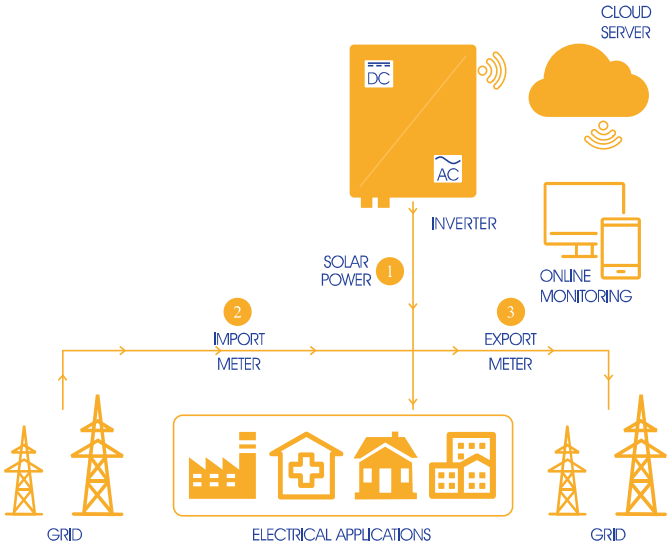





SOLAR HIGH MAST

- System Comprises of high efficient, durable, weather proof construction SOLAR lighting mini mast suitable for 80W to 240W for 10/12 hrs operation with 1 day autonomy
- Charge controller, Battery and related electrical accessories on the lantern carriage having weather proof construction
- 4 to 6 nos. of LED Street and Flood light of IP 66 PDC aluminium housing, SMD type LED having >100 LPW with an option of secondary optical lens arrangement for improved lighting performance to provide general lighting
- Manually operated winch or Electro mechanically motorized winch operations
- Applications: Traffic Junctions, Car Parks and Area Lighting

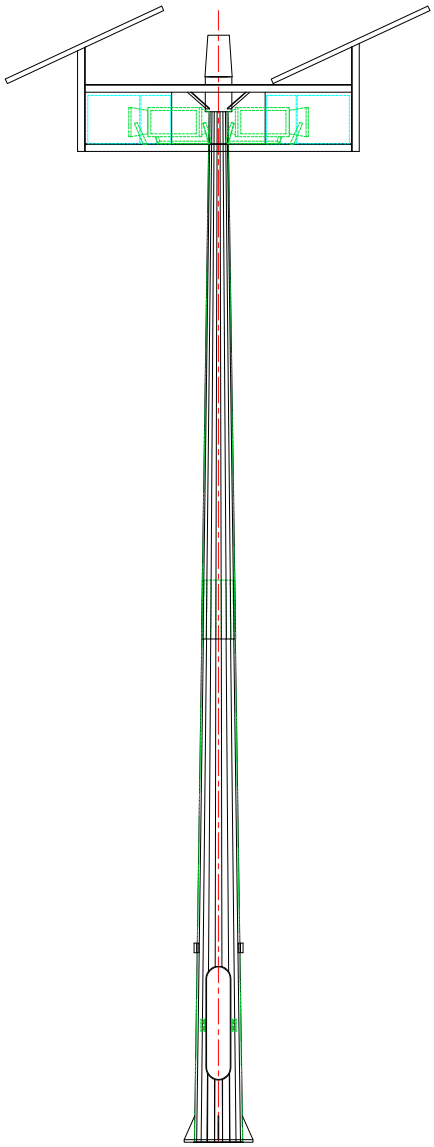



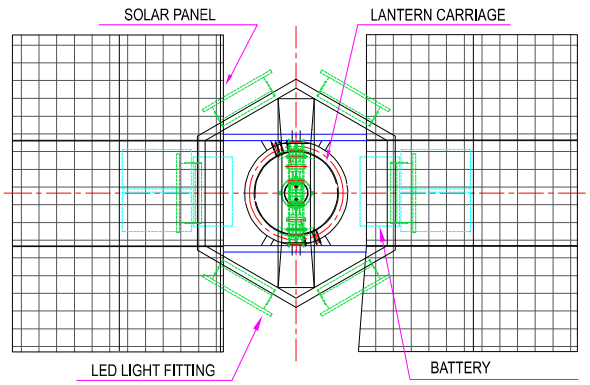

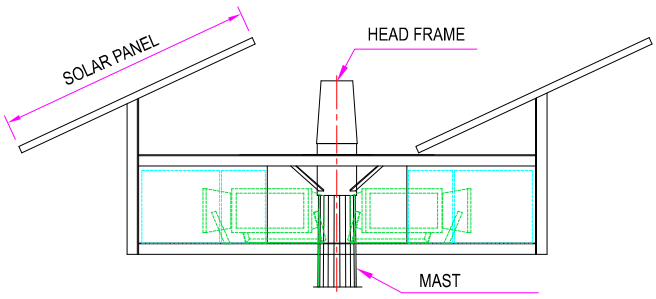

CERTIFICATES

DNV·GL

Site certificate No.: 174480CC1-2015-AE-IND-RvA | Initial certification date: 10, March, 2009 | Valid: 10, March, 2018 - 09, March, 2021

Belongs to Central Office Certificate No.: 174480-2015-AE-IND-RvA

This is to certify that the management system of

Transrail Lighting Limited

Corporate & Registered Office: Fortune - 2000, A - Wing, 5th Floor, Bharat Nagar, Near SEBI/Wockhardt Hospital, Bandra - Kurla Complex (BKC), Bandra (E)/Kurla (W), Mumbai - 400 051, Maharashtra, India

has been found to conform to the Environmental Management System standard:
ISO 14001:2015

This certificate is valid for the following scope:
Design, development, engineering, procurement & support processes related to supply of steel towers for overhead electrical transmission lines, substation structures, rural electrification structure, railway electrification structure, microwave towers & similar structures, transmission, distribution & other poles, stadium masts, high mast systems, gantries & accessories, other structures, railway structures for turnkey projects, EC & aluminium alloy wire rods and overhead bare conductors for 11 KV to 1200 KV

Design of lighting luminaries

Place and date: **Chennai, 16, January, 2018**

IAF MGMT. SYS. RvA C 024 — The RvA is a signatory to the IAF MLA

For the issuing office:
DNV GL – Business Assurance
ROMA, No. 10, GST Road, Alandur, Chennai - 600 016, India

Sivadasan Madiyath
Management Representative

Lack of fulfilment of conditions as set out in the Certification Agreement may render this Certificate invalid.
ACCREDITED UNIT: DNV GL Business Assurance B.V., ZWOLSEWEG 1, 2994 LB, BARENDRECHT, NETHERLANDS. TEL: +31102922689. assurance.dnvgl.com

DNV·GL

Site certificate No.: 171749CC1-2015-AQ-IND-RvA | Initial certification date: 10, March, 2009 | Valid: 10, March, 2018 - 09, March, 2021

Belongs to Central Office Certificate No.: 171749-2015-AQ-IND-RvA

This is to certify that the management system of

Transrail Lighting Limited

Corporate & Registered Office: Fortune - 2000, A - Wing, 5th Floor, Bharat Nagar, Near SEBI/Wockhardt Hospital, Bandra - Kurla Complex (BKC), Bandra (E)/Kurla (W), Mumbai - 400 051, Maharashtra, India

has been found to conform to the Quality Management System standard:
ISO 9001:2015

This certificate is valid for the following scope:
Design, development, engineering, procurement & support processes related to supply of steel towers for overhead electrical transmission lines, substation structures, rural electrification structure, railway electrification structure, microwave towers & similar structures, transmission, distribution & other poles, stadium masts, high mast systems, gantries & accessories, other structures, railway structures for turnkey projects, EC & aluminium alloy wire rods and overhead bare conductors for 11 KV to 1200 KV

Design of lighting luminaries

Place and date: **Chennai, 16, January, 2018**

IAF MGMT. SYS. RvA C 024 — The RvA is a signatory to the IAF MLA

For the issuing office:
DNV GL – Business Assurance
ROMA, No. 10, GST Road, Alandur, Chennai - 600 016, India

Sivadasan Madiyath
Management Representative

Lack of fulfilment of conditions as set out in the Certification Agreement may render this Certificate invalid.
ACCREDITED UNIT: DNV GL Business Assurance B.V., ZWOLSEWEG 1, 2994 LB, BARENDRECHT, NETHERLANDS. TEL: +31102922689. assurance.dnvgl.com

DNV·GL

Site certificate No.: 174482CC1-2015-HSO-IND-DNV | Initial certification date: 10, March, 2009 | Valid: 10, March, 2018 - 09, March, 2021

Belongs to Central Office Certificate No.: 174482-2015-HSO-IND-DNV

This is to certify that the management system of

Transrail Lighting Limited

Corporate & Registered Office: Fortune - 2000, A - Wing, 5th Floor, Bharat Nagar, Near SEBI/Wockhardt Hospital, Bandra - Kurla Complex (BKC), Bandra (E)/Kurla (W), Mumbai - 400 051, Maharashtra, India

has been found to conform to the Occupational Health and Safety Management System standard:
OHSAS 18001:2007

This certificate is valid for the following scope:
Design, development, engineering, procurement & support processes related to supply of steel towers for overhead electrical transmission lines, substation structures, rural electrification structure, railway electrification structure, microwave towers & similar structures, transmission, distribution & other poles, stadium masts, high mast systems, gantries & accessories, other structures, railway structures for turnkey projects, EC & aluminium alloy wire rods and overhead bare conductors for 11 KV to 1200 KV

Design of lighting luminaries

Place and date: **Chennai, 16, January, 2018**

MANAGEMENT SYSTEM CERTIFICATION DNV·GL

For the issuing office:
DNV GL – Business Assurance
ROMA, No. 10, GST Road, Alandur, Chennai - 600 016, India

Sivadasan Madiyath
Management Representative

Lack of fulfilment of conditions as set out in the Certification Agreement may render this Certificate invalid.
CERTIFYING UNIT: DNV GL BUSINESS ASSURANCE INDIA PRIVATE LIMITED, ROMA, No. 10, GST Road, Alandur, Chennai, 600 016, India.

DNV·GL

MANAGEMENT SYSTEM CERTIFICATE

Site certificate No.: 174480CC7-2015-AE-IND-RvA | Initial certification date: 10, March, 2009 | Valid: 10, March, 2018 - 09, March, 2021

Belongs to Central Office Certificate No.: 174480-2015-AE-IND-RvA

This is to certify that the management system of

Transrail Lighting Limited

Survey No. 227/1/1/1/1/1, 228/2, 228/3, 228/4, 228/5, Khanvel Kherdi Road, Kherdi Village, Silvassa – 396 230, Union Territory of Dadra & Nagar Haveli, India

has been found to conform to the Environmental Management System standard:
ISO 14001:2015

This certificate is valid for the following scope:
Manufacture and supply of transmission, distribution & other poles, stadium masts, high mast systems, gantries & accessories, other structures, railway structures, supply of lighting luminaries

Place and date: **Chennai, 16, January, 2018**


IAF MGMT. SYS. RvA C 024 — The RvA is a signatory to the IAF MLA

For the issuing office:
DNV GL – Business Assurance
ROMA, No. 10, GST Road, Alandur, Chennai - 600 016, India

Sivadasan Madiyath
Management Representative

Lack of fulfilment of conditions as set out in the Certification Agreement may render this Certificate invalid.
ACCREDITED UNIT: DNV GL Business Assurance B.V., ZWOLSEWEG 1, 2994 LB, BARENDRECHT, NETHERLANDS. TEL: +31102922689. assurance.dnvgl.com



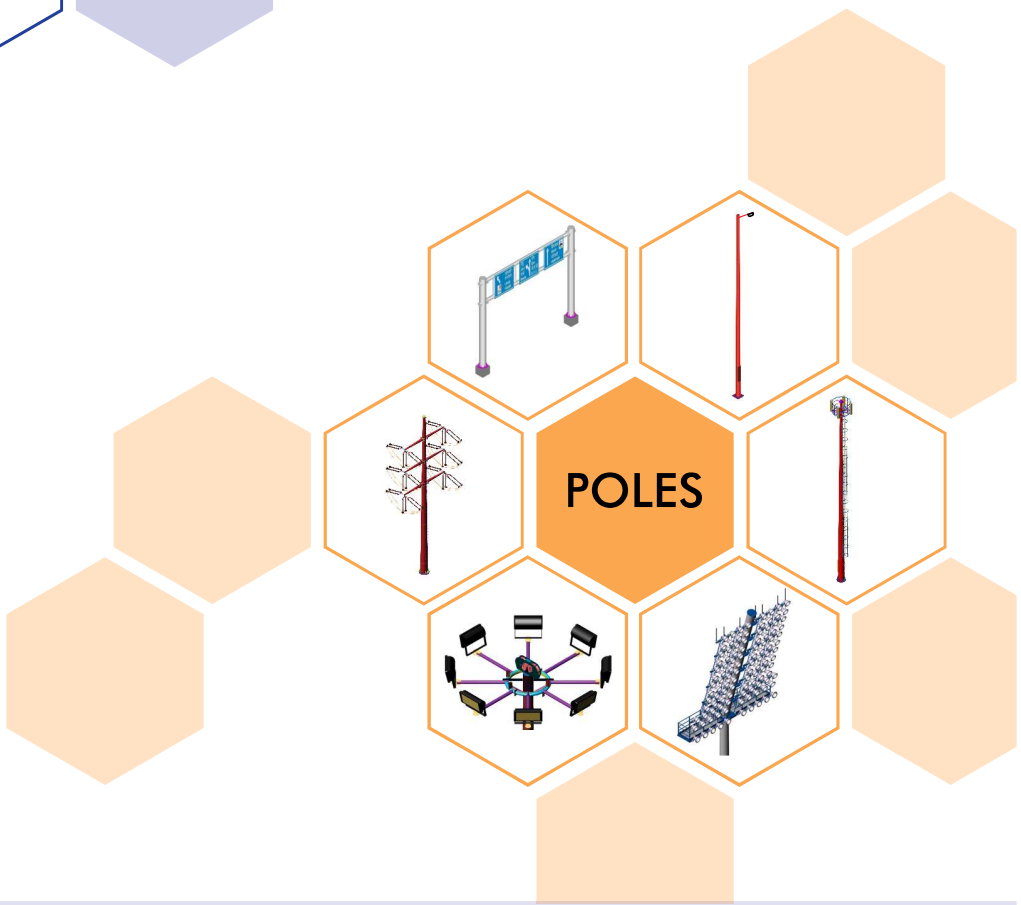

CORPORATE OFFICE

Transrail Lighting Limited
501 A, B, C, E Fortune 2000, Block G, Bandra Kurla Complex, Bandra East, Mumbai - 400 051, India.
Tel: +91-22-6197 9600 | Fax: +91-22-6197 9666 | Email: enquiry@transraillighting.com | Web: www.transrail.in

MANUFACTURING UNIT

Silvassa Plant (Poles)
Survey No. 227/1, 227/2, 227/3, 227/4, 227/5, Khanvel, Talasari Road, Opp HPCL,
Kherdi Village, Silvassa - 396 230 .
Tel: +91-260 2641 666 | Fax: +91-260 2631 666

Disclaimer: every endeavor have been made in compilation of the technical details in this catalogue for correctness. Product installation and other images are for reference and representation purpose. Due to continuous improvements in Technology, Standards, and specifications; content are subject to change without prior notice. Contact nearest TRANSRAIL office or its representative for latest update and information. Copying, reproducing and sharing of the details in part or full is subject to prior consent and approval of TRANSRAIL