



Product description

MS series servo motor


Match DS2 series single/3-phase 0.2~0.4kw servo drive

Encoder is 2500 ppr

Specifications:

Voltage level	220V
Motor type	MS-60ST-M01330□□-20P4
Rated power (KW)	0.4
Rated current (A)	2.8
Rated speed (rpm)	3000
Rated torque (N·m)	1.27
Peak torque (N·m)	3.8
Back EMF constant (V/krpm)	28
Torque coefficient (N·m/A)	0.5
Rotor inertia ($\text{Kg} \cdot \text{m}^2$)	0.30×10^{-4}
Winding resistor (Ω)	5.83
Winding inductance (mH)	12.23
Electrical time constant (ms)	2.1
Weight (Kg)	1.33
Encoder ppr (PPR)	2500
Pole pairs	4
Motor insulation level	Class B (130°C)
Protection level	IP64
Ambient temperature	0°C ~ 40°C
Ambient humidity	Related humidity <90% (no condensation)

Dimension (unit: mm)

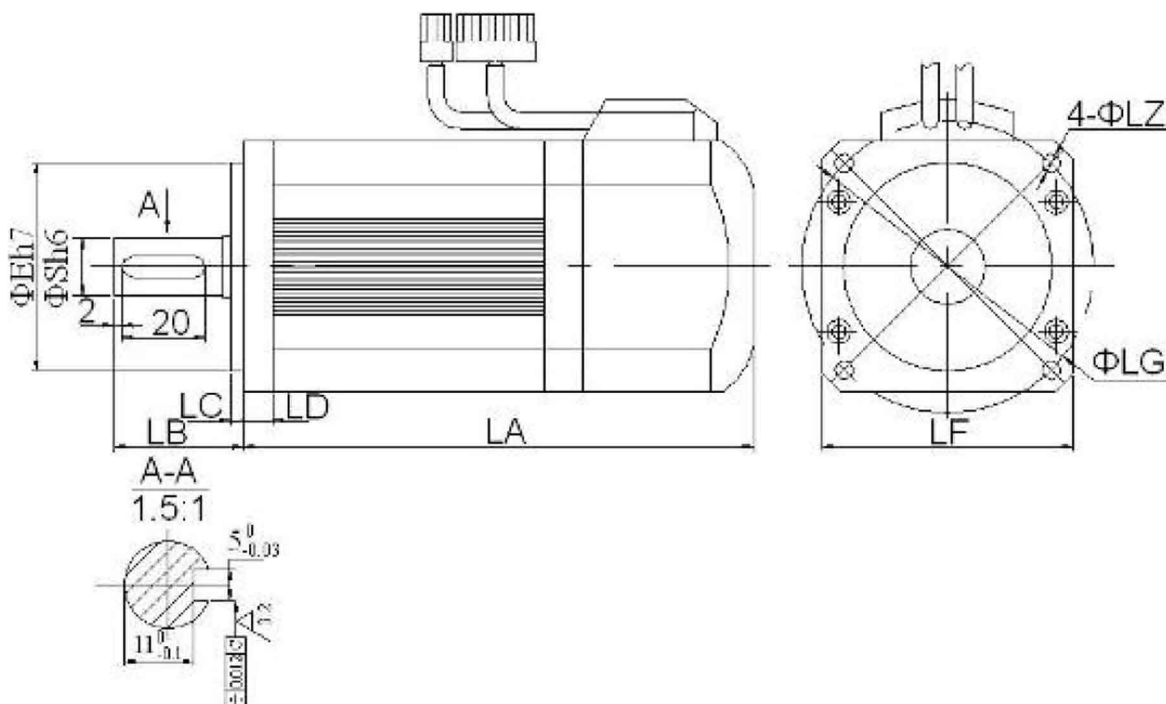

Model	LA	LB	LC	LD	LE	LF	LG	LZ	S
MS-60ST-M01330□□-20P4	146	30	3	7	50	60	70	4.5	14