

Duralon™



DURALON MOUNTED BEARINGS



RegalRexnord™



WHERE DO MOUNTED DURALON® BEARINGS EXCEL?

OSCILLATING, PIVOTING, SLIDING AND SLOW ROTATING APPLICATIONS

Grease lubricated bearings often seize and fail in oscillating, pivoting and slow rotating applications due to breakdown of lubricating film caused by stagnation over long periods of time. This leads to metal-on-metal contact between the inner and outer races. Duralon bearings are ideal for these types of applications due to their non-metallic construction and self lubricating properties that eliminate the need for grease.

CORROSIVE ENVIRONMENTS

Grease lubricated bearings often fail in corrosive environments due to component rust and the break down of the lubricating properties of grease. Duralon's non-metallic bearings excel in these applications due to their non-oxidizing material and self lubricating properties that eliminate the potential for lubrication breakdown. In addition, because Duralon bearings never rust they are easily removed from shafts, unlike standard bearings that often need to be cut from shafts due to fretting corrosion when being replaced. Duralon bearings are also electrically insulating.

STRENGTH

Duralon bearings have the ability to withstand significantly greater pressures than standard UHMW bearings and do not breakdown and cause metal to metal contact like a lubricated bronze bearing. Duralon bearings can withstand as much as 6 times more projected bearing pressure than a standard UHMW bearing.

CUSTOM CONFIGURATIONS

Duralon bearings can be custom made to fit your unique application. Square, rectangular D-shaped and hex are just a few of the custom shapes Duralon bearing inserts can accommodate, and Regal Rexnord can package them in the housing you need for your application. Regal Rexnord Application Engineers will work with you to configure a solution that meets your needs.

Applications:

- Pivoting Arms of Cranes
- Walking Beams
- Aeration Equipment in Water Treatment
- HVAC Ventilation Equipment

Environments:

- Heavy Chemical Washdown Environments
- Saltwater and Chlorinated Water
- Highly Acidic Environments
- Heavy Fertilizers

Applications:

- Retractable Stadium Roofs
- Palletizer Conveyors
- Construction Equipment

Custom Applications:


- Bottling Machinery
- Ship Unloading Equipment
- Exercise Equipment

INDUSTRIES SERVED

Agriculture
Air Handling
Construction Machinery
Food and Beverage
Oil & Gas
Recreational Vehicles
Water Treatment




2-BOLT FLANGE MOUNTING

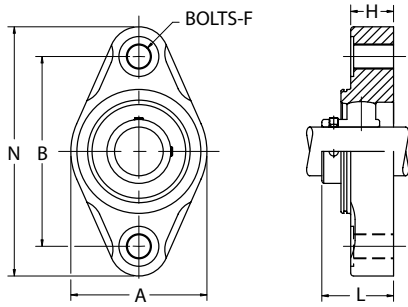


Part Number	Shaft Diameter	A	B	F - Bolts	H	L - Shaft Protector Length	N
DKLFXM012SP	3/4	2 7/16	3.543	3/8	5 1/64	1.44	4 9/16
DKLFXM013SP	13/16	2 13/16	3.898		7/8	1.5	5 1/8
DKLFXM014SP	7/8	2 13/16	3.898		7/8	1.5	5 1/8
DKLFXM015SP	15/16	2 13/16	3.898		7/8	1.5	5 1/8
DKLFXM016SP	1	2 13/16	3.898		7/8	1.5	5 1/8
DKLFXM017SP	1 1/16	3 11/32	4.606		1 1/64	1.82	5 53/64
DKLFXM018SP	1 1/8	3 11/32	4.606		1 1/64	1.82	5 53/64
DKLFXM019SP	1 3/16	3 11/32	4.606		1 1/64	1.82	5 53/64
DKLFXME020SP	1 1/4S	3 11/32	4.606		1 1/64	1.82	5 53/64
DKLFXM020SP	1 1/4	3 21/32	5.118		1 1/64	1.96	6 3/8
DKLFXM021SP	1 5/16	3 21/32	5.118		1 1/64	1.96	6 3/8
DKLFXM022SP	1 3/8	3 21/32	5.118		1 1/64	1.96	6 3/8
DKLFXM023SP	1 7/16	3 21/32	5.118		1 1/64	1.96	6 3/8
DKLFXM024SP	1 1/2	4 1/64	5.672		1 3/16	2.03	6 59/64

4-BOLT FLANGE MOUNTING

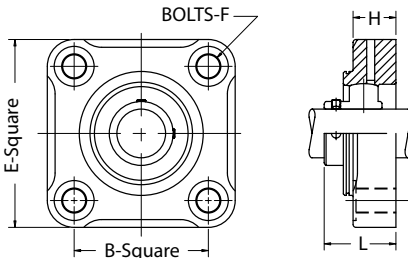


Part Number	Shaft Diameter	B	E	F - Bolts	H	L - Shaft Protector Length
DKLFM013SP	13/16	2.756	3 55/64	3/8	7/8	1.5
DKLFM014SP	7/8	2.756	3 55/64		7/8	1.5
DKLFM015SP	15/16	2.756	3 55/64		7/8	1.5
DKLFM016SP	1	2.756	3 55/64		7/8	1.5
DKLFM017SP	1 1/16	3.268	4 21/64		1 1/64	1.82
DKLFM018SP	1 1/8	3.268	4 21/64		1 1/64	1.82
DKLFM019SP	1 3/16	3.268	4 21/64		1 1/64	1.82
DKLFME020SP	1 1/4S	3.268	4 21/64		1 1/64	1.82
DKLFM020SP	1 1/4	3.622	4 23/32		1 1/64	1.96
DKLFM021SP	1 5/16	3.622	4 23/32		1 1/64	1.96
DKLFM022SP	1 3/8	3.622	4 23/32		1 1/64	1.96
DKLFM023SP	1 7/16	3.622	4 23/32		1 1/64	1.96
DKLFM024SP	1 1/2	4.016	5 5/32		1 3/16	2.03

PILLOW BLOCK

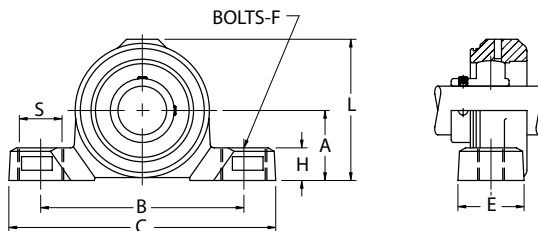

Part Number	Shaft Diameter	A	B	C	E	F - Bolts	H	J	L	L - Shaft Protector Length	S
DKLPM012SP	3/4	1 5/16	3 25/32	5 1/32	1 3/16	3/8	43/64	3/4	3 1/32	1.44	7/8
DKLPM013SP	13/16	1 7/16	4 11/16	5 31/64	1 23/64		43/64	13/16	3 11/32	1.5	7/8
DKLPM014SP	7/8	1 7/16	4 11/16	5 31/64	1 23/64		43/64	13/16	3 11/32	1.5	7/8
DKLPM015SP	15/16	1 7/16	4 11/16	5 31/64	1 23/64		43/64	13/16	3 11/32	1.5	7/8
DKLPM016SP	1	1 7/16	4 11/16	5 31/64	1 23/64		43/64	13/16	3 11/32	1.5	7/8
DKLPM017SP	1 1/16	1 11/16	4 49/64	6 27/64	1 27/64		25/32	61/64	3 55/64	1.82	15/16
DKLPM018SP	1 1/8	1 11/16	4 49/64	6 27/64	1 27/64		25/32	61/64	3 55/64	1.82	15/16
DKLPM019SP	1 3/16	1 11/16	4 49/64	6 27/64	1 27/64		25/32	61/64	3 55/64	1.82	15/16
DKLPME020SP	1 1/4S	1 11/16	4 49/64	6 27/64	1 27/64		25/32	61/64	3 55/64	1.82	15/16
DKLPM020SP	1 1/4	1 7/8	4 31/32	6 37/64	1 33/64		25/32	1 7/16	4 1/4	1.96	15/16
DKLPM021SP	1 5/16	1 7/8	4 31/32	6 37/64	1 33/64		25/32	1 7/16	4 1/4	1.96	15/16
DKLPM022SP	1 3/8	1 7/8	4 31/32	6 37/64	1 33/64		25/32	1 7/16	4 1/4	1.96	15/16
DKLPM023SP	1 7/16	1 7/8	4 31/32	6 37/64	1 33/64		25/32	1 7/16	4 1/4	1.96	15/16
DKLPM024SP	1 1/2	2	5 11/32	7 9/32	1 33/64		25/32	1 13/64	4 13/32	2.03	15/16

3-BOLT FLANGE BRACKET

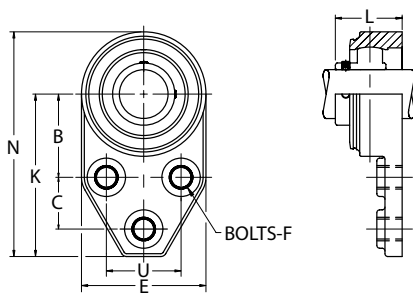

Part Number	Shaft Diameter	B	C	D	E	F – Bolts	K	L – Shaft Protector Length	N	U
DKLFBM013SP	13/16	1 13/16	1 1/8	1 11/64	2 23/32	3/8	3 17/32	1.5	4 57/64	1 5/8
DKLFBM014SP	7/8	1 13/16	1 1/8	1 11/64	2 23/32		3 17/32	1.5	4 57/64	1 5/8
DKLFBM015SP	15/16	1 13/16	1 1/8	1 11/64	2 23/32		3 17/32	1.5	4 57/64	1 5/8
DKLFBM016SP	1	1 13/16	1 1/8	1 11/64	2 23/32		3 17/32	1.5	4 57/64	1 5/8
DKLFBM017SP	1 1/16	2 1/16	1 1/4	1 11/32	3 13/64		3 55/64	1.82	5 15/32	1 7/8
DKLFBM018SP	1 1/8	2 1/16	1 1/4	1 11/32	3 13/64		3 55/64	1.82	5 15/32	1 7/8
DKLFBM019SP	1 3/16	2 1/16	1 1/4	1 11/32	3 13/64		3 55/64	1.82	5 15/32	1 7/8
DKLFBME020SP	1 1/4S	2 1/16	1 1/4	1 11/32	3 13/64		3 55/64	1.82	5 15/32	1 7/8
DKLFBM020SP	1 1/4	2 3/8	1 1/4	1 9/16	3 11/16	7/16	4 15/64	1.96	6 5/64	2
DKLFBM021SP	1 5/16	2 3/8	1 1/4	1 9/16	3 11/16		4 15/64	1.96	6 5/64	2
DKLFBM022SP	1 3/8	2 3/8	1 1/4	1 9/16	3 11/16		4 15/64	1.96	6 5/64	2
DKLFBM023SP	1 7/16	2 3/8	1 1/4	1 9/16	3 11/16		4 15/64	1.96	6 5/64	2

Duralon™

Industrial Powertrain Solutions
Regal Rexnord

Contact us: [rexnord.com/contact](https://www.rexnord.com/contact)

[regalrexnord.com](https://www.regalrexnord.com)

The proper selection and application of products and components, including assuring that the product is safe for its intended use, are the responsibility of the customer. To view our Application Considerations, please visit <https://www.regalrexnord.com/Application-Considerations>.

To view our Standard Terms and Conditions of Sale, please visit <https://www.regalrexnord.com/Terms-and-Conditions-of-Sale> (which may redirect to other website locations based on product family).

"Regal Rexnord" is not indicative of legal entity. Refer to product purchase documentation for the applicable legal entity.

Regal Rexnord and Duralon are trademarks of Regal Rexnord Corporation or one of its affiliated companies.

© 2019, 2023 Regal Rexnord Corporation, All Rights Reserved. MCB23053E • Form# BR1-014E

RegalRexnord