

**McGILL®**



## **HEAVY-DUTY CAMROL® BEARINGS**



**RegalRexnord™**


# Heavy-Duty CAMROL® Bearings Features

## The Industry Leader...

In 1937, McGILL® bearing engineers invented the first needle bearing cam follower. Since that time the McGILL CAMROL bearing line has maintained its leadership position through development of innovative solutions to the problems faced by industry.

## The Problem Solver...Heavy-Duty


McGILL Heavy-Duty CAMROL bearings are designed to help solve some of the toughest problems in your cam follower applications. Utilizing Heavy-Duty CAMROL bearings in situations involving incidental thrust loads, higher speeds, contamination, or maintenance-free operation can provide significant operational life increases over standard cam followers.

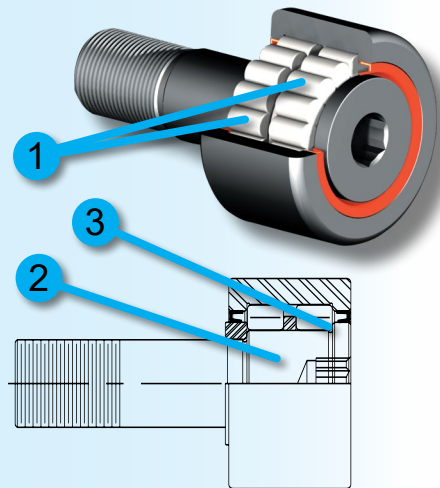

### Improved Thrust Capability

Standard needle bearing cam followers are designed to handle heavy radial loads; however, thrust loads can cause early failure.

1. Double rows of cylindrical rollers are designed in the bearing to help it take incidental thrust sometimes associated with cam follower operation. The double row of cylindrical rollers also allows for high speeds and a high dynamic rating for extended fatigue life.

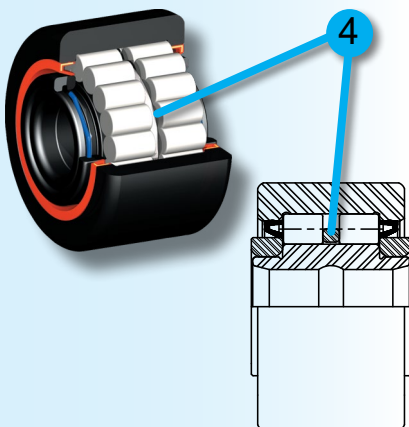


### Maintains McGILL® Bearing Quality Features

The Heavy-Duty CAMROL bearing was designed with tough applications in mind, and maintains a quality, robust design unique to McGILL bearings.


2. Zone hardened raceways provide high load ratings, and the ductile stem gives strength for absorbing shocks.
3. Integral flange in the stud type prevents disassembly in thrust load situations.
4. Center thrust ring provides a smooth surface for thrust load carrying and roller guidance.



## CFD Series

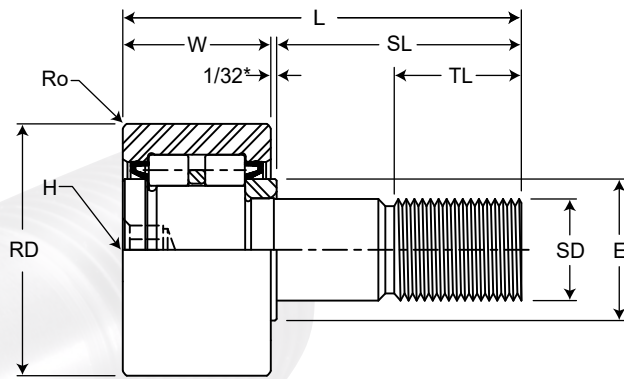

## CCFD Series

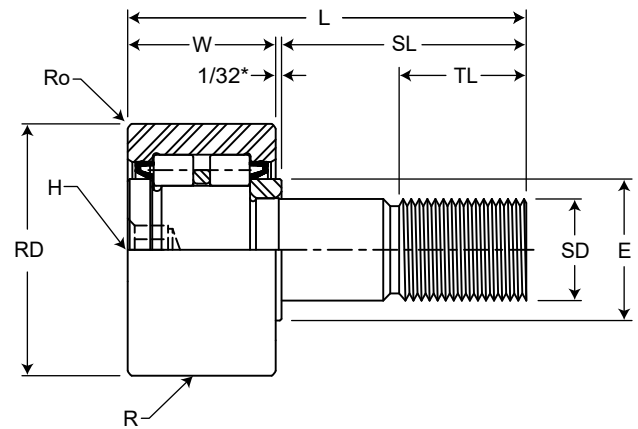

| INCH           |            |                    |                  |                  |                |                       |                       |                 |               |                        |                       |                               |                             |                         |             |                                       |
|----------------|------------|--------------------|------------------|------------------|----------------|-----------------------|-----------------------|-----------------|---------------|------------------------|-----------------------|-------------------------------|-----------------------------|-------------------------|-------------|---------------------------------------|
| Bearing Number |            | Roller Diameter RD | Roller Width W   | Stud Diameter SD | Stud Length SL | Min. Thread Length TL | Fine Threads Class 2A | Hex Hole Size H | Endplate OD E | Outer Corner Radius Ro | Crown Radius R (CCFD) | Rec'd Hsg. Bore +.0002 -.0003 | Max Rec'd Torque** In.-Lbs. | ISO/ABMA Load Rating*** |             | Track Roller Load Rating Dynamic Lbs. |
|                |            | + .000<br>- .001   | + .000<br>- .005 | + .001<br>- .000 |                |                       |                       |                 |               |                        |                       |                               |                             | Dynamic Lbs.            | Static Lbs. |                                       |
| CFD-1 1/4      | CCFD-1 1/4 | 1.250              | .750             | .500             | 1 1/4          | 5/8                   | 1/2-20                | 1/4             | 45/64         | .03                    | 14                    | .5003                         | 350                         | 4000                    | 4260        | 3300                                  |
| CFD-1 3/8      | CCFD-1 3/8 | 1.375              | .750             | .500             | 1 1/4          | 5/8                   | 1/2-20                | 1/4             | 45/64         | .05                    | 14                    | .5003                         | 350                         | 4000                    | 4260        | 3600                                  |
| CFD-1 1/2      | CCFD-1 1/2 | 1.500              | .875             | .625             | 1 1/2          | 3/4                   | 5/8-18                | 5/16            | 55/64         | .06                    | 20                    | .6253                         | 650                         | 6150                    | 6910        | 5000                                  |
| CFD-1 5/8      | CCFD-1 5/8 | 1.625              | .875             | .625             | 1 1/2          | 3/4                   | 5/8-18                | 5/16            | 55/64         | .06                    | 20                    | .6253                         | 650                         | 6150                    | 6910        | 5400                                  |
| CFD-1 3/4      | CCFD-1 3/4 | 1.750              | 1.000            | .750             | 1 3/4          | 7/8                   | 3/4-16                | 5/16            | 15/16         | .06                    | 20                    | .7503                         | 1250                        | 7900                    | 9190        | 6650                                  |
| CFD-1 7/8      | CCFD-1 7/8 | 1.875              | 1.000            | .750             | 1 3/4          | 7/8                   | 3/4-16                | 5/16            | 15/16         | .06                    | 20                    | .7503                         | 1250                        | 7900                    | 9190        | 7100                                  |
| CFD-2          | CCFD-2     | 2.000              | 1.250            | .875             | 2              | 1                     | 7/8-14                | 7/16            | 1 5/32        | .09                    | 24                    | .8753                         | 1500                        | 12100                   | 14600       | 9500                                  |
| CFD-2 1/4      | CCFD-2 1/4 | 2.250              | 1.250            | .875             | 2              | 1                     | 7/8-14                | 7/16            | 1 5/32        | .09                    | 24                    | .8753                         | 1500                        | 12100                   | 14600       | 10500                                 |
| CFD-2 1/2      | CCFD-2 1/2 | 2.500              | 1.500            | 1.000            | 2 1/4          | 1 1/8                 | 1-14                  | 1/2             | 1 5/16        | .09                    | 30                    | 1.0003                        | 2250                        | 16600                   | 22600       | 14000                                 |
| CFD-2 3/4      | CCFD-2 3/4 | 2.750              | 1.500            | 1.000            | 2 1/4          | 1 1/8                 | 1-14                  | 1/2             | 1 5/16        | .09                    | 30                    | 1.0003                        | 2250                        | 16600                   | 22600       | 15000                                 |
| CFD-3          | CCFD-3     | 3.000              | 1.750            | 1.250            | 2 1/2          | 1 1/4                 | 1 1/4-12              | 3/4             | 1 27/32       | .13                    | 30                    | 1.2503                        | 3450                        | 25100                   | 36500       | 18300                                 |
| CFD-3 1/4      | CCFD-3 1/4 | 3.250              | 1.750            | 1.250            | 2 1/2          | 1 1/4                 | 1 1/4-12              | 3/4             | 1 27/32       | .13                    | 30                    | 1.2503                        | 3450                        | 25100                   | 36500       | 20300                                 |
| CFD-3 1/2      | CCFD-3 1/2 | 3.500              | 2.000            | 1.375            | 2 3/4          | 1 3/8                 | 1 3/8-12              | 3/4             | 2 3/16        | .13                    | 30                    | 1.3753                        | 4200                        | 34200                   | 52500       | 23700                                 |
| CFD-4          | CCFD-4     | 4.000              | 2.250            | 1.500            | 3 1/2          | 1 1/2                 | 1 1/2-12              | 3/4             | 2 27/64       | .13                    | 30                    | 1.5003                        | 5000                        | 44100                   | 67900       | 32500                                 |
| CFD-5          | CCFD-5     | 5.000              | 2.750            | 2.000            | 5 1/16         | 2 9/16                | 2-12                  | 7/8             | 2 61/64       | .13                    | 48                    | 2.0003                        | 5000                        | 67800                   | 109500      | 50500                                 |
| CFD-6          | CCFD-6     | 6.000              | 3.250            | 2.500            | 6              | 3                     | 2 1/2-12              | 1               | 3 11/16       | .13                    | 56                    | 2.5003                        | 5000                        | 101900                  | 169900      | 71500                                 |

\*1/16 for CFD/CCFD 5 and 6


\*\*Clamping torque is based on dry threads. If threads are lubricated, use half of values shown.

\*\*\*Ratings for comparison purposes only.






## CYRD Series

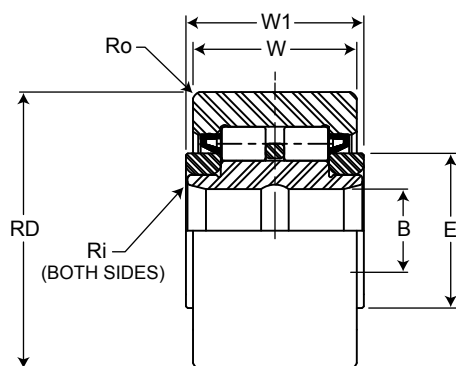

## CCYRD Series

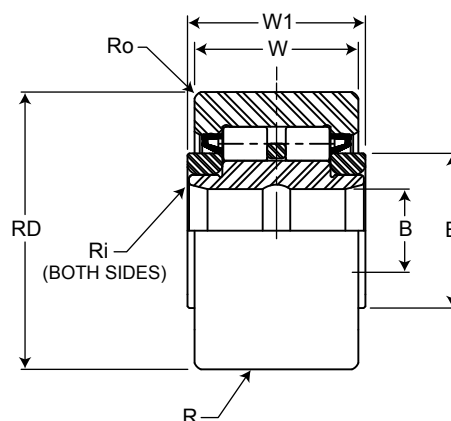


| INCH           |             |                                      |                                  |                                     |                                    |               |                        |                        |                         |                            |                     |                     |                         |             |                                       |
|----------------|-------------|--------------------------------------|----------------------------------|-------------------------------------|------------------------------------|---------------|------------------------|------------------------|-------------------------|----------------------------|---------------------|---------------------|-------------------------|-------------|---------------------------------------|
| Bearing Number |             | Roller Diameter RD<br>+.000<br>-.001 | Roller Width W<br>+.000<br>-.005 | Bore Diameter B<br>+.0002<br>-.0004 | Overall Width W1<br>+.005<br>-.010 | Endplate OD E | Outer Corner Radius Ro | Crown Radius R (CCYRD) | Bore Corner Ri**** Min. | Recommended Shaft Diameter |                     |                     | ISO/ABMA Load Rating*** |             | Track Roller Load Rating Dynamic Lbs. |
|                |             |                                      |                                  |                                     |                                    |               |                        |                        |                         | Push Fit +/--.0002         | Drive Fit +/--.0002 | Press Fit +/--.0002 | Dynamic Lbs.            | Static Lbs. |                                       |
| CYRD-1 1/4     | CCYRD-1 1/4 | 1.250                                | .750                             | .3750                               | .8125                              | 45/64         | .03                    | 14                     | .030                    | .3745                      | .3751               | .3753               | 4000                    | 4260        | 3300                                  |
| CYRD-1 3/8     | CCYRD-1 3/8 | 1.375                                | .750                             | .3750                               | .8125                              | 45/64         | .05                    | 14                     | .030                    | .3745                      | .3751               | .3753               | 4000                    | 4260        | 3600                                  |
| CYRD-1 1/2     | CCYRD-1 1/2 | 1.500                                | .875                             | .4375                               | .9375                              | 55/64         | .06                    | 20                     | .040                    | .4370                      | .4376               | .4378               | 6150                    | 6910        | 5000                                  |
| CYRD-1 5/8     | CCYRD-1 5/8 | 1.625                                | .875                             | .4375                               | .9375                              | 55/64         | .06                    | 20                     | .040                    | .4370                      | .4376               | .4378               | 6150                    | 6910        | 5400                                  |
| CYRD-1 3/4     | CCYRD-1 3/4 | 1.750                                | 1.000                            | .5000                               | 1.0625                             | 15/16         | .06                    | 20                     | .050                    | .4995                      | .5001               | .5005               | 7900                    | 9190        | 6650                                  |
| CYRD-1 7/8     | CCYRD-1 7/8 | 1.875                                | 1.000                            | .5000                               | 1.0625                             | 15/16         | .06                    | 20                     | .050                    | .4995                      | .5001               | .5005               | 7900                    | 9190        | 7100                                  |
| CYRD-2         | CCYRD-2     | 2.000                                | 1.250                            | .6250                               | 1.3125                             | 1 5/32        | .09                    | 24                     | .060                    | .6245                      | .6251               | .6255               | 12100                   | 14600       | 9500                                  |
| CYRD-2 1/4     | CCYRD-2 1/4 | 2.250                                | 1.250                            | .6250                               | 1.3125                             | 1 5/32        | .09                    | 24                     | .060                    | .6245                      | .6251               | .6255               | 12100                   | 14600       | 10500                                 |
| CYRD-2 1/2     | CCYRD-2 1/2 | 2.500                                | 1.500                            | .7500                               | 1.5625                             | 1 5/16        | .09                    | 30                     | .070                    | .7495                      | .7501               | .7505               | 16600                   | 22600       | 14000                                 |
| CYRD-2 3/4     | CCYRD-2 3/4 | 2.750                                | 1.500                            | .7500                               | 1.5625                             | 1 5/16        | .09                    | 30                     | .070                    | .7495                      | .7501               | .7505               | 16600                   | 22600       | 15000                                 |
| CYRD-3         | CCYRD-3     | 3.000                                | 1.750                            | 1.0000                              | 1.8125                             | 1 27/32       | .13                    | 30                     | .080                    | .9994                      | 1.0002              | 1.006               | 25100                   | 36500       | 18300                                 |
| CYRD-3 1/4     | CCYRD-3 1/4 | 3.250                                | 1.750                            | 1.0000                              | 1.8125                             | 1 27/32       | .13                    | 30                     | .080                    | .9994                      | 1.0002              | 1.006               | 25100                   | 36500       | 20300                                 |
| CYRD-3 1/2     | CCYRD-3 1/2 | 3.500                                | 2.000                            | 1.1250                              | 2.0625                             | 2 3/16        | .13                    | 30                     | .090                    | 1.1244                     | 1.1252              | 1.1256              | 34200                   | 52500       | 23700                                 |
| CYRD-4         | CCYRD-4     | 4.000                                | 2.250                            | 1.1250                              | 2.3125                             | 2 27/64       | .13                    | 30                     | .100                    | 1.2494                     | 1.2502              | 1.2506              | 44100                   | 67900       | 32500                                 |
| CYRD-5         | CCYRD-5     | 5.000                                | 2.750                            | 1.7500                              | 2.8750                             | 2 61/64       | .13                    | 48                     | .110                    | 1.7494                     | 1.7502              | 1.7506              | 67800                   | 109500      | 50500                                 |
| CYRD-6         | CCYRD-6     | 6.000                                | 3.250                            | 2.2500                              | 3.3750                             | 3 11/16       | .13                    | 56                     | .120                    | 2.2494                     | 2.2506              | 2.2506              | 101900                  | 169900      | 71500                                 |

\*\*\* Ratings for comparison purposes only.

\*\*\*\* Max. fillet for shaft




# Heavy-Duty CAMROL® Bearings Features

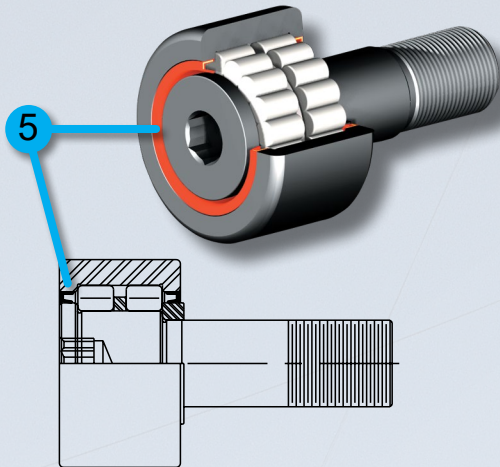

## Resists Contamination

Even a small amount of contamination can significantly reduce bearing life. Dust can wick oil out of the bearing, water can wash grease out, and particulate matter or contamination can dent raceways.

- 5. Rubber Lip Seals** are standard in the Heavy-Duty CAMROL Bearings. Although standard cam followers do well in most situations, at times, seals such as those in the Heavy-Duty CAMROL Bearing are needed for increased protection against contamination. The rubber lip seals are pointed inward for improved grease retention.

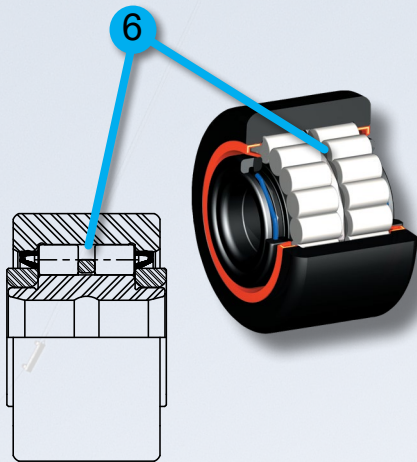


## Provides Lube-For-Life Operation

Heavy-Duty CAMROL Bearings last up to 5 times longer than standard needle bearing cam followers in lube-for-life tests.

- 6. Large Lubricant Reservoirs** and rubber lip seals help keep more grease in the bearing for maintenance-free operation.

## Up to Five Times Longer Life

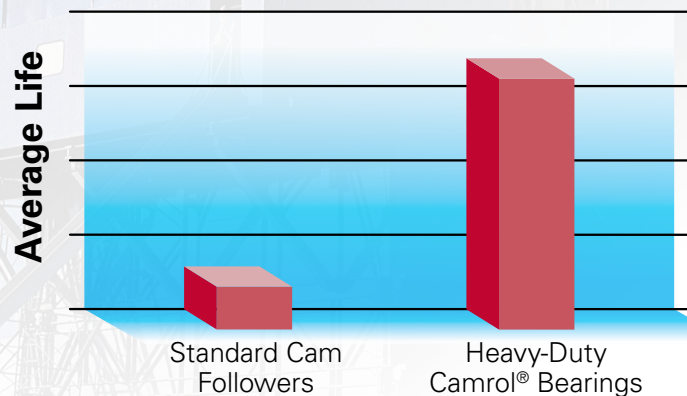

# McGILL®

## **Motion Control Solutions Regal Rexnord**

Customer Service: 800-626-2120

Technical Service: 800-626-2093

[CustomerService.PTSolutions@regalrexnord.com](mailto:CustomerService.PTSolutions@regalrexnord.com)

[regalrexnord.com](http://regalrexnord.com)

The proper selection and application of products and components, including assuring that the product is safe for its intended use, are the responsibility of the customer. To view our Application Considerations, please visit <https://www.regalrexnord.com/Application-Considerations>.

To view our Standard Terms and Conditions of Sale, please visit <https://www.regalrexnord.com/Terms-and-Conditions-of-Sale> (which may redirect to other website locations based on product family).

"Regal Rexnord" is not indicative of legal entity.

Regal Rexnord, CAMROL and McGill are trademarks of Regal Rexnord Corporation or one of its affiliated companies.

© 2015, 2022 Regal Rexnord Corporation, All Rights Reserved. MCB22038E • Form# 8752E

The logo for Regal Rexnord, featuring a stylized 'R' icon followed by the text 'RegalRexnord' in a bold, sans-serif font.