



Rex™ ZAF5000 Series Roller Bearings



The Rex™ ZAF5000 Series...

THE SOLID CHOICE

- **Self-Aligning Spherical Roller Bearing** provides $\pm 1.5^\circ$ of both static and dynamic misalignment.
- **Case Carburized, Double Set Collar Inner Ring** resists fracture under shock and heavy loads.
- **Three Standard Field Interchangeable Seal Choices Z, K, M**
- **Auxiliary Cap Seals Available**
- **Field Adjustable Clearance**
- **Bearing Design Accommodates High Thrust Loads**
- **Super-Finished Raceways** provide a cool running, quiet, high speed and high load capacity bearing
- **Rugged One-Piece Cast Iron Housing**
- **Solid Base** for additional housing strength
- **Precision Milled Ends** for accurate location when replacement is required
- **Powder Coated Housings** for superior corrosion resistance
- **Factory Lubricated, Pre-Adjusted and Shaft Ready**




Bearing Down on Your Application Needs

INTERCHANGEABLE SEALS

Rex ZAF5000 Series Mounted Roller Bearings have three interchangeable seals to meet a wide range of application requirements.


- Field interchangeability without bearing disassembly
- Operate on hardened and ground inner ring extension
- Cannot be forced out during relubrication
- Viton®* M Seal available for high temperature and chemical resistant applications

The following seal types are designed to fit your application needs.




Z SEAL

- No frictional drag - generates no heat
- No speed limitations
- All metal - no temperature limitations



K SEAL

- Protects against contaminants
- Handles high speeds
- Less drag and heat generation than heavy contact seals



M SEAL

- Protects against liquids and grit
- Spring-loaded lip assures constant contact - even during misalignment
- Molded-in garter spring retains seal in housing
- Seals in lubricant on horizontal and vertical shafts
- Available in Viton material MA2207V

*Viton is believed to be the trademark and/or trade name of The Chemours Company and is not owned or controlled by Regal Rexnord Corporation or its affiliates.

AUXILIARY CAPS – FOR SEVERE APPLICATIONS

All caps are made from cast iron and are securely bolted to the housing. They allow for dynamic misalignment up to 2° included angle.

- Seals against liquids, gritty contaminants
- Protects primary seal against physical damage
- Available open or closed end

A Prefix AZAF5207 = 2 Open Caps


B Prefix BZAF5207 = 1 Open (Housing Side) & 1 Closed

A Suffix ZAF5207A = 1 Open (Cover Side)

B Suffix ZAF5207B = 1 Closed (Cover Side)



THE FIVE POINT PROTECTION PLAN

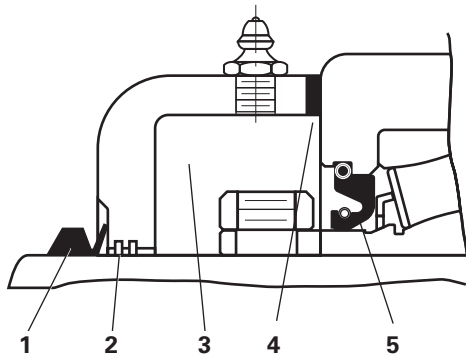




The Auxiliary Cap Five Point Protection Plan is designed to protect against contamination. For maximum protection, be sure to specify heavy contact "M" seals and Auxiliary end caps.

1. Molded rubber V-ring seal is press-fit on shaft and rotates with it, preventing fine dirt and moisture from entering so there is no wear on the shaft.
2. Machined multi-grooved labyrinth seal and rugged cast iron cap provide physical protection to primary bearing seal.
3. Large cavity traps contaminants and moisture. The cavity can be filled with grease to provide continuous purging.
4. A pliable noprene gasket supplies a positive static seal between the cap and the housing.
5. The heavy contact "M" seal provides the final line of defense. It retains grease and prevents contamination from entering and damaging the bearings.

Rex™ ZAF/ZAFS Pillow Blocks

Heavy Duty 5000 Series

Double Set Collar Fixed and Floating 2 and 4 Bolt

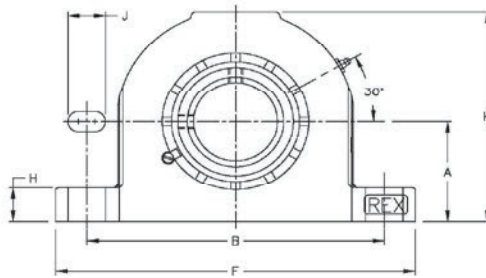

Shaft	Complete Block No.		Size	Dimensions in Inches													Bolts Req'd		Complete Block Net Wt. Blbs.	
Size			Code	A	B		C	E		F	G	H	I	J	K	W	No.	Size		
Inches	Fixed	Floating		+/- .005	Min.	Max.		Fixed	Floating Max	+/- .0075									Fixed	Float
2-7/16	ZAF-5207	ZAFS-5207	8	3-1/4	8-5/8	9-5/8	4-3/8	7/8	1-1/16	11.125	3-1/8	1-1/4	—	1-1/4	7	3-9/16	2	5/8	32.5	32.5
2-7/16	ZAF-5207-F	ZAFS-5207-F											4	1/2			31	31.5		
2-11/16	ZAF-5211	ZAFS-5211	9	3-1/2	9-7/8	11	4-7/8	7/8	1-1/8	12.594	3-1/2	1	—	1-7/16	7-5/8	4-1/16	2	3/4	45.5	45
2-11/16	ZAF-5211-F	ZAFS-5211-F											4	5/8			44.5	44.5		
2-15/16	ZAF-5215	ZAFS-5215	9	3-3/4	9-7/8	11	4-7/8	7/8	1-1/8	12.594	3-1/2	1-1/4	—	1-7/16	7-7/8	4-1/16	2	3/4	45.5	45.5
2-15/16	ZAF-5215-F	ZAFS-5215-F											4	5/8			45	45.5		
3-7/16	ZAF-5307	ZAFS-5307	10	4-1/2	11-13/16	13-1/8	5-5/16	15/16	1-3/16	15.375	4-11/32	1-21/32	—	1-21/32	9-3/8	4-15/16	2	7/8	76.5	76.5
3-7/16	ZAF-5307-F	ZAFS-5307-F			11-5/8	13-1/8							7-7/8	1-3/8			2-3/8	1-5/8	4	3/4
3-15/16	ZAF-5315-F	ZAFS-5315-F	11	4-15/16	12-19/32	14-1/2	6-1/4	1-1/16	1-5/16	16.500	4-3/4	1-25/32	2-3/4	1-53/64	10-5/16	5-5/8	4	3/4	102	104
4-7/16	ZAF-5407Y-F	ZAFS-5407Y-F	12	6	14-1/2	16	6-1/4	1	1-3/8	18.375	5-1/8	2-1/16	3-1/4	1-3/4	11-7/8	6-3/16	4	7/8	143	144
4-15/16	ZAF-5415-F	ZAFS-5415-F	13	6	15-5/8	17-3/8	7-7/8	1-3/16	1-9/16	19.703	5-7/8	2-1/16	3-3/8	1-15/16	12-9/16	7-1/16	4	1	207	209

4-Bolt block - Use Suffix F

Bore Size=Nominal Shaft Size +.001 - .000

Expansion - Size Codes 4-8 is 3/8", Size Codes 9-11 is 1/2", Size Code 12-16 is 3/4"

Seals - To Specify K or M seal, replace "Z" in model number with "K" or "M" Auxiliary Caps available all sizes



Rex™

Regal Rexnord

Contact us: [rexnord.com/contact](https://www.rexnord.com/contact)

[regalrexnord.com](https://www.regalrexnord.com)

The proper selection and application of products and components, including assuring that the product is safe for its intended use, are the responsibility of the customer. To view our Application Considerations, please visit <https://www.regalrexnord.com/Application-Considerations>.

To view our Standard Terms and Conditions of Sale, please visit <https://www.regalrexnord.com/Terms-and-Conditions-of-Sale> (which may redirect to other website locations based on product family).

"Regal Rexnord" is not indicative of legal entity. Refer to product purchase documentation for the applicable legal entity.

Regal Rexnord and Rex are trademarks of Regal Rexnord Corporation or one of its affiliated companies.

© 2006, 2025 Regal Rexnord Corporation, All Rights Reserved. MCB-1063-RX-EN-US 02/25

 **RegalRexnord™**