

BALL BEARINGS FOR ELECTRICAL MOTORS

ROLLWAY® BALL BEARINGS
PRODUCT INFORMATION

ROLLWAY ELECTRIC MOTOR QUALITY “EMQ” BALL BEARING VERSIONS

ROLLWAY Ball Bearings for Electric Motors are available in standard, C3 & C4 clearances.



OPEN BEARING - 6207 EMQ

Max. Operating
Temp. = 150 °C




SHIELDED BEARING - 6207 ZZ EMQ

Max. Operating
Temp. = 120 °C¹
Grease: Polyrex®* EM
Shields: Steel



SEALED BEARING - 6207 2RS EMQ

Max. Operating
Temp. = 100 °C¹
Grease: Polyrex®* EM
Seals: Synthetic Rubber

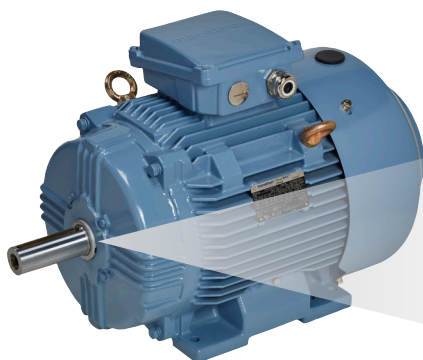

Rollway® bearings are used
in select Regal Rexnord motors

¹ Although the grease can sustain temperatures up to the maximum operating temperature noted, the life of the grease and consequently the bearing will be reduced when operating at temperatures over 80 °C.

* Polyrex is believed to be the trademark and/or trade name of Exxon Mobil Corporation and is not owned or controlled by Regal Rexnord Corporation.

SPECIFICATION SHEET

ROLLWAY® BALL BEARINGS FOR ELECTRIC MOTORS

PRODUCT SPECIFICATION

- Produced to standard P6 according to ISO 492-1981 and is equivalent to ABEC 3.
- Noise Level is according to the shown specification sheet.



ROLLWAY®

Industrial Powertrain Solutions Regal Rexnord

Customer Service: 800-626-2120

Technical Service: 800-626-2093

CustomerService.PTSolutions@regalrexnord.com

regalrexnord.com

The proper selection and application of products and components, including assuring that the product is safe for its intended use, are the responsibility of the customer. To view our Application Considerations, please visit <https://www.regalrexnord.com/Application-Considerations>.

To view our Standard Terms and Conditions of Sale, please visit <https://www.regalrexnord.com/Terms-and-Conditions-of-Sale> (which may redirect to other website locations based on product family).

"Regal Rexnord" is not indicative of legal entity. Refer to product purchase documentation for the applicable legal entity.

Regal Rexnord and Rollway are trademarks of Regal Rexnord Corporation or one of its affiliated companies.

© 2018, 2021, 2023 Regal Rexnord Corporation, All Rights Reserved. MCSSP23045E • Form# 10343E

DEEP GROOVE BALL BEARING NOISE LEVEL SPECIFICATION Specification of Anderson meter test (A)

Bore (mm)	Low Band	Medium Band	High Band	Preload (N)
3	31	16	15	20
4	31	16	15	
5	35	21	18	
6	35	21	18	
7	44	28	24	30
8	44	28	24	
9	44	28	24	
10	55	35	30	40
12	55	35	30	
15	65	46	35	
17	65	46	35	
20	80	60	45	
22	80	60	45	80
25	80	60	45	
28	80	60	45	
30	90	75	60	
32	90	75	60	
35	90	75	60	
40	110	90	80	120
45	180	150	130	
50	210	160	160	
55	210	180	180	
60	240	180	200	
65	130	100	150	180
70	150	120	200	
75	150	120	200	
80	180	120	240	
85	180	150	240	225
90	210	180	270	
95	210	180	270	
100	250	215	310	

 **Regal Rexnord**