


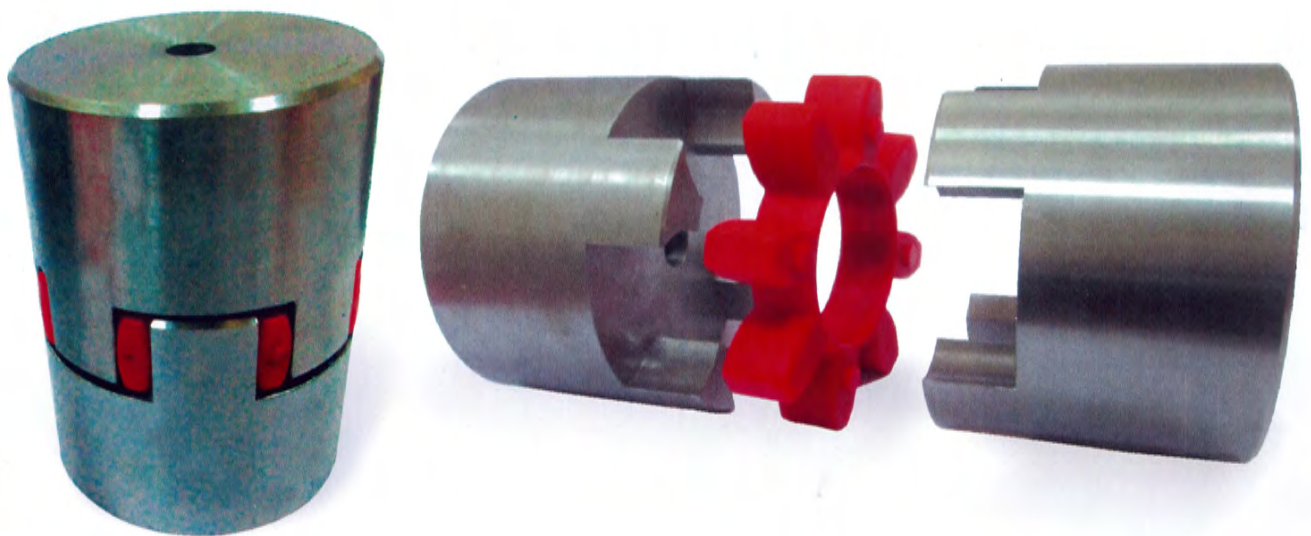

Rexnord® Spidalink

Precision. Power. Performance.

You want a trusted name when it comes to providing engineered power transmission products that improve productivity and efficiency. Rexnord provides superior products for your industrial applications world wide. We work closely with you to reduce maintenance costs, eliminate redundant inventories and prevent equipment downtime.

Applications include:

- ▣** pumps
- ▣** paper machines
- ▣** general purpose
- ▣** fans
- ▣** blowers
- ▣** compressors

Rexnord® Spidalink Couplings

Rexnord® Elastomeric Spidalink Couplings are non-lubricated, material flexing couplings. These are used in a variety of applications.


Spidalink couplings have excellent vibration dampening capacity, providing extended life to connected equipment.




Rexnord® Spidalink

Features & Benefits

- Suitable for drives subjected to higher loads.
- Excellent torsional stiffness. Fail-Safe.
- Quiet in operation, excellent resistance to oil, dirt and moisture.
- Excellent capacity for handling infrequent torque spikes.

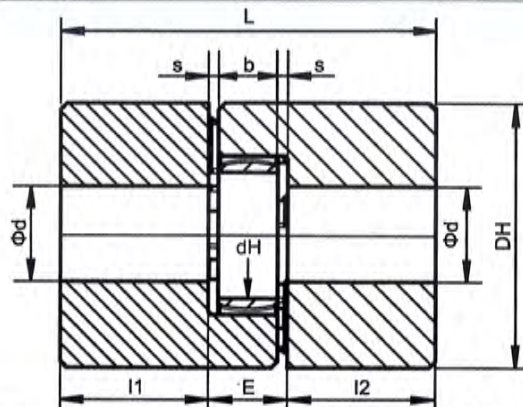

Torque Demands Driven Machine

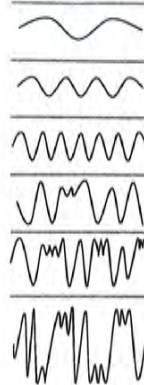

Typical Application for Electric Motor or Turbine Driven Equipment

Constant torque such as centrifugal pumps, blowers and compressors

Continuous duty with some torque variations including plastic extruders and forced draft fans

Light shock loads from metal extruders, cooling towers and log haulers

Moderate shock loading as expected from a car dumper, stone crusher, vibrating screen

Heavy shock load with some negative torques from reciprocating pumps, compressors, reversing turnout tables

Frequent torque reversals such as reciprocating Compressors with frequent torque reversals which do not necessarily include reverse rotations

Typical Service Factor

1.0


1.5

2.0


2.5

3.0

Consult Rexnord Engineering



(1a) - Standard Hub



(1b) - Longer Hub

SIZE		RATED TORQUE		MAX. BORE	DIMENSIONS (mm)							
		92 sh-A	98 sh-A	d (mm)	L	l1	l2	E	b	s	DH	dH
14	1a	7.5	12.5	16	35	11	11	13	10	1.5	30	10
19	1a	10	17	25	66	25	25	16	12	2	40	18
	1b				90	37	37					
24	1a	35	60	35	78	30	30	18	14	2	55	27
	1b				118	50	50					
28	1a	95	160	40	90	35	35	20	15	2.5	65	30
	1b				140	60	60					
38	1a	190	325	48	114	45	45	24	18	3	80	38
	1b				164	70	70					
42	1a	265	450	55	126	50	50	26	20	3	95	46
	1b				176	75	75					
48	1a	310	525	62	140	56	56	28	21	3.5	105	51
	1b				188	80	80					
55	1a	410	685	74	160	65	65	30	22	4	120	60
	1b				210	90	90					
65	1a	625	940	80	185	75	75	35	26	4.5	135	68
	1b				235	100	100					
75	1a	1280	1920	95	210	85	85	40	30	5	160	80
	1b				260	110	110					
90	1a	2400	3600	110	245	100	100	45	34	5.5	200	100
	1b				290	125	125					

** Material for Hubs - "Cast Iron". Steel Hubs are also available on request.



Rexnord India Pvt. Ltd.

Office No. 18, 4th Floor, L-Square,
Plot No. 8, S. No. 187, Sanghvinagar,
Aundh, Pune - 411 007, India

Ph: 91 - 20 - 30204513/501

E-Mail: IndiaCustomerService@rexnord.com

www.rexnord.com

Contact