

FALK™ WRAPFLEX® ELASTOMERIC COUPLINGS

INCH HALF SPACER TYPE R35 SERIES

Falk™ Wrapflex® Inch Dimensions Half Spacer Type R35 Elastomeric Couplings provide exceptional torsional damping and dependable driveline buffering across variable industrial applications. Constructed using one standard standard coupling hub matched with a single elongated spacer hub section, the Type R35 configuration accommodates standard ANSI process pump setups, facilitating element swap-outs and equipment servicing without moving the motor or driving equipment alignments.

TECHNICAL CONFIGURATION PROFILE BLUEPRINT

Half Spacer Type R35

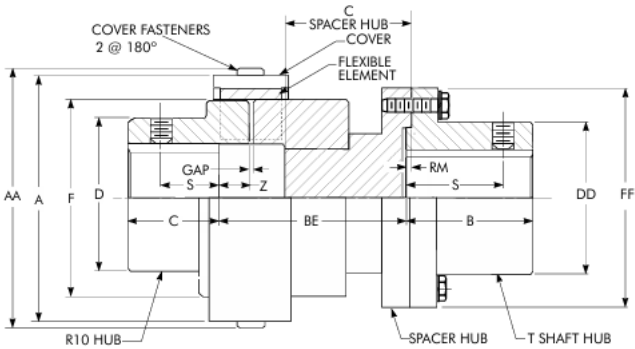


Figure 1: Technical cross-sectional blueprint profile highlighting envelope clearances A, B, C, and length index L across assemblies.

TECHNICAL SPECIFICATIONS & INTERFACE DIMENSIONAL REFERENCES (INCH SYSTEM)

{rows_html}

COUPLING SIZE	CONTINUOUS TORQUE [lb-in]	MAX SPEED [rpm]	BORE SIZE RANGE		PHYSICAL DIMENSIONS LAYOUT REFERENCE				APPROX. WEIGHT [lb]
			MIN [in]	MAX [in]	A [in]	B [in]	C [in]	L [in]	

- Technical Notes & Catalog Specifications:**
- Weight estimates correspond to complete coupling assemblies featuring default catalog pilot bores. Custom finish boring or keyway configurations dynamically alter final mass metrics.
 - Misalignment boundaries should be thoroughly evaluated against specific motor operational parameters to preserve maximum elastomer lifespan curves.
 - Tough polyurethane flexible formulation is highly resistant to standard chemical contaminants, petroleum products, and moisture washes.

Authorized India Engineering Distribution & Technical Support Center:
Jinharsh Industrial Solutions Private Limited
Email: crm@jinharsh.com | Official Web Domain: www.jinharsh.com