


FALK™ WRAPFLEX® ELASTOMERIC COUPLINGS (METRIC)

CLOSE-COUPLED TYPE R10

Falk™ Wrapflex® Close-Coupled Type R10 Elastomeric Couplings provide a non-lubricated solution designed for low-maintenance configurations across standard industrial pump operations.

TECHNICAL LAYOUT BLUEPRINT

Close-Coupled Type R10

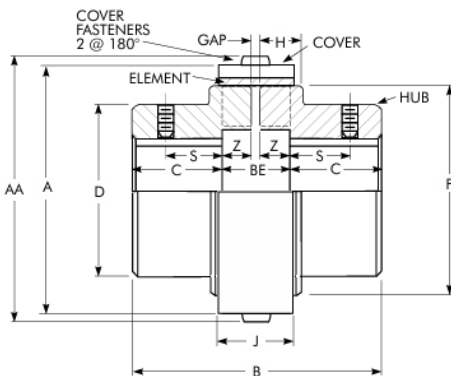

TECHNICAL SPECIFICATIONS & INTERFACE DIMENSIONAL REFERENCES

COUPLING SIZE	CONTINUOUS TORQUE [Nm]	MAX SPEED [rpm]	BORE CAPACITY LIMITS		PHYSICAL DIMENSIONS REFERENCE				APPROX. WEIGHT [kg]
			MIN [mm]	MAX [mm]	A [mm]	B [mm]	C [mm]	L [mm]	
5R	62	4500	12	38	90	35	34	72	0.68
10R	125	4500	14	42	102	40	38	84	1.10
20R	311	4500	19	55	124	48	44	100	2.20
30R	565	4500	24	65	144	55	52	115	3.60
40R	961	4500	28	75	166	65	58	135	5.70
50R	1695	4200	38	90	210	78	72	162	10.4
60R	3051	3800	42	105	245	90	84	188	16.8
70R	5650	3300	48	115	285	105	100	220	27.5
80R	15028	2000	60	140	380	135	134	320	64.0

Technical Notes & Specifications:
• Weight estimates are calculated based on coupling setups with generic solid/pilot-bore setups.

- Ensure operational speed boundaries are rigidly verified against factory alignment frameworks.
- Polyurethane element compounding is optimized to endure standard corrosive atmospheric conditions.

Authorized India Engineering Distribution & Technical Support Center:

Jinharsh Industrial Solutions Private Limited

Email: crm@jinharsh.com | Official Web Domain: www.jinharsh.com