


FALK™ WRAPFLEX® ELASTOMERIC COUPLINGS (METRIC)

FULL SPACER TYPE R31

Falk™ Wrapflex® Full Spacer Type R31 Elastomeric Couplings are specifically developed for standard ANSI and ISO process pump maintenance applications.

TECHNICAL LAYOUT BLUEPRINT

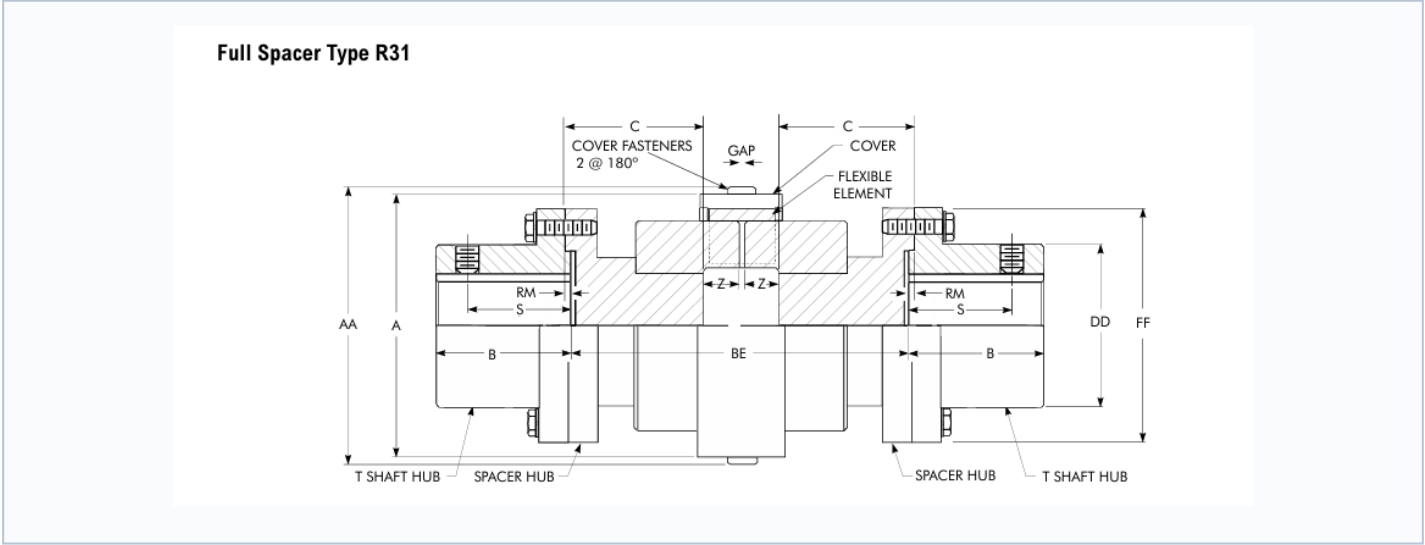

TECHNICAL SPECIFICATIONS & INTERFACE DIMENSIONAL REFERENCES

COUPLING SIZE	CONTINUOUS TORQUE [Nm]	MAX SPEED [rpm]	BORE CAPACITY LIMITS		PHYSICAL DIMENSIONS REFERENCE				APPROX. WEIGHT [kg]
			MIN [mm]	MAX [mm]	A [mm]	B [mm]	C [mm]	L [mm]	
5R	62	4500	12	38	90	35	34	194	1.80
10R	125	4500	14	42	102	40	38	214	2.90
20R	311	4500	19	55	124	48	44	240	4.90
30R	565	4500	24	65	144	55	52	270	7.80
40R	961	4500	28	75	166	65	58	306	12.1
50R	1695	4200	38	90	210	78	72	364	21.6
60R	3051	3800	42	105	245	90	84	412	34.2
70R	5650	3300	48	115	285	105	100	474	54.8
80R	15028	2000	60	140	380	135	134	616	124.0

Technical Notes & Specifications:

- Weight estimates are calculated based on coupling setups with generic solid/pilot-bore setups.

- Ensure operational speed boundaries are rigidly verified against factory alignment frameworks.
- Polyurethane element compounding is optimized to endure standard corrosive atmospheric conditions.

Authorized India Engineering Distribution & Technical Support Center:

Jinharsh Industrial Solutions Private Limited

Email: crm@jinharsh.com | Official Web Domain: www.jinharsh.com