


FALK™ WRAPFLEX® ELASTOMERIC COUPLINGS (METRIC)

HALF SPACER TYPE R35

Falk™ Wrapflex® Half Spacer Type R35 Elastomeric Couplings are designed for standard ANSI process pump configurations.

TECHNICAL LAYOUT BLUEPRINT

Half Spacer Type R35

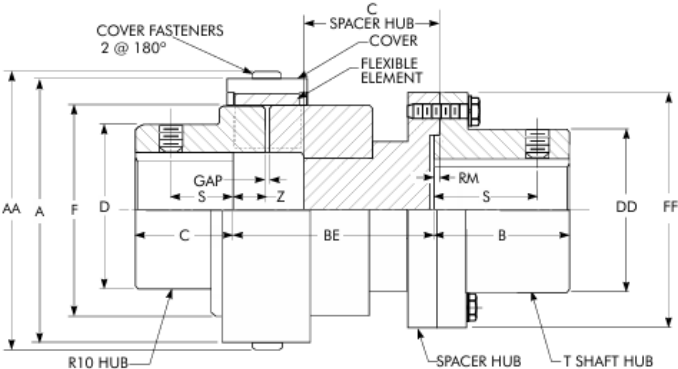

TECHNICAL SPECIFICATIONS & INTERFACE DIMENSIONAL REFERENCES

COUPLING SIZE	CONTINUOUS TORQUE [Nm]	MAX SPEED [rpm]	BORE CAPACITY LIMITS		PHYSICAL DIMENSIONS REFERENCE				APPROX. WEIGHT [kg]
			MIN [mm]	MAX [mm]	A [mm]	B [mm]	C [mm]	L [mm]	
5R	62	4500	12	38	90	35	34	145	1.30
10R	125	4500	14	42	102	40	38	161	2.20
20R	311	4500	19	55	124	48	44	180	3.70
30R	565	4500	24	65	144	55	52	204	5.90
40R	961	4500	28	75	166	65	58	231	9.20
50R	1695	4200	38	90	210	78	72	276	16.4
60R	3051	3800	42	105	245	90	84	313	25.9
70R	5650	3300	48	115	285	105	100	359	41.6
80R	15028	2000	60	140	380	135	134	469	94.0

Technical Notes & Specifications:

- Weight estimates are calculated based on coupling setups with generic solid/pilot-bore setups.

- Ensure operational speed boundaries are rigidly verified against factory alignment frameworks.
- Polyurethane element compounding is optimized to endure standard corrosive atmospheric conditions.

Authorized India Engineering Distribution & Technical Support Center:

Jinharsh Industrial Solutions Private Limited

Email: crm@jinharsh.com | Official Web Domain: www.jinharsh.com