


# FALK™ WRAPFLEX® ELASTOMERIC COUPLINGS

## INCH QD BUSHINGS TYPE R10 SERIES

Falk™ Wrapflex® QD (Quick-Disconnect) Bushings Type R10 Elastomeric Couplings combine premium non-lubricated operation with the robust mechanical gripping power of industry-standard QD flanged bushings. Designed around a tough polyurethane split-half element wrap design, the Type R10 system delivers reliable shaft alignment, exceptional cushioning capability, and prompt component maintenance execution without the need to relocate connected drive hub machinery.

### TECHNICAL CONFIGURATION BLUEPRINT LAYOUT

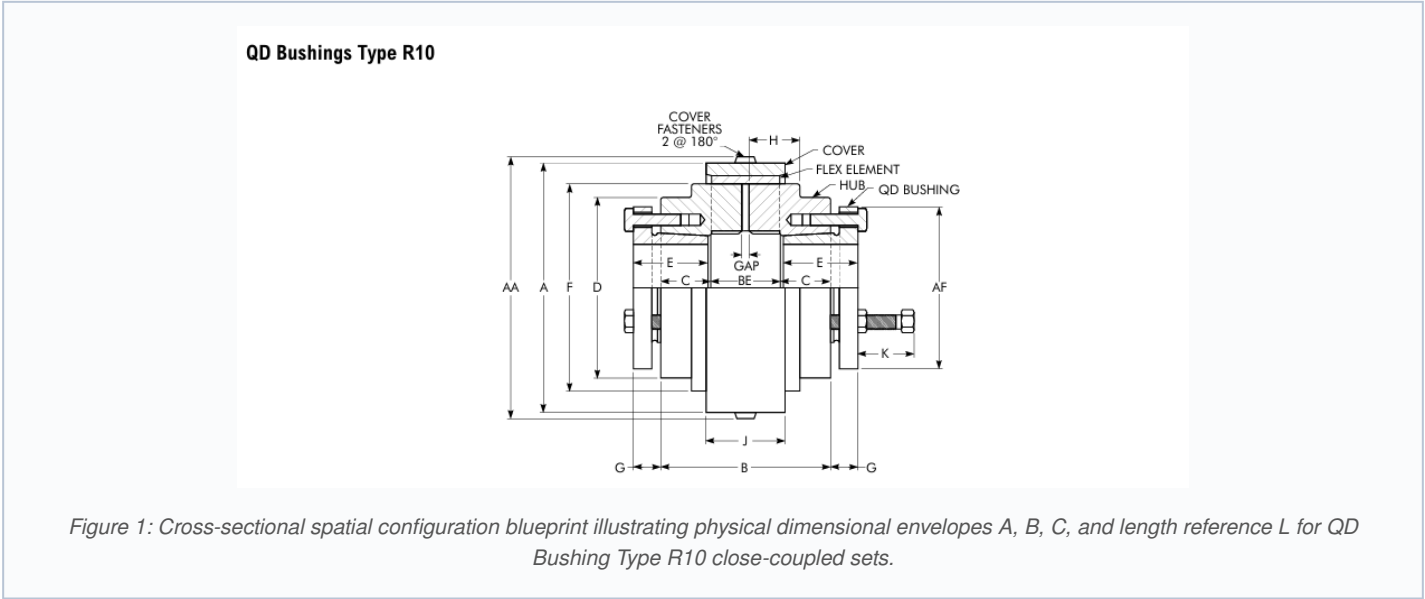

### TECHNICAL SPECIFICATIONS & INTERFACE DIMENSIONAL REFERENCES (INCH SYSTEM)

| COUPLING SIZE | CONTINUOUS TORQUE<br>[lb-in] | MAX SPEED<br>[rpm] | QD BUSHING SIZE | BORE SIZE CAPACITY RANGE |             | PHYSICAL DIMENSIONS LAYOUT REFERENCE |           |           |           | APPROX. WEIGHT<br>[lb] |
|---------------|------------------------------|--------------------|-----------------|--------------------------|-------------|--------------------------------------|-----------|-----------|-----------|------------------------|
|               |                              |                    |                 | MIN<br>[in]              | MAX<br>[in] | A<br>[in]                            | B<br>[in] | C<br>[in] | L<br>[in] |                        |
| 5R            | 550                          | 4500               | JA              | 0.500                    | 1.250       | 3.54                                 | 1.38      | 1.00      | 3.48      | 1.7                    |
| 10R           | 1100                         | 4500               | JA              | 0.500                    | 1.250       | 4.02                                 | 1.57      | 1.00      | 3.52      | 2.4                    |
| 20R           | 2750                         | 4500               | SH              | 0.500                    | 1.688       | 4.88                                 | 1.89      | 1.31      | 4.33      | 5.1                    |
| 30R           | 5000                         | 4500               | SDS             | 0.500                    | 2.000       | 5.67                                 | 2.17      | 1.38      | 4.67      | 7.3                    |
| 40R           | 8500                         | 4500               | SK              | 0.500                    | 2.625       | 6.54                                 | 2.56      | 1.94      | 5.83      | 12.7                   |
| 50R           | 15000                        | 4200               | SF              | 0.500                    | 2.938       | 8.27                                 | 3.07      | 2.06      | 6.12      | 21.6                   |
| 60R           | 27000                        | 3800               | E               | 0.875                    | 3.500       | 9.65                                 | 3.54      | 2.75      | 7.92      | 39.8                   |
| 70R           | 50000                        | 3300               | F               | 1.000                    | 4.000       | 11.22                                | 4.13      | 3.75      | 9.94      | 68.6                   |

| COUPLING<br>SIZE | CONTINUOUS<br>TORQUE<br>[lb-in] | MAX<br>SPEED<br>[rpm] | QD<br>BUSHING<br>SIZE | BORE SIZE<br>CAPACITY RANGE |             | PHYSICAL DIMENSIONS LAYOUT<br>REFERENCE |           |           |           | APPROX.<br>WEIGHT<br>[lb] |
|------------------|---------------------------------|-----------------------|-----------------------|-----------------------------|-------------|-----------------------------------------|-----------|-----------|-----------|---------------------------|
|                  |                                 |                       |                       | MIN<br>[in]                 | MAX<br>[in] | A<br>[in]                               | B<br>[in] | C<br>[in] | L<br>[in] |                           |
| 80R              | 133000                          | 2000                  | J                     | 1.438                       | 4.500       | 14.96                                   | 5.31      | 4.63      | 12.87     | 151.7                     |

**Technical Notes & Catalog Specifications:**

- Total assembly weight indices are calculated using standard configurations with default pilot-bore blocks. Finished setups vary slightly based on final bore options.
- Ensure operational angular, parallel, and axial misalignments are within technical tolerances to optimize flexible element lifespans.
- Polyurethane split element design prevents metal-to-metal contact, dampening shock loading effectively while resisting standard industrial lubricants and chemical spills.

**Authorized India Engineering Distribution & Technical Support Center:**  
Jinharsh Industrial Solutions Private Limited  
Email: [crm@jinharsh.com](mailto:crm@jinharsh.com) | Official Web Domain: [www.jinharsh.com](http://www.jinharsh.com)