


FALK™ WRAPFLEX® ELASTOMERIC COUPLINGS (METRIC)

QD BUSHINGS TYPE R10

Falk™ Wrapflex® QD Bushings Type R10 Elastomeric Couplings deliver premium non-lubricated operation optimized for easy and flexible shaft connections.

TECHNICAL LAYOUT BLUEPRINT

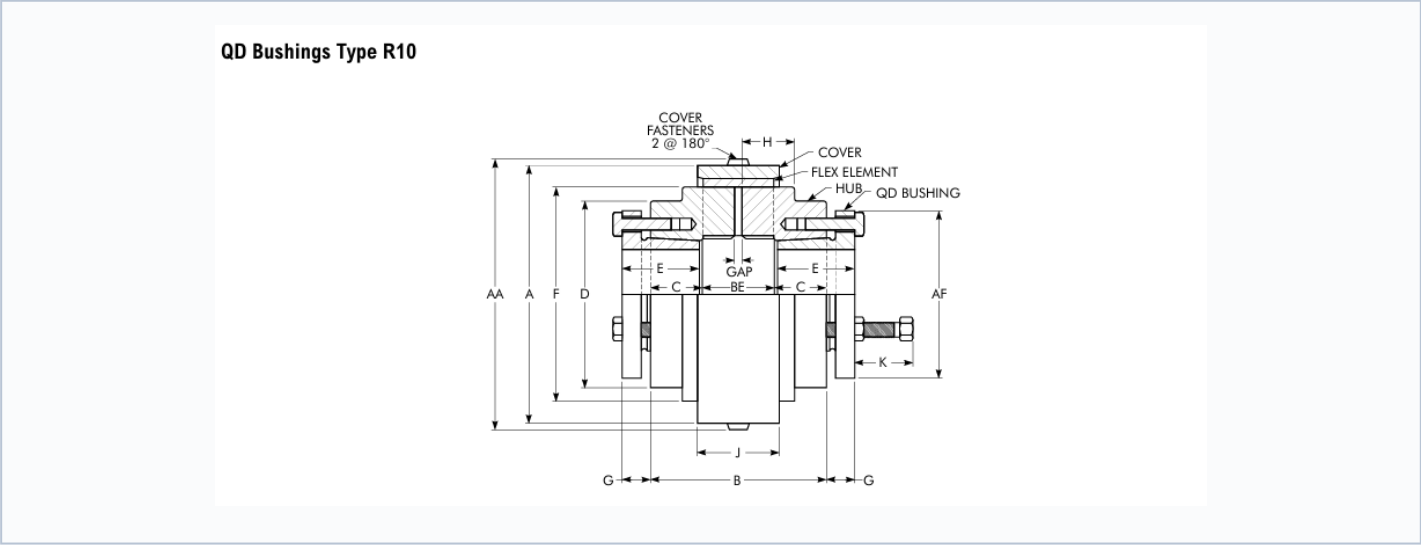

TECHNICAL SPECIFICATIONS & INTERFACE DIMENSIONAL REFERENCES

COUPLING SIZE	QD BUSHING SIZE	CONTINUOUS TORQUE [Nm]	MAX SPEED [rpm]	BORE SIZE RANGE		PHYSICAL DIMENSIONS LAYOUT REFERENCE				APPROX. WEIGHT [kg]
				MIN [mm]	MAX [mm]	A [mm]	B [mm]	C [mm]	L [mm]	
5R	JA	62	4500	12	32	90	35	34	68	0.72
10R	JA	125	4500	14	32	102	40	38	74	1.18
20R	SH	311	4500	14	42	124	48	44	90	2.25
30R	SDS	565	4500	19	50	144	55	52	104	3.75
40R	SK	961	4500	19	65	166	65	58	122	5.95
50R	SF	1695	4200	24	70	210	78	72	146	10.85
60R	E	3051	3800	28	90	245	90	84	172	17.40
70R	F	5650	3300	28	100	285	105	100	204	28.90
80R	J	15028	2000	38	114	380	135	134	298	66.50

Technical Notes & Specifications:

- Weight estimates are calculated based on coupling setups with generic solid/pilot-bore setups.

- Ensure operational speed boundaries are rigidly verified against factory alignment frameworks.
- Polyurethane element compounding is optimized to endure standard corrosive atmospheric conditions.

Authorized India Engineering Distribution & Technical Support Center:

Jinharsh Industrial Solutions Private Limited

Email: crm@jinharsh.com | Official Web Domain: www.jinharsh.com