

CENTAFLEX-DS Dual-Stage Couplings

Standard Normalbauformen & Flanges to SAE J620 Abmessungen

DUAL-STAGE TORSIONAL TECHNOLOGY

The CENTAFLEX-DS coupling is a signature dual-stage design engineered specifically for main propulsion drives, marine gearboxes, and diesel-driven generator configurations operating across broad idling and operating speed bands. By integrating two elastomeric components with progressive stiffness configurations, it successfully shifts harmful resonance speeds far below idling limits while providing exceptionally high torsional compliance under nominal loads.

KEY ADVANTAGES

- **Progressive Dual-Stage Stiffness:** Stage one yields extremely soft torsional traits for flawless vibration isolation during low-RPM idle. Stage two shifts smoothly into a robust, stiffer profile to manage full load demands cleanly.
- **Standard SAE J620 Flywheel Integration:** Built to connect directly to standard industrial engine flywheel dimensions (\$6 rac12"\$, \$7 rac12"\$, \$8"\$, \$10"\$, \$11 rac12"\$, and \$14"\$) for drop-in modularity.
- **Robust Thermal Tolerance:** Formulated with advanced high-performance elastomers that dissipate inner friction heat buildup effectively during heavy operational cyclic loads.
- **Fail-Safe Design Dependability:** Protects driven gear meshes from clatter, eliminates acoustic transmission paths, and dramatically extends drivetrain service lifespan.

TECHNICAL CONSTRUCTION PROFILE

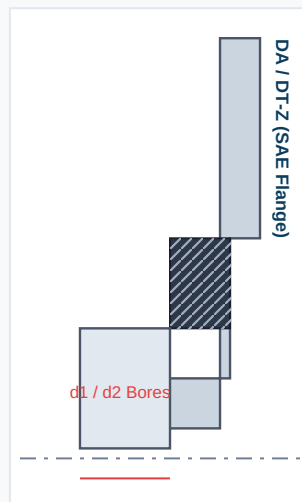


Figure 1: Sectional technical architecture showing direct engine flywheel mounting profile and concentric dual-stage dampening core.

STANDARD TYPES & SAE J620 FLANGE MATRIX

Dimensional properties and geometric metrics catalog for CENTAFLEX-DS series couplings.

size Grösse	SAE J620	d _{1max} [mm]	d ₂ [mm]	C ₁ [mm]	C ₂ [mm]	L _{min} [mm]	Weight Gewicht [kg]	Order Code Bestellnummer
10	6½"	30	141	6	19	32	2,0	CF-DS-10-.....-006
10	7½"	30	141	6	19	32	2,0	CF-DS-10-.....-007
10	8"	30	141	0	25	32	2,1	CF-DS-10-.....-008
22	6½"	40	184	9	33	44	3,1	CF-DS-22-.....-006
22	7½"	40	184	12	30	44	3,1	CF-DS-22-.....-007
25	8"	40	184	4,6	43,4	50	3,5	CF-DS-25-.....-008
25	10"	40	184	12,8	35,2	50	3,6	CF-DS-25-.....-010
25	11½"	40	184	27	21	50	3,7	CF-DS-25-.....-011
30	11½"	40	220	26	32	60	6,6	CF-DS-30-.....-011
35	11½"	48	236	25	32	60	7,6	CF-DS-35-.....-011
40	11½"	48*	254	27,5	31	52	10,3	CF-DS-40-.....-011
40	14"	48*	254	27,5	31	52	10,5	CF-DS-40-.....-014
45	11½"	56*	274	27,5	31	52	12,3	CF-DS-45-.....-011
45	14"	56*	274	27,5	31	52	12,5	CF-DS-45-.....-014

* For larger bores and for the sizes 12, 15, 64, 65, 70 and 80 please contact us. / Für größere Bohrungen und für die Größen 12, 15, 64, 65, 70 und 80 wenden Sie sich bitte an uns.

Technical remarks: Highly customized flywheel connection combinations or bespoke application drawings are readily available upon specific request.

Procurement & Torsional Vibration Analysis (TVA) Support in India:

For specialized engineering calculations, multi-stage compliance alignment setup, or formal commercial pricing sheets, reach out to our authorized partner network:

Jinharsh Industrial Solutions Private Limited

Email: crm@jinharsh.com | Web: www.jinharsh.com