

CENTAFLEX-D Series Couplings

Standard Types for Generators to DIN 6281 / Flanges to SAE J620


HIGHLY FLEXIBLE GENERATOR COUPLINGS

The CENTAFLEX-D series consists of highly flexible, robust torsional couplings explicitly designed for diesel-driven generator sets, centrifugal pumps, and matching station applications. Purpose-built to pair diesel engines directly with single-bearing or multi-bearing generators according to standard **DIN 6281** frameworks, these couplings seamlessly interface with standard engine flywheels via **SAE J620** blind-fit mounting arrangements.

KEY ADVANTAGES

- **Optimized for Generator Sets:** Specifically designed to manage the critical speed profiles of power generation plants, pushing dangerous torsional vibrations out of the operational frequency ranges.
- **DIN 6281 & SAE J620 Compatibility:** Drop-in, standardized configuration sets matching standard sizes (A, BCD, BCDE, EF) and standardized engine flywheel patterns.
- **Excellent Misalignment Capacity:** High elastic tolerance protects auxiliary bearing structures from axial, radial, and angular alignment errors.
- **Blind Assembly Advantage:** Allows smooth axial push-together engagement during packaging, reducing installation effort and plant downtime.

TECHNICAL INTERFACING DIAGRAM

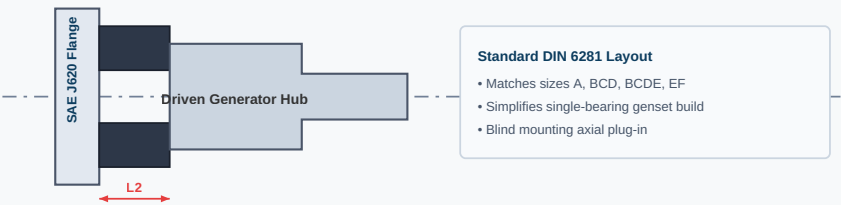

STANDARD BAUFORMEN FOR GENERATORS (DIN 6281)

Technical dimensional data matrix and inertia ratings for CENTAFLEX-D couplings.

size Grösse	SAE J620	DIN 6281 Gen. Size Kenngröss.	C ₃ [mm]	L ₂ [mm]	d ₂ [mm]		N ₂ [mm]	d ₃ [mm]	S ±1	d ₄ +3	T +3	weight [kg]	Mass moment of inertia J [kgm ²]		Order Code Bestellnummer
					min	max							primary	secondary	
160	10"	A	73	55	-	60	90	160	4	-	-	8,7	0,0621	0,0098	CF-D-160-* -10-73-**
160	11½"	A	59	55	-	60	90	160	4	300	10	11,2	0,0724	0,0098	CF-D-160-* -11-59-**
198	10"	A	73	58	-	70	115	198	4	225	2	13,1	0,0681	0,0257	CF-D-198-* -10-73-**
198	10"	BCD	121	106	-	75	115	198	4	225	2	15,3	0,0681	0,0295	CF-D-198-* -10-121-**
198	11½"	BCD	107	82	-	75	115	198	4	-	-	16,4	0,1251	0,0272	CF-D-198-* -11-107-**
198	14"	BCD	93	82	-	75	115	198	4	345	6	24,4	0,3716	0,0272	CF-D-198-* -14-93-**
220	11½"	BCD	107	82	-	80	124	220	4	-	-	19,8	0,1328	0,0498	CF-D-220-* -11-107-**
220	14"	BCD	93	82	-	80	124	220	4	345	6	27,6	0,3746	0,0498	CF-D-220-* -14-93-**
275	11½"	BCDE	107	82	-	95	145	275	4	-	-	29,5	0,1743	0,1384	CF-D-275-* -11-107-**
275	14"	BCDE	93	82	-	95	145	275	4	345	6	28,6	0,4044	0,1384	CF-D-275-* -14-93-**
275	16"	EF	83	82	-	95	145	275	4	450	15	41,8	0,6850	0,1384	CF-D-275-* -16-83-**
350	11½"	EF	107	90	65	120	192	350	4	-	-	47,0	0,2377	0,4371	CF-D-350-* -11-107-**
350	14"	EF	93	90	65	120	192	350	4	396	15	55,5	0,6640	0,4371	CF-D-350-* -14-93-**
350	16"	EF	83	90	65	120	192	350	4	450	25	59,0	0,7455	0,4371	CF-D-350-* -16-83-**

* indicate shorehardness here. / Shorehärte, hier einsetzen.
** state finished bore dia d₂ here. / Fertigbohrung für d₂ hier einsetzen.
Note: Technical data values given in this catalog are for general selection guidance and remain subject to alteration without formal notification.

Procurement & Technical Engineering Center (India):
For finished bore machining specifications (\$d_2\$), specialized rubber shorehardness selections (\$^{*}\$), or official quotation requests,
please contact:
Jinharsh Industrial Solutions Private Limited
Email: crm@jinharsh.com | Web: www.jinharsh.com