

CENTAFLEX-E Flexible Couplings

Type 1 Dimensions & Performance Data / CENTAFLEX-E Bauform 1 Abmessungen

SIMPLE, ROBUST & VERSATILE PIN-TYPE COUPLINGS

The CENTAFLEX-E Type 1 is a highly reliable flexible coupling designed for straightforward mechanical torque transmission applications. Featuring a robust construction with easily replaceable elastomeric elements, it excels at dampening torsional vibrations, compensating for significant misalignments, and ensuring dependable failure-safe operations across intensive industrial drives.

KEY ADVANTAGES

- **Torsional Flexibility:** High elasticity allows effective smoothing of peak torque shocks and system resonances.
- **Compact Design:** Optimized installation dimensions (Bauform 1 Layout) ensure straightforward integration into tight machine configurations.
- **Fail-Safe Construction:** Robust interlocking jaws provide maximum system security even during unpredictable overload occurrences.
- **Maintenance Friendly:** Simplistic alignment criteria combined with long-life flexible components minimizes total cost of ownership.

TECHNICAL CONSTRUCTION DIAGRAM

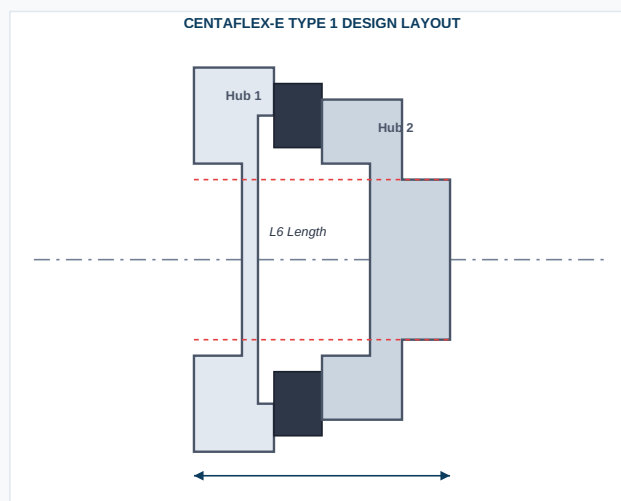


Figure 1: Sectional structural layout blueprint detailing Hub 1, Hub 2, and intermediate elastomeric shock absorbers for CENTAFLEX-E Bauform 1.

TECHNICAL DIMENSIONS & SPECIFICATIONS

Complete geometry matrix and mechanical properties catalog for Type 1 Flexible Couplings.

Size Grösse	d ₃ [mm]	d ₂ [mm]		d ₄ H9	N ₂ [mm]	S ±1 [mm]	B [mm]	L ₂ [mm]	L ₆ [mm]	Weight Gewicht [kg]	Mass moments of inertia Massenträgheitsmomente [kgm ²]		Order Code Bestellbezeichnung
		min.	max.								N ₁ J	N ₂ J	
80	80	12	30	25	50	4	14	30	48	1,1	0,00043	0,00019	CF-E-080-1-48
105	105	12	42	30	65	4	17	42	63	2,4	0,00158	0,00145	CF-E-105-1-63
135	135	15	60	40	85	4	22	55	81	5,3	0,00558	0,00355	CF-E-135-1-81
160	160	--	60	88	90	4	8,5	55 92	67,5 104,5	5,1 6,7	0,0059	0,0098 0,0112	CF-E-160-1-67,5 CF-E-160-1-104,5
198	198	--	75	110	115	4	10,5	82 106	96,5 120,5	11,2 12,2	0,0170	0,0272 0,0295	CF-E-198-1-96,5 CF-E-198-1-120,5
220	220	--	85	116	124	4	10,5	82 122	96,5 136,5	11,2 14,1	0,0300	0,0498 0,0545	CF-E-220-1-96,5 CF-E-220-1-136,5
275	275	--	100	145	145	4	10,5	82 142	96,5 156,5	22,5 28,2	0,0800	0,1384 0,1550	CF-E-275-1-96,5 CF-E-275-1-156,5
350	350	65	130	190	192	4	12,5	90 150	106,5 166,5	46,0 57,0	0,3023	0,4371 0,4910	CF-E-350-1-106,5 CF-E-350-1-166,5
425	425	85	160	235	240	5	16,5	180	201,5	106,2	0,6973	1,3104	CF-E-425-1-201,5
560	560	120	220	370	330	6	24	240	270	219,5	1,6984	5,0808	CF-E-560-1-270

Technical remarks: Multi-line value pairs inside dimensions L₂, L₆, and mechanical capacities correspond to standard alternating component design variations.

Procurement & Technical Support in India:

For standard requests, precise engineering support, torque alignment calculation, or official quotations, please get in touch with our authorized engineering partner network:

Jinharsh Industrial Solutions Private Limited

Email: crm@jinharsh.com | Web: www.jinharsh.com