

# CENTAFLEX-E Flexible Couplings

Type 2 Dimensions & Performance Data / CENTAFLEX-E Bauform 2 Abmessungen


## EXTENDED HUB TYPE 2 DESIGN MATRIX

The CENTAFLEX-E Type 2 layout features dual extended shoulder configurations (Bauform 2) designed to accommodate broader shaft engagement criteria and deep-set keyway placements. This design provides maximum alignment rigidity and high torsional vibration damping across premium pump systems, heavy generator modules, and industrial compressor lines.

## KEY ADVANTAGES

- **Extended Engagement Lengths (\$L\_1 / L\_2\$):** Longer matching internal bore geometries ensure robust connection grip surface areas across large-diameter drive pins.
- **High-Performance Elastomeric Dampening:** Dampens destructive shaft vibration spikes and absorbs misalignments across all horizontal axes.
- **Integrated Tightening Torque (\$T\_A\$):** Features dedicated tightening specification options for heavy-duty series configurations (Sizes 350 and 425).
- **Premium Service Longevity:** Built for simple inspection protocols and low physical friction wear cycles over continuous long-term operations.

## TECHNICAL CONSTRUCTION DIAGRAM

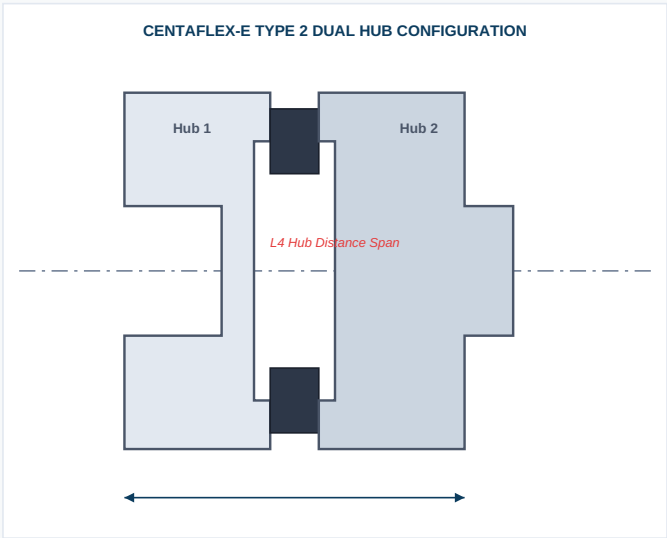

**Figure 1:** Balanced cross-sectional architecture of CENTAFLEX-E Type 2, displaying extended alignment shoulders (\$L\_1 / L\_2\$) on both driven sides.

## TECHNICAL DIMENSIONS & SPECIFICATIONS

Complete geometry matrix and mechanical properties catalog for Type 2 Flexible Couplings.

| Size<br>Grösse | d <sub>3</sub><br>[mm] | d <sub>1</sub><br>[mm] |      | d <sub>2</sub><br>[mm] |      | L <sub>1</sub><br>[mm] | N <sub>1</sub><br>[mm] | N <sub>2</sub><br>[mm] | S ±1<br>[mm] | T <sub>A</sub><br>[Nm] | L <sub>2</sub><br>[mm] | L <sub>4</sub><br>[mm] | Weight<br>Gewicht<br>[kg] | Mass moments of inertia<br>Massenträgheitsmomente<br>[kgm <sup>2</sup> ] |                  | Order Code<br>Bestellbezeichnung |
|----------------|------------------------|------------------------|------|------------------------|------|------------------------|------------------------|------------------------|--------------|------------------------|------------------------|------------------------|---------------------------|--------------------------------------------------------------------------|------------------|----------------------------------|
|                |                        | min.                   | max. | min.                   | max. |                        |                        |                        |              |                        |                        |                        |                           | N <sub>1</sub> J                                                         | N <sub>2</sub> J |                                  |
| 80             | 80                     | 12                     | 35   | 12                     | 30   | 40                     | 50                     | 50                     | 4            | --                     | 30                     | 74                     | 1,4                       | 0,00056                                                                  | 0,00019          | CF-E-80-2-74                     |
| 105            | 105                    | 12                     | 50   | 12                     | 42   | 50                     | 70                     | 65                     | 4            | --                     | 42                     | 96                     | 3,4                       | 0,00220                                                                  | 0,00145          | CF-E-105-2-96                    |
| 135            | 135                    | 15                     | 65   | 15                     | 60   | 60                     | 90                     | 85                     | 4            | --                     | 55                     | 119                    | 7,1                       | 0,00755                                                                  | 0,00355          | CF-E-135-2-119                   |
| 160            | 160                    | --                     | 70   | --                     | 60   | 55                     | 100                    | 90                     | 4            | --                     | 55<br>92               | 120<br>157             | 7,4<br>9,0                | 0,0091                                                                   | 0,0098<br>0,0112 | CF-E-160-2-120<br>CF-E-160-2-157 |
| 198            | 198                    | --                     | 85   | --                     | 75   | 55                     | 120                    | 115                    | 4            | --                     | 82<br>106              | 147<br>171             | 14,4<br>15,4              | 0,0235                                                                   | 0,0272<br>0,0295 | CF-E-198-2-147<br>CF-E-198-2-171 |
| 220            | 220                    | --                     | 100  | --                     | 85   | 70                     | 140                    | 124                    | 4            | --                     | 82<br>122              | 162<br>202             | 16,2<br>18,4              | 0,0400                                                                   | 0,0498<br>0,0545 | CF-E-220-2-162<br>CF-E-220-2-202 |
| 275            | 275                    | --                     | 120  | --                     | 100  | 82                     | 170                    | 145                    | 4            | --                     | 82<br>142              | 174<br>234             | 30,0<br>35,7              | 0,0995                                                                   | 0,1384<br>0,1550 | CF-E-275-2-174<br>CF-E-275-2-234 |
| 350            | 350                    | 50                     | 125  | 65                     | 130  | 120                    | 200                    | 192                    | 4            | 280                    | 90<br>150              | 225<br>285             | 64,0<br>76,0              | 0,3882                                                                   | 0,4371<br>0,4910 | CF-E-350-2-225<br>CF-E-350-2-285 |
| 425            | 425                    | 60                     | 150  | 85                     | 160  | 140                    | 240                    | 240                    | 5            | 490                    | 180                    | 330                    | 138,3                     | 0,9023                                                                   | 1,3104           | CF-E-425-2-330                   |

Technical remarks: Multi-line stacked entries inside dimensional parameters correspond to sequential length variant configurations available across specific product groups.

### Procurement & Technical Support in India:

For standard requests, precise engineering support, torque alignment calculation, or official quotations, please get in touch with our authorized engineering partner network:

**Jinharsh Industrial Solutions Private Limited**

Email: [crm@jinharsh.com](mailto:crm@jinharsh.com) | Web: [www.jinharsh.com](http://www.jinharsh.com)