

CENTAFLEX-E Flexible Couplings

Type 3 Dimensions & Performance Data / CENTAFLEX-E Bauform 3 Abmessungen

BOLTED ELEMENT TYPE 3 DESIGN MATRIX

The CENTAFLEX-E Type 3 variant introduces an integrated fail-safe design with distinct bolted attachment features (Part/Teil 3). Engineered with specific hardware tightening torques (\$T_A\$), it provides additional operational security and streamlined component replacement mechanics for high-load systems subjected to heavy reverse torques or severe multi-directional vibration loads.

KEY ADVANTAGES

- **Secure Bolted Locking Interface:** Equipped with robust screw assemblies requiring specific torque limits (\$T_A\$) for reliable clamp forces under heavy dynamic loading.
- **High Bounding Capacity (\$d_1^{* ext}\$):** Optimized clamping hubs allow larger maximum shaft bores to handle specialized machinery inputs.
- **Advanced Vibration Deflection:** The high-damping elastomeric design eliminates peak resonance stresses across critical speed ranges.
- **Optimized Structural Envelope (\$L_5\$):** Precision total lengths fit standard commercial industrial shaft spacing footprints perfectly.

TECHNICAL CONSTRUCTION DIAGRAM

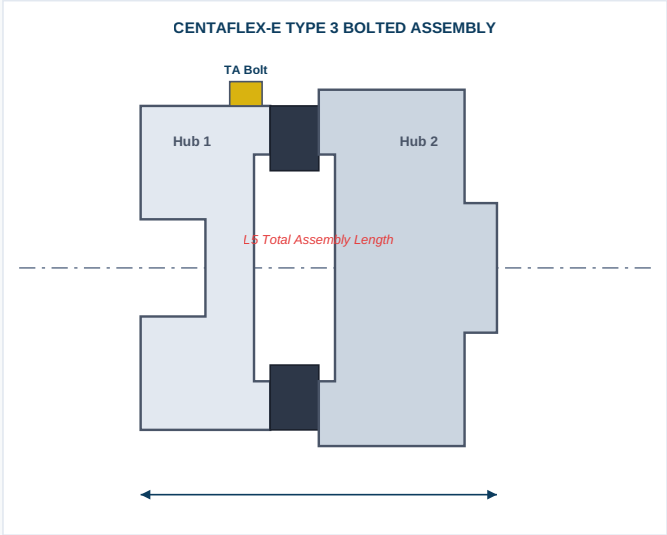


Figure 1: Sectional technical drawing highlighting the specialized clamping hardware arrangement (Part 3) and torque-locked configuration (\$T_A\$) of a CENTAFLEX-E Type 3 hub.

TECHNICAL DIMENSIONS & SPECIFICATIONS

Complete geometry matrix and mechanical properties catalog for Type 3 Flexible Couplings.

Size Grösse	d ₃ [mm]	d ₁ [mm]		d ₂ [mm]		L ₁ [mm]	N ₁ [mm]	N ₂ [mm]	S ±1 [mm]	T _A [Nm]	L ₂ [mm]	L ₅ [mm]	Weight Gewicht [kg]	Mass moments of inertia Massenträgheitsmomente [kgm ²]		Order Code Bestellbezeichnung
		min.	max.*	min.	max.									N ₁ J	N ₂ J	
160	160	22	50	--	60	55	66	90	4	35	55 92	114 151	7,6 9,2	0,0066	0,0098 0,0112	CF-E-160-3-114 CF-E-160-3-151
198	198	28	60	--	75	55	80	115	4	70	82 106	141 165	14,7 15,7	0,0182	0,0272 0,0295	CF-E-198-3-141 CF-E-198-3-165
220	220	30	60	--	85	70	80	124	4	117	82 122	156 196	17,1 19,2	0,0323	0,0498 0,0545	CF-E-220-3-156 CF-E-220-3-196
275	275	40	70	--	100	85	100	145	4	280	82 142	168 228	31,9 37,6	0,0935	0,1384 0,1550	CF-E-275-3-168 CF-E-275-3-228
350	350	50	110	65	130	120	145	192	4	280	90 150	214 274	65,8 77,8	0,2946	0,4371 0,4910	CF-E-350-3-214 CF-E-350-3-274
425	425	60	130	85	160	180	174	240	5	490	180	365	147,8	0,8527	1,3104	CF-E-425-3-365
560	560	100	220	120	220	240	295	330	6	600	240	486	400,5	3,6694	5,0808	CF-E-560-3-486

* Larger bores with different designs are possible, please ask us. / Größere Bohrungen mit anderer Nabenumform möglich, bitte fragen Sie an.

Technical remarks: Multi-line stacked values correspond directly to the matching component length variation options within that size bracket.

Procurement & Technical Support in India:

For standard requests, precise engineering support, torque alignment calculation, or official quotations, please get in touch with our authorized engineering partner network:

Jinharsh Industrial Solutions Private Limited

Email: crm@jinharsh.com | Web: www.jinharsh.com