

CENTAFLEX-E Torsional Link Shafts

Type 3-GZ Dimensions & Technical Data / CENTAFLEX-E Bauform 3-GZ Abmessungen

FLEXIBLE LINK SHAFT TYPE 3-GZ DESIGN

The CENTAFLEX-E Type 3-GZ layout is a specialized cardan-style torsional link shaft configuration designed for spanning extended distances between the prime mover and driven machine. Utilizing dual flexible elements flanking a variable intermediate central tube assembly, this configuration accommodates massive parallel, axial, and angular misalignments while providing exceptional torsional damping properties.

KEY ADVANTAGES

- **Variable Extended Spanning Lengths (\$L^*\$):** Engineered precisely to specification for bridging large physical structural gaps without requiring intermediate support bearings.
- **Exceptional Misalignment Compensation:** The dual elastomeric articulation joints handle multi-directional compound misalignments effortlessly.
- **High-Speed Stability:** Precision-balanced tube choices protect matching powertrain bearing housings from lateral harmonic forces at operational velocities.
- **Torsional Sound Damping:** Effectively isolates acoustics and truncates destructive peak vibration waves before transmission.

TECHNICAL CONSTRUCTION DIAGRAM

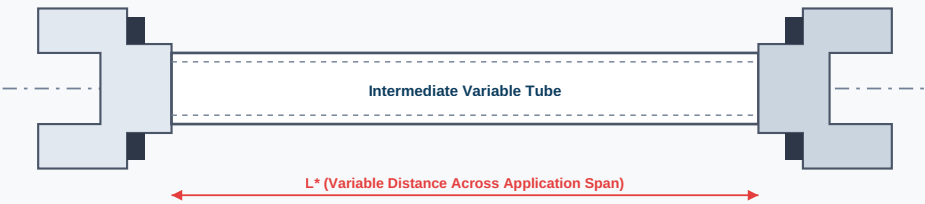


Figure 1: Sectional technical architecture of the CENTAFLEX-E Type 3-GZ bridging configuration.

TECHNICAL DIMENSIONS & SPECIFICATIONS

Dimensional matrix and mechanical properties table for Type 3-GZ Link Shaft Couplings.

Size Grösse	d ₃ [mm]	d ₁ [mm]	d ₂ [mm]	d _s [mm]	C [mm]	N ₂ [mm]	L*min [mm]	L ₇ [mm]	S ±1 [mm]	T _A ** [Nm]	Weight / Gewicht [kg]		Mass moments of inertia [kgm ²]		Order Code Bestellbezeichnung
											w/o tube	per 100mm	w/o tube J	per 100mm J	
160	160	--	60	61	113	90	125	72	5	35	14,1	0,7	0,0018	0,0005	CF-E-160-3-GZ
198	198	--	75	78	127	115	130	89	5	70	25,6	1,1	0,0927	0,0012	CF-E-198-3-GZ
220	220	--	80	83	147	124	140	101	5	117	36,4	1,1	0,1711	0,0012	CF-E-220-3-GZ
275	275	--	100	102	177	145	150	114	5	280	63,6	2,2	0,4781	0,0045	CF-E-275-3-GZ
350	350	65	130	132	184	195	160	122	5	280	119	3,2	1,4831	0,0136	CF-E-350-3-GZ
425	425	85	160	165	225	240	185	152	5	490	218	6,1	4,0545	0,0364	CF-E-425-3-GZ
560	560	120	220	260	297	330	200	200	7	580	472	10,9	14,9517	0,2080	CF-E-560-3-GZ

* L* = Please state upon inquiries and orders. / Maß bitte bei Anfragen und Bestellungen angeben.

** T_A = Tightening torque of bolts, DIN 912 - 10.9 / Anziehdrehmoment der Schrauben, DIN 912 - 10.9.

Note: If no details are given, the hubs will be supplied pilot bored. All data given in this catalog are without obligation. We reserve the right to change details and dimensions without notice. This technical document has legal protection according to DIN 34.

Procurement & Engineering Support in India:

For specialized engineering support, customized variable length calculations (\$L^{*}\$), or official quotes, please contact:

Jinharsh Industrial Solutions Private Limited

Email: crm@jinharsh.com | Web: www.jinharsh.com