

FALK TRUE TORQUE


Fluid Couplings – HF31, 31-1 Steelflex/Hollow Shaft Mount

The Falk True Torque Steelflex Type T10 coupling input with hollow shaft output is engineered specifically for reliable horizontal mounting applications. The precision hollow shaft is bored to order with a modified clearance fit, equipped with two setscrews (one positioned directly over the keyway, and one at 90 degrees to the keyway). Types HF31 and 31-1 drastically diminish the physical gap required between connected equipment shafts. Type 31-1 features an advanced greater maximum bore capacity within the hollow shaft while requiring slightly more shaft gap than Type HF31.

AVAILABILITY BY COUPLING SIZE & TYPE

Type	Description	320	370	1420	1480
HFN31	Non Delay Fill	X	—	—	—
HFD31, 31-1	Delay Fill	—	X	X	X
HFR31, 31-1	Inactive Delay Fill	—	X	X	X

DIMENSIONAL SCHEMATICS & LAYOUT

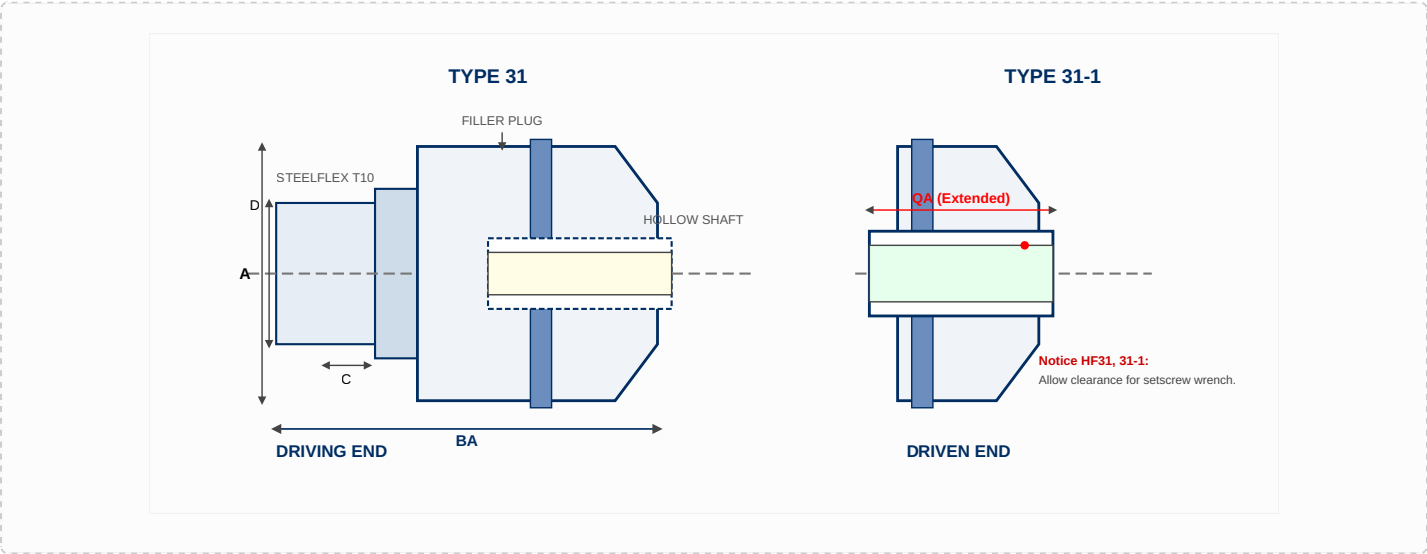

TYPE HF ENGINEERING DATA & DIMENSIONS

CPLG SIZE ★	Cplg Weight lb No Bore & W/O Fluid		Allow Speed rpm	Dimensions — Inches																CPLG SIZE ★	SE (Min)	YA
	HFN	HFD HFR		A	C	D	J	S	AA	BA		CA	DA	EA	IA	NA	QA		SA †			
										HFN	HFD HFR				Fastener Size Types 32 & 32-1		Type 31-1	Type 32-1				
320HF	89	N/A	1800	5.94	2.50	3.00	3.62	2.06	14.37	13.60	N/A	6.06	3.13	0.88	5/8-11 UNC	2.75	N/A	5.00	0.45	3.20	0.75	320HF
370HF	N/A	151	1800	7.62	3.50	4.12	4.56	2.54	16.73	N/A	18.64	7.65	3.52	0.98	3/4-10 UNC	3.83	5.26	5.26	0.45	3.80	0.75	370HF
1420HF	N/A	216	1800	8.38	3.88	4.88	4.81	2.82	18.70	N/A	20.76	8.16	4.12	0.98	7/8-9 UNC	4.21	5.50	5.50	0.45	4.40	1.00	1420HF
1480HF	N/A	320	1800	9.88	4.75	5.59	6.12	N/A	21.65	N/A	24.65	9.01	4.71	1.09	7/8-9 UNC	5.16	6.50	6.50	0.50	5.00	1.12	1480HF
1584HF	N/A	502	1800	10.62	5.00	6.31	6.36	N/A	26.38	N/A	26.74	10.73	5.49	1.00	1 - 8 UNC	5.49	N/A	7.50	N/A	5.80	1.12	1584HF
1660HF	N/A	727	1800	12.12	5.88	7.06	7.54	N/A	29.92	N/A	31.04	12.75	6.28	1.29	1 1/4 - 7 UNC	6.33	N/A	9.00	N/A	6.50	1.12	1660HF
2760HF	N/A	1176	1800 ‡	15.12	7.25	10.00	7.92	N/A	34.25	N/A	36.03	15.00	6.68	1.41	1 1/4 - 7 UNC	7.69	N/A	10.50	N/A	7.20	1.25	2760HF

★ **Technical Table Designatory Notes:** Fluid couplings are offered strictly for horizontal mounting configurations as detailed above. Please consult the Factory or your local Authorized India Partner for alternative vertical/custom mounting arrangements. All recorded dimensions are intended for reference only and are subject to engineering changes without prior notice unless certified explicitly.

† **Setscrew Specifications:** Sizes 320HF through 1420HF are integrated with .375-16 X .250 setscrews. Size 1480HF utilizes .500-13 X .250 setscrews.

‡ **Operating Special Parameters:** Model 2760HF utilizes specific high-grade special aluminum components optimized for continuous professional industrial operations.

Dimensions Continue on Page 25 →

PARTNER ASSISTANCE & ORDERING

For direct technical documentation verification, custom bore engineering requirements, or official commercial quotes, please connect with the Falk True Torque specialized support desk at **Jinharsh Industrial Solutions Private Limited**.