

FALK TRUE TORQUE


Fluid Couplings – HF25 Disc Coupling Mount

The Falk True Torque Type FD disc coupling mount configuration features high-precision discpacks integrated at both the input and output ends, purpose-built for premium horizontal mounting drive arrangements. The robust A-Hubs are furnished with a strict interference fit and contain no setscrews unless specified otherwise for unique system requirements. Designed for optimal operational maintenance and flexibility, the core fluid coupling drops cleanly in or out in conjunction with the discpack and adapter sub-assemblies without disturbing or removing the connected machinery shafts.

AVAILABILITY BY COUPLING SIZE & TYPE

Type	Description	370	1420	1480	1584	1660	2760	2870
HFN25	Non Delay Fill	—	—	—	—	—	—	X
HFD25	Delay Fill	X	X	X	X	X	X	X
HFDD25	Extended Delay Fill	—	X	X	X	X	X	—
HFR25	Inactive Delay Fill	X	X	X	X	X	X	—

DIMENSIONAL SCHEMATICS & LAYOUT (TYPE HF25)

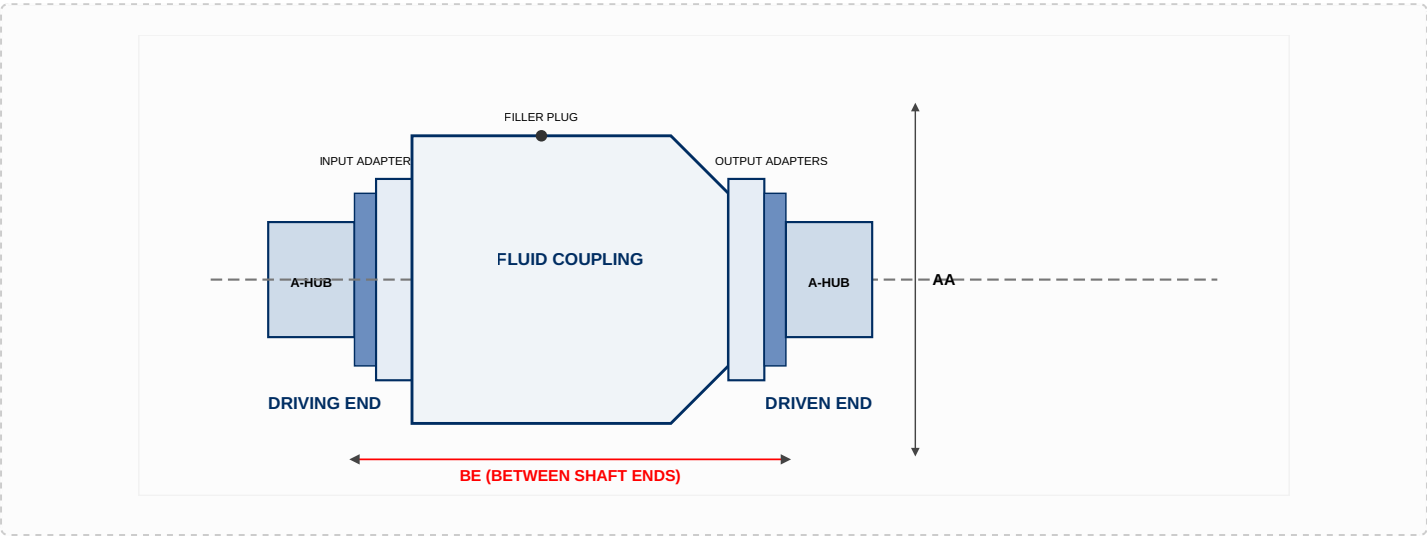

TYPE HF25 ENGINEERING & PERFORMANCE SPECS

CPLG SIZE ★	Cplg Weight lb No Bore & W/O Fluid		Allow Speed rpm	Dimensions — Inches								BE Dimensions		Maximum Bore † Shaft Coupling Type FD		WR ² (lb-in ²) ‡			Fluid @ Max Fill			CPLG SIZE ★
	HFD HFR	HFDD		A	C	D	F	H	K	AA	HFD HFR	HFDD	Size	Sq. Key •	Input		Output	HFD	HFR	HFDD		
															HFD HFR	HFDD						
370HF	184	N/A	1800	9.50	2.92	5.30	6.60	7.75	10.04	16.73	15.60	N/A	190FD06A	3.750	1,870	N/A	650	478	393	N/A	370HF	
1420HF	230	239	1800	9.50	2.92	5.30	6.60	7.75	11.50	18.70	17.12	20.23	190FD06A	3.750	2,850	3,010	827	990	820	925	1420HF	
1480HF	337	350	1800	11.25	3.43	6.30	7.75	9.50	13.28	21.65	19.50	22.92	340FD06A	4.375	5,214	5,545	1,864	1,980	1,504	1,950	1480HF	
1584HF	546	568	1800	12.00	3.82	7.10	8.60	10.25	15.24	26.38	22.18	26.00	625FD06A	5.000	11,200	12,050	3,620	4,955	3,844	5,125	1584HF	
1660HF	816	845	1800	15.00	4.60	8.34	10.40	12.50	17.80	29.92	25.25	29.58	1080FD06A	5.750	20,815	22,315	7,290	9,225	8,167	9,570	1660HF	
2760HF	1177	1219	1800	16.50	5.30	9.60	11.70	13.75	20.34	34.25	28.88	33.72	1700FD06A	7.000	38,520	41,321	14,275	16,230	14,660	15,240	2760HF	
2870HF	1685	1758	1500	17.00	5.08	8.38	10.85	13.50	23.60	38.98	31.50	37.09	2500FD08A	5.875	Refer to Falk		9,360	Refer to Falk			2870HF	

- ★ **Mounting Guidelines:** Fluid couplings are offered for horizontal mounting configurations as shown. Refer to the Factory or your local Authorized India Partner for other alternative mounting arrangements. Dimensions are for reference only and are subject to change without notice unless certified explicitly.
- † **Fit & Bore Criteria:** Type FD Disc Couplings are furnished with an average INTERFERENCE FIT of .0005" per inch of shaft diameter, without setscrew, unless otherwise specified. Maximum bore capacity is REDUCED when INTERFERENCE FIT with a setscrew OVER the keyway is specified. Refer to publication 427-105 for detailed allowable bores.
- ‡ **Mass Moment Values:** Equivalent mass moment values shown apply only to the fluid coupling (without bore), with stub shaft (flexible coupling not included). Refer to Page 31 for fluid WR² multipliers for other than maximum fill parameters.
- **Keyway Standards:** Maximum bore values specified indicate sizes engineered for hubs featuring standard keyways for rectangular keys.
- **Material Enhancements:** Model 2760HF utilizes specific high-strength special aluminum components designed for demanding continuous industrial deployments.

ENGINEERING CONSULTATION & LOGISTICS

For custom drop-in alignment metrics, interference fit configurations, or order placement assistance, please reach out to the dedicated fluid power engineering team at **Jinharsh Industrial Solutions Private Limited**.