

FALK TRUE TORQUE


Fluid Couplings – HF32, 32-1 Steelflex/Hollow Shaft Mount

The Falk True Torque Steelflex Type T10 coupling input with hollow shaft output is engineered for high-performance horizontal mounting configurations. The hollow shaft is secured directly to the driven shaft by an axial retention fastener, bored to order, and features a modified transitional fit with no setscrew. The driven shaft end must be drilled and tapped for a retention fastener. The fluid coupling package includes a Factory-furnished spacer, which is machined to length by the Factory based on actual shaft engagement dimensions provided by the customer. Types HF32 and 32-1 significantly diminish the gap required between connected shafts. Type HF32-1 has a greater max bore capacity within the hollow shaft but requires more shaft gap than Type HF32.

AVAILABILITY BY COUPLING SIZE & TYPE

Type	Description	320	370	1420	1480	1584	1660	2760
HFN32, 32-1	Non Delay Fill	X	—	—	—	—	—	—
HFD32, 32-1	Delay Fill	—	X	X	X	X	X	X
HFR32, 32-1	Inactive Delay Fill	—	X	X	X	X	X	X

DIMENSIONAL SCHEMATICS & LAYOUT (TYPES 32 & 32-1)

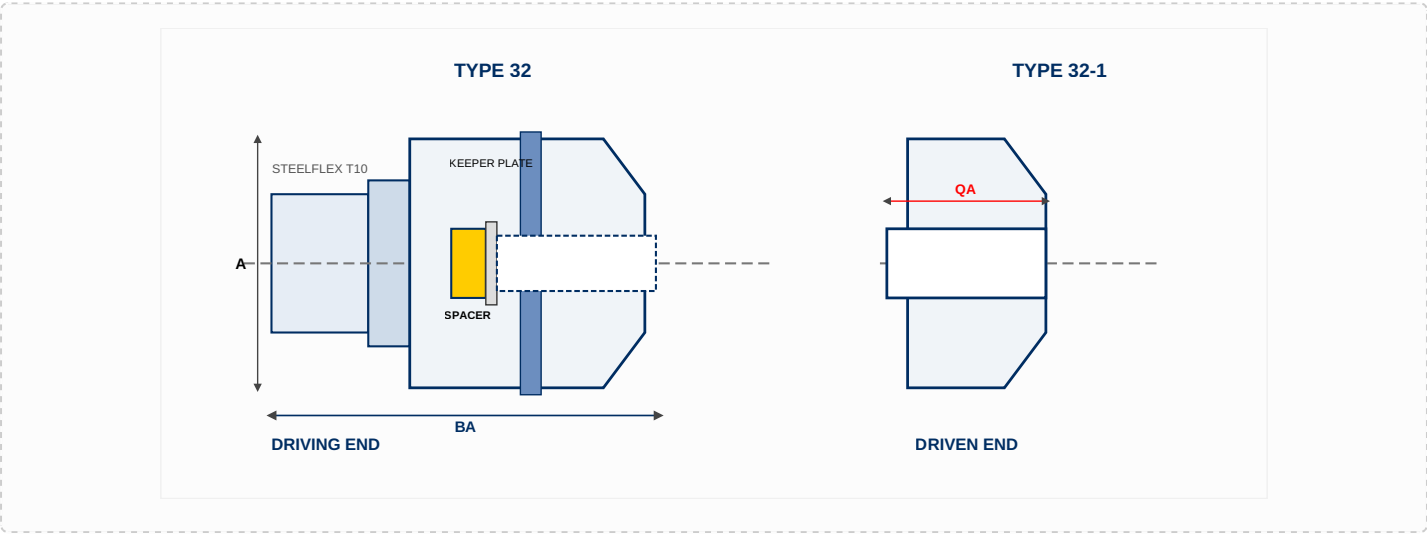

TYPE HF SHAFT & MAXIMUM BORE SPECIFICATIONS

CPLG SIZE ★	Stub Shaft		Maximum Bore										WR ² (lb-in ²) ■		Fluid @ Max Fill		CPLG SIZE ★	
	T	Key	Shaft Coupling †		Hollow Shaft •							Input	Output	HFN HFR	HFD			
			Gap	Type T10		Type 31 •		Type 31-1 •		Type 32 •								Type 32-1 •
				Size	Sq Key	Rect Key ‡	Sq Key	Rect Key ‡	Sq Key	Rect Key ‡	Sq Key							Rect Key ‡
320HF	1.875	1/2 x 1/2 x 2 1/4	0.125	1060	2.125	2.375	2.250	2.500	N/A	N/A	2.250	2.500	2.500	947	143	191.0	N/A	320HF
370HF	2.500	5/8 x 5/8 x 2 3/4	0.125	1080	3.000	3.375	2.250	2.500	2.500	2.875	2.250	2.500	2.875	1,910	283	393.0	478	370HF
1420HF	3.000	3/4 x 3/4 x 3	0.125	1090	3.500	3.875	2.500	2.875	3.000	3.375	2.500	2.875	3.375	3,050	570	820.0	990	1420HF
1480HF	3.500	7/8 x 7/8 x 3 3/4	0.188	1100	4.000	4.500	3.000	3.375	3.375	3.750	3.000	3.375	3.750	5,620	1,260	1,504	1,980	1480HF
1584HF	4.000	1 x 1 x 4	0.188	1110	4.500	5.000	N/A	N/A	N/A	N/A	3.500	3.875	4.500	12,100	2,900	3,844	4,955	1584HF
1660HF	4.500	1 x 1 x 4 1/2	0.250	1120	5.000	5.750	N/A	N/A	N/A	N/A	4.000	4.500	5.000	22,830	5,080	8,167	9,225	1660HF
2760HF	4.750	1 1/4 x 1 1/4 x 5 1/2	0.250	1140	7.000	7.250	N/A	N/A	N/A	N/A	4.750	5.500	5.500	38,750	9,360	14,660	16,230	2760HF

★ **General Reference Note:** Fluid couplings are offered for horizontal mounting configurations as shown. Refer to the Factory or your local Authorized India Partner for other specialized mounting arrangements. Dimensions are for reference only and are subject to change without notice unless certified.

† **Coupling Fit Options:** Unless otherwise specified, Sizes 1060T10 thru 1090T10 will be furnished for CLEARANCE FIT with a setscrew OVER the keyway, and Sizes 1100T10 and larger will be furnished for INTERFERENCE FIT without setscrew. Maximum bore capacities of Type T10 coupling hubs are REDUCED when INTERFERENCE FIT with a setscrew OVER the keyway is specified. Refer to publication 427-105 for allowable bores.

‡ **High-Capacity Keyways:** To utilize these maximum bores, a customer-furnished rectangular key must replace the standard square key that was supplied with the shaft. Always **CHECK KEY STRESSES** during implementation.

• **Hollow Shaft Tolerances:** Types 31 & 31-1 hollow shafts are furnished for a modified CLEARANCE FIT with one setscrew over the keyway and one setscrew at 90° to the keyway. Types 32 & 32-1 hollow shafts are furnished with modified TRANSITIONAL FIT, no setscrew.

■ **Mass Moment Values:** Equivalent mass moment values shown apply only to the fluid coupling (without bore), with stub shaft (flexible coupling not included). Refer to Page 31 for fluid WR² multipliers for other than maximum fill.

CONTACT & ENGINEERING SUPPORT

For comprehensive technical verification, detailed transition fit metrics, or custom quote requests, connect directly with the specialized fluid coupling desk at **Jinharsh Industrial Solutions Private Limited**.