

FALK TRUE TORQUE


Fluid Couplings – HF41 Sheave/Hollow Shaft Mount

The Falk True Torque Type HF41 Sheave/Hollow Shaft Mount fluid coupling features a high-efficiency hollow shaft input design combined with a QD sheave output configuration engineered specifically for reliable horizontal mounting applications. For all sizes listed, the Factory provides a specially manufactured QD Adapter (in lieu of a traditional QD bushing) to perfectly accommodate a standard QD sheave supplied by the purchaser. All system sizes are securely locked and clamped directly to the motor shaft utilizing a robust, heavy-duty collet and collet draw bolt assembly, delivering precise alignment and optimal torque transition under continuous industrial operating conditions.

AVAILABILITY BY COUPLING SIZE & TYPE

Type	Description	185	235	270	320	370
HFN41	Non Delay Fill	X	X	X	X	X
HFD41	Delay Fill	—	—	—	—	X

DIMENSIONAL SCHEMATICS & LAYOUT (TYPE HF41)

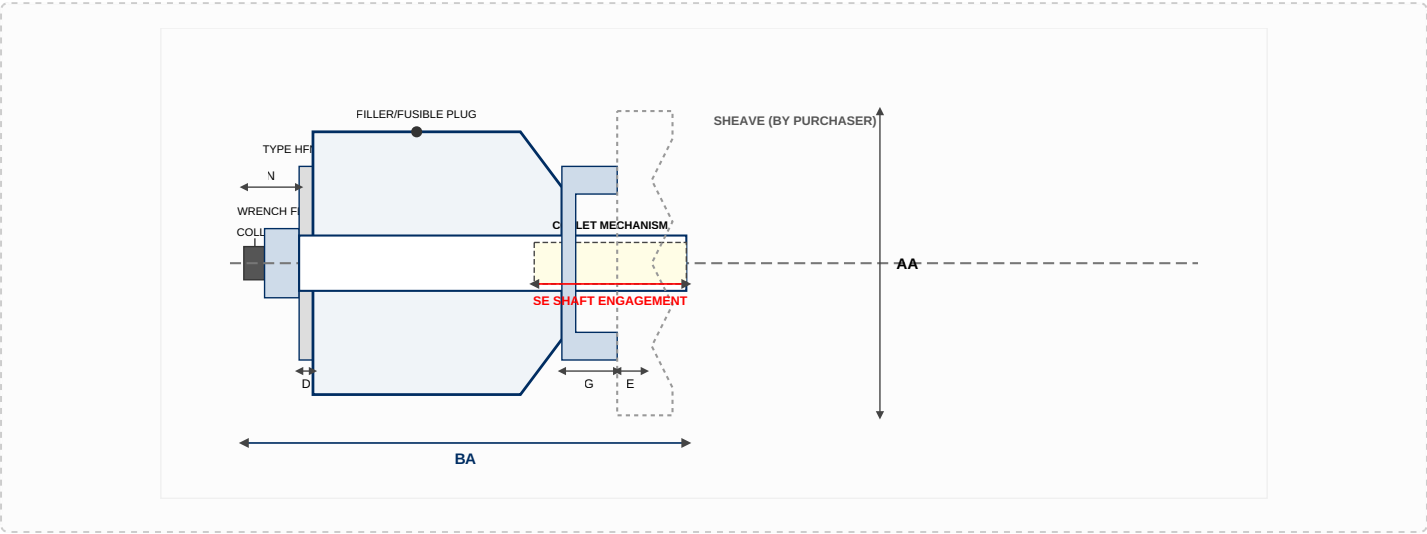

TYPE HF41 TECHNICAL PERFORMANCE & DIMENSIONS

CPLG SIZE ★	Cplg Weight lb No Bore & W/O Sheave, Fluid		Allowable Speed rpm	Sheave Adapter QD ★	Dimensions — Inches							SE (Max)	CPLG SIZE ★
	HFN	HFD			D	E †	G	N	AA	BA	SE (Min)		
185HF	22	N/A	1800	SDS	N/A	.26	2.29	.99	8.86	7.69	2.00	See Page 29	185HF
235HF	38	N/A	1800	SK	N/A	.36	2.95	1.31	10.83	9.65	2.50		235HF
270HF	50	N/A	1800	SF	N/A	.42	3.19	1.36	12.40	10.02	2.50		270HF
320HF	81	N/A	1800	E	N/A	.53	4.21	1.93	14.37	12.48	3.12		320HF
370HF	107	114	1800	E	1.45	.53	4.11	3.34	16.73	14.46	3.75	—	370HF

★ **General Installation Guidelines:** Fluid couplings are offered explicitly for horizontal mounting configurations as shown. For custom vertical positions or unlisted application arrangements, please consult the Factory or your local Authorized India Partner. All dimensions and data listed are intended as standard reference metrics only and are subject to engineering changes without notice unless formally certified.

* **QD Adapter Source:** Rexnord furnishes the specially manufactured QD Adapter component (in lieu of standard generic QD bushings) to perfectly align and match the standard QD sheave supplied by the purchaser.

† **Dimensional Variability Parameters:** For explicit details regarding Dimensions K and L, please reference the specialized sheave tables located on Page 29 of the main core engineering manual. Dimensions E and L for Sizes 185HF through 370HF may exhibit normal variation tolerances up to ±.12 inches. For Dimension L specifically, any recorded negative value formally represents a dimension situated to the left of the collet face surface.

TECHNICAL SUPPORT & LOGISTICS HUB

For direct confirmation of standard collet configurations, matching sheave parameters, or prompt quote information, contact the fluid power engineering division directly at **Jinharsh Industrial Solutions Private Limited**.