



FR-5 · U-body (2 sides + plate A-C)

10 ga 0.135" (3.42 mm) · HR steel sheet A1011 CS · flat blank 10.643" × 6.198" · ≈ 1.57 lb each · QTY 1 FR + 1 FL = 2 per vehicle

FLAT PATTERN (as laser-cut, marked side up)

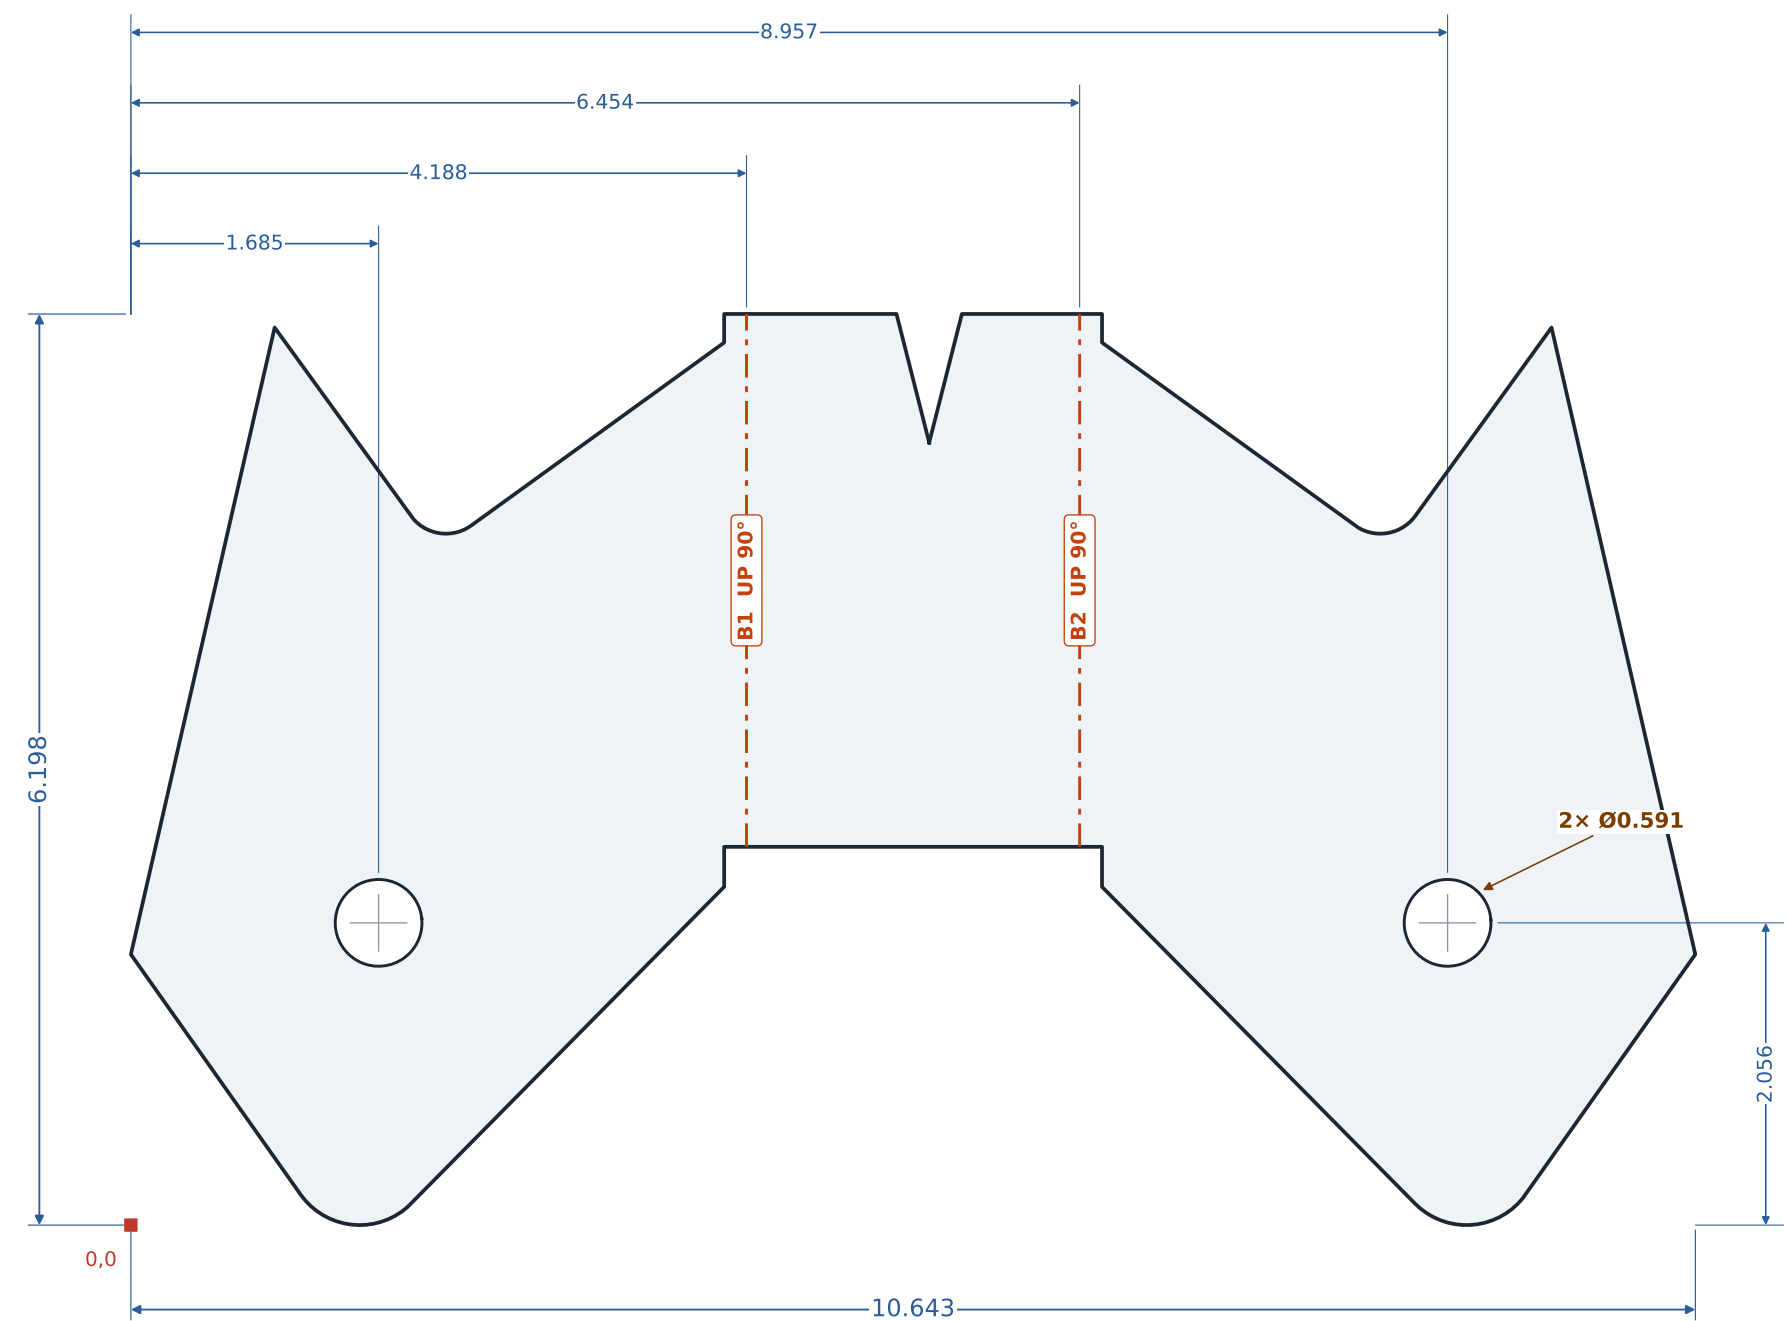

FORMED PART (after bending)

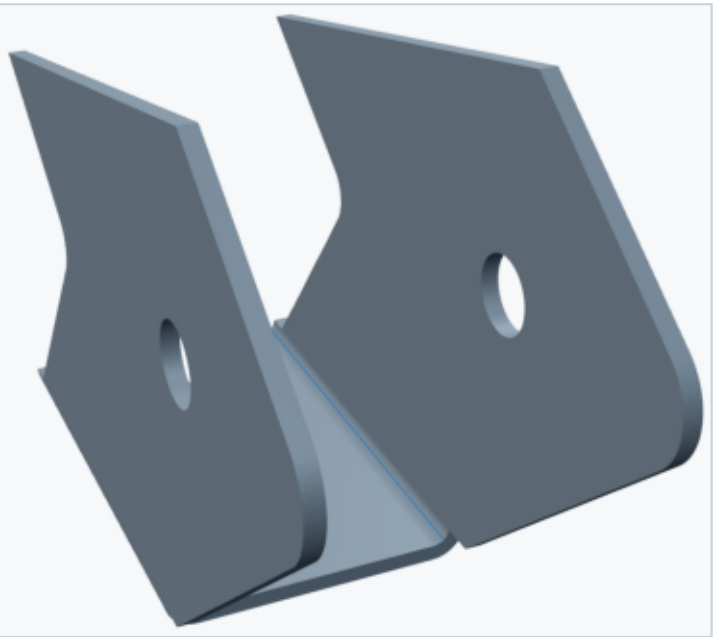

BEND TABLE

Bend	Angle	Direction	Inside R	Order	Bend line position
B1	90.0°	UP (toward)	R=t 0.135	1	X = 4.188
B2	90.0°	UP (toward)	R=t 0.135	2	X = 6.454

HOLES (centre from 0,0)

Hole	Size	X	Y	Made by
H1	Ø0.591	1.685	2.056	laser
H2	Ø0.591	8.957	2.056	laser

FILES

- FR-5_FR_cut.dxf (right, qty 1 / vehicle)
- FR-5_FL_cut.dxf (left = mirror, qty 1 / vehicle)
- FR-5_ref.dxf (reference: + bend lines, drill-later)

NOTES

- Laser cut from the *_cut.dxf file (1:1, inch). The DXF governs the geometry; dimensions here are for checking.
 - Bend allowance (K = 0.44, inside radius = t) is already in the flat. Bend on the orange lines; UP = toward you when the part lies as drawn.
 - Holes marked DRILL LATER (red dashed) are not laser cut — drill after bending/welding.
 - Deburr all edges, remove dross.
 - Right part (FR) shown. Left part (FL) = mirror: cut *_FL_cut.dxf, bend the same UP/DOWN.
- * 90° bends, R = t

FR-5U-body bracket	HR steel sheet A1011 CS 10 ga 0.135" (3.42 mm)	Units: inch · NOT TO SCALE	Sienna WAV frame	REV A
FR-5 · U-body (2 sides + plate A-C)	QTY 1 FR + 1 FL = 2 per vehicle	Tol.: cut ±0.010" · bend ±1° · IR = t	2026-10-03	SHEET 1/1