


FR-10 (bent version) — blank 1 of 2

Part 1 "U-body" — 2 sides + wall A-H + flange E-F (3 bends) · blank 12.268" × 11.210" · HR steel sheet 0.138" · 1 per side · FR + FL (mirror) = 2 per vehicle

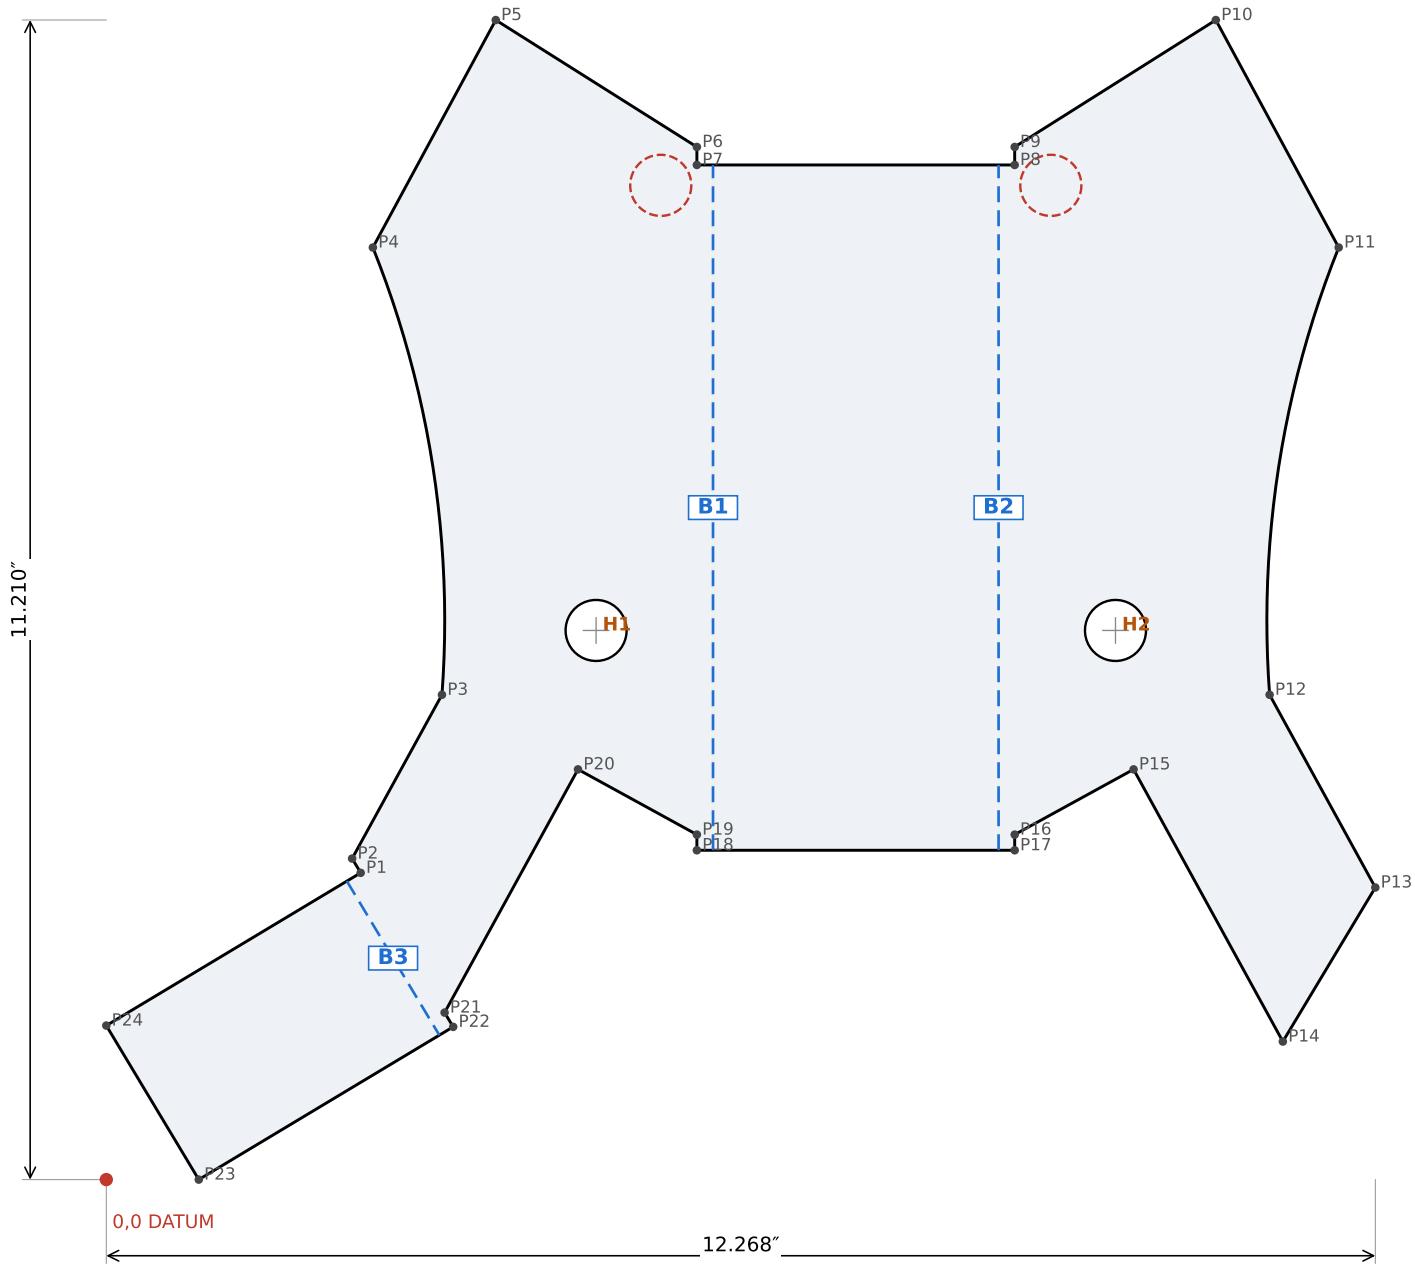

HOLES (centre X, Y from datum)

|    |         |         |         |
|----|---------|---------|---------|
| H1 | Ø0.591" | X 4.735 | Y 5.309 |
| H2 | Ø0.591" | X 9.756 | Y 5.309 |

DRILL AFTER WELDING (red dashed — do NOT laser cut)

|    |         |         |         |
|----|---------|---------|---------|
| D1 | Ø0.591" | X 5.360 | Y 9.612 |
| D2 | Ø0.591" | X 9.131 | Y 9.612 |

BENDS (bend centre line, from datum) IR = t = 0.138"

|    |         |                                 |
|----|---------|---------------------------------|
| B1 | (2) 90° | (5.865, 3.184) → (5.865, 9.809) |
| B2 | (3) 90° | (8.626, 3.184) → (8.626, 9.809) |
| B3 | (1) 90° | (2.325, 2.885) → (3.220, 1.396) |

CURVED EDGES (radius, centre X, Y)

|    |          |                      |
|----|----------|----------------------|
| R1 | R 9.699" | centre -6.427, 5.406 |
| R2 | R 9.700" | centre 20.919, 5.406 |

OUTLINE POINTS (X, Y from datum)

|     |        |        |
|-----|--------|--------|
| P1  | 2.459  | 2.966  |
| P2  | 2.376  | 3.103  |
| P3  | 3.245  | 4.687  |
| P4  | 2.577  | 9.011  |
| P5  | 3.765  | 11.210 |
| P6  | 5.709  | 9.982  |
| P7  | 5.709  | 9.809  |
| P8  | 8.781  | 9.809  |
| P9  | 8.781  | 9.982  |
| P10 | 10.726 | 11.210 |
| P11 | 11.914 | 9.011  |
| P12 | 11.246 | 4.687  |
| P13 | 12.268 | 2.824  |
| P14 | 11.374 | 1.335  |
| P15 | 9.931  | 3.966  |
| P16 | 8.781  | 3.335  |
| P17 | 8.781  | 3.184  |
| P18 | 5.709  | 3.184  |
| P19 | 5.709  | 3.335  |
| P20 | 4.560  | 3.966  |
| P21 | 3.270  | 1.615  |
| P22 | 3.353  | 1.476  |
| P23 | 0.894  | 0.000  |
| P24 | 0.000  | 1.489  |

NOTES

1. Cut from the DXF file (1:1, inches). This sheet is for checking.
  2. Material: HR steel sheet 0.138" (t). Inside bend radius = t.
  3. Flat pattern already includes bend allowance (K = 0.44, R = t).
  4. Blue dashed = bend centre lines (B1, B2 ...). ↓ = bend DOWN (away from you), no arrow = bend UP. Red dashed = drill later.
  5. Deburr all edges. Curved edges: smooth arcs per DXF.
  6. FR side as drawn; FL side = mirror image (flip the blank).
- \* bends (1)(2)(3) 90° up, R = t; the 2 Ø0.591 holes near A (½" from A-B, ⅝" from A-H) are not in the flat — drill after bending

|                                                             |                                                    |                                  |                               |
|-------------------------------------------------------------|----------------------------------------------------|----------------------------------|-------------------------------|
| FR-10 (bent version) — blank 1 of 2                         | HR steel sheet 0.138"                              | inches · flat blank, 1:1 in DXF  | Sienna WAV frame · 2026-10-02 |
| Part 1 "U-body" — 2 sides + wall A-H + flange E-F (3 bends) | QTY: 1 per side · FR + FL (mirror) = 2 per vehicle | cut ±0.010" · bends ±1° · IR = t | SHEET 1 / 3                   |

FR-10 (bent version) — blank 2 of 2

Part 2 "strip" — A-B · B-C · shelf · inner plate (3 bends) · blank 12.460" × 2.709" · HR steel sheet 0.138" · 1 per side · FR + FL (mirror) = 2 per vehicle

HOLES (centre X, Y from datum)


|    |         |         |         |
|----|---------|---------|---------|
| H1 | Ø1.100" | X 1.150 | Y 1.355 |
| H2 | Ø1.181" | X 5.796 | Y 1.355 |

BENDS (bend centre line, from datum) IR = t = 0.138"

|    |               |                                 |
|----|---------------|---------------------------------|
| B1 | (5) B 93.9°   | (2.330, 0.000) → (2.330, 2.709) |
| B2 | (6) C 86.1°   | (4.727, 0.000) → (4.727, 2.709) |
| B3 | (4) X 79.2° ↓ | (7.033, 0.000) → (7.033, 2.709) |

OUTLINE POINTS (X, Y from datum)

|    |        |       |
|----|--------|-------|
| P1 | 0.000  | 2.519 |
| P2 | 0.190  | 2.709 |
| P3 | 12.270 | 2.709 |
| P4 | 12.460 | 2.519 |
| P5 | 12.460 | 0.190 |
| P6 | 12.270 | 0.000 |
| P7 | 0.190  | 0.000 |
| P8 | 0.000  | 0.190 |

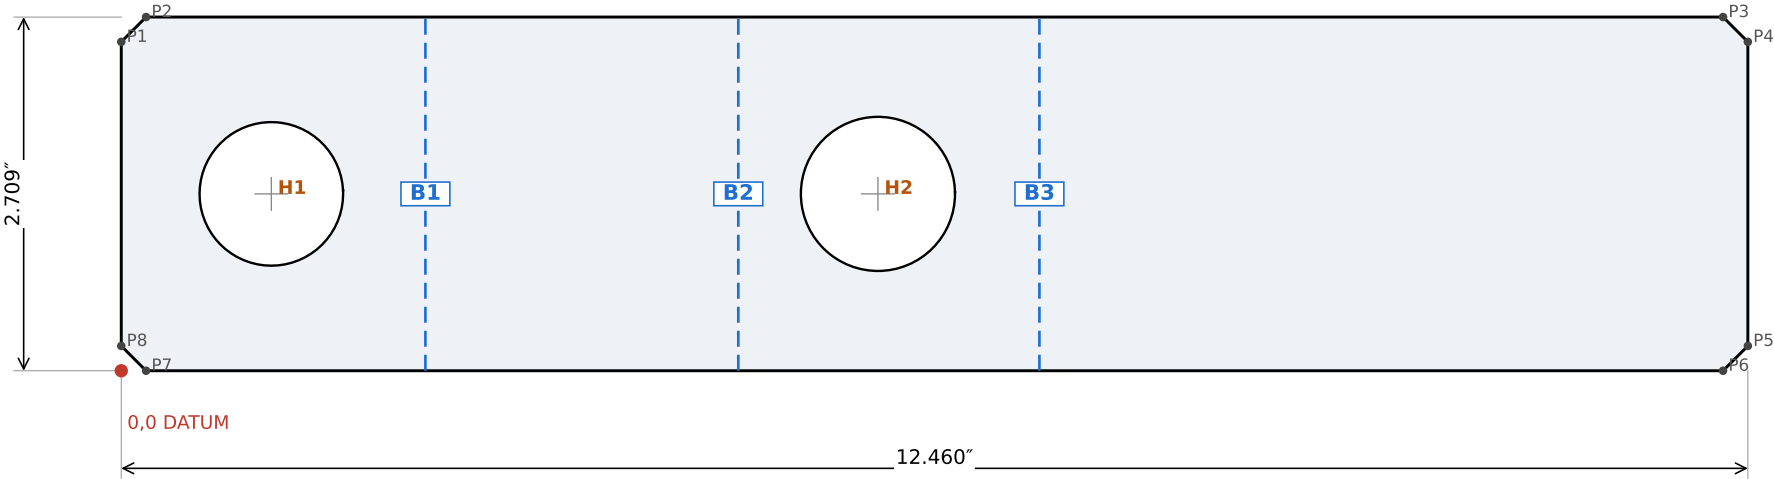

NOTES

- 1. Cut from the DXF file (1:1, inches). This sheet is for checking.
- 2. Material: HR steel sheet 0.138" (t). Inside bend radius = t.
- 3. Flat pattern already includes bend allowance (K = 0.44, R = t).
- 4. Blue dashed = bend centre lines (B1, B2 ...). ↓ = bend DOWN (away from you), no arrow = bend UP. Red dashed = drill later.
- 5. Deburr all edges. Curved edges: smooth arcs per DXF.
- 6. FR side as drawn; FL side = mirror image (flip the blank).
- \* (4) X 79.2° opposite way; (5) B 93.9°, (6) C 86.1° up; corners 3/16"x45°

|                                                            |                                                    |                                  |                               |
|------------------------------------------------------------|----------------------------------------------------|----------------------------------|-------------------------------|
| FR-10 (bent version) — blank 2 of 2                        | HR steel sheet 0.138"                              | inches · flat blank, 1:1 in DXF  | Sienna WAV frame · 2026-10-02 |
| Part 2 "strip" — A-B · B-C · shelf · inner plate (3 bends) | QTY: 1 per side · FR + FL (mirror) = 2 per vehicle | cut ±0.010" · bends ±1° · IR = t | SHEET 2 / 3                   |

FR-10 (bent version) — cut list (tubes)

• Ring OD 1.5 / ID 1.1 — cut 0.4” (on A-B)

Stock: DOM round tube · cut length 0.400” · QTY 1 per side · FR + FL (mirror) = 2 per vehicle

• Ring OD 1.6 / ID 1.181 — cut 0.394” (under the shelf)

Stock: DOM round tube · cut length 0.394” · QTY 1 per side · FR + FL (mirror) = 2 per vehicle

Cut square, ±1/32”. Deburr. Lengths in inches.

|                                          |                                                    |                                  |                               |
|------------------------------------------|----------------------------------------------------|----------------------------------|-------------------------------|
| FR-10 — tubes                            |                                                    | inches · flat blank, 1:1 in DXF  | Sienna WAV frame · 2026-10-02 |
| Ring OD 1.5 / ID 1.1 — cut 0.4” (on A-B) | QTY: 1 per side · FR + FL (mirror) = 2 per vehicle | cut ±0.010” · bends ±1° · IR = t | SHEET 3 / 3                   |