


FR-10 (welded version) — blank 1 of 7

Side plate (right + left) · blank 3.762” × 9.875” · HR steel sheet 0.138” · 2 per side · FR + FL (mirror) = 4 per vehicle

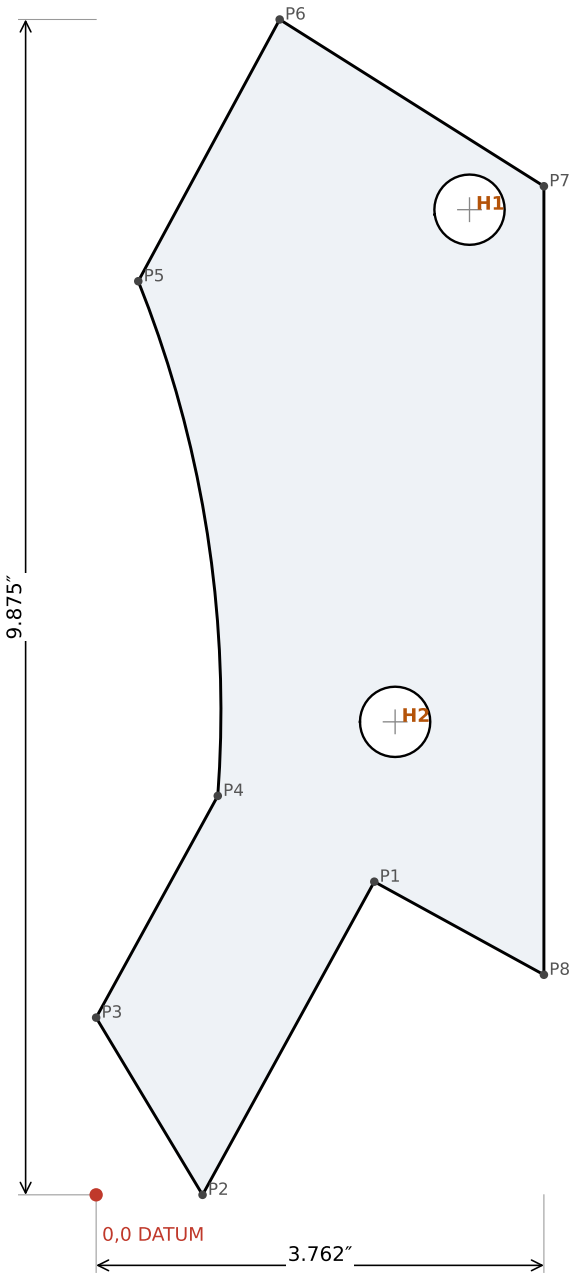

HOLES (centre X, Y from datum)

H1	Ø0.591"	X 3.137	Y 8.277
H2	Ø0.591"	X 2.512	Y 3.974

CURVED EDGES (radius, centre X, Y)

R1	R 9.700"	centre -8.651, 4.071
----	----------	----------------------

OUTLINE POINTS (X, Y from datum)

P1	2.337	2.631
P2	0.894	0.000
P3	0.000	1.489
P4	1.022	3.352
P5	0.354	7.676
P6	1.542	9.875
P7	3.762	8.474
P8	3.762	1.849

NOTES

1. Cut from the DXF file (1:1, inches). This sheet is for checking.
2. Material: HR steel sheet 0.138" (t). Inside bend radius = t.
3. Flat pattern already includes bend allowance (K = 0.44, R = t).
4. Blue dashed = bend centre lines (B1, B2 ...). ↓ = bend DOWN (away from you), no arrow = bend UP. Red dashed = drill later.
5. Deburr all edges. Curved edges: smooth arcs per DXF.
6. FR side as drawn; FL side = mirror image (flip the blank).

FR-10 (welded version) — blank 1 of 7	HR steel sheet 0.138"	inches · flat blank, 1:1 in DXF	Sienna WAV frame · 2026-10-02
Side plate (right + left)	QTY: 2 per side · FR + FL (mirror) = 4 per vehicle	cut ±0.010" · bends ±1° · IR = t	SHEET 1 / 7

FR-10 (welded version) — blank 2 of 7

Plate A-H · blank 6.625" × 2.724" · HR steel sheet 0.138" · 1 per side · FR + FL (mirror) = 2 per vehicle

HOLES (centre X, Y from datum)

none

OUTLINE POINTS (X, Y from datum)

P1	0.000	2.724
P2	6.625	2.724
P3	6.625	0.000
P4	0.000	0.000




NOTES

- 1. Cut from the DXF file (1:1, inches). This sheet is for checking.
- 2. Material: HR steel sheet 0.138" (t). Inside bend radius = t.
- 3. Flat pattern already includes bend allowance (K = 0.44, R = t).
- 4. Blue dashed = bend centre lines (B1, B2 ...). ↓ = bend DOWN (away from you), no arrow = bend UP. Red dashed = drill later.
- 5. Deburr all edges. Curved edges: smooth arcs per DXF.
- 6. FR side as drawn; FL side = mirror image (flip the blank).

FR-10 (welded version) — blank 2 of 7	HR steel sheet 0.138"	inches · flat blank, 1:1 in DXF	Sienna WAV frame · 2026-10-02
Plate A-H	QTY: 1 per side · FR + FL (mirror) = 2 per vehicle	cut ±0.010" · bends ±1° · IR = t	SHEET 2 / 7

FR-10 (welded version) — blank 3 of 7

Plate A-B (hole Ø1.1) · blank 2.625" × 2.724" · HR steel sheet 0.138" · 1 per side · FR + FL (mirror) = 2 per vehicle

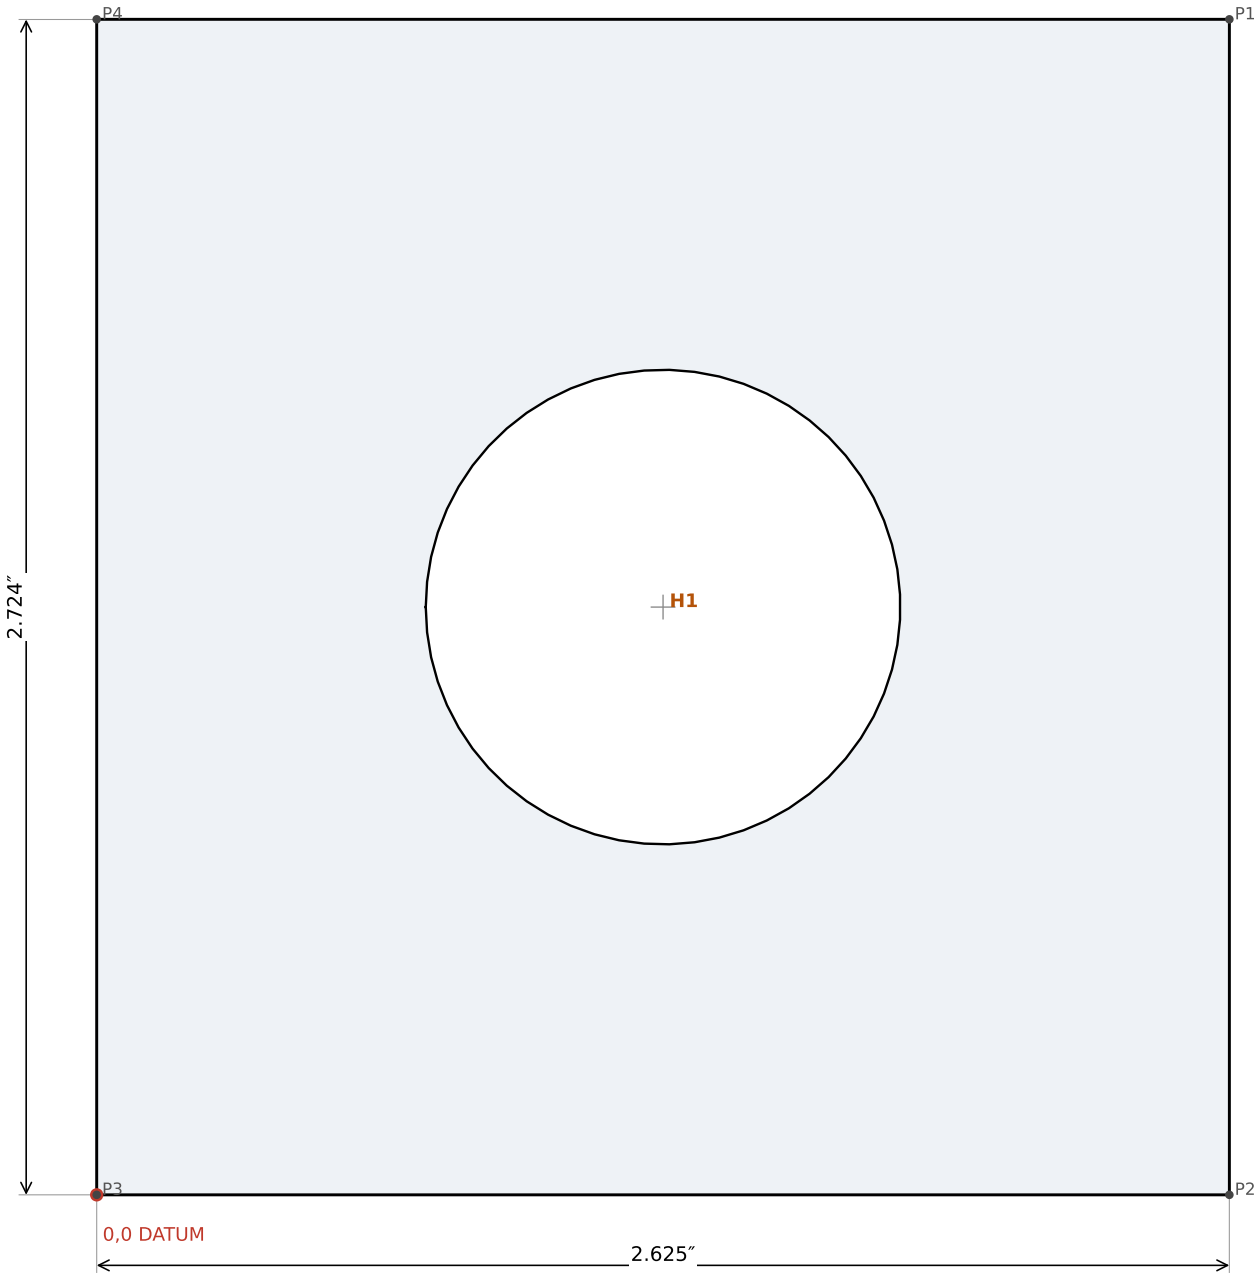

HOLES (centre X, Y from datum)

H1 Ø1.100" X 1.313 Y 1.362

OUTLINE POINTS (X, Y from datum)

P1	2.625	2.724
P2	2.625	0.000
P3	0.000	0.000
P4	0.000	2.724


NOTES

- 1. Cut from the DXF file (1:1, inches). This sheet is for checking.
 - 2. Material: HR steel sheet 0.138" (t). Inside bend radius = t.
 - 3. Flat pattern already includes bend allowance (K = 0.44, R = t).
 - 4. Blue dashed = bend centre lines (B1, B2 ...). ↓ = bend DOWN (away from you), no arrow = bend UP. Red dashed = drill later.
 - 5. Deburr all edges. Curved edges: smooth arcs per DXF.
 - 6. FR side as drawn; FL side = mirror image (flip the blank).
- * + bushing OD1.5×0.4

FR-10 (welded version) — blank 3 of 7	HR steel sheet 0.138"	inches · flat blank, 1:1 in DXF	Sienna WAV frame · 2026-10-02
Plate A-B (hole Ø1.1)	QTY: 1 per side · FR + FL (mirror) = 2 per vehicle	cut ±0.010" · bends ±1° · IR = t	SHEET 3 / 7

FR-10 (welded version) — blank 4 of 7

Plate B-C · blank 2.499" × 2.724" · HR steel sheet 0.138" · 1 per side · FR + FL (mirror) = 2 per vehicle

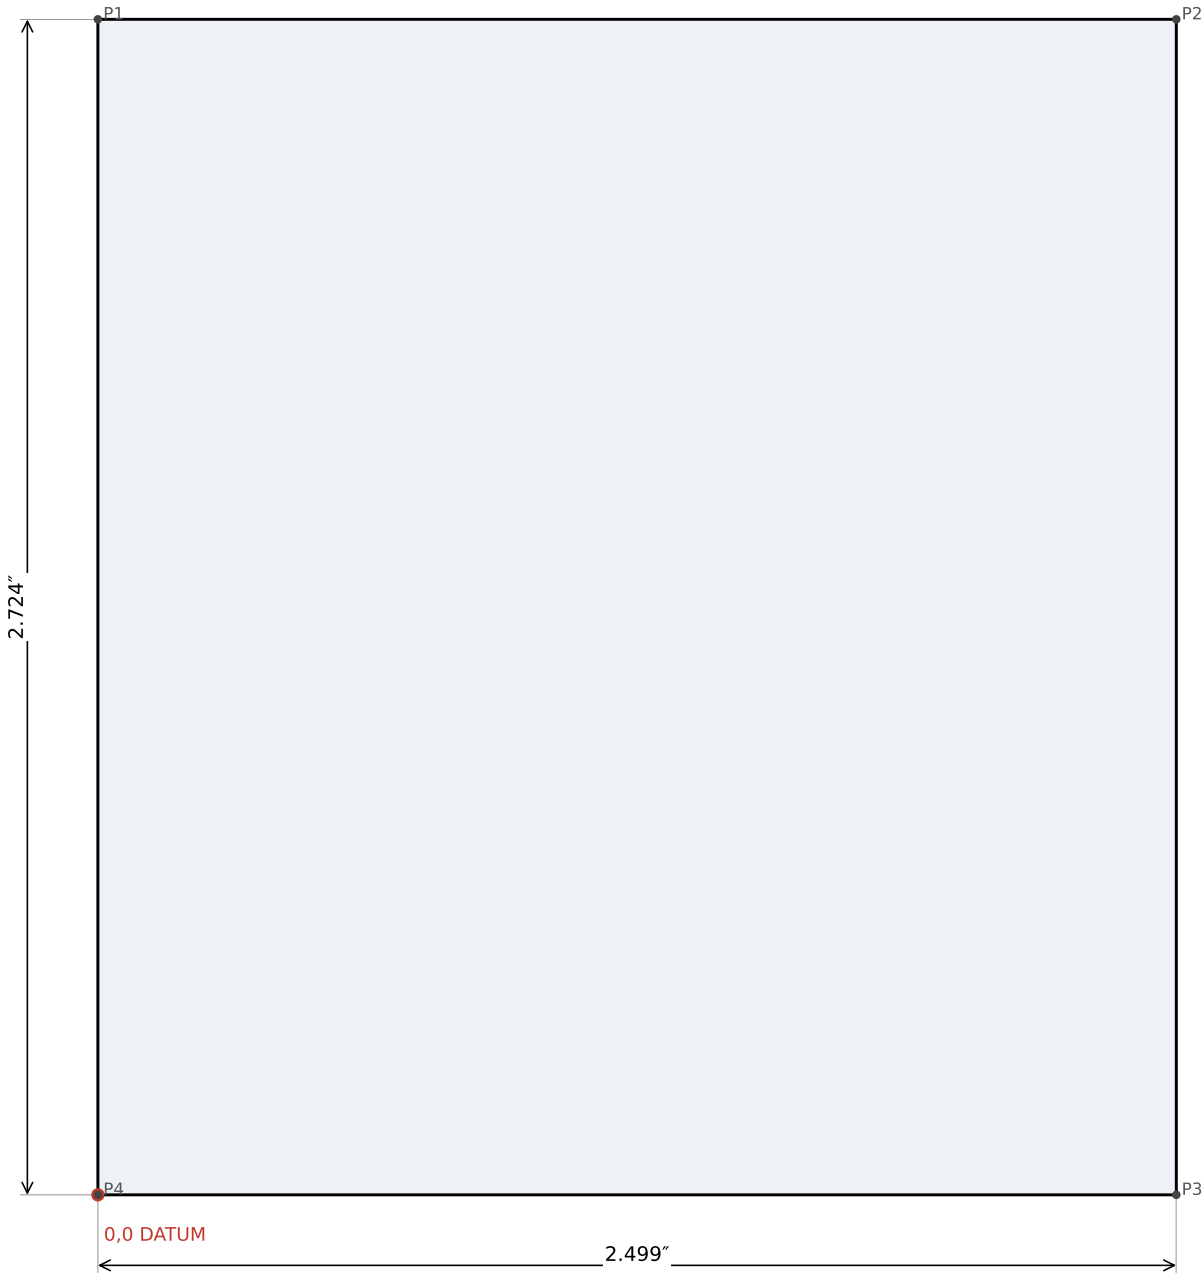

HOLES (centre X, Y from datum)

none

OUTLINE POINTS (X, Y from datum)

P1	0.000	2.724
P2	2.499	2.724
P3	2.499	0.000
P4	0.000	0.000


NOTES

- 1. Cut from the DXF file (1:1, inches). This sheet is for checking.
- 2. Material: HR steel sheet 0.138" (t). Inside bend radius = t.
- 3. Flat pattern already includes bend allowance (K = 0.44, R = t).
- 4. Blue dashed = bend centre lines (B1, B2 ...). ↓ = bend DOWN (away from you), no arrow = bend UP. Red dashed = drill later.
- 5. Deburr all edges. Curved edges: smooth arcs per DXF.
- 6. FR side as drawn; FL side = mirror image (flip the blank).

FR-10 (welded version) — blank 4 of 7	HR steel sheet 0.138"	inches · flat blank, 1:1 in DXF	Sienna WAV frame · 2026-10-02
Plate B-C	QTY: 1 per side · FR + FL (mirror) = 2 per vehicle	cut ±0.010" · bends ±1° · IR = t	SHEET 4 / 7

FR-10 (welded version) — blank 5 of 7

Plate E-F · blank 1.737" × 2.724" · HR steel sheet 0.138" · 1 per side · FR + FL (mirror) = 2 per vehicle

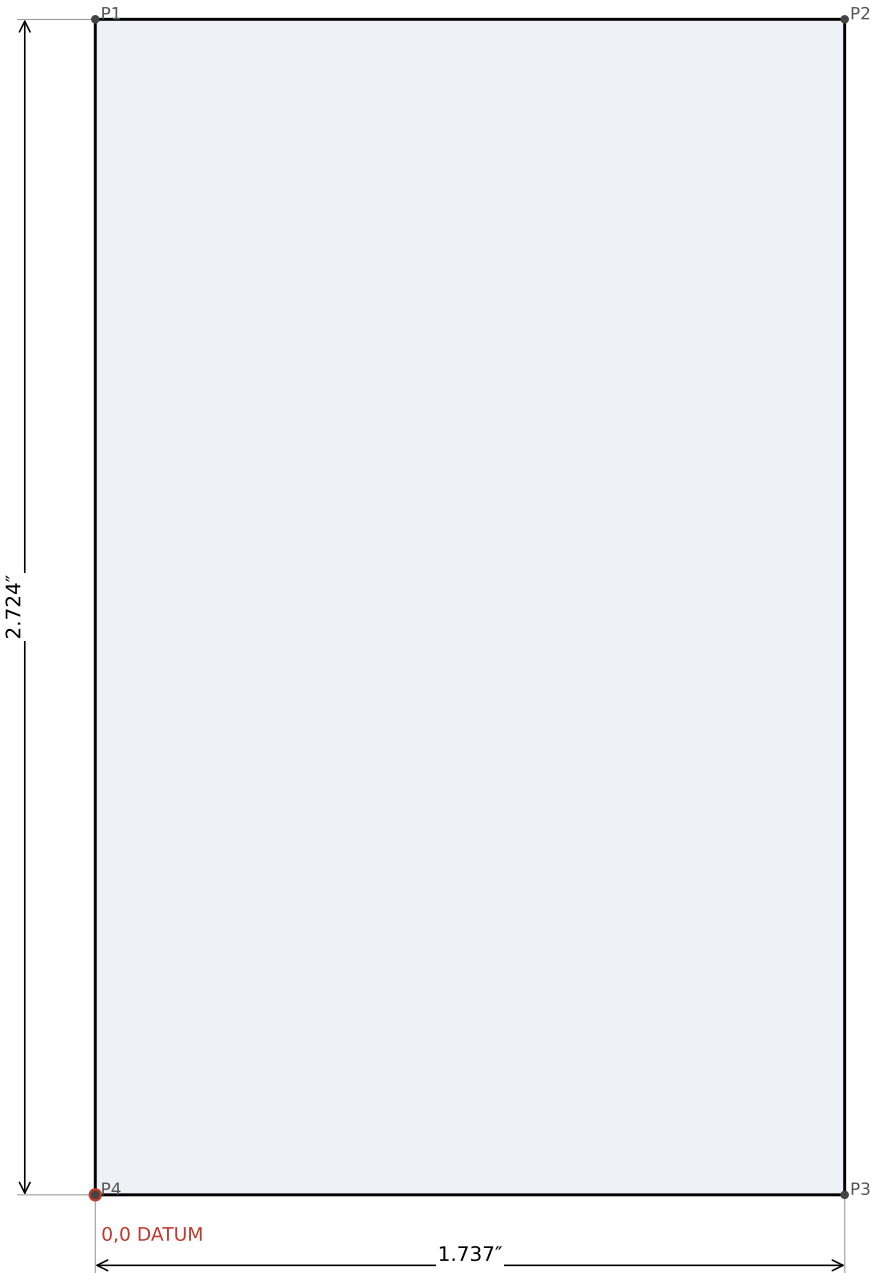

HOLES (centre X, Y from datum)

none

OUTLINE POINTS (X, Y from datum)

P1	0.000	2.724
P2	1.737	2.724
P3	1.737	0.000
P4	0.000	0.000


NOTES

- 1. Cut from the DXF file (1:1, inches). This sheet is for checking.
- 2. Material: HR steel sheet 0.138" (t). Inside bend radius = t.
- 3. Flat pattern already includes bend allowance (K = 0.44, R = t).
- 4. Blue dashed = bend centre lines (B1, B2 ...). ↓ = bend DOWN (away from you), no arrow = bend UP. Red dashed = drill later.
- 5. Deburr all edges. Curved edges: smooth arcs per DXF.
- 6. FR side as drawn; FL side = mirror image (flip the blank).

FR-10 (welded version) — blank 5 of 7	HR steel sheet 0.138"	inches · flat blank, 1:1 in DXF	Sienna WAV frame · 2026-10-02
Plate E-F	QTY: 1 per side · FR + FL (mirror) = 2 per vehicle	cut ±0.010" · bends ±1° · IR = t	SHEET 5 / 7

FR-10 (welded version) — blank 6 of 7

Shelf (hole Ø1.181 for the bushing) · blank 2.375" × 2.724" · HR steel sheet 0.138" · 1 per side · FR + FL (mirror) = 2 per vehicle

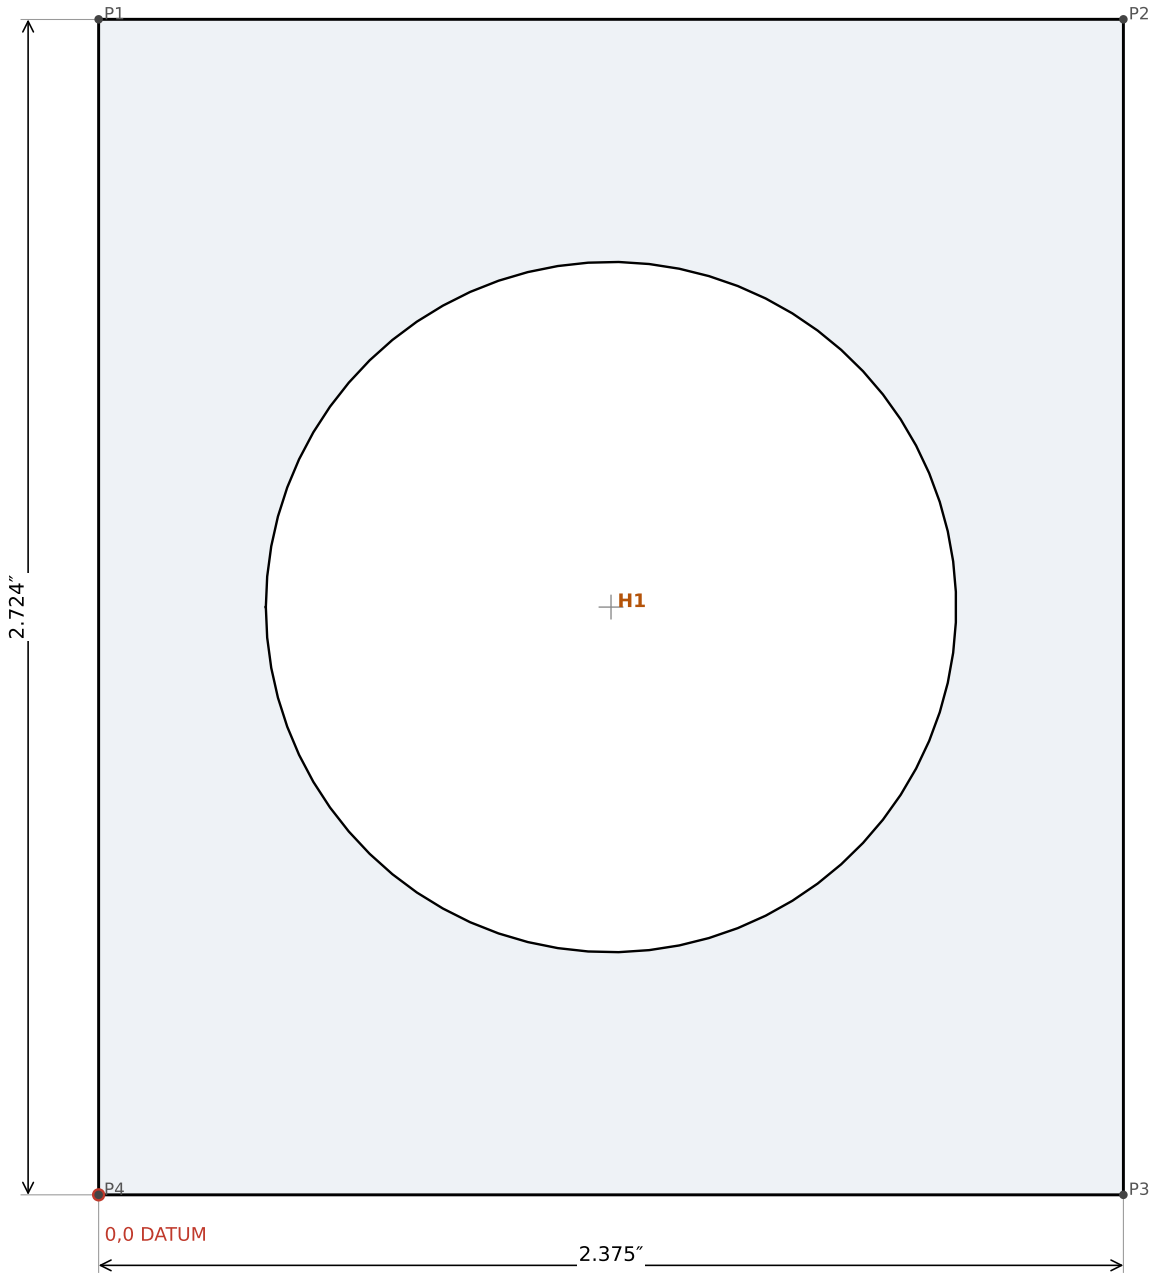

HOLES (centre X, Y from datum)

H1 Ø1.600" X 1.187 Y 1.362

OUTLINE POINTS (X, Y from datum)

P1 0.000 2.724
P2 2.375 2.724
P3 2.375 0.000
P4 0.000 0.000

NOTES

- 1. Cut from the DXF file (1:1, inches). This sheet is for checking.
 - 2. Material: HR steel sheet 0.138" (t). Inside bend radius = t.
 - 3. Flat pattern already includes bend allowance (K = 0.44, R = t).
 - 4. Blue dashed = bend centre lines (B1, B2 ...). ↓ = bend DOWN (away from you), no arrow = bend UP. Red dashed = drill later.
 - 5. Deburr all edges. Curved edges: smooth arcs per DXF.
 - 6. FR side as drawn; FL side = mirror image (flip the blank).
- * + bushing OD1.6×0.394

FR-10 (welded version) — blank 6 of 7	HR steel sheet 0.138"	inches · flat blank, 1:1 in DXF	Sienna WAV frame · 2026-10-02
Shelf (hole Ø1.181 for the bushing)	QTY: 1 per side · FR + FL (mirror) = 2 per vehicle	cut ±0.010" · bends ±1° · IR = t	SHEET 6 / 7

FR-10 (welded version) — blank 7 of 7

Inner plate · blank 5.748” × 2.724” · HR steel sheet 0.138” · 1 per side · FR + FL (mirror) = 2 per vehicle

HOLES (centre X, Y from datum)

none

OUTLINE POINTS (X, Y from datum)

P1	0.000	0.000
P2	0.000	2.724
P3	5.748	2.724
P4	5.748	0.000



NOTES

- 1. Cut from the DXF file (1:1, inches). This sheet is for checking.
- 2. Material: HR steel sheet 0.138” (t). Inside bend radius = t.
- 3. Flat pattern already includes bend allowance (K = 0.44, R = t).
- 4. Blue dashed = bend centre lines (B1, B2 ...). ↓ = bend DOWN (away from you), no arrow = bend UP. Red dashed = drill later.
- 5. Deburr all edges. Curved edges: smooth arcs per DXF.
- 6. FR side as drawn; FL side = mirror image (flip the blank).

FR-10 (welded version) — blank 7 of 7	HR steel sheet 0.138”	inches · flat blank, 1:1 in DXF	Sienna WAV frame · 2026-10-02
Inner plate	QTY: 1 per side · FR + FL (mirror) = 2 per vehicle	cut ±0.010” · bends ±1° · IR = t	SHEET 7 / 7