


FR-2 (bent version) — blank 1 of 3

Leg 1 (U: 2 walls + bottom) · blank 7.745" × 3.250" · HR steel sheet 0.138" · 1 per side · FR + FL (mirror) = 2 per vehicle

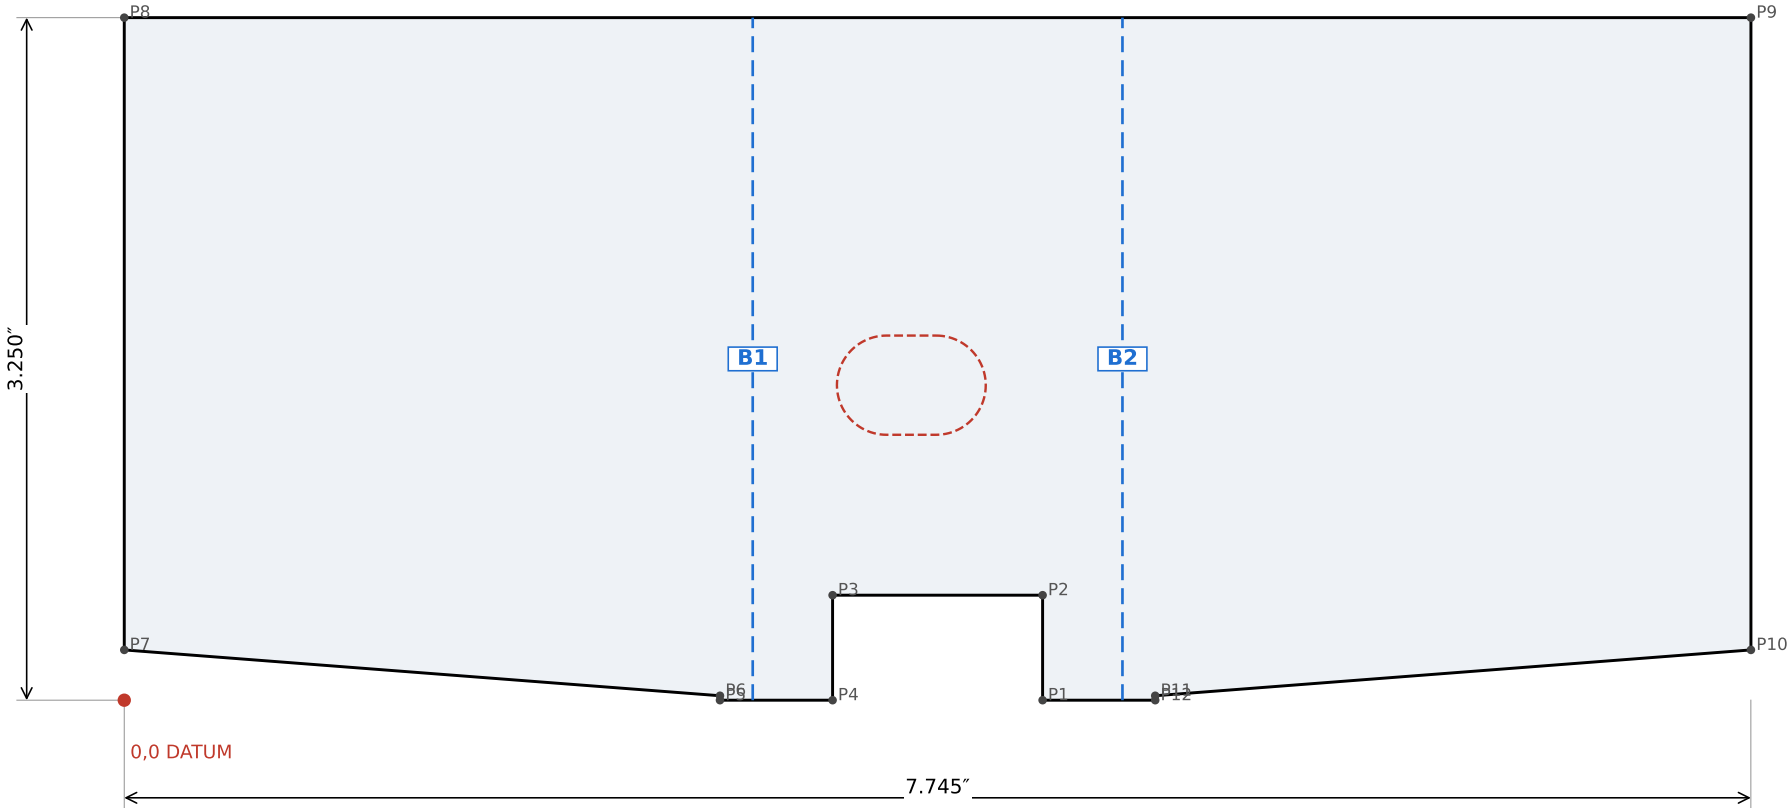

HOLES (centre X, Y from datum)

none

DRILL AFTER WELDING (red dashed — do NOT laser cut)

D1 slot 0.709 × 0.472" X 3.748 Y 1.500

BENDS (bend centre line, from datum) IR = t = 0.138"

B1 (1) 90° (2.992, 0.000) → (2.992, 3.250)

B2 (2) 90° (4.753, 0.000) → (4.753, 3.250)

OUTLINE POINTS (X, Y from datum)

P1	4.373	0.000
P2	4.373	0.500
P3	3.373	0.500
P4	3.373	0.000
P5	2.837	0.000
P6	2.837	0.021
P7	0.000	0.239
P8	0.000	3.250
P9	7.745	3.250
P10	7.745	0.239
P11	4.909	0.021
P12	4.909	0.000


NOTES

- 1. Cut from the DXF file (1:1, inches). This sheet is for checking.
- 2. Material: HR steel sheet 0.138" (t). Inside bend radius = t.
- 3. Flat pattern already includes bend allowance (K = 0.44, R = t).
- 4. Blue dashed = bend centre lines (B1, B2 ...). ↓ = bend DOWN (away from you), no arrow = bend UP. Red dashed = drill later.
- 5. Deburr all edges. Curved edges: smooth arcs per DXF.
- 6. FR side as drawn; FL side = mirror image (flip the blank).
- * 90° bends, R = t; ½" notch at the front. Do NOT cut the 0.709×0.472 oval — drill it after welding through the top oval (centre 0.875" from the outer wall, 1¼" from front edge A)

FR-2 (bent version) — blank 1 of 3	HR steel sheet 0.138"	inches · flat blank, 1:1 in DXF	Sienna WAV frame · 2026-10-02
Leg 1 (U: 2 walls + bottom)	QTY: 1 per side · FR + FL (mirror) = 2 per vehicle	cut ±0.010" · bends ±1° · IR = t	SHEET 1 / 3

FR-2 (bent version) — blank 2 of 3

Leg 2 (U: 2 walls + bottom) · blank 7.745" × 3.250" · HR steel sheet 0.138" · 1 per side · FR + FL (mirror) = 2 per vehicle

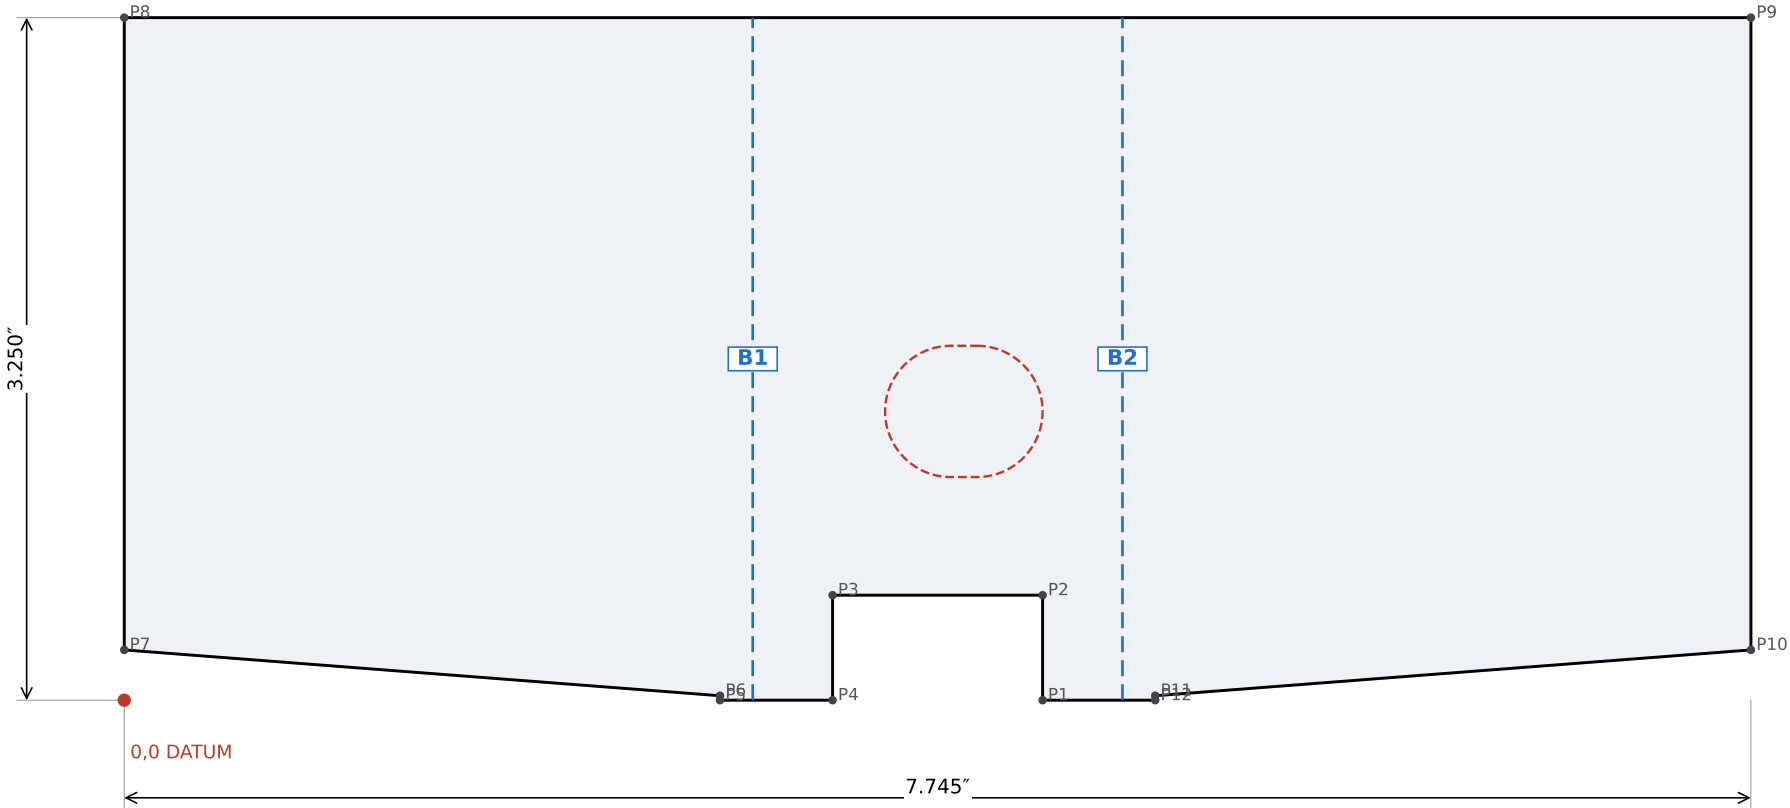

HOLES (centre X, Y from datum)

none

DRILL AFTER WELDING (red dashed — do NOT laser cut)

D1 slot 0.750 × 0.625" X 3.998 Y 1.375

BENDS (bend centre line, from datum) IR = t = 0.138"

B1 (3) 90° (2.992, 0.000) → (2.992, 3.250)

B2 (4) 90° (4.753, 0.000) → (4.753, 3.250)

OUTLINE POINTS (X, Y from datum)

P1	4.373	0.000
P2	4.373	0.500
P3	3.373	0.500
P4	3.373	0.000
P5	2.837	0.000
P6	2.837	0.021
P7	0.000	0.239
P8	0.000	3.250
P9	7.745	3.250
P10	7.745	0.239
P11	4.909	0.021
P12	4.909	0.000

NOTES

- 1. Cut from the DXF file (1:1, inches). This sheet is for checking.
- 2. Material: HR steel sheet 0.138" (t). Inside bend radius = t.
- 3. Flat pattern already includes bend allowance (K = 0.44, R = t).
- 4. Blue dashed = bend centre lines (B1, B2 ...). ↓ = bend DOWN (away from you), no arrow = bend UP. Red dashed = drill later.
- 5. Deburr all edges. Curved edges: smooth arcs per DXF.
- 6. FR side as drawn; FL side = mirror image (flip the blank).
- * 90° bends, R = t. Do NOT cut the ¾×⅝ oval — drill it after welding through the top oval (centre 0.875" from the outer wall, 1⅙" from the front edge)

FR-2 (bent version) — blank 2 of 3	HR steel sheet 0.138"	inches · flat blank, 1:1 in DXF	Sienna WAV frame · 2026-10-02
Leg 2 (U: 2 walls + bottom)	QTY: 1 per side · FR + FL (mirror) = 2 per vehicle	cut ±0.010" · bends ±1° · IR = t	SHEET 2 / 3

FR-2 (bent version) — blank 3 of 3

Top 6 ¾×3 (2 ovals) · blank 6.750″ × 3.000″ · HR steel sheet 0.138″ · 1 per side · FR + FL (mirror) = 2 per vehicle

HOLES (centre X, Y from datum)			
H1	slot	0.709 × 0.472″	@0° X 0.875 Y 1.250
H2	slot	0.750 × 0.625″	@0° X 5.875 Y 1.125
OUTLINE POINTS (X, Y from datum)			
P1		0.000	3.000
P2		6.750	3.000
P3		6.750	0.000
P4		0.000	0.000



NOTES

- 1. Cut from the DXF file (1:1, inches). This sheet is for checking.
 - 2. Material: HR steel sheet 0.138″ (t). Inside bend radius = t.
 - 3. Flat pattern already includes bend allowance (K = 0.44, R = t).
 - 4. Blue dashed = bend centre lines (B1, B2 ...). ↓ = bend DOWN (away from you), no arrow = bend UP. Red dashed = drill later.
 - 5. Deburr all edges. Curved edges: smooth arcs per DXF.
 - 6. FR side as drawn; FL side = mirror image (flip the blank).
- * flat, no bends

FR-2 (bent version) — blank 3 of 3	HR steel sheet 0.138″	inches · flat blank, 1:1 in DXF	Sienna WAV frame · 2026-10-02
Top 6 ¾×3 (2 ovals)	QTY: 1 per side · FR + FL (mirror) = 2 per vehicle	cut ±0.010″ · bends ±1° · IR = t	SHEET 3 / 3