


FR-7 (welded version) — blank 1 of 3

Side plate with tab · blank 3.750″ × 5.000″ · HR steel sheet 0.138″ · 2 per side · FR + FL (mirror) = 4 per vehicle

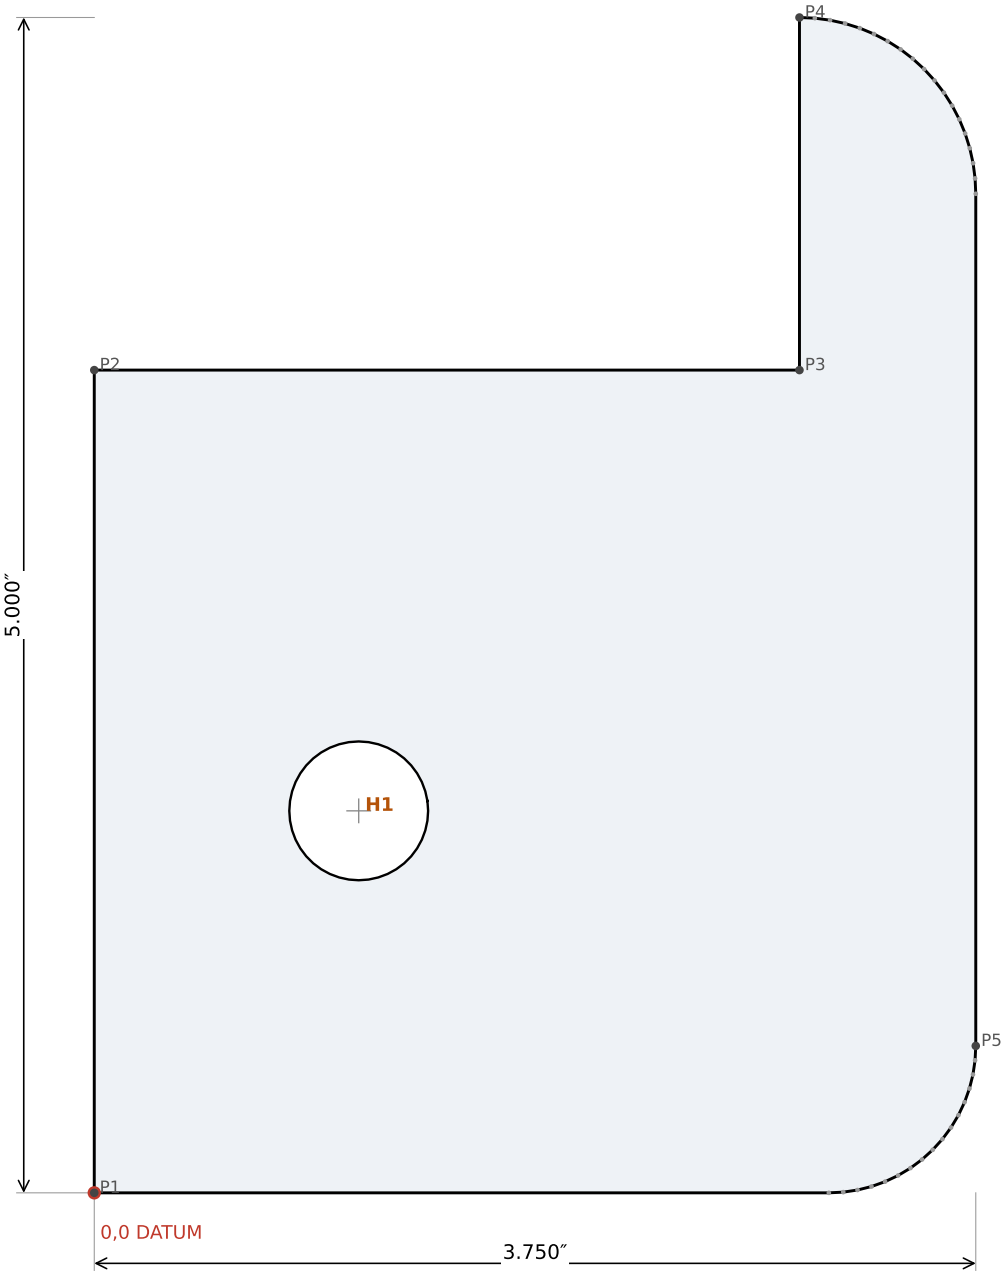

HOLES (centre X, Y from datum)

H1 Ø0.591″ X 1.125 Y 1.625

OUTLINE POINTS (X, Y from datum)

P1	0.000	0.000
P2	0.000	3.500
P3	3.000	3.500
P4	3.000	5.000
P5	3.750	0.625

FREE-FORM CURVE 1 (grey dots, follow DXF) — points X, Y

3.065	4.997
3.130	4.989
3.194	4.974
3.256	4.955
3.317	4.930
3.375	4.899
3.430	4.864
3.482	4.824
3.530	4.780
3.575	4.732
3.614	4.680
3.650	4.625
3.680	4.567
3.705	4.506
3.724	4.444
3.739	4.380
3.747	4.315
3.750	4.250

FREE-FORM CURVE 2 (grey dots, follow DXF) — points X, Y

3.747	0.564
3.738	0.503
3.723	0.444
3.702	0.386
3.676	0.330
3.645	0.278
3.608	0.229
3.567	0.183
3.522	0.142
3.472	0.105
3.420	0.074
3.364	0.048
3.306	0.027
3.247	0.012
3.186	0.003
3.125	0.000


NOTES

1. Cut from the DXF file (1:1, inches). This sheet is for checking.
2. Material: HR steel sheet 0.138″ (t). Inside bend radius = t.
3. Flat pattern already includes bend allowance (K = 0.44, R = t).
4. Blue dashed = bend centre lines (B1, B2 ...). ↓ = bend DOWN (away from you), no arrow = bend UP. Red dashed = drill later.
5. Deburr all edges. Curved edges: smooth arcs per DXF.
6. FR side as drawn; FL side = mirror image (flip the blank).

FR-7 (welded version) — blank 1 of 3	HR steel sheet 0.138″	inches · flat blank, 1:1 in DXF	Sienna WAV frame · 2026-10-02
Side plate with tab	QTY: 2 per side · FR + FL (mirror) = 4 per vehicle	cut ±0.010″ · bends ±1° · IR = t	SHEET 1 / 3

FR-7 (welded version) — blank 2 of 3

Bottom plate · blank 2.224" × 3.125" · HR steel sheet 0.138" · 1 per side · FR + FL (mirror) = 2 per vehicle

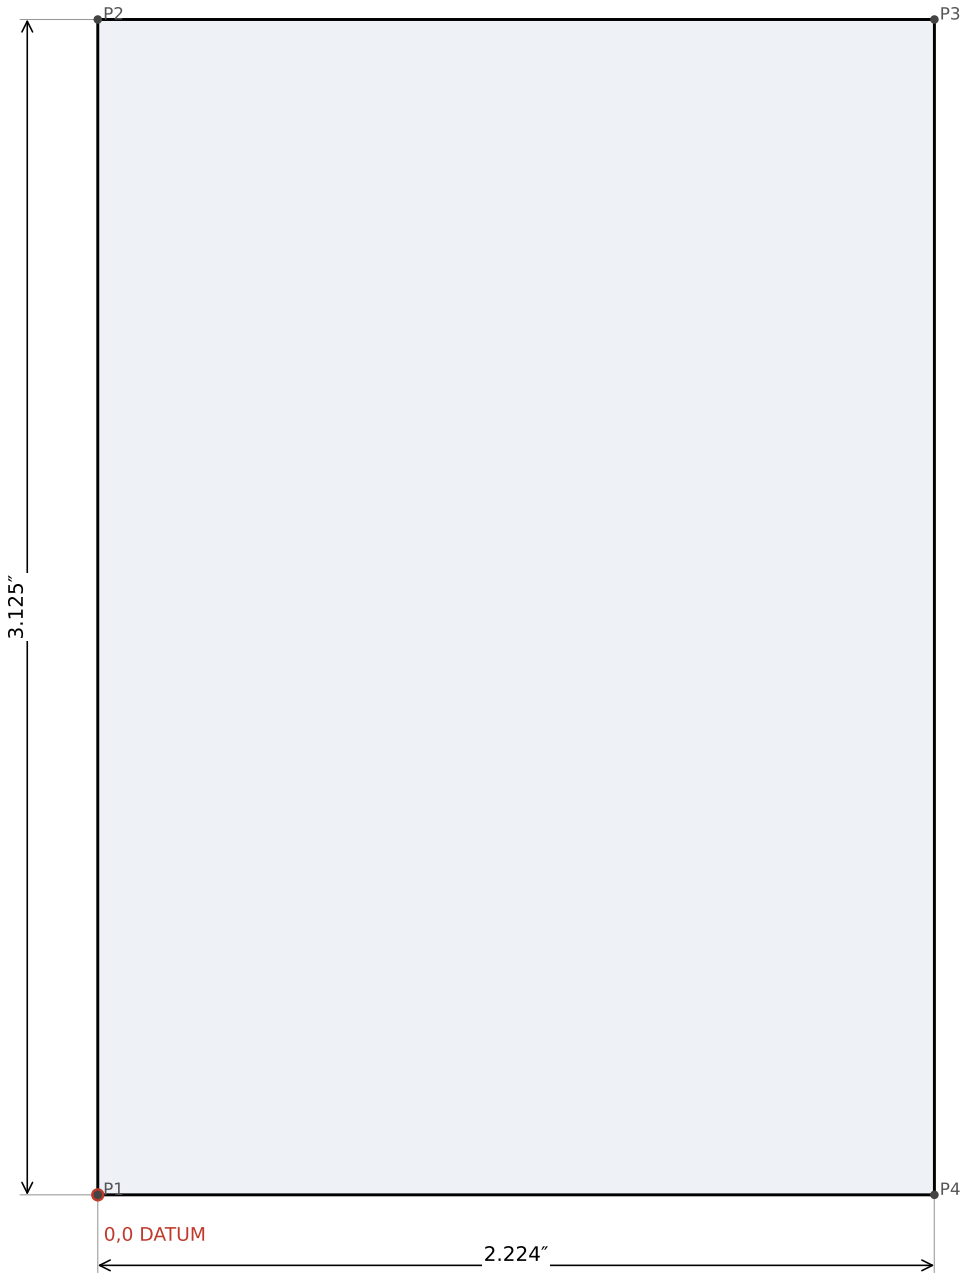

HOLES (centre X, Y from datum)

none

OUTLINE POINTS (X, Y from datum)

P1	0.000	0.000
P2	0.000	3.125
P3	2.224	3.125
P4	2.224	0.000


NOTES

- 1. Cut from the DXF file (1:1, inches). This sheet is for checking.
- 2. Material: HR steel sheet 0.138" (t). Inside bend radius = t.
- 3. Flat pattern already includes bend allowance (K = 0.44, R = t).
- 4. Blue dashed = bend centre lines (B1, B2 ...). ↓ = bend DOWN (away from you), no arrow = bend UP. Red dashed = drill later.
- 5. Deburr all edges. Curved edges: smooth arcs per DXF.
- 6. FR side as drawn; FL side = mirror image (flip the blank).

FR-7 (welded version) — blank 2 of 3	HR steel sheet 0.138"	inches · flat blank, 1:1 in DXF	Sienna WAV frame · 2026-10-02
Bottom plate	QTY: 1 per side · FR + FL (mirror) = 2 per vehicle	cut ±0.010" · bends ±1° · IR = t	SHEET 2 / 3

FR-7 (welded version) — blank 3 of 3

Back plate (hole Ø0.5) · blank 2.224" × 3.625" · HR steel sheet 0.138" · 1 per side · FR + FL (mirror) = 2 per vehicle

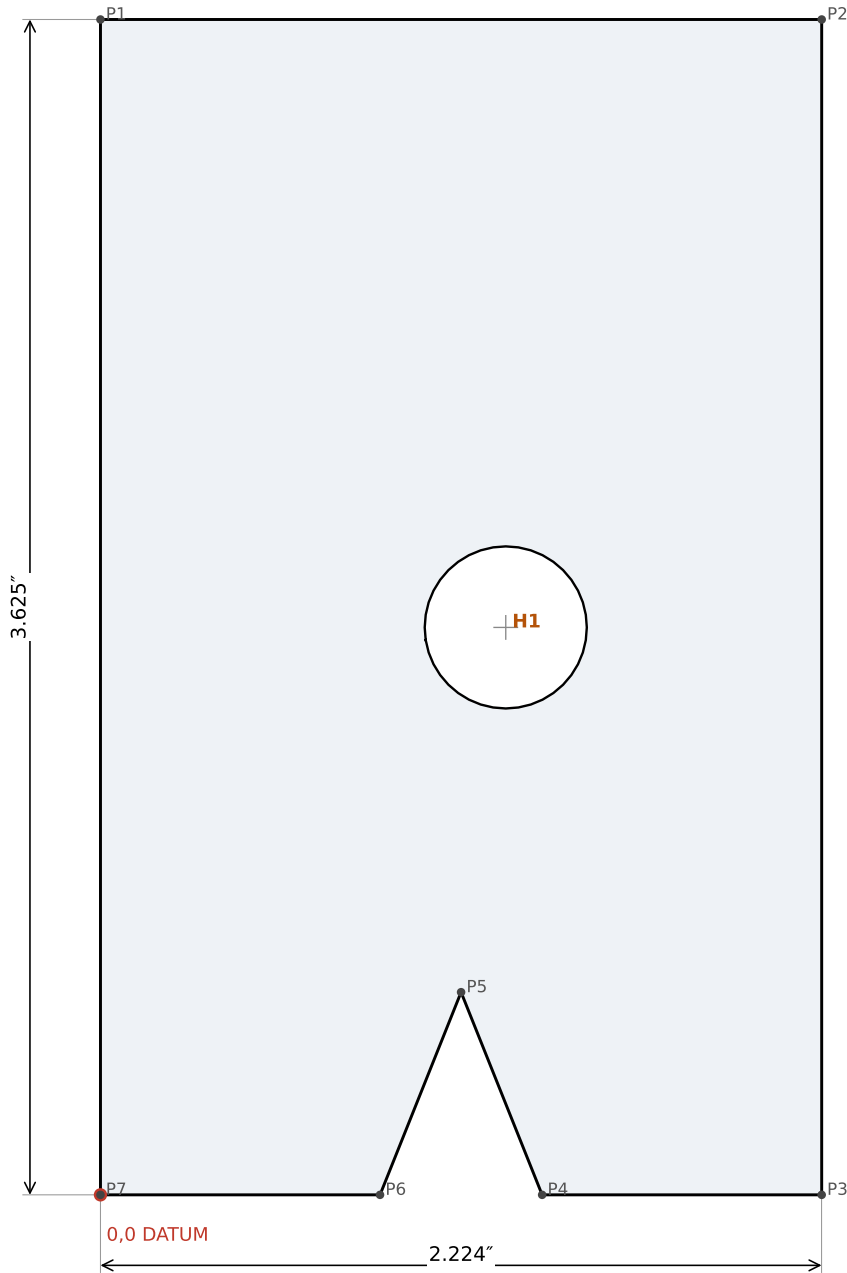

HOLES (centre X, Y from datum)

H1	Ø0.500"	X 1.250	Y 1.750
----	---------	---------	---------

OUTLINE POINTS (X, Y from datum)

P1	0.000	3.625
P2	2.224	3.625
P3	2.224	0.000
P4	1.362	0.000
P5	1.112	0.625
P6	0.862	0.000
P7	0.000	0.000

NOTES

- 1. Cut from the DXF file (1:1, inches). This sheet is for checking.
- 2. Material: HR steel sheet 0.138" (t). Inside bend radius = t.
- 3. Flat pattern already includes bend allowance (K = 0.44, R = t).
- 4. Blue dashed = bend centre lines (B1, B2 ...). ↓ = bend DOWN (away from you), no arrow = bend UP. Red dashed = drill later.
- 5. Deburr all edges. Curved edges: smooth arcs per DXF.
- 6. FR side as drawn; FL side = mirror image (flip the blank).

FR-7 (welded version) — blank 3 of 3	HR steel sheet 0.138"	inches · flat blank, 1:1 in DXF	Sienna WAV frame · 2026-10-02
Back plate (hole Ø0.5)	QTY: 1 per side · FR + FL (mirror) = 2 per vehicle	cut ±0.010" · bends ±1° · IR = t	SHEET 3 / 3