


FR-10 (welded version) — blank 1 of 7

Side plate (right + left) · blank 3.762” × 9.875” · HR steel sheet 10 ga (0.135”) · 2 per side · FR + FL (mirror) = 4 per vehicle

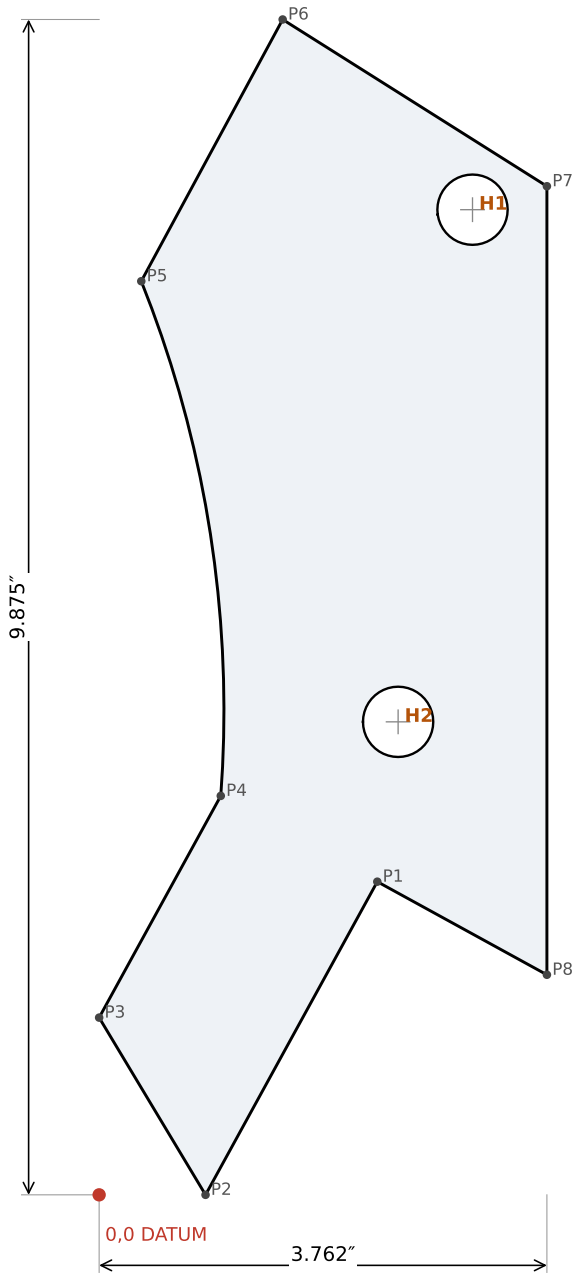

HOLES (centre X, Y from datum)

H1	Ø0.591"	X 3.137	Y 8.277
H2	Ø0.591"	X 2.512	Y 3.974

CURVED EDGES (radius, centre X, Y)

R1	R 9.700"	centre -8.651, 4.071
----	----------	----------------------

OUTLINE POINTS (X, Y from datum)

P1	2.337	2.631
P2	0.894	0.000
P3	0.000	1.489
P4	1.022	3.352
P5	0.354	7.676
P6	1.542	9.875
P7	3.762	8.474
P8	3.762	1.849

NOTES

1. Cut from the DXF file (1:1, inches). This sheet is for checking.
2. Material: HR steel sheet 10 ga (0.135") (t). Inside bend radius = t.
3. Flat pattern already includes bend allowance (K = 0.44, R = t).
4. Blue dashed = bend centre lines (B1, B2 ...). ↓ = bend DOWN (away from you), no arrow = bend UP. Red dashed = drill later.
5. Deburr all edges. Curved edges: smooth arcs per DXF.
6. FR side as drawn; FL side = mirror image (flip the blank).

FR-10 (welded version) — blank 1 of 7	HR steel sheet 10 ga (0.135")	inches · flat blank, 1:1 in DXF	Sienna WAV frame · 2026-10-02
Side plate (right + left)	QTY: 2 per side · FR + FL (mirror) = 4 per vehicle	cut ±0.010" · bends ±1° · IR = t	SHEET 1 / 7

FR-10 (welded version) — blank 2 of 7


Plate A-H · blank 6.625" × 2.731" · HR steel sheet 10 ga (0.135") · 1 per side · FR + FL (mirror) = 2 per vehicle

HOLES (centre X, Y from datum)

none

OUTLINE POINTS (X, Y from datum)

P1	0.000	2.731
P2	6.625	2.731
P3	6.625	0.000
P4	0.000	0.000

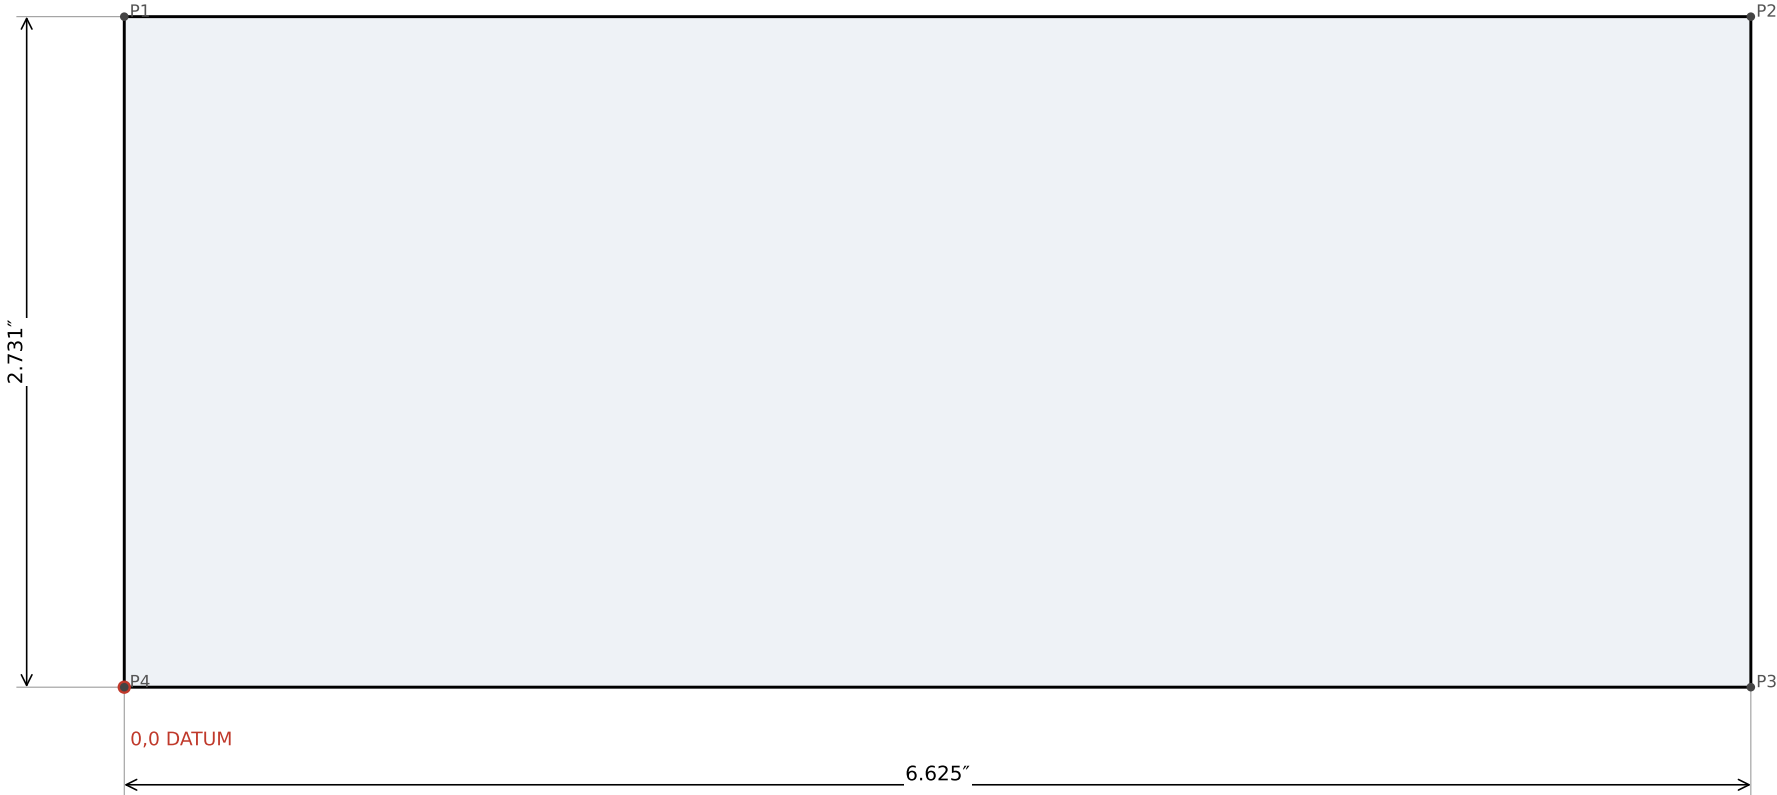


NOTES

- 1. Cut from the DXF file (1:1, inches). This sheet is for checking.
- 2. Material: HR steel sheet 10 ga (0.135") (t). Inside bend radius = t.
- 3. Flat pattern already includes bend allowance (K = 0.44, R = t).
- 4. Blue dashed = bend centre lines (B1, B2 ...). ↓ = bend DOWN (away from you), no arrow = bend UP. Red dashed = drill later.
- 5. Deburr all edges. Curved edges: smooth arcs per DXF.
- 6. FR side as drawn; FL side = mirror image (flip the blank).

FR-10 (welded version) — blank 2 of 7	HR steel sheet 10 ga (0.135")	inches · flat blank, 1:1 in DXF	Sienna WAV frame · 2026-10-02
Plate A-H	QTY: 1 per side · FR + FL (mirror) = 2 per vehicle	cut ±0.010" · bends ±1° · IR = t	SHEET 2 / 7

FR-10 (welded version) — blank 3 of 7

Plate A-B (hole Ø1.5 for the tube) · blank 2.625” × 2.731” · HR steel sheet 10 ga (0.135”) · 1 per side · FR + FL (mirror) = 2 per vehicle

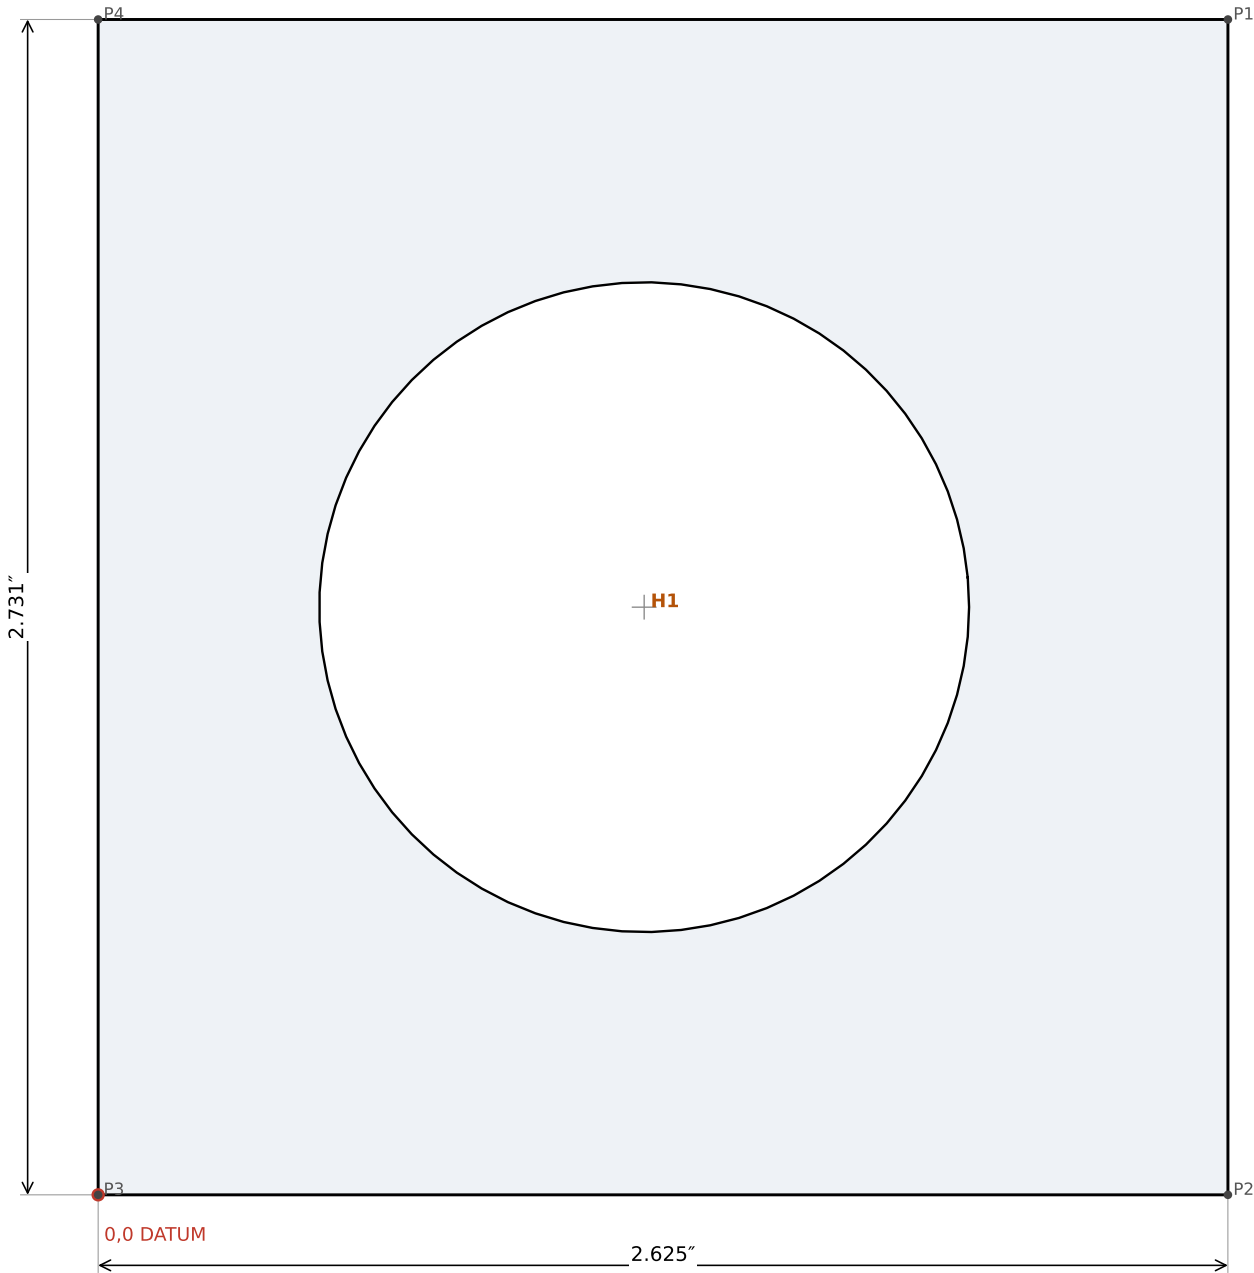

HOLES (centre X, Y from datum)

H1 Ø1.510” X 1.269 Y 1.366

OUTLINE POINTS (X, Y from datum)

P1 2.625 2.731
P2 2.625 0.000
P3 0.000 0.000
P4 0.000 2.731


NOTES

- 1. Cut from the DXF file (1:1, inches). This sheet is for checking.
 - 2. Material: HR steel sheet 10 ga (0.135”) (t). Inside bend radius = t.
 - 3. Flat pattern already includes bend allowance (K = 0.44, R = t).
 - 4. Blue dashed = bend centre lines (B1, B2 ...). ↓ = bend DOWN (away from you), no arrow = bend UP. Red dashed = drill later.
 - 5. Deburr all edges. Curved edges: smooth arcs per DXF.
 - 6. FR side as drawn; FL side = mirror image (flip the blank).
- * tube OD 1.5 / ID 1.181 passes through

FR-10 (welded version) — blank 3 of 7	HR steel sheet 10 ga (0.135”)	inches · flat blank, 1:1 in DXF	Sienna WAV frame · 2026-10-02
Plate A-B (hole Ø1.5 for the tube)	QTY: 1 per side · FR + FL (mirror) = 2 per vehicle	cut ±0.010” · bends ±1° · IR = t	SHEET 3 / 7

FR-10 (welded version) — blank 4 of 7

Plate B-C · blank 2.499" × 2.731" · HR steel sheet 10 ga (0.135") · 1 per side · FR + FL (mirror) = 2 per vehicle

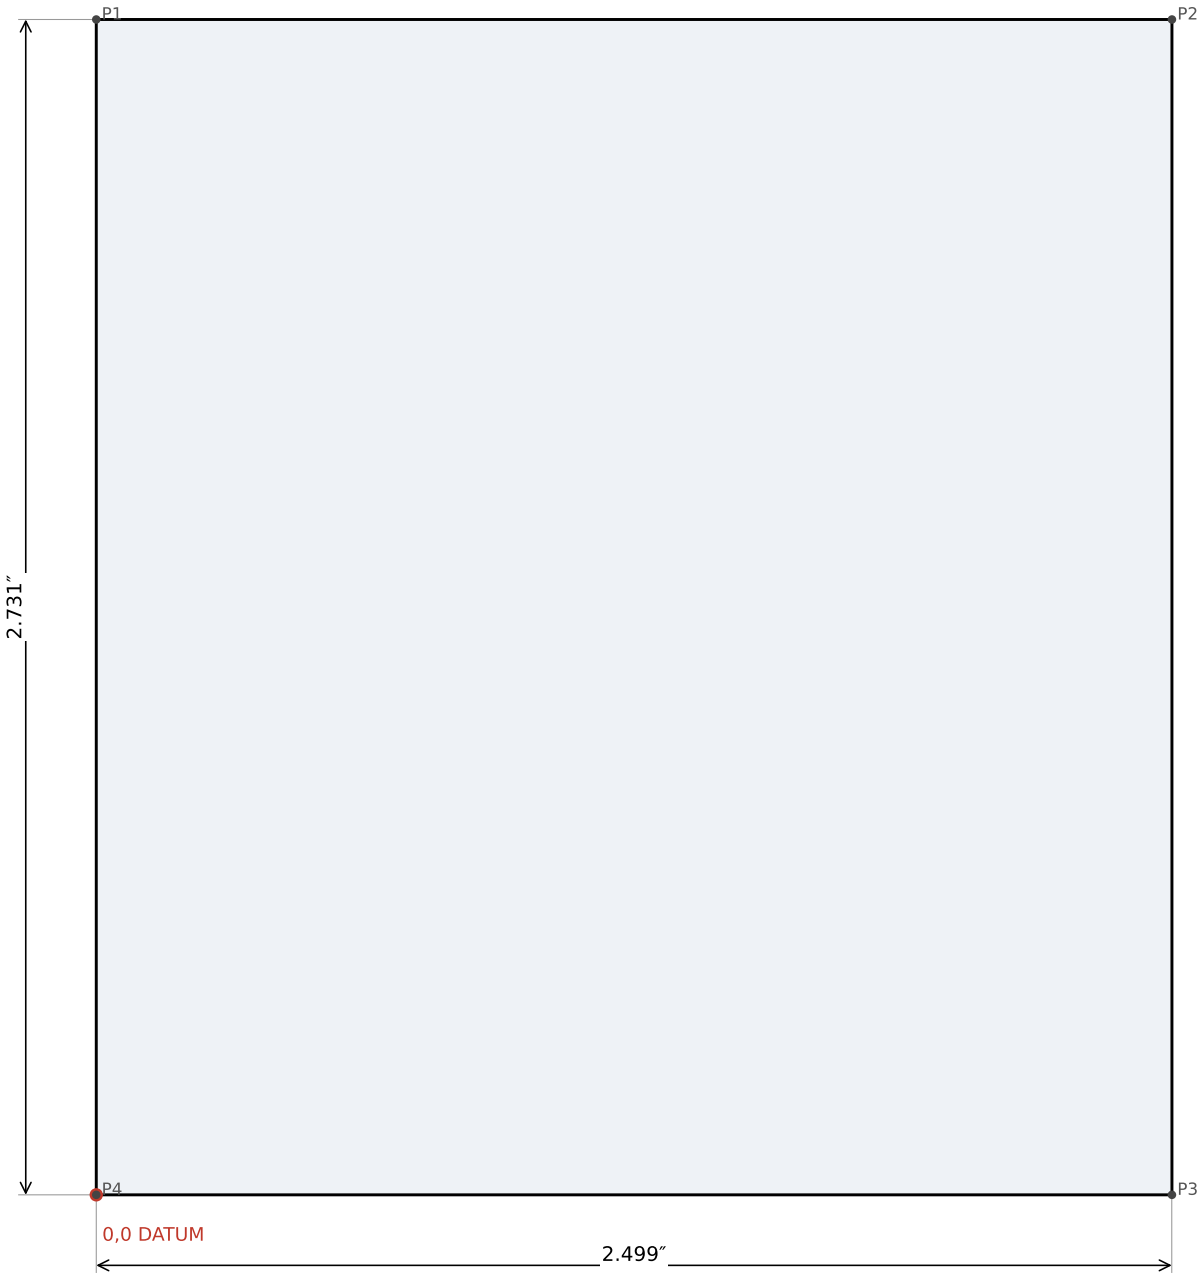

HOLES (centre X, Y from datum)

none

OUTLINE POINTS (X, Y from datum)

P1	0.000	2.731
P2	2.499	2.731
P3	2.499	0.000
P4	0.000	0.000


NOTES

- 1. Cut from the DXF file (1:1, inches). This sheet is for checking.
- 2. Material: HR steel sheet 10 ga (0.135") (t). Inside bend radius = t.
- 3. Flat pattern already includes bend allowance (K = 0.44, R = t).
- 4. Blue dashed = bend centre lines (B1, B2 ...). ↓ = bend DOWN (away from you), no arrow = bend UP. Red dashed = drill later.
- 5. Deburr all edges. Curved edges: smooth arcs per DXF.
- 6. FR side as drawn; FL side = mirror image (flip the blank).

FR-10 (welded version) — blank 4 of 7	HR steel sheet 10 ga (0.135")	inches · flat blank, 1:1 in DXF	Sienna WAV frame · 2026-10-02
Plate B-C	QTY: 1 per side · FR + FL (mirror) = 2 per vehicle	cut ±0.010" · bends ±1° · IR = t	SHEET 4 / 7

FR-10 (welded version) — blank 5 of 7

Plate E-F · blank 1.737" × 2.731" · HR steel sheet 10 ga (0.135") · 1 per side · FR + FL (mirror) = 2 per vehicle

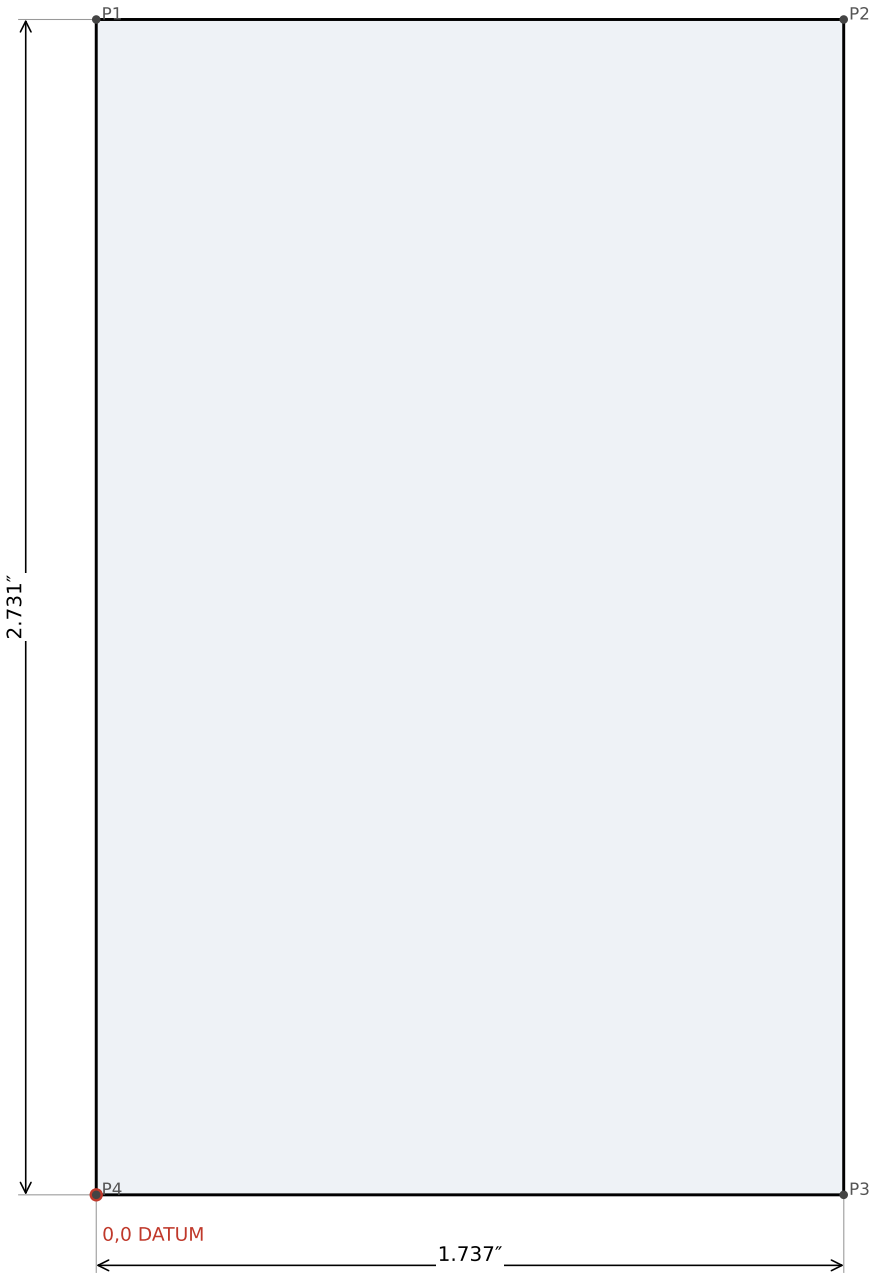

HOLES (centre X, Y from datum)

none

OUTLINE POINTS (X, Y from datum)

P1	0.000	2.731
P2	1.737	2.731
P3	1.737	0.000
P4	0.000	0.000


NOTES

- 1. Cut from the DXF file (1:1, inches). This sheet is for checking.
- 2. Material: HR steel sheet 10 ga (0.135") (t). Inside bend radius = t.
- 3. Flat pattern already includes bend allowance (K = 0.44, R = t).
- 4. Blue dashed = bend centre lines (B1, B2 ...). ↓ = bend DOWN (away from you), no arrow = bend UP. Red dashed = drill later.
- 5. Deburr all edges. Curved edges: smooth arcs per DXF.
- 6. FR side as drawn; FL side = mirror image (flip the blank).

FR-10 (welded version) — blank 5 of 7	HR steel sheet 10 ga (0.135")	inches · flat blank, 1:1 in DXF	Sienna WAV frame · 2026-10-02
Plate E-F	QTY: 1 per side · FR + FL (mirror) = 2 per vehicle	cut ±0.010" · bends ±1° · IR = t	SHEET 5 / 7

FR-10 (welded version) — blank 6 of 7

Shelf (hole Ø1.5 for the tube) · blank 2.375" × 2.731" · HR steel sheet 10 ga (0.135") · 1 per side · FR + FL (mirror) = 2 per vehicle

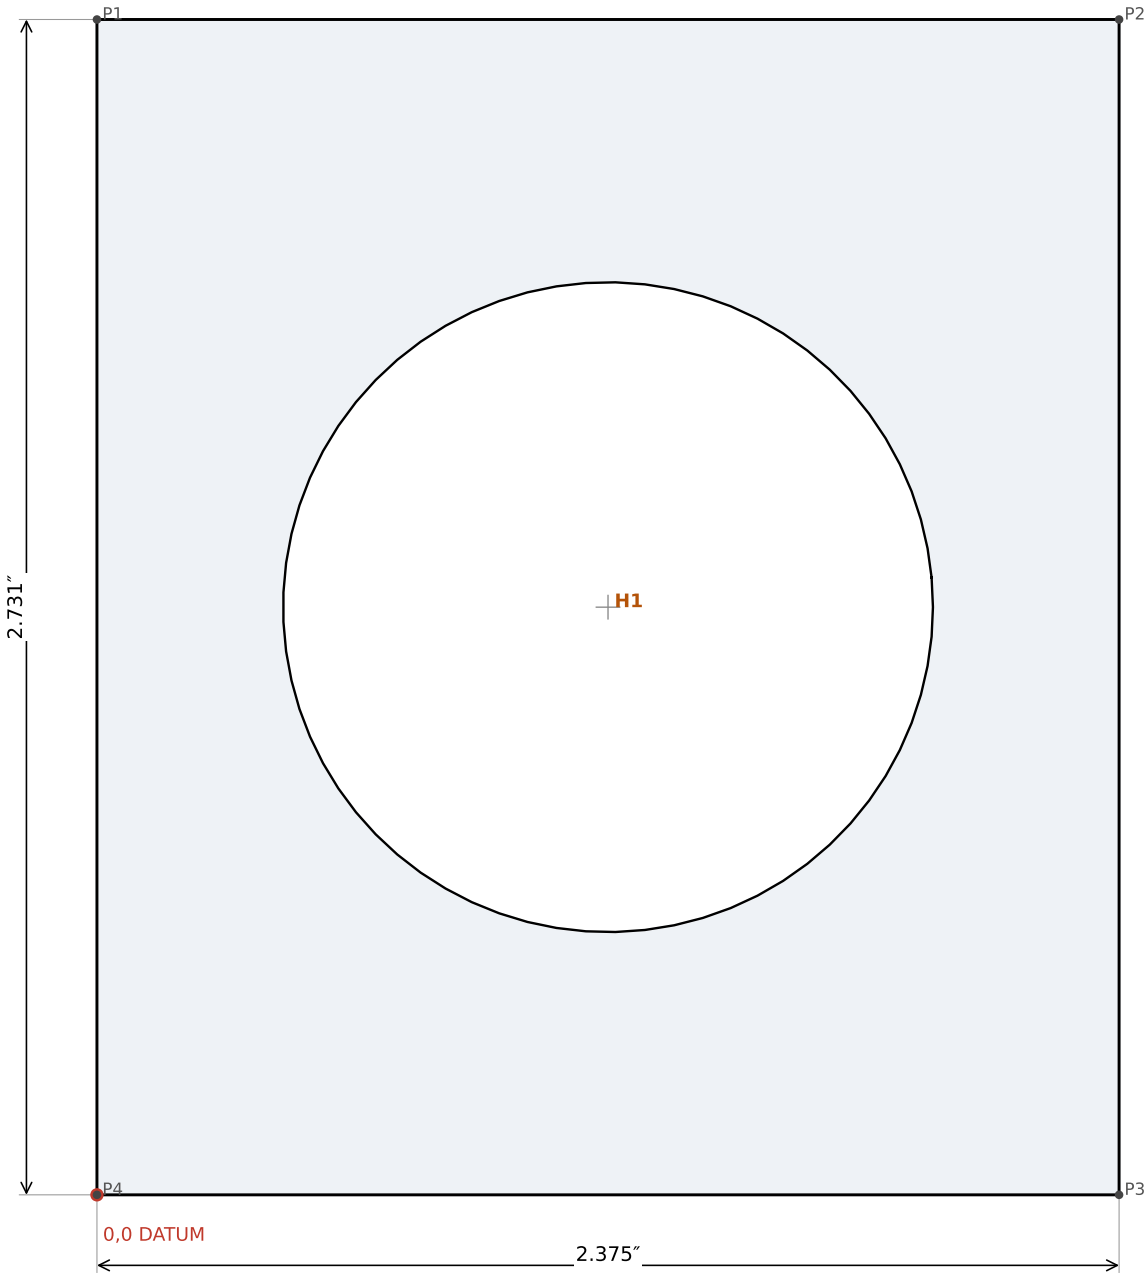

HOLEs (centre X, Y from datum)

H1 Ø1.510" X 1.187 Y 1.366

OUTLINE POINTS (X, Y from datum)

P1 0.000 2.731
P2 2.375 2.731
P3 2.375 0.000
P4 0.000 0.000

NOTES

- 1. Cut from the DXF file (1:1, inches). This sheet is for checking.
 - 2. Material: HR steel sheet 10 ga (0.135") (t). Inside bend radius = t.
 - 3. Flat pattern already includes bend allowance (K = 0.44, R = t).
 - 4. Blue dashed = bend centre lines (B1, B2 ...). ↓ = bend DOWN (away from you), no arrow = bend UP. Red dashed = drill later.
 - 5. Deburr all edges. Curved edges: smooth arcs per DXF.
 - 6. FR side as drawn; FL side = mirror image (flip the blank).
- * + tube OD1.5 / ID1.181, 3.42", through A-B and the shelf, weld all round, cut off the excess

FR-10 (welded version) — blank 6 of 7	HR steel sheet 10 ga (0.135")	inches · flat blank, 1:1 in DXF	Sienna WAV frame · 2026-10-02
Shelf (hole Ø1.5 for the tube)	QTY: 1 per side · FR + FL (mirror) = 2 per vehicle	cut ±0.010" · bends ±1° · IR = t	SHEET 6 / 7

FR-10 (welded version) — blank 7 of 7

Inner plate · blank 5.748" × 2.731" · HR steel sheet 10 ga (0.135") · 1 per side · FR + FL (mirror) = 2 per vehicle

HOLES (centre X, Y from datum)

none

OUTLINE POINTS (X, Y from datum)

P1	0.000	0.000
P2	0.000	2.731
P3	5.748	2.731
P4	5.748	0.000



NOTES

- 1. Cut from the DXF file (1:1, inches). This sheet is for checking.
- 2. Material: HR steel sheet 10 ga (0.135") (t). Inside bend radius = t.
- 3. Flat pattern already includes bend allowance (K = 0.44, R = t).
- 4. Blue dashed = bend centre lines (B1, B2 ...). ↓ = bend DOWN (away from you), no arrow = bend UP. Red dashed = drill later.
- 5. Deburr all edges. Curved edges: smooth arcs per DXF.
- 6. FR side as drawn; FL side = mirror image (flip the blank).

FR-10 (welded version) — blank 7 of 7	HR steel sheet 10 ga (0.135")	inches · flat blank, 1:1 in DXF	Sienna WAV frame · 2026-10-02
Inner plate	QTY: 1 per side · FR + FL (mirror) = 2 per vehicle	cut ±0.010" · bends ±1° · IR = t	SHEET 7 / 7